


```
// Linux interface
```

```
// 1 walk for Radix, ECPT unsupported
```

Assumes radix layout

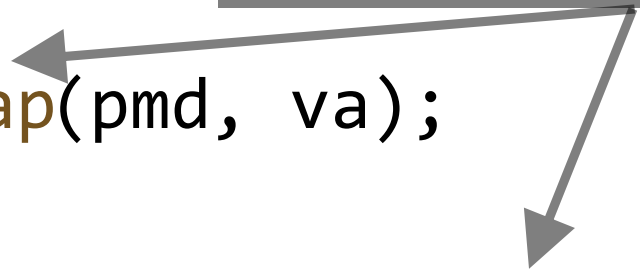


```
pte_t *ptep = pte_offset_map(pmd, va);
```

```
for (; addr < cend; addr += PAGE_SIZE, ptep++) {
```

```
    pte_t pte = *ptep;
```

```
    pa = pte_pfn(pte) << PAGE_SHIFT;
```

Use pointer to in-place read
No need to rewalk

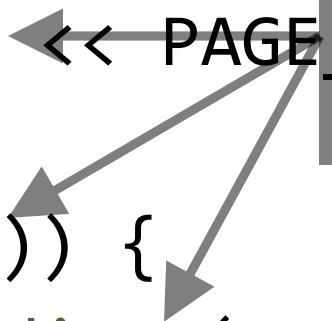

```
    if (!pte_none(pte)) {
```

```
        if (... && pte_dirty(pte))
```

```
            ...
```

```
    }
```

```
}
```