

# OS HW1

---

Operating System 106 Fall

W.J.Tsai 蔡文錦 教授

TA 鍾陳恩  
倪莞雅  
巫怡慧  
任佳靜

# PREWORK

---

# Putty

- Login Tools
  - Putty
- Editors
  - vim
- FTP Tools
  - FileZilla Client

# Putty

- Login
  - Download Putty
  - <https://goo.gl/rM4Scb>

## Alternative binary files

---


The installer packages above will provide all of these (except PuTTYtel), but you can download  
(Not sure whether you want the 32-bit or the 64-bit version? Read the [FAQ entry](#).)

### **putty.exe (the SSH and Telnet client itself)**

32-bit:	<a href="#">putty.exe</a>	<a href="#">(or by FTP)</a>	<a href="#">(signature)</a>
64-bit:	<a href="#">putty.exe</a>	<a href="#">(or by FTP)</a>	<a href="#">(signature)</a>


# Putty

- Login
  - Download Putty
  - <https://goo.gl/rM4Scb>
  - How to Use Putty
  - <https://goo.gl/8AJsPL>

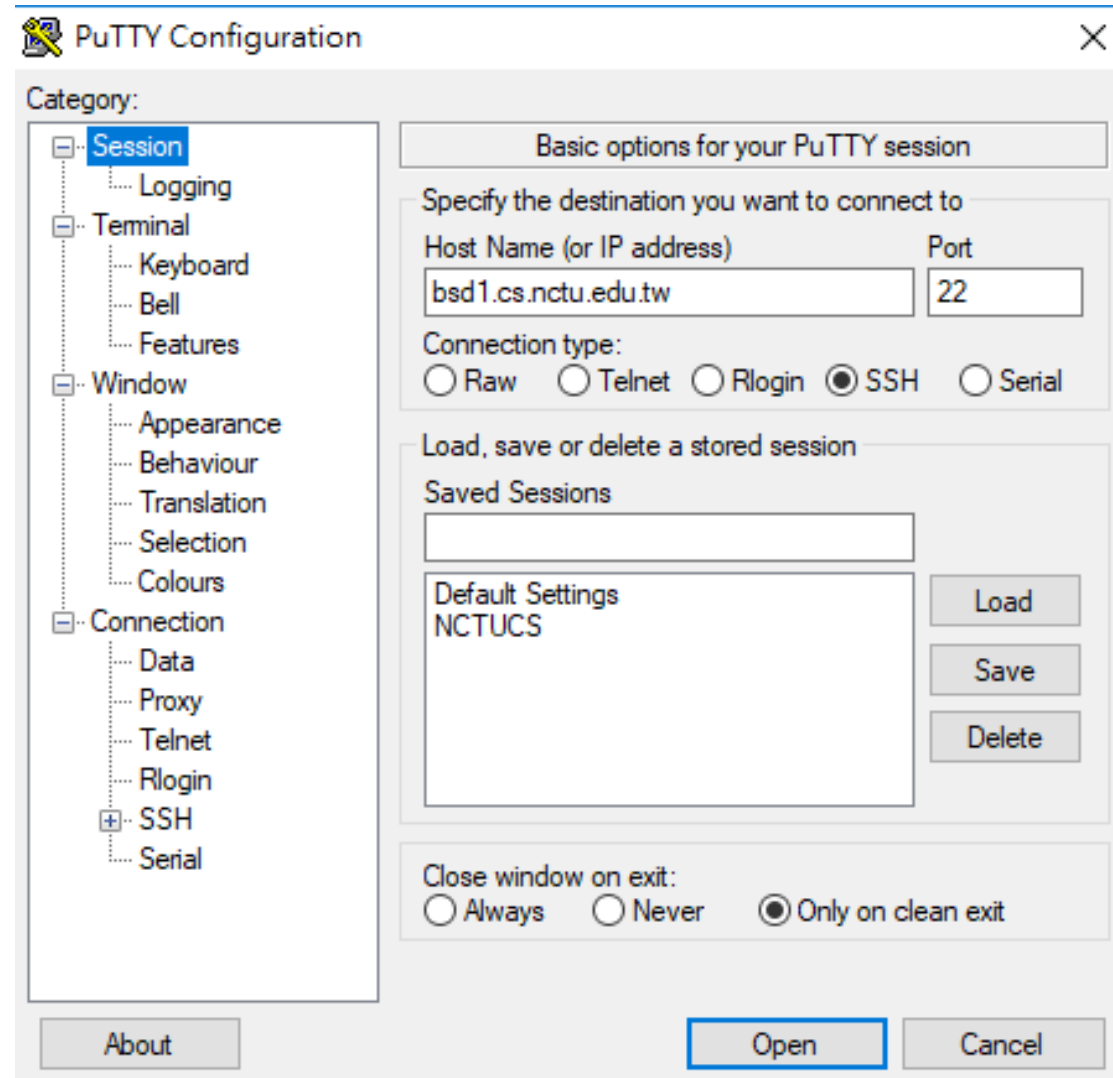

# Putty

- Login
- The default for SSH service is port 22
  - bsd1.cs.nctu.edu.tw – bsd5.cs.nctu.edu.tw
  - linux1.cs.nctu.edu.tw – linux6.cs.nctu.edu.tw

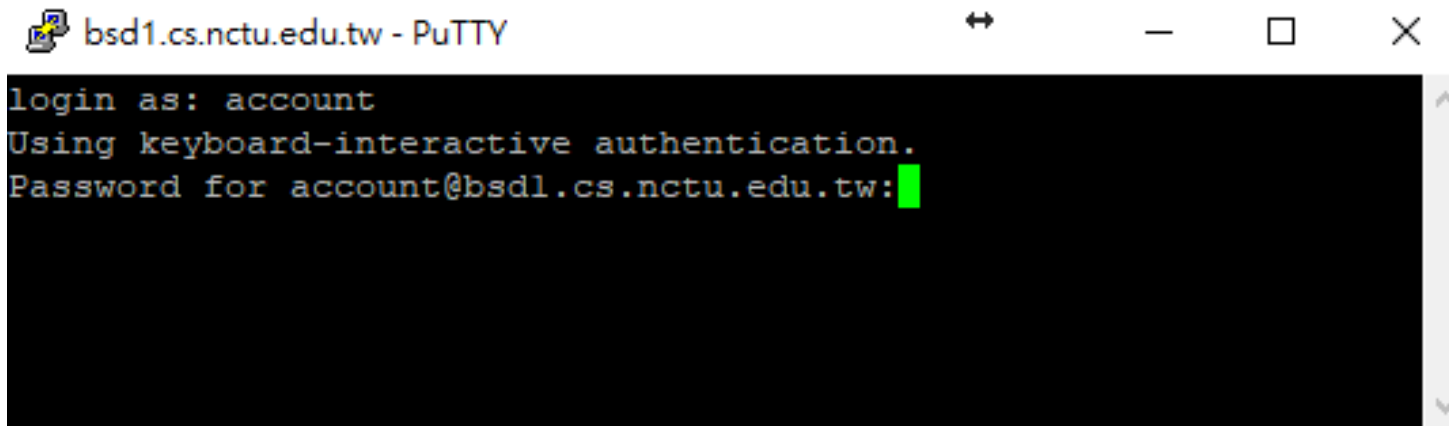

The screenshot shows a PuTTY terminal window titled "bsd1.cs.nctu.edu.tw - PuTTY". The terminal output is as follows:

```
login as: account
Using keyboard-interactive authentication.
Password for account@bsd1.cs.nctu.edu.tw: 
```

The password prompt line ends with a green cursor. The terminal window has standard window controls (minimize, maximize, close) and a scrollbar on the right side.

# Putty

- Command


- clear – clear the screen
- ls – list directory contents
- mv – move files or directories
- mkdir – create directories
- rm – remove files or directories
- chmod – change file system modes of files or directories
- ....

- Reference

- [http://linux.vbird.org/linux\\_basic/redhat6.1/linux\\_06command.php#filesystem](http://linux.vbird.org/linux_basic/redhat6.1/linux_06command.php#filesystem)

# FileZilla

- Upload File to Workstation
- Login

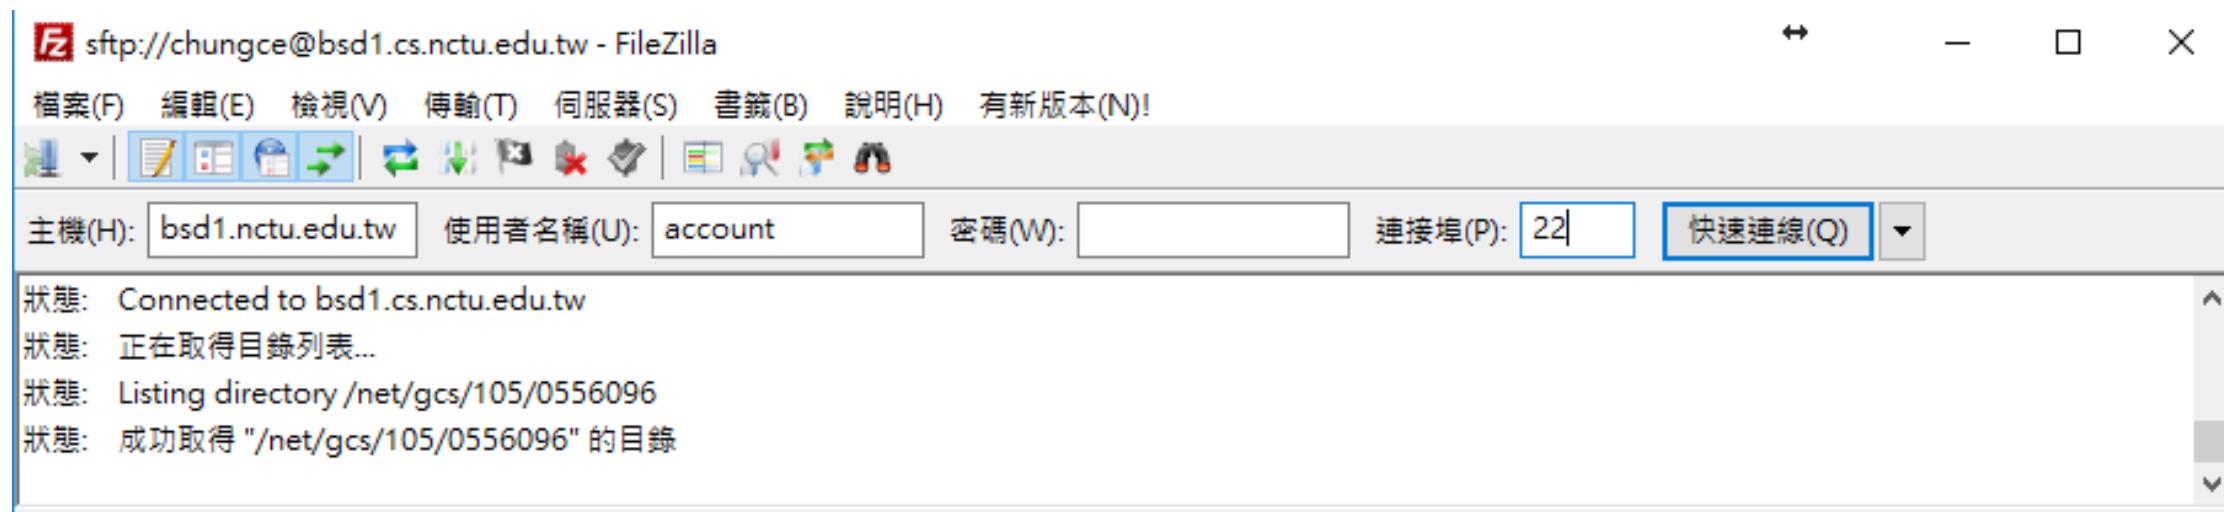




HW 1-1

---

# Fork 3 Times

According this tree format to fork.

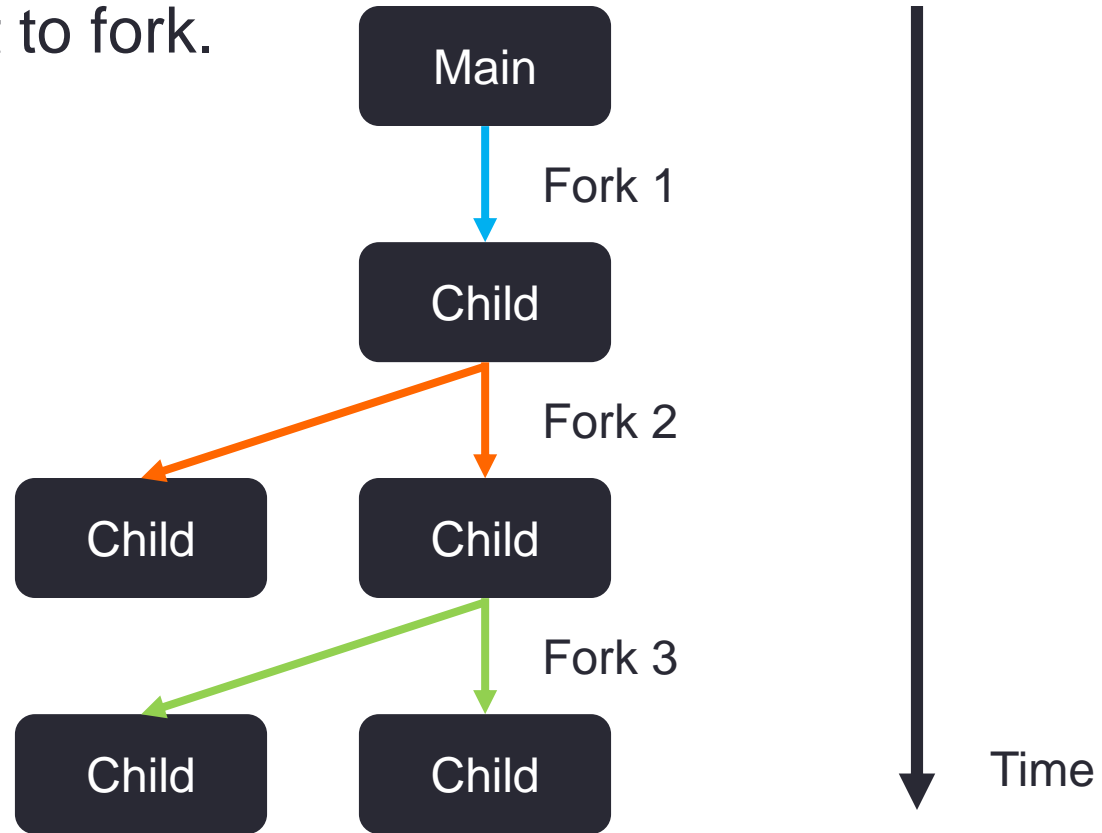

# Output Format

Main Process ID



Total 5 Children



The **format** & **fork order**  
have to be same.

(Fork 1 2 2 3 3)




```
16:07          @bsd1 [~/106_OS/hw1] >./a.out
Main Process ID : 29428

Fork 1. I'm the child 29429, my parent is 29428.
Fork 2. I'm the child 29431, my parent is 29429.
Fork 2. I'm the child 29432, my parent is 29429.
Fork 3. I'm the child 29433, my parent is 29432.
Fork 3. I'm the child 29434, my parent is 29431.
```

Hint:

**Parent Process** has to wait until  
**Child Process** finish, then **exit**.

# Hint

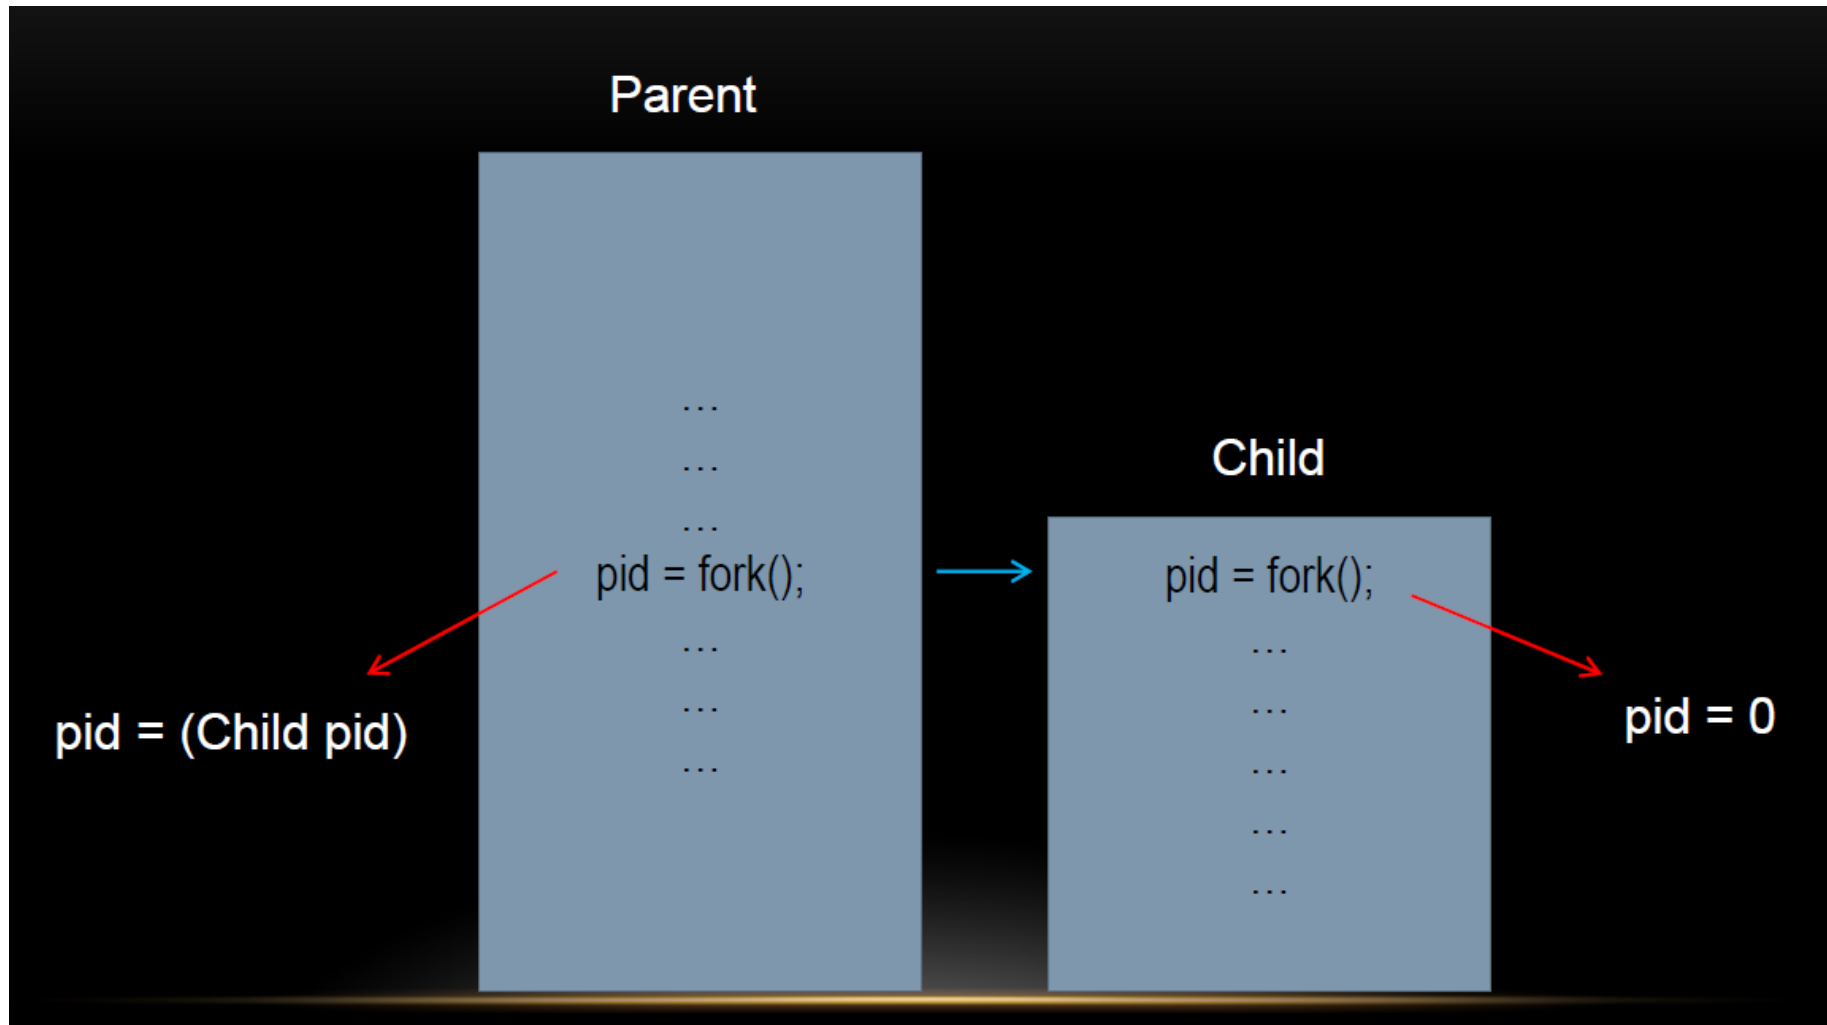

# HW 1-2

---

Original Author: Prof. Li-Ping, Chang

# Multi-Process Matrix Multiplication using Shared Memory

Original Author: Prof. Li-Ping, Chang

- Matrix multiplication using multiple processes
  - Parallel processing; faster on multicore machines
- **Input:** The dimension of the square matrices A & B
  - E.g., 100 → A, B, and C are 100 x 100 square matrices
- **Output:** Execution Time and a Checksum(Sum of all elements of Matrix C)

$$\begin{pmatrix} A \end{pmatrix} \times \begin{pmatrix} B \end{pmatrix} = \begin{pmatrix} C \end{pmatrix}$$

# Task Partition

Original Author: Prof. Li-Ping, Chang

- 1-process matrix multiplication

$$\begin{pmatrix} A \end{pmatrix} \times \begin{pmatrix} B \end{pmatrix} = \begin{pmatrix} C \end{pmatrix}$$

- 4-process matrix multiplication


$$\begin{pmatrix} A \end{pmatrix} \times \begin{pmatrix} B \end{pmatrix} = \begin{array}{|c|} \hline P1 \\ \hline P2 \\ \hline P3 \\ \hline P4 \\ \hline \end{array} C$$

# Shared Memory

Original Author: Prof. Li-Ping, Chang

- Matrices A, B, and C are stored in a shared memory
  - No memory locking is required since sub-matrix multiplications are mutually independent

Shared Memory

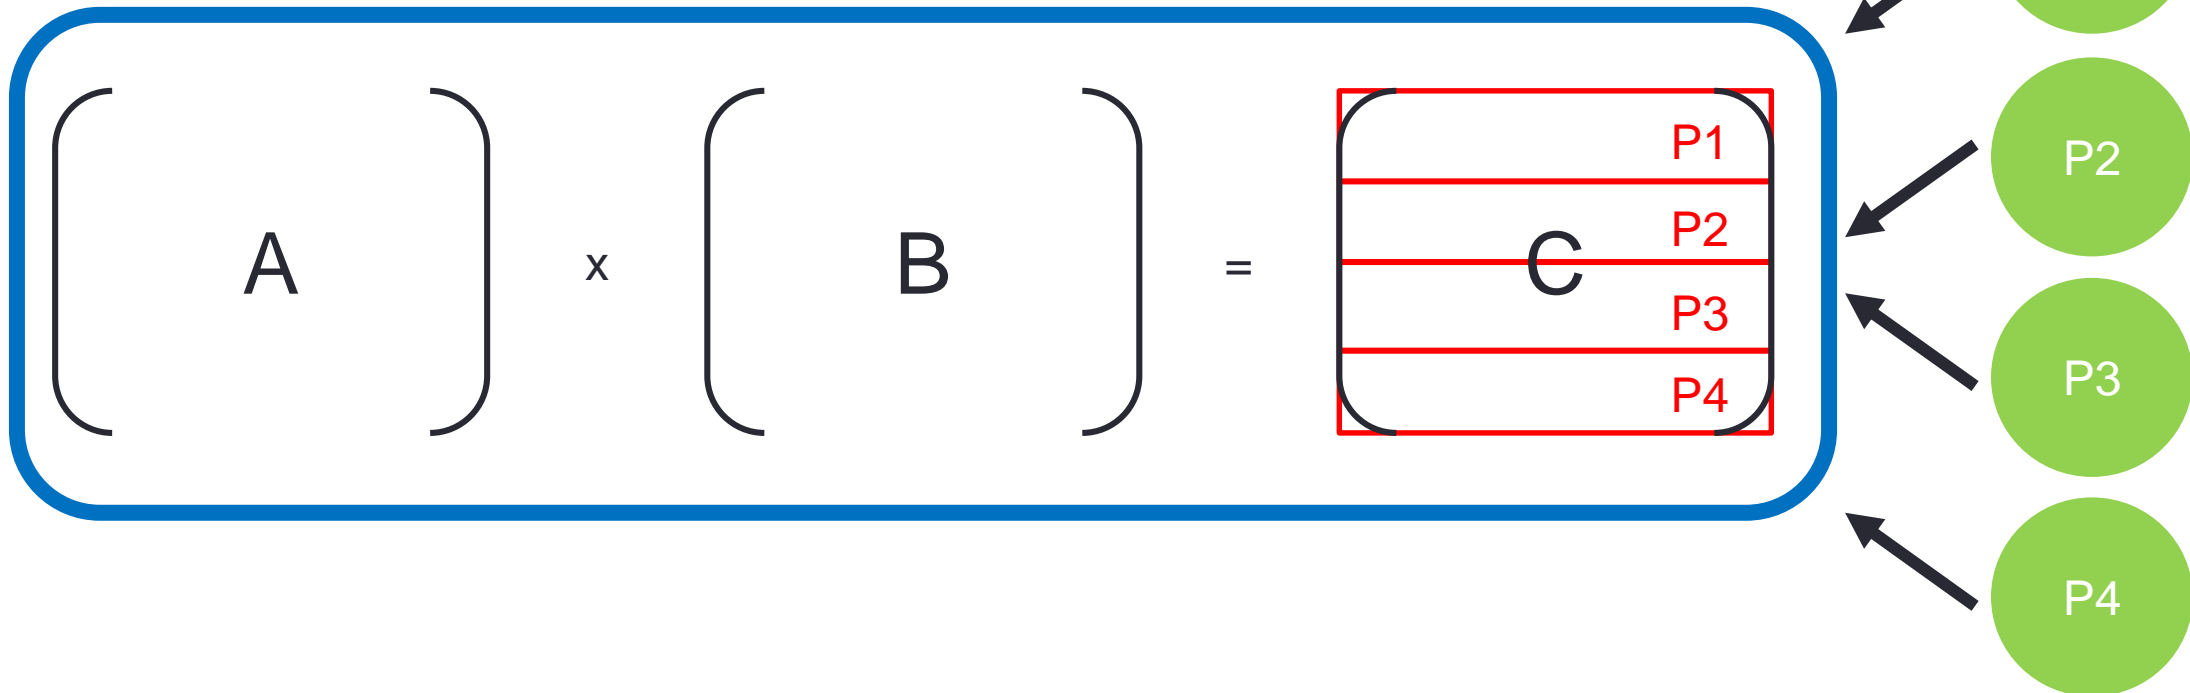



# Matrix Initial Values

Original Author: Prof. Li-Ping, Chang

- Matrix elements in A and B are initialized as follows
- (suppose the dimension is 8x8)

0	1	2	3	4	5	6	7
8	9	10	11	12	13	14	15
16	17	18	19	20	21	22	23
24	25	26	27	28	29	30	31
32	33	34	35	36	37	38	39
40	41	42	43	44	45	46	47
48	49	50	51	52	53	54	55
56	57	58	59	60	61	62	63

Checksum = 2016

# Requirements

- Use `fork()` to create worker processes.
- Do **NOT** declare any of the matrices as global arrays.  
Put all the matrices in the shared memory.
- Print the time and checksum of **1** & **4** process numbers.
- The final checksum must be correct
  - The TAs will test any matrix dimension between 100 and 800
  - Elements & Checksum are **32-bit unsigned integers**
- 4-process version must be noticeably faster than 1-process version
- Violating any of the requirements will receive a score penalty

# Output

```
17:13      @bsd1 [~/106_OS/hw1] >./a.out  
Dimension: 800  
1-process, checksum = 561324032  
elapsed 5.524694  s  
4-process, checksum = 561324032  
elapsed 2.871483  s
```

# RULES

---

# Rules

- 0. Use NCTU CS Workstation as your programming environment
- 1. Do **NOT** create ZOMBIE process, otherwise you will get -10 pts
- 2. Use only C/C++, **OTHER LANGUAGES WILL GET 0 POINT!**
- 3. Filename format: **StudentID\_hw1-1.c** & **StudentID\_hw1-2.c** (or .cpp)
- 4. Put two .c files into compressed file, and name it **StudentID\_OS\_hw1.zip**
- 5. Incorrect filename format will get -5 pts
- 6. Total score: 100pts. **PLAGIARISM WILL GET 0 POINT!**
- 7. Deadline: 2017/10/15 (Sun) PM11:59
- 8. **DELAYED SUBMISSION WILL GET 0 POINT!**
- If you have any question, just send email to TAs.

# APPENDIX – HW 1-2

---

Original Author: Prof. Li-Ping, Chang

# Appendix – Header Files

- `unistd.h`
- `sys/ipc.h`
- `sys/shm.h`
- `sys/wait.h`
  
- `sys/time.h`

# Appendix – APIs

Original Author: Prof. Li-Ping, Chang

- `shmget()` – create a block of shared memory
- `shmat()` – attach shared memory to the current process's address space
- `shmdt()` – detach shared memory from the current process's address space
- `shmctl()` – control shared memory
  
- `gettimeofday()`



# Appendix – shmget

Original Author: Prof. Li-Ping, Chang

- `int shmget(key_t key, size_t size, int shmflg);`
- create a block of shared memory
- Return the **ID of the request shm** of size equals to the value of `size`
- `key` : 0/IPC\_PRIVATE for new allocate shm
- `size` : size in bytes
- `shmflg` : IPC\_CREAT | mode\_flags(9 bits)  
e.g. IPC\_CREAT | 0600 for read only shm

# Appendix – shmat

Original Author: Prof. Li-Ping, Chang

- `void *shmat(int shmid, const void *shmaddr, int shmflg) ;`
- Attach shared memory to the current process's address space
- Return the address of the attached shared memory segment identified by *shmid*
- *shmaddr* : NULL for system to choose suitable address
- *shmflg* : 0 for read/write, **SHM\_RDONLY** for read only

# Appendix – shmdt

Original Author: Prof. Li-Ping, Chang

- `int shmdt(const void *shmaddr) ;`
- Detach the shared memory segment located at the address `shmaddr` from the address space of the calling process
- `shmaddr` must equal to the value returned by `shmat()`

# Appendix – shmctl

Original Author: Prof. Li-Ping, Chang

- `int shmctl(int shmid, int cmd, struct shmid_ds *buf);`
- Control shared memory
- Perform control operation
  - `IPC_STAT`
  - `IPC_SET`
  - `IPC_RMID`
  - ...
- `IPC_RMID`: Marking a shared memory to be deleted. The share memory will be destroyed on when the last process detach the memory from its address space. Must be called by the creator of the shared memory.

# Appendix – gettimeofday

Original Author: Prof. Li-Ping, Chang

```
struct timeval start, end;  
gettimeofday(&start, 0);
```

```
//do something
```

```
gettimeofday(&end, 0);  
int sec = end.tv_sec - start.tv_sec;  
int usec = end.tv_usec - start.tv_usec;
```

```
printf("elapsed %f ms", sec*1000+(usec/1000.0));
```

# Appendix – API Reference

- <http://blog.csdn.net/guoping16/article/details/6584058>
- <http://man7.org/linux/man-pages/man2/shmget.2.html>
- <http://man7.org/linux/man-pages/man2/shmat.2.html>