

Engineering Reliable Coding Agents

Evaluation, Recovery, Context, and Control Beyond the Model

Stephanie Jarmak

Public review edition
August 2026

An evidence-grounded technical monograph on the evaluation, operation, and governance of AI coding-agent systems.

Abstract

AI coding agents are commonly assessed as models but deployed as systems whose behavior also depends on evaluation harnesses, execution state, retrieval, permissions, review interfaces, and resource allocation. This technical monograph synthesizes evidence for engineering reliability at those system boundaries. Its evidence base comprises 118 scholarly sources organized into seven topic-specific review threads, 91 practitioner records, a 29-benchmark catalog, and 17 project dossiers. Evidence items are classified independently by source type and strength; a separate audit rechecks high-strength synthesis claims against underlying sources. From this corpus, two independent derivations produced a catalog of 192 bounded practices, of which 55 are developed in depth. The monograph contributes the evidence audit and practice catalog; a dependency chain connecting measurement, grading, containment and recovery, context, oversight, and allocation; scoped measurements and failure analyses from author-operated systems; and runnable protocols for local evaluation and fault testing. The synthesis is structured rather than exhaustive, capability results remain time- and workload-dependent, and evidence is uneven across topics. Author-system cases are therefore used as illustrations and are not treated as independent external evidence.

Contents

Abstract	i
Method, scope, and evidence classification	vi
Evidence collection and scope	vi
Evidence classification	vi
Practice derivation and selection	vii
Contributions	vii
Treatment of author-system cases	viii
Limitations	viii
Preface	ix
What this book is not	x
How the book is organized	x
What I assume you know	xii
How I grade evidence	xii
How to read a chapter	xiii
The companion catalog	xiv
What you should be able to do by the end	xiv
I Evaluation measurement and experiment design	1
1 Run-to-run variance, statistical power, and paired comparisons	2
1.1 One run is one draw	2
1.2 What could the experiment have detected?	4
1.3 Compare outcomes item by item	7
1.4 The procedure I run before crediting a delta	10
1.5 Sources and evidence	11
2 Baselines, ablations, and cost-accuracy tradeoffs	13
2.1 Remove the component and rerun the evaluation	14
2.2 Select on accuracy and cost together	16
2.3 Build the next comparison	19
2.4 Sources and evidence	20
3 Benchmark contamination, oracle strength, and workload validity	21
3.1 Measure the public-private gap	22
3.2 Keep the task window ahead of the model	24

3.3	Make passing patches harder to preserve	26
3.4	Move the instrument onto your work	28
3.5	Discount the next public number	30
3.6	Sources and evidence	31
II	Evaluation and grading systems	33
4	Execution-based evaluation, correction gates, and release tests	34
4.1	Make execution decide whether work moves	34
4.2	Let failed runs change the next attempt	37
4.3	Turn repeated trials into a release test	39
4.4	Build the first gate this week	42
4.5	Sources and evidence	42
5	Calibrating model graders and separating agreement from correctness	44
5.1	Build the reference labels before the grader	44
5.2	What a panel’s vote establishes	50
5.3	Rebuild the grader as a measured system	52
5.4	Sources and evidence	52
6	Proxy metric gaming and layered evaluation signals	55
6.1	When perfect recall rewards returning everything	55
6.2	Watch the relationship, not the rising score	57
6.3	Preserve the channel that reveals intent	59
6.4	Rebuild the acceptance path	61
6.5	Sources and evidence	62
III	Containment, durable execution, and recovery engineering	63
7	Agent isolation, injection defenses, and independent verification	64
7.1	Put the recovery path outside the failure domain	64
7.2	Verify the workspace, not the agent’s confidence	67
7.3	Design for instructions that arrive through data	69
7.4	Audit one live boundary	71
7.5	Sources and evidence	71
8	Persistent agent state, durable workflows, and idempotent retries	73
8.1	Declare the state that outlives the worker	73
8.2	When coordination belongs in an engine	75
8.3	The interval that cannot be closed	77
8.4	Companion patterns	79
8.5	Run the crash check	80
8.6	Sources and evidence	80
9	Replayable traces and fault-injection recovery testing	82
9.1	What a transcript cannot answer	82
9.2	Recovery is a measured property	85

9.3	A protocol for trusting recovery	90
9.4	Sources and evidence	91
10	Human-auditable failure analysis and taxonomy development	92
10.1	Build the taxonomy from the failures you can inspect	92
10.2	Keep causal assignment under human control	96
10.3	Design the record for a skeptical reader	98
10.4	Turn failed runs into an operating record	100
10.5	Sources and evidence	101
IV	Context engineering: retrieval, budgets, and memory	103
11	Measuring and designing repository retrieval	104
11.1	Score retrieval and generation separately	105
11.2	Recover the evidence a single lane misses	109
11.3	Preserve code structure inside the retrieval unit	111
11.4	Run the retrieval protocol on the operated workload	114
11.5	Sources and evidence	114
12	Localization funnels, repository indexes, and freshness checks	116
12.1	Where staged narrowing earns its cost	116
12.2	The maintenance decision behind a typed index	119
12.3	Freshness as an admission condition	123
12.4	Decisions to make this week	125
12.5	Sources and evidence	125
13	Usable context budgets, consolidated-spec restarts, and file-based tool output	127
13.1	Measure the context the model can use	128
13.2	Restart from the specification the work has become	131
13.3	Put bulk output behind a pointer	133
13.4	Test the standing context file against no file	134
13.5	A week-one context protocol	137
13.6	Sources and evidence	137
14	Cross-session memory, raw traces, and compaction policies	139
14.1	Preserve the evidence before deriving the memory	139
14.2	Make the storage system earn its complexity	142
14.3	Tune compaction against failures	144
14.4	A staged protocol for recoverable memory	146
14.5	Sources and evidence	147
V	Human review and accountability engineering	149
15	Efficient verification interfaces and risk-based human escalation	150
15.1	The price of a check	151
15.2	Friction at the decision, not across the workflow	152
15.3	Escalation as measured triage	154

15.4	An operating protocol	158
15.5	Sources and evidence	158
16	Autonomy calibration, provenance, effective gates, and accountability	161
16.1	Autonomy is a ladder for each action type	162
16.2	Provenance belongs at the review surface	164
16.3	A gate must have causal power	166
16.4	Responsibility must follow control	168
16.5	Test the operational path	170
16.6	Sources and evidence	171
VI	Work allocation and cost engineering	173
17	Agent topology selection and dynamic task allocation	174
17.1	A failure class earns a structural repair only after it persists	174
17.2	Gate fan-out on a live single-agent baseline	176
17.3	Match the topology to the shape of the work	179
17.4	Dispatch through dependencies, not a guessed sequence	182
17.5	The protocol I run before promoting a topology	183
17.6	Sources and evidence	184
18	Cost-aware fleet scheduling and model routing	186
18.1	Name the decision before reaching for the algorithm	186
18.2	Re-decide cheaply and ship the incumbent	188
18.3	Route each request to the cheapest sufficient model	190
18.4	Replay fixed arrival traces before changing policy	191
18.5	Instrument the ledger before choosing a policy	194
18.6	Sources and evidence	194
19	Closing: each part decides what the next one can claim	196
19.1	The order is a dependency chain	196
19.2	The support is thinnest where the urgency is highest	197
19.3	What this book does not settle	198
19.4	What to run first	199
19.5	Sources and evidence	199

Method, scope, and evidence classification

This work is an evidence-grounded technical monograph rather than a comprehensive systematic review. It asks which claims about the reliability of coding-agent systems can be supported, which operational practices follow from those claims, and which observations a team must reproduce locally before adopting a practice. The unit of analysis is the system around an agent: its evaluation harness, execution and recovery machinery, retrieval and context path, permission boundary, review interface, and allocation policy.

Evidence collection and scope

The scholarly corpus contains 118 sources organized into seven topic-specific threads: benchmark validity, failure taxonomies, evaluation statistics, human oversight and accountability, context and retrieval, durable execution, and scheduling with repository-scale scoping. The searches were consolidated on July 26, 2026, using the SciX scholarly index, which mirrors arXiv and NASA ADS metadata. Six threads contain 17 sources each; a seventh contains 16 sources added after an adversarial citation audit identified relevant scheduling and repository-scoping work that had entered the draft through other syntheses. Metadata and identifiers were checked against the scholarly index.

The external operational corpus adds 91 practitioner records drawn from engineering reports, incident accounts, vendor and independent analyses, conference material, and community field reports. A separate benchmark catalog records 29 coding-agent and adjacent evaluation suites. Seventeen project dossiers describe author-operated systems and experiments. These sources were selected to cover the system boundaries above, not to estimate a prevalence rate for the entire literature. The resulting corpus should therefore be read as a structured, current evidence synthesis, not as an exhaustive or publication-bias-corrected census.

Evidence classification

Each admitted item carries two independent labels. The *source class* records where the claim comes from: research literature, an explorer synthesis of a topic-scoped source set, or a practitioner account. The *strength grade* records what the item can support. A **strong** item directly supports the stated practice through a controlled result, peer-reviewed methodological result, or independently recomputable artifact. A **directional** item supports the direction of a claim while leaving its magnitude or transfer uncertain. An **anecdotal** item establishes a reported case, not its frequency. A **null-result** item records a test that did not support the proposed effect. Contested items retain their counterevidence rather than being resolved by averaging incompatible claims.

Source class and strength are deliberately separate. A research paper may be too narrow to

support a general operational prescription, while a recomputable project artifact may strongly support a local factual claim. Every taught practice reports its evidence at the start of the relevant treatment and lists the supporting records in a chapter-level “Sources and evidence” section.

A separate evidence audit rechecked every explorer-synthesis item initially graded strong against its underlying source. The grade was retained only when the source reported a controlled result that supported the practice’s own claim; otherwise the item was downgraded or its prose was narrowed. This audit prevents agreement among summaries from being mistaken for independent experimental support.

Practice derivation and selection

The practice catalog was derived in two independent passes. In the first, eight specialist analyses examined separate slices of the corpus: fleet operations, durable execution, evaluation practice, measurement methodology, failure diagnostics, context and structure, attention and accountability, and existing-draft material. Their candidate practices were merged and adversarially checked line by line against sources; 43 evidence corrections were recorded during that stage. In the second pass, a whole-corpus analysis derived practices without seeing the specialist outputs. Agreement between the two differently structured passes is used as a derivation-confidence signal, not as a substitute for evidence strength.

A candidate practice was admitted only when it named an action, a mechanism, and a boundary at which the action could stop working. This process produced 192 practices grouped into 14 mechanism clusters. Three independent selection lenses then proposed which practices required full treatment by asking whether a practice changes an engineering decision, whether omitting it loses mechanism coverage, and whether the available case can teach the mechanism without exceeding its evidence. Their agreements and disagreements determined the 55 practices developed in the main chapters; the remainder stay in the companion catalog as bounded alternatives or thin-support research prompts.

Contributions

The monograph makes five contributions:

1. an audited evidence map that separates source provenance from evidentiary strength and preserves null, anecdotal, and contested results;
2. a catalog of 192 bounded engineering practices, with 55 practices developed in depth and the remainder retained for scoped follow-up;
3. a dependency chain across measurement, grading, containment and recovery, retrieval and context, human oversight, and allocation, showing what each operational layer permits the next layer to claim;
4. scoped measurements and failure analyses from author-operated coding-agent and retrieval systems, reported with their local conditions and used to expose mechanisms rather than to estimate universal effects; and
5. runnable protocols for repeated evaluation, paired comparison, oracle and grader validation, fault injection, trace analysis, retrieval diagnosis, escalation design, topology comparison, and scheduling replay.

Treatment of author-system cases

Cases from the author’s systems are illustrations. They reveal state transitions, permission boundaries, measurement defects, or recovery failures and can motivate a locally reproducible test. They are not counted as independent external evidence for a general recommendation. Where an author-system result is reported, the claim is restricted to the named workload, task set, scorer, execution window, and available artifact. Chapter-level evidence sections identify when a case corroborates a mechanism but does not admit the practice into the evidence base.

Limitations

The corpus is current through July 2026 but is not exhaustive. Search threads were selected around the monograph’s engineering questions, and the practitioner corpus is especially vulnerable to selective reporting. The evidence is uneven: measurement and retrieval have substantially more controlled support than containment, recovery, and fleet allocation. Several results concern language, office, or general agents rather than repository-scale coding agents, and their transfer is labeled rather than assumed.

Fast-moving model and harness capabilities also limit the life of numerical results. Context lengths, grader error rates, localization accuracy, model costs, and routing frontiers are snapshots rather than constants. The protocols are intended to make those quantities locally measurable. They do not supply universal thresholds where the corpus has none.

Finally, the derivation process used multiple model-assisted analyses to inspect and compare the corpus. Independence here describes separation of inputs and visibility between derivation passes, not statistical independence or human inter-rater reliability. All retained claims remain traceable to the listed human-authored sources or author-owned artifacts, and the evidence grades describe those sources rather than the confidence of the model-assisted derivation process. Stephanie Jarmak

Preface

An agent has finished a change. The tests are green, and a reviewer is looking at a compact diff. The run appears successful. Yet, no one can say whether another run would produce the same result, whether the tests exercised the relevant behavior, or whether the reviewer was aware of the decisions that carried the most risk.

The visible output is code. The uncertainty around its quality lives in the system that produced, evaluated, and approved it.

I wrote this book for the engineer who now owns that system. I assume you are fluent in software engineering and may be new to evaluation methodology. Your agents write and ship code, so you must decide which claims about their reliability ought to be trusted.

That system is more than the model, and even more than the tools that model uses that make it ‘agentic’. The agent itself is one component in a more complex apparatus. Managing that apparatus involves evaluation, governance, context management, review, and scheduling. Evaluation determines what counts as success, governance defines what an agent should be able to access, context management controls what information enters the session state, review determines the quality gate, and scheduling allocates time, money, compute, and human attention.

Those five activities do not map one-to-one onto the six parts of this book. Evaluation takes two parts, measurement first and grading systems second, because the second depends on the first. Context management is Part IV. Scheduling is Part VI. Governance runs across two parts rather than sitting in one: Part III covers what an agent can reach and whether its work survives failure, and Part V covers who authorizes the work and who answers for it.

These components do not operate independently. A better score may reflect an easier test rather than a better system. A reviewer may appear ineffective because the interface concealed the evidence needed for judgment. Instrumentation may record failures within individual components while missing failures in the connections among them. A recovery procedure may pass repeatedly while relying on the same credentials whose compromise would make recovery impossible.

Plausible results can survive weak measurement. In one controlled study, researchers compared a single score from each of two identical systems. As many as 26 percent of those comparisons appeared significantly different at ($p < 0.05$). The statistical test correctly described the two runs it received, but the experiment could not establish that the systems differed because it had sampled too few runs to estimate the variation between them.

That example captures the practical problem beneath many claims about agents. A number can be calculated correctly and still answer a narrower question than the reader assumes (i.e., lies, damned lies, and statistics). It is best to treat measurement as part of the operating system around an agent. It determines which changes are adopted, which regressions are detected, and which risks remain invisible.

The same reasoning applies to safety boundaries. We all know the stories of an agent deleting a production database with the backups disappearing along with it. In one such case, the same credentials could reach both resources, so while the immediate action was deletion, the deeper failure

was shared authority across systems that were expected to fail independently. These systems are far too complex with unpredictable emergent behaviors, make such assumptions at your own peril.

I focus on mechanisms because outcomes alone provide poor guidance. “The agent failed” is as useful as a two-percent point spread on a benchmark leaderboard. It does not reveal where state lived, which boundary was crossed, why the failure propagated, or why recovery failed as well. A useful account traces ownership, permissions, persistence, ordering, and observation. It also distinguishes correctness from reliability, performance, cost, safety, and usability.

This book draws from a catalog of 192 practices assembled from research literature and independent practitioner sources along with my own experiences. The chapters develop 55 of those practices in depth. All 192 appear in the companion catalog, with the remaining 137 in compact form. The extent to which we explore these was prioritized based on a tradeoff between evidence strength and operational urgency, which did not always correlate with each other.

These practices are not universal rules. Each applies under particular workloads, permissions, failure costs, and organizational constraints. Where the evidence supports only a narrow claim, I keep the claim narrow. Where support remains incomplete, I state the uncertainty and describe the comparison needed to resolve it.

The goal of this book is to enable others to build and maintain agentic systems whose reliability can be observed, tested, and defended.

What this book is not

It is not a survey of the literature. The companion catalog does that work, at an entry each, while the chapters spend their length on a minority of the practices and on the conditions under which each one stops working. Equal coverage would produce a better index and a worse book.

It is not a comparison of models either. Capability moves faster than a book can track, and a ranking of the ‘state of the art’ written in one quarter describes a different population by the next. The methods here concern how you measure and contain whatever model you are handed, which is why they outlast the ranking.

It is also not a guide to writing agents. No chapter covers prompt structure, tool schema design, or framework selection. I assume you already have an agent running, or will soon, and that your open question is whether its results can be believed and its reach can be bounded.

How the book is organized

The book has six parts and eighteen chapters. Measurement comes first because every later practice is adopted or rejected through a measured comparison. Nineteen taught practices in Parts II through VI also require a method taught in Part I. Interleaving those methods with their uses would scatter each method across four or five chapters.

This order costs you roughly three chapters of experiment design before we specifically get to agents. The alternative would make later recommendations easier to reach but harder to assess. Definitions would arrive after their first use, and repeated fragments would replace a coherent method.

Part I establishes how I compare systems when runs vary and scores can mislead. Part II turns those measurements into grading and release decisions. Part III addresses containment, persistent state, recovery, and failure analysis. Part IV examines how repository information enters, survives, and leaves an agent run. Part V treats human review as an engineered control with interfaces, escalation rules, and accountable ownership. Part VI allocates work across agents and models

under cost and capacity constraints.

Part	Ch	Title
Part I: Evaluation measurement and experiment design	1	Run-to-run variance, statistical power, and paired comparisons
	2	Baselines, ablations, and cost-accuracy tradeoffs
	3	Benchmark contamination, oracle strength, and workload validity
Part II: Evaluation and grading systems	4	Execution-based evaluation, correction gates, and release tests
	5	Calibrating model graders and separating agreement from correctness
	6	Proxy metric gaming and layered evaluation signals
Part III: Containment, durable execution, and recovery engineering	7	Agent isolation, injection defenses, and independent verification
	8	Persistent agent state, durable workflows, and idempotent retries
	9	Replayable traces and fault-injection recovery testing
	10	Human-auditable failure analysis and taxonomy development
Part IV: Context engineering: retrieval, budgets, and memory	11	Measuring and designing repository retrieval
	12	Localization funnels, repository indexes, and freshness checks
	13	Usable context budgets, consolidated-spec restarts, and file-based tool output
	14	Cross-session memory, raw traces, and compaction policies
Part V: Human review and accountability engineering	15	Efficient verification interfaces and risk-based human escalation

Part	Ch	Title
Part VI: Work allocation and cost engineering	16	Autonomy calibration, provenance, effective gates, and accountability
	17	Agent topology selection and dynamic task allocation
	18	Cost-aware fleet scheduling and model routing

What I assume you know

I assume working knowledge of version control, continuous integration, code review, on-call practice, containers, and basic statistics. I use those foundations without rebuilding them. I still describe the relevant system boundary when a familiar tool plays an unfamiliar role.

I assume no prior exposure to the evaluation methods specific to public agent results. I begin with how to read a public score and identify the claim it can support. I then show how many repeated runs a comparison needs before an observed difference carries useful information. The answer depends on variation and the size of the difference you need to detect.

I also teach why agreement with human labels does not by itself make an automated grader correct. Agreement can conceal shared mistakes, ambiguous examples, or a reference answer that measures the wrong property. I separate the observed agreement from the inference made about correctness, which becomes important when a grader controls release.

Another method checks whether a score was earned on work the model had already encountered. I introduce the required vocabulary only when the mechanism appears. My goal is that a technically capable reader should be able to reproduce the reasoning presented in this book, not merely accept my interpretation.

The book does not assume a particular agent architecture or deployment scale. I describe architecture separately from implementation so the mechanism survives changes in products and interfaces. Examples expose permissions, retries, caching, concurrency, identity, and ordering when those details affect the claim. Code appears only when prose would obscure a state transition or failure path.

How I grade evidence

Every taught practice states its support in its first paragraph. Each evidence item has a **source class** and an independent **strength grade**. **Research literature** comprises papers, preprints, and published benchmarks cited by identifier. An **explorer synthesis** distills a topic-scoped corpus of papers and industry sources into named practices with a source list for each. An item in this class points to the synthesis, whose record usually names one paper identifier even when the synthesis summarized several works. I assessed this class separately because its claim may be real despite thinner provenance than a direct citation. Convergence across independent corpora on the same structure provides a different kind of support from a single reported measurement in one study. A **practitioner account** is a production report, incident write-up, or first-person operational account.

The strength grades are **strong**, directly supporting the practice's claim, and **directional**,

supporting its direction without establishing it firmly. An **anecdotal** grade is drawn from a single reported case. A **null-result** grade records a test that found no supported effect. Class and grade are reported together, so an explorer-synthesis item may be graded strong while a practitioner account may be graded anecdotal.

The **selection lenses** were three independent passes over the catalog. Each proposed a taught set by asking whether a practice changes a decision in the reader's system, whether its omission loses coverage, or whether there is a case that can be taught. Their agreements and disagreements decided the taught set.

The **evidence audit** separately rechecked every explorer-synthesis item graded strong against its underlying source, retaining that grade only when the source was a controlled result supporting the practice's own claim and downgrading the rest.

The catalog's **mechanism clusters**, numbered 1 through 14, group practices acting on the same mechanism. The book's parts are named for the engineering disciplines those clusters require. Chapters refer to clusters by number.

Items graded strong form a minority of the evidence items across the book. Their distribution is also uneven. In Part I, they account for 59% of the items. In Part III, the thinnest part, they account for 14%.

Cases from my own systems appear only as illustrations to reveal a mechanism, suggest a failure mode, or make an abstract constraint concrete. I do not use them as the basis for a recommendation.

Chapter 7 presents the clearest tension between evidence strength and operational urgency. None of its three practices is supported by research literature, and three of the seven supporting sources are single anecdotes. Even so, two of its three practices were chosen for the main chapters by all three selection methods independently, and the third by two of them. Across this corpus, evidence strength and urgency showed little relationship.

That mismatch does not warrant greater confidence in the practices. It indicates a decision made under uncertainty, where the costs of acting and waiting are unequal. Some failures justify protective boundaries before their frequency is known with confidence, especially when a single credential can destroy both the primary resource and its recovery path. In those cases, I state the limits of the evidence and identify the observation that would cause me to revise the design.

I also treat every measured result as conditional on the experiment that produced it. A comparison inherits its workload, scoring procedure, task sample, and run conditions. Interpretation begins by checking those boundaries. Any claim that extends beyond them requires a separate argument; the result does not generalize on its own.

How to read a chapter

A chapter opens on a concrete situation, usually a measurement that came out wrong or a failure with a traceable cause. The mechanism follows, then what the evidence does and does not establish, then the boundary conditions, then a procedure you can run. Specialized terms are marked in bold where they are defined, so a term met later can be traced back to that site.

Citations appear inline, in author-year form, with the year linked to the source. The back matter of each chapter, headed Sources and evidence, carries the record behind those mentions: the source class, the strength grade, the identifier, and what the item supports. The two layers have separate jobs. The back matter is the authority for the identifier, the author list, and the grade, while the prose is the authority for the claim a source is being used to support. A disagreement between them is a defect.

The class and the grade both do practical work while you read. Research literature, an explorer

synthesis, and a practitioner account fail in different ways. A paper can be narrow, a synthesis can compress several works into one line of provenance, and a production report can be true of exactly one system.

A strong item means I state the finding as measured, inside the conditions the study ran under. A directional item means the direction has support and the magnitude does not, so the prose stops at the direction. An anecdotal item is one reported case, which can establish that a failure mode exists and cannot establish how often it occurs. A null-result item records a test that found no supported effect, and any recommendation standing near it has to survive that. A few items are contested, meaning the same corpus supplies a counterweight, and there the chapter names the counterweight.

Sentences are scoped to what was actually measured. Where support is thin, the chapter says so in its opening paragraph and prescribes a measurement you can run rather than a number to adopt.

The companion catalog

The companion site indexes all 192 practices under the chapter whose mechanism each extends. The 55 developed in the main chapters appear as short pointers into the chapter; the remaining 137 appear as compact entries. The catalog broadens the set of available options without forcing the main text to explain every variation.

Use the relevant chapter as the foundation, then consult the catalog for practices that match a specific constraint. A compact entry cannot reproduce the chapter's full treatment of mechanism, evidence, tradeoffs, and failure boundaries. The chapter provides the reasoning needed to decide whether a neighboring practice applies to your workload.

Twenty-nine of the full entries are labeled as thin-support asides. I excluded them from the taught set because the available evidence does not support a recommendation. Treat them as prompts for investigation rather than established guidance. They may point to a useful experiment, a missing control, or a failure mode worth instrumenting.

The chapters and catalog serve different purposes. The chapters develop methods and claims in enough detail to evaluate critically. The catalog preserves breadth and makes related practices easier to find. Together, they let you begin with a measured problem and identify an intervention suited to the system you actually operate.

What you should be able to do by the end

Given a published agent score, you should be able to state the narrower claim it supports and identify the conditions on which that claim depends. Given a proposed change to your own system, you should be able to measure run-to-run variation before crediting a difference and size the comparison before spending the model calls. Both systems should run on the same items, and a design that cannot resolve the difference relevant to the decision should return no verdict. Cost belongs in that judgment alongside accuracy, as does the possibility that a simpler configuration would have performed just as well.

You should be able to assess whether a public score was earned on tasks the model may already have encountered and to build an evaluation set from your own repositories when the public benchmark does not represent your work. Grades should rest on execution rather than the model's confidence, and automated graders should be validated against human labels before they gate releases. When a proxy improves without a corresponding improvement in the outcome it represents,

the system should make that divergence visible.

Operationally, you should be able to bound what a single run can access and destroy, and you should treat an agent's account of its own work as a claim that still requires verification. A run that fails partway through should leave a durable record of which steps completed, and every retried step should be safe to execute again. Recovery should be tested by injecting failures rather than inferred from an architecture diagram. Reading a hundred traces from your own system should yield a concrete failure taxonomy.

Retrieval should be evaluated separately from generation so that a wrong answer can be attributed to the stage that produced it. You should also be able to measure how much of an advertised context window the system can use effectively. Human review should occur where the reviewer can see the decision that carries the risk, and autonomy should expand by action type only when measured approval and modification rates justify it. A multi-agent design should be required to outperform a single agent on the same tasks, and each component should run on the least expensive model that can perform its role reliably.

The goal is to provide you with the tools to measure what matters for your work, so the result describes the system you operate rather than a position on a leaderboard.

Part I

Evaluation measurement and experiment design

Chapter 1

Run-to-run variance, statistical power, and paired comparisons

1.1 One run is one draw

I created an evaluation tool called CodeProbe (public repository) that mines tasks from a repository’s merged pull requests. In one of my runs using the tool it had reported that one configuration led another by +0.054 on a task family, and a single task accounted for most of that gap with a +0.300 advantage. This seemed reasonable, nothing about the run was ‘wrong’, and the scoring code returned a number precise to three decimal places. I could easily have written the larger score up as a win.

But, in my stubborn scientific ways, I reran the family instead, three times per configuration. The difference fell to +0.0035, with a 95% **confidence interval**, the range produced by a procedure that covers the true value in 95% of repeated experiments, running from -0.0005 to +0.0074. The five tasks in the family were the paired units: the three repeats collapsed into one per-configuration score for each task, leaving five paired observations and 4 degrees of freedom. The paired t statistic of 2.41 fell below the critical value of 2.776, so the result was the semi-dreaded ‘not significant’. The task that had appeared to improve by +0.300 came back at exactly 0.000, with both configurations scoring 0.800 on every repeat.

Those reruns showed that the original observation could not justify a claim that would have been easy to make. One bad baseline score created the outlier, and the outlier disappeared once the trial was repeated. Three decimal places of ‘precision’ is meaningless with a single run, and it describes the format of the number while indicating nothing about the stability of the process that produced it.

This task family scores through a deterministic test-suite oracle, under which the end state either passes the fixed tests or does not. That oracle collapses different trajectories onto the same score, so the tight repeat scores are a certification of scorer stability rather than agent determinism. The conclusion covers these five fixed tasks and no wider population.

It is critical to record repeated independent runs before declaring a meaningful difference between agent systems. A single score is one outcome from a variable execution process, even when the configuration appears deterministic. Without repeats, the observed difference mixes the system change I intended to test with variation from model execution, infrastructure, task ordering, and the other choices built into the evaluation apparatus.

Agent evaluations usually arrive as a table with one row per system and one score per row, which suppresses the execution history behind each cell. A score can aggregate hundreds of tasks and

still be a single run, if each task was attempted once under one instantiation of the surrounding conditions.

Each cell has three layers behind it. A public agent benchmark is a shared, published task suite used to score agents: **SWE-bench** presents real issues from software repositories, and tests decide whether a proposed change passes or fails, with SWE-bench Verified as a human-screened subset of those tasks. The **evaluation harness** is the execution and scoring apparatus that checks out the repository, supplies the task, invokes the agent, applies its change, runs the tests, and produces the reported number. The published comparison is the third layer, assembled from many harness executions.

Repeated attempts need their own vocabulary. **pass@k** names success across repeated attempts: **pass@1** is the fraction of tasks solved in one attempt, **pass@k** is the probability that at least one of k attempts passes, and **pass[^]k** the probability that all k attempts pass. One opportunity, retries available, and consistency across every attempt are three different questions. A run-level record keeps them separable by storing each attempt’s outcome next to its task identity, and an item-level record joins those attempts back to the task. An aggregate is the summary computed from those records; a distribution is the set of outcomes before that aggregation.

Large-scale measurement shows how much of that hidden history reaches the score. Across 60,000 SWE-bench-Verified trajectories, single-run **pass@1** varied by 2.2 to 6.0 percentage points. At decoding temperature 0, where temperature controls how randomly the model selects each token, the standard deviation still exceeded 1.5 percentage points because of infrastructure nondeterminism. The trajectories began to diverge within the first few percent of generated tokens, and each difference changed the context for the next token, so the divergence cascaded through the run.

Temperature 0 therefore does not deliver a deterministic code-generation evaluation. Ouyang et al. (2023) reached the same qualitative conclusion in an earlier empirical study of code generation: nominally identical requests produced different programs and different outcomes. That variation was not confined to the sampling control the model API exposes.

These findings influence how I read benchmark evaluation claims. Improvements of 2 to 3 percentage points, a common magnitude in system comparisons, fit inside the single-run variation Bjarnason et al. (2026) observed across 60,000 trajectories. That envelope applies to SWE-bench-Verified-class tasks, models, and execution conditions, but it is not a universal constant, and it is necessary to estimate local spread before treating a delta of that size as an improvement.

A small p-value also does not repair a single-score comparison. Reimers and Gurevych (2018) compared one score from each of two identical systems and found apparent significant differences in up to 26% of comparisons at $p < 0.05$. The test correctly described the two observed runs, but it could not establish that the methods differed, because the experiment had not sampled enough runs to estimate method-level variation.

Seed choice exposes the same failure at a different layer. Two five-seed samples from the same algorithm can look as if they came from different distributions. In reinforcement-learning experiments, Henderson et al. (2017) found that unreported choices among seeds, environments, and evaluation checkpoints gave researchers enough degrees of freedom to promote an ordinary fluctuation into a state-of-the-art claim. Selecting the best run after inspecting the results performs the same transformation more insidiously.

The history predates current agents. Across 2,100 trials that fine-tuned BERT models at identical hyperparameters, Dodge et al. (2020) found that distinct seeds produced substantially different results, and that weight initialization and data order contributed comparable variation. That result concerns small-data fine-tuning of pretrained encoders, so it needs re-verification before anyone treats it as a measured property of large-scale instruction tuning. What it establishes today is that a fixed hyperparameter record can leave consequential experimental state unspecified.

Nuisance sources, e.g., factors that affect the measured result but are not the capability under evaluation, are better varied by design than left to accident. Seeds, data order, task order, and splits can all be randomized, and the corresponding realizations can be matched across the systems being compared. Bouthillier et al. (2021) found that randomizing many nuisance sources and averaging the results approximated the estimator obtained by controlling each source, at about 51 times less compute. Fixed seeds produced precise estimates conditional on one arbitrary configuration, rather than estimates averaged over the range of configurations the benchmark was meant to represent.

Prompt wording is another nuisance source. In a study spanning 53 mostly classification and few-shot tasks, Sclar et al. (2023) found that meaning-preserving changes in prompt formatting produced a median accuracy spread of 7.5 percentage points, with spreads as large as 76 points. On some tasks, Salinas and Morstatter (2024) found that trivial edits changed more than 10 percent of predictions. Mizrahi et al. (2024) found that individual templates even reversed which model appeared to perform better, despite greater stability in aggregate comparisons.

Those results do not establish an equivalent variance rate for long-horizon agents. Prompt phrasing should be treated as a local sensitivity measure. It tells us how much a particular result moves under reasonable reformulations, not how much agent performance varies in general.

Prompt variation also creates an ownership problem. Teams often freeze one prompt and describe the resulting configuration as fixed, even though that wording is only one realization from a broader family of semantically equivalent instructions. Fixing the prompt supports reproducibility. Varying it tests whether the conclusion survives reasonable changes in expression. A credible comparison needs both. The exact prompt should be reported so the experiment can be reconstructed, and prompt sensitivity should be measured whenever the conclusion could plausibly depend on wording.

Repeated runs make these hidden choices visible as a distribution. For each configuration, I report every run-level score, along with the mean and standard deviation across runs, and inspect the per-item outcomes behind those aggregates. I randomize the declared nuisance sources and, wherever the design permits, use the same realizations for both configurations. Reporting only the best run identifies the luckiest draw, not how the configuration performs across draws.

Repetition is a direct cost multiplier. Three runs require roughly three times the model calls and execution capacity of one run, before adding prompt or seed variants. That cost cannot be avoided by borrowing a variance estimate from another model or task suite, because observed variance depends on the model, the tasks, and the evaluation apparatus together. Provider-side updates introduce temporal drift that local repetition cannot remove. Repeated results therefore also require either a pinned model version or an explicit record that the provider does not make one available.

The operational rule is narrow. Measure the local run-to-run spread, and do not credit a difference that remains smaller than that spread. Repetition alone does not establish that a detected difference is large enough to matter, nor does it determine how many runs are sufficient. Both depend on the decision threshold and the statistical power of the experiment.

1.2 What could the experiment have detected?

Before running a suite, the first question is which differences the design can resolve at all. In Miller’s worked example (2024), sampling more responses per question reduced the minimum detectable effect from 13.2 percent to 7.5 percent. The minimum detectable effect is the smallest difference the experiment can reliably distinguish from noise. Neither the model nor the questions became more accurate. Each question simply produced a less variable estimate, allowing the same experiment to resolve a smaller difference.

I run a **power analysis** before commissioning an evaluation. The calculation relates sample size, variance, the false-positive rate, and the probability of detecting a specified difference. I set that difference to the smallest change that would alter the engineering decision, not the difference I hope to report. This prior **effect size** is the magnitude assumed before any results are observed.

Statistical and engineering importance must be separated during design. An experiment sized to detect a gain too small to justify a more expensive configuration spends capacity on a decision that will never be made. The target should therefore be the smallest improvement that would justify deployment. Writing that threshold down before the results arrive prevents the observed delta from redefining what counts as a win.

Power is the probability that an experiment detects the specified effect when that effect is present. The false-positive rate controls how often the test reports a difference when no difference exists under its assumptions. These error controls trade off through sample size. At a fixed variance, a smaller target effect, a lower false-positive rate, or a higher desired detection probability each increases the number of observations required.

The minimum detectable effect expresses the same power calculation in reverse. Fix the task set, repeat count, variance estimate, and error rates, and it states the experiment’s resolution. Reporting it clarifies what a null result can support. The experiment had adequate power to detect differences of that magnitude or larger, while smaller differences were not reliably distinguishable from noise.

Many published benchmark comparisons cannot support the distinctions their tables imply. In a power analysis of GLUE, Card et al. (2020) found that many test sets lacked the resolution needed to distinguish the small state-of-the-art improvements researchers reported. This does not mean every reported ordering was false. It means the available samples left too much uncertainty to establish those differences at the chosen error rates.

An underpowered study fails in two directions. Most real effects will not reach significance, filling the literature or internal decision record with inconclusive null results. Among the estimates that do cross the significance threshold, the observed effects tend to be exaggerated because unusually large estimates are the ones most likely to survive. A significant result from a weak experiment can therefore provide a much less reliable estimate of magnitude than its p-value suggests.

I estimate the required sample size from a pilot and then add margin. The pilot supplies a variance estimate for the planned model, task family, prompts, and evaluation apparatus. Colas, Sigaud and Oudeyer (2018) recommend at least 20 pilot runs for estimating this variance. That is a floor for the pilot estimate, not a claim that the estimate has stabilized or that every final configuration requires 20 repetitions. A small or unrepresentative pilot can understate variance and produce a design that appears adequate on paper but remains underpowered in practice.

The sizing sequence remains reproducible even when its inputs change. I choose the smallest effect that would alter the engineering decision, estimate variance from the pilot, set the false-positive rate and desired detection probability, and solve for the required item and run counts. At fixed error rates, greater variance increases the required sample size, while a larger target effect reduces it. For a suite whose counts are already fixed, I solve in the other direction for the minimum detectable effect and add margin for uncertainty in the pilot estimate.

Which count to increase depends on where the uncertainty originates. More benchmark items reduce uncertainty about performance across items. More independent runs reduce uncertainty from execution variation. More responses per question reduce answer-level variance. Holding the other design choices constant, additional responses cost more model calls but can allow the experiment to resolve a smaller difference.

This is what reduced the minimum detectable effect from 13.2 percent to 7.5 percent in the worked example. The three counts are not interchangeable because each averages over a different

random quantity. That measured reduction is one empirical result, not a general conversion between response count and experimental resolution.

Lowering temperature is not a substitute for sampling more responses when the deployed system will run at the original temperature. It changes the distribution being measured rather than estimating that distribution more precisely. A lower temperature is a legitimate system change when the deployed configuration will use it, but it cannot serve as free variance reduction in an experiment intended to evaluate another configuration.

Small run counts also affect which inferential procedure is defensible. A **bootstrap** estimates uncertainty by resampling the observed data. In a paired comparison, it resamples the observed pairs. In experiments on reinforcement-learning systems, Colas et al. (2018) found that the bootstrap produced a realized false-positive rate of about 10 percent at small sample sizes despite a nominal rate of 5 percent. Two identical implementations of DDPG, a continuous-control reinforcement-learning algorithm, also appeared significantly different when evaluated with only five runs. Under those measured conditions, Welch’s t-test performed better than the bootstrap, and the evidence supported using a false-positive threshold below 0.05.

Welch’s t-test does not assume that the two configurations have equal variance, which makes it a more defensible default than the equal-variance t-test for independent small samples. Its advantage at low run counts is empirical and conditional. When the design pairs observations across matched tasks or nuisance realizations, the analysis should preserve that pairing rather than treat the samples as independent. No test removes the need to inspect the score distribution, and no test can repair samples that fail to represent the intended population.

Standard power formulas often assume that aggregated performance is approximately bell-shaped. Reinforcement-learning outcomes can be strongly bimodal, and agent outcomes may similarly divide between complete success and early failure. In the measured reinforcement-learning cases, even the t-test did not fully control the type I error rate for bimodal outcomes. Analytical power calculations should therefore be treated cautiously when the observed distribution is highly discrete, skewed, or multimodal.

Sizing from pilot tasks also assumes that their variation resembles the evaluation suite and that the suite resembles the deployment workload behind the decision. More runs can narrow uncertainty around the wrong population. No sample-size formula can repair a task distribution that omits important cases the deployed system will encounter.

Retrospective power does not solve these limitations. Computing power from the observed effect reuses the noisy outcome as though it had been the design target. The result largely restates the p-value and creates circular reasoning. A small observed effect produces low reported power, while a large observed effect produces high reported power. The useful calculation happens before the result, using an effect threshold and variance estimate chosen independently of the observed comparison.

One of my evaluation frameworks makes refusal mechanical. It scores a system across a ladder of successively weakened configurations and locates each readout on the resulting score curve. When too few rungs have been evaluated, the grader cannot place the readouts reliably, so it raises an error and emits no verdict. This refusal is a methodological rule, not a statistical test, and it carries no false-positive or false-negative rate of its own. Its value is that it keeps insufficient resolution visible to the person making the engineering decision.

A completed comparison should therefore report its detectable range. When the observed difference falls below the predeclared engineering threshold or below the experiment’s minimum detectable effect, I report that limitation explicitly. Insufficient resolution is not evidence that the systems are equal.

1.3 Compare outcomes item by item

When two systems face the same tasks, the comparison should be based on their per-item differences, and the experiment must preserve those differences from the start. A **paired design** runs both systems on the same experimental units so that their outcomes can be compared item by item. Pairing is a property of the experiment. The statistical test is chosen only after the paired observations exist.

The identical-system comparisons discussed earlier show the limit of analyzing one aggregate score from each run. A test may determine whether two realized scores differ under its assumptions, while the scientific question concerns whether the underlying methods differ across repeated realizations. Pairing does not answer that second question. Repeated runs are still needed to estimate variation across realizations. Pairing instead improves precision for the comparison within each realization.

The gain comes from removing shared item difficulty. If both systems tend to succeed on easy tasks and fail on hard ones, their item-level scores will be positively correlated. Subtracting the scores item by item removes much of that common movement, leaving variation that more directly represents disagreement between the systems.

For item i , let x_i and y_i be the two system scores and define the paired difference as $d_i = x_i - y_i$. Across n items, the estimated mean difference and its standard error are

$$\bar{d} = \frac{1}{n} \sum_{i=1}^n d_i, \quad SE(\bar{d}) = \frac{s_d}{\sqrt{n}}.$$

The variance of the mean difference contains the covariance between the two systems:

$$\text{Var}(\bar{d}) = \frac{s_x^2 + s_y^2 - 2 \text{Cov}(x, y)}{n}.$$

When the systems respond similarly to item difficulty, the covariance is positive and reduces the variance of the comparison. An independent analysis omits this term. It treats the two systems as though they had been evaluated on unrelated samples and counts the variation between easy and hard tasks twice. The resulting uncertainty estimate is therefore unnecessarily large when item-level outcomes move together.

Item-level subtraction removes shared task difficulty, so the remaining variation better represents system disagreement. Positive covariance narrows uncertainty without changing the mean difference.


The interval around the mean difference is obtained by multiplying its standard error by an appropriate critical value. The choice of critical value and the validity of the approximation depend on the statistical procedure and the observed score distribution.

The data record must preserve the pairing. For every task, I retain the task identity, both system scores, the nuisance-source assignments, and the run identity. I report the mean paired difference, its standard error, an interval around that mean, and the correlation between the systems' item-level scores. Once the per-item relationship has been discarded, two headline means are not enough to reconstruct any of these quantities.


Pairing also improves diagnosis. The same average difference can arise from small gains across most tasks, a few large reversals, or a trade in which each system solves a different subset. Those patterns have different engineering implications. Item-level records reveal which tasks changed and whether the overall result depends on a small number of discordant cases.

The validity of the pairing depends on experimental identity, not matching task labels. Both systems must receive the same task state under the same execution and scoring apparatus. Repos-

Easy and hard items move together
Independent arms count this movement twice

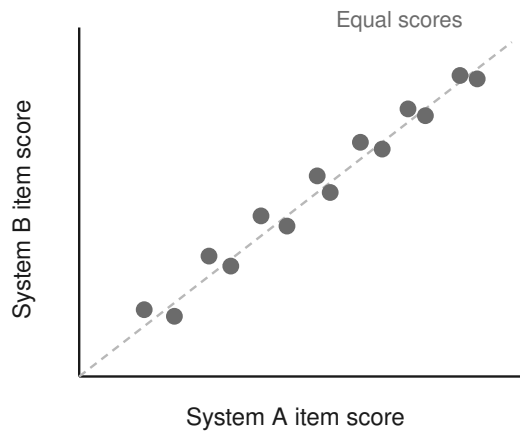

The center stays fixed
The width changes
Width determines whether a difference is credited

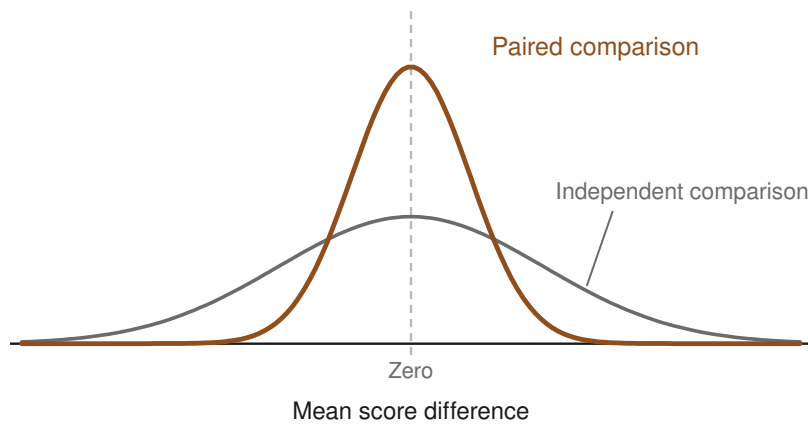

Illustrative geometry only - points and curves are not measured data.

Figure 1.1: Illustrative, unmeasured geometry shows item scores for systems A and B rising together, while paired and independent mean-difference distributions share zero but pairing produces narrower uncertainty.

itory revision, dependency state, tool permissions, time limits, and scoring logic are all part of the experimental unit. If any of them differ between the two arms, the subtraction no longer removes shared task difficulty because the systems did not receive the same item.

An adversarial review of one of my own experiment designs found this exact defect. One arm transformed the repository before presenting it to the system, while the other operated on the original repository. The task label remained the same, but the executable state did not. I therefore treated the planned pairing as invalid. A shared label does not establish that two experimental units are equivalent.

Published aggregate scores create a simpler boundary. If I did not run the other system on the same item instances, I do not have paired observations. The aggregate results can still be compared descriptively, but their item-level covariance cannot be recovered from the means. A valid paired analysis requires rerunning both systems on the same items.

Repeated attempts introduce the same identity requirement. Attempt one from system A pairs with attempt one from system B only when the attempts share randomized conditions by construction. Selecting pairs after inspecting the outcomes biases the comparison. Seeds, task order, data order, and other nuisance assignments must therefore be matched before results are visible and recorded with every pair.

The statistical procedure must also match the mathematical form of the outcome. When the reported score is the arithmetic mean of per-item numerical contributions, and the distribution of paired differences is reasonably compatible with a normal approximation, a paired t-test can test the mean difference and support a corresponding power analysis. That approximation should not be assumed automatically for small, discrete, skewed, or highly irregular samples.

Composite metrics require different treatment. An F-score is a nonlinear function of aggregate counts. There is generally no set of independent per-item F-scores whose arithmetic mean equals the corpus-level F-score. Corpus-level BLEU has a similar aggregation problem, and some forms of ROUGE may also depend on nonlinear or corpus-level aggregation. Applying a t-test to invented per-item metric contributions can produce a familiar p-value without satisfying the mathematical assumptions that give the test meaning.

A paired bootstrap preserves the relationship between the systems by resampling items as pairs and recomputing the full metric on each resampled dataset. A paired permutation test instead exchanges system labels within each observed pair under the null hypothesis. Neither requires the same normal approximation as a parametric t-test. Both still depend on choosing the correct resampling unit and having a sufficiently representative sample. The small-sample bootstrap failure described earlier occurred when the resampling unit was only a handful of runs.

Agent evaluations introduce outcomes that standard benchmark guidance does not fully resolve. Cost-weighted success combines task outcome with resource use. A pass or fail assigned by an imperfect grader includes uncertainty from the grading process. Neither outcome inherits a valid test merely because its final value lies between zero and one. The sampling unit, dependence structure, and aggregation rule must be specified before choosing the analysis.

The table below gives directional guidance. The recommendations for language-generation metrics come from the broader methodological guidance of Dror and Reichart (2018) rather than from controlled comparisons of agent evaluations. The binary row applies **McNemar’s test**, introduced by McNemar (1947), the standard test for paired pass or fail outcomes. It analyzes the discordant pairs in which one system passes and the other fails. The table is a starting point, not a substitute for deriving the metric’s actual sampling structure.

Outcome structure	Comparison to analyze	Test guidance
Per-item numerical scores whose paired differences plausibly satisfy a normal approximation	Mean of the paired item differences	Paired t-test
Metrics computed nonlinearly from aggregate counts, including corpus-level F-score and BLEU	Full metric recomputed on resampled or relabeled item pairs	Paired bootstrap or paired permutation test
Pass or fail outcomes on the same items	Discordant pairs in which only one system passes	McNemar’s test

A later chapter on retrieval freshness uses McNemar’s test for this reason. Both systems receive the same items, and each item produces a pass or fail outcome.

The companion catalog covers designs that this basic framework does not. Clustered items require correlation-aware standard errors. Estimating pass@(*k*) from repeated attempts requires the appropriate combinatorial estimator. Claims spanning many tasks or metrics require multiplicity correction. Ranking several systems rather than comparing two requires paired-comparison ranking models with uncertainty intervals.

The catalog also covers profiling benchmark noise before making decisions, declaring the decoding configuration, aggregating scarce repetitions with interquartile means and resampled intervals, reducing an evaluation around a specific decision, using precommitted confirmatory designs, and measuring sensitivity across prompt variants. Each addresses a narrower problem than the core decisions developed in this chapter.

1.4 The procedure I run before crediting a delta

I write the engineering threshold first, before the expensive suite runs. Pilot variance then determines the required task and run counts, with margin added for uncertainty in that estimate, and the design record states the smallest difference the planned experiment can detect. When the available budget cannot resolve the threshold, I narrow the claim or postpone the verdict before spending the calls.

Three independent repeats per configuration form my floor. The variance estimate may remain unstable at three, and a single lucky or unlucky draw no longer owns the result. I pair nuisance assignments across systems wherever possible and run both systems on identical item states. Each retained row records the item identity, both outcomes, the repeat identity, and the assigned random conditions.

Per-item differences supply the analysis: the mean difference, its standard error, the correlation between system scores, and a confidence interval on the mean difference. Pass/fail tasks call for the discordant pairs and the binary paired test, and nonlinear composite metrics call for resampling or permuting intact pairs. Matching task names do not establish pairing when repository state or execution path differs.

A repeat stays interpretable only while the apparatus is pinned: model version, decoding settings, exact prompts, task revision, tool permissions, and harness version. When a provider exposes no stable model version, I record the evaluation window and treat later reruns as open to drift. The observed delta belongs beside the complete run distribution and the prewritten threshold. I

credit no difference smaller than the measured spread, and I return no verdict on a difference the experiment lacked the power to resolve.

1.5 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

1.5.1 Taught entry 1: never-report-a-single-run

- lit/strong: Ouyang, Zhang, Harman & Wang (2023). An Empirical Study of the Non-determinism of ChatGPT in Code Generation. arXiv:2308.02828. Nominally identical requests, different programs and outcomes.
- lit/strong: Bjarnason, Silva & Monperrus (2026). On Randomness in Agentic Evals. arXiv:2602.07150. The 60,000-trajectory result: 2.2 to 6.0 pp single-run spread, SD above 1.5 pp at temperature 0, early-token divergence.
- lit/strong: Reimers & Gurevych (2018). Why Comparing Single Performance Scores Does Not Allow to Draw Conclusions About Machine Learning Approaches. arXiv:1803.09578. The 26% result.
- lit/strong: Bouthillier et al. (2021). Accounting for Variance in Machine Learning Benchmarks. MLSys 2021. arXiv:2103.03098. The ~51x result and the fixed-seed critique.
- lit/strong: Henderson et al. (2017). Deep Reinforcement Learning that Matters. AAAI 2018. arXiv:1709.06560. Five-seed splits and unreported researcher degrees of freedom.
- lit/strong: Dodge et al. (2020). Fine-Tuning Pretrained Language Models: Weight Initializations, Data Orders, and Early Stopping. arXiv:2002.06305. The 2,100-trial seed result, scoped to small-data fine-tuning of pretrained encoders.
- Prompt-variance finding: merged into this chapter’s first taught entry, with its full evidence held by the companion-catalog entry. lit/strong Sclar et al. (2023), FormatSpread, arXiv:2310.11324; lit/strong Mizrahi et al. (2024), TACL, arXiv:2401.00595; lit/strong Salinas & Morstatter (2024), arXiv:2401.03729.

1.5.2 Taught entry 2: power-analyze-before-running

- lit/strong: Miller (2024). Adding Error Bars to Evals. arXiv:2411.00640 (Anthropic). The 13.2% to 7.5% minimum-detectable-effect example and the response-count lever.
- lit/strong: Card et al. (2020). With Little Power Comes Great Responsibility. EMNLP 2020. arXiv:2010.06595. GLUE underpowering and effect-size exaggeration.
- lit/strong: Colas, Sigaud & Oudeyer (2018). How Many Random Seeds? arXiv:1806.08295. The pilot floor, the bootstrap false-positive rate at small N, the DDPG case, and the preference for Welch’s t-test.

1.5.3 Taught entry 3: use-paired-tests-matched-to-metric

- lit/strong: Miller (2024). Adding Error Bars to Evals. arXiv:2411.00640. Paired per-item differences with paired standard error and score correlation.
- lit/directional: Dror & Reichart (2018). Appendix, Recommended Statistical Significance Tests for NLP Tasks. arXiv:1809.01448. The per-metric test selection; directional, so the table is guidance, not a measured result.

- reference/standard method: McNemar, Q. (1947). Psychometrika 12(2), 153-157. DOI: 10.1007/BF02295996. The paired pass/fail test used in the binary-outcome row.

1.5.4 Author artifact cited inline

- Not an evidence item: CodeProbe, the author's task-mining evaluation tool, public repository. Named inline for the task-family run and rerun described in the opening, which are narrative illustration.

Chapter 2

Baselines, ablations, and cost-accuracy tradeoffs

In one end-to-end run of CodeProbe (public repository), the plain baseline came out ahead of the tool-augmented arm on both score and score per dollar. The configuration with the retrieval machinery in it lost to the configuration with none. That outcome was visible only because the run included a baseline at all. Reported alone, the tool arm’s score would have had nothing to be read against, and a reader could have credited the retrieval machinery with whatever the number implied.

Published comparisons frequently omit the inexpensive arm. Kapoor et al. (2024) re-evaluated published agent architectures and found that on HumanEval, retrying the model could match more elaborate architectures at a fraction of their inference cost. When they optimized cost and accuracy jointly, they reduced cost without giving up accuracy.

Those results do not establish the same conclusion for repository-scale engineering. The re-evaluation is directional, and its coding evidence comes from a function-level benchmark. The comparison design transfers even when the finding does not. The inexpensive arm belongs in the experiment, and cost belongs in the report.

That omission changes the claim. A system with memory, retrieval, tools, or multiple agents may score higher than a direct model call. The score alone cannot tell us whether the added machinery caused the gain, whether another model call would have produced the same gain, or whether the comparison spent more until it found more successful samples. Engineering selection requires two coordinates: what the system accomplishes and what it consumes.

The evidence base for this chapter is narrow. It holds five items across two taught entries. Four of them are explorer-class syntheses, and none of those four is a controlled experiment. One of the two entries has no strong evidence item at all. I therefore use the evidence to specify comparisons readers can run on their own workloads. The record cannot support a universal cost threshold or a recommended architecture.

An elaborate system is worth keeping only when both comparisons support it. Its components must contribute something that remains when the rest of the experiment is held fixed, and the full configuration must beat the simple alternatives at a cost the operator is willing to pay. These are separate tests. Component removal addresses causal attribution. Direct-call and retry baselines address engineering value.

2.1 Remove the component and rerun the evaluation

An **ablation** removes one component and reruns the evaluation with the rest of the system and procedure held fixed. If a memory-enabled agent outperforms an agent without memory, the missing-memory arm estimates what the memory system contributed. If the comparison changes the model, prompt, task subset, token budget, harness version, or scoring procedure at the same time, the subtraction no longer isolates memory. It measures an unspecified bundle of changes. Without the missing-component arm, base-model capability and item difficulty remain plausible explanations for the observed score.

The evidence for this practice is explorer-class synthesis, which the evidence audit retained as strong although no single controlled experiment supplies the support. The same control logic appeared independently in two corpora. In agent memory, the spine of that synthesis is SkillEvol-Bench, from Lei et al. (2026). In code retrieval, CoIR, from Li et al. (2024), supplies only the task and metric substrate, and the control logic below comes from the explorer’s evaluation-design blocks rather than from that benchmark paper. The provenance is imperfect, because the memory explorer named three works behind a single carried identifier before that record was split. Two of the three are now carried at directional strength with no figure of their own. The support rests on convergence between the corpora rather than on one reported effect size.

Memory requires at least three arms. The first is the proposed memory system. The second is the no-skill control, which removes the written memory entirely. The third reuses the raw trajectory from prior work without asking a writer to consolidate it into a skill or memory record. The no-skill arm tests whether prior experience helps at all. The raw-trajectory arm tests whether the consolidation mechanism adds anything beyond retaining the original evidence.

Those two questions are easy to collapse into one. Suppose an agent that receives a distilled lesson solves more tasks than an agent starting from an empty context. The gain could come from the lesson, but it could also come from any useful tokens copied out of the earlier attempt. Raw-trajectory reuse makes that alternative visible. If the raw trace matches the distilled record, the experiment has shown that prior information helps, but it has not shown that the writer extracted a better representation.

The comparison also needs matched opportunities to retrieve. A memory arm evaluated on tasks for which a relevant record exists cannot be compared directly against a no-memory arm scored across a broader or harder task set. The primary comparison should be restricted to a coverage-matched subset, that is, the tasks for which the memory or retrieval system had a genuine opportunity to return relevant material. The full-set result should be reported separately, because coverage is itself an operational property. Unequal coverage should not be read as a difference in answer quality.

Retrieval and tool evaluations need a corresponding no-tool arm. Tool availability is an experimental variable and should be recorded with the rest of the arm configuration. The control gets the same base model, instructions, stopping conditions, and task instances, with access to the tool removed. If the treatment also receives a different system prompt, a larger context budget, or extra retries, those changes belong in additional arms or in a sweep that varies them one at a time.

One-factor sweeps matter because agent components interact. Retrieval can change context length. Context length can change model behavior. Tool schemas consume tokens before the agent begins the task. A different endpoint can expose a different tool set. A single comparison between ‘agent’ and ‘baseline’ assigns the combined effect to whichever feature appears in the label. Factorial experiments can estimate interactions when the evaluation budget supports them, but a sequence of one-factor comparisons is usually enough to find the first unsupported attribution.

An ablation result is conditional on the configuration in which the removal occurred. If retrieval

helps only when a summarizer compresses its output, removing retrieval from the full system estimates retrieval’s contribution with that summarizer present. The result does not show whether retrieval would help without summarization, or whether summarization would help without retrieval. Those questions require the corresponding component combinations as separate arms.

Skills and multi-agent structures need the same discipline, but their removal needs a more precise intervention. Deleting a skill while also shortening the prompt changes both procedural guidance and context length. Replacing several agents with one while reducing the call budget changes topology and sampling opportunity together. A useful control preserves the available information and budget wherever the design permits and removes only the coordination or representation being credited. When that preservation is impossible, an intermediate arm lets the comparison separate fewer model calls from a different arrangement of those calls.

The paired design from Chapter 1 belongs here. Each arm runs on the same tasks, task ordering and other sources of randomness are matched across arms wherever the execution system permits it, and the outcomes are analyzed as pairs. Otherwise, item difficulty can dominate the component effect. A retrieval arm that happens to receive more questions answerable by lexical lookup may appear superior even when the tool adds nothing on matched items.

Target size is a second confound of the same kind. A tool may look better when its index contains a narrow, curated collection and worse when it searches a large repository with many plausible distractors. Query coverage, corpus size, and retrieval depth should therefore be recorded with the configuration. If target size changes between arms, the experiment measures both the target and the retrieval algorithm.

In two studies from my own team, we asked the same practical question: does a retrieval tool help an agent? The positive-sign study was a paired comparison across many repositories, in which the tool arm came out slightly ahead. The negative-sign study was the CodeProbe run described at the start of this chapter, in which the plain baseline came out ahead. The two used different task curation and different enforcement of which arm had to use the capability under test. That experience is narrative illustration rather than independent evidence for the control method, but it exposed the mechanism. The apparatus decided which work entered the evaluation and whether the agent had to use the capability supposedly under test. The label on the treatment arm therefore did not identify a stable intervention.

Arm separation should be established at the task level through observed usage. A task cannot estimate a tool effect when the treatment completes it without touching the tool. Such a task may remain useful for measuring the agent’s overall capability, but it contributes no information to the comparison of tool access.

In my own enterprise-scale benchmark, one candidate task ran for 41 turns without a single call to the tool under test. By every static check we had, it was a perfect task, and for the tool comparison it was useless. We removed it from the tool-effect comparison because both arms had effectively received the same treatment. Candidate tasks are hypotheses about discrimination, and a pilot run has to show that they actually separate the arms.

This gate should be empirical. For every candidate task, record whether the treatment invoked the component, whether the control could reach it through another path, and whether both arms received equivalent task information. A binary ‘tool enabled’ field is inadequate when the agent may ignore the tool. Usage counts, arguments, returned bytes or tokens, and the point in the trajectory where the result entered context make the intervention observable.

The exclusion rule needs the same protection as any other post-hoc filter. Removal should be keyed to observed component usage and declared before the outcomes are inspected. Dropping tasks after seeing which arm won selects on the result, and it converts a usage gate into a mechanism for improving the reported effect.

Usage does not establish usefulness, but absence establishes non-use. If the treatment calls a retriever and then ignores its output, the task may still show a cost effect or an interference effect. If it never calls the retriever, its outcome cannot support a claim about retrieved information improving correctness.

The strongest boundary concerns information flow into the component. Evaluation labels and gold answers must stay out of any memory writer. A writer that sees the correct answer can encode it directly, encode a near paraphrase, or preserve features that make later retrieval trivial. Freezing the memory after that write does not repair the experiment, because the evaluated artifact already contains the target.

The same rule applies to the scoring target. A ‘right answer’ generated with the tool or mechanism under evaluation cannot then be used to grade that mechanism by agreement with its own output. A retrieval system compared against answers assembled from the same retrieval system has been graded against its own oracle, the reference an evaluation scores candidate answers against. A target capable of disagreeing with the system requires independent human verification, or sources outside the evaluated path. Public benchmarks carry a related problem, because models have often already seen those tasks during training, an inflation channel Chapter 3 measures.

An ablation cannot remove every threat to inference, and it does not show that a useful component will remain useful under another workload. It answers a narrower question: under the evaluated task distribution and the fixed surrounding system, did removing this component change the measured outcomes? This question is narrow enough to test and strong enough to prevent a common attribution error.

The completed record should make the subtraction reproducible. Name the component removed, list every configuration field that remained fixed, identify the coverage-matched task subset, report component usage per task, and preserve the paired results. When multiple factors changed, describe the arm as a bundle and resist assigning its effect to one member of that bundle.

2.2 Select on accuracy and cost together

The support for this entry is one directional re-evaluation study and no strong evidence item. Kapoor et al. (2024) covered a small set of benchmark families, including function-level coding, multi-hop question answering, and web-agent tasks. They did not establish the same result for repository-scale software work. Their contribution here is a comparison design that can be applied beyond those tasks. Evaluate the elaborate system against direct model calls and retries, then place accuracy and inference cost in the same result.

Additional model calls can raise the pass rate without any change to the architecture. If one attempt has probability p of passing and two attempts are independent, the probability that at least one passes is $1 - (1 - p)^2$. The expression illustrates the effect under independence. It does not estimate real agent behavior, in which attempts are correlated. Correlation changes the size of the gain, but a system allowed to sample, revise, or delegate more often still has more opportunities to produce a passing output.

An accuracy-only ranking conceals those opportunities. It may rank a five-call scaffold above a direct call without showing that the improvement came from four additional samples. It may also compare one architecture with a retry loop against another configured to stop after its first answer. The ranking then credits budget and stopping policy under the name of architecture.

Use at least three initial arms. The direct-call arm sends the task to the base model with the minimum production-valid prompt and no scaffold. The retry-once arm makes one additional model attempt after a defined failure signal. The candidate arm runs the proposed architecture with its

intended tools, memory, or delegation.

The failure signal in the retry arm must be available to the deployed system. Unit tests, a compiler error, or a schema validator can supply one. A hidden benchmark answer cannot. If the experiment retries only because the evaluator knows the first answer is wrong, that arm should be labeled oracle-assisted, because it otherwise understates the operational cost of deciding when to retry.

Model version, task set, and scoring target stay fixed across the three arms. Match any shared context required to attempt the task, but do not give the direct call internal traces that exist only because the scaffold ran. The inexpensive alternative has to be built credibly, since a deliberately crippled direct call provides no useful control. Record the stopping condition for every arm, because ‘one run’ can mean one model response, one agent trajectory, or a tree of dozens of calls.

Cost accounting begins at the task boundary. Count all input and output tokens consumed after the task enters the system, including calls made by planners, delegates, critics, summarizers, and retries. When a provider bills cached input differently, preserve cache-read and cache-write quantities rather than folding them into an undocumented token total. Failed calls, timeouts that incur usage, and discarded branches are part of the cost of the configuration that created them.

Report token quantities even when the organization buys capacity rather than paying per request. Tokens remain a portable description of inference demand, while dollars depend on contract terms, provider prices, model aliases, and date. Convert the token ledger to money with a named pricing basis and a snapshot date. A dollar figure without that snapshot becomes uninterpretable after prices change.

Latency belongs beside this record when users wait for the answer or when workers occupy scarce execution slots. Latency and inference cost are not interchangeable quantities. Two arms can consume the same tokens while one serializes its calls and the other runs them concurrently. The parallel arm may reduce wall-clock time while raising peak capacity requirements. Cost, performance, and scheduling pressure therefore remain separate operational properties.

Plot each configuration by accuracy and cost. A configuration is Pareto-dominated when another configuration is at least as accurate and no more expensive, with a strict advantage on at least one axis. Dominated points drop out of consideration unless they supply some separately measured property the two-axis plot omits. The remaining points form the Pareto frontier. Moving along it trades accuracy for cost in one direction and cost for accuracy in the other.

The points on the plot should be configurations. Architecture names are too coarse, because model choice, retry limit, retrieval depth, and context budget all change both coordinates. A frontier built from configurations is usable for routing. Inexpensive settings may serve routine tasks, while costly settings are reserved for cases in which their measured gain justifies the added inference.

This rule is stronger than ranking by score per dollar alone. A ratio can favor a configuration that is cheap but below the minimum acceptable accuracy, or hide how much accuracy the additional spending returns at the high end of the curve. The frontier preserves the actual coordinates. Deployment constraints apply afterward: a minimum pass rate, a maximum per-task cost, or a latency ceiling measured for the workload.

Dominating configurations remove weaker alternatives unless an omitted property is measured separately. Deployment constraints then narrow the frontier.

The paired analysis from Chapter 1 keeps the frontier from acquiring false precision. Cost and accuracy estimates have uncertainty, and two nearby configurations may be indistinguishable at the available sample size. A single run also yields one realization of aggregate cost, which inherits the run-to-run variation that Chapter 1 describes for scores. The paired comparison runs on the per-task costs inside that run rather than on the aggregate. Preserve per-task cost as well as

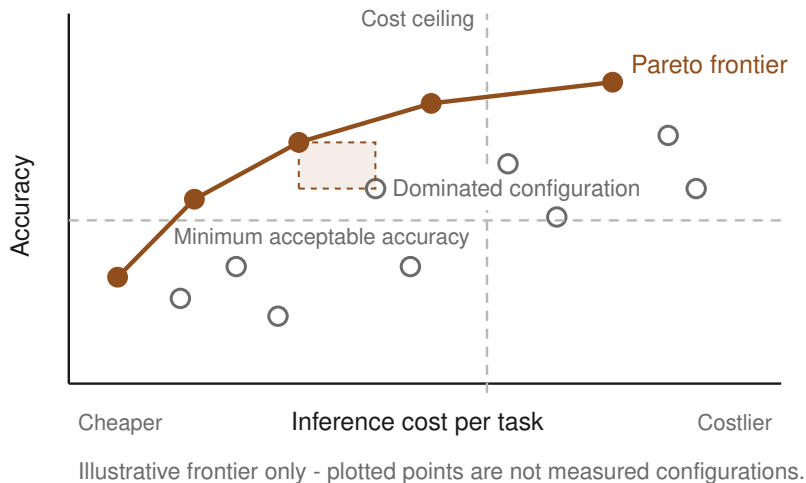


Figure 2.1: In this illustrative set of unmeasured configurations, five connected points form the accuracy-cost frontier and nine open points are dominated; a shaded region demonstrates domination, while minimum-accuracy and cost-ceiling guides bound feasibility.

per-task correctness, so that bootstrap intervals can be computed for both axes and for the paired differences. A point should not be called cheaper or more accurate when the interval around that comparison does not support the ordering.

The retry arm needs the same accounting discipline as the candidate. If only some first attempts fail, report how often the second call fired, how much it cost when it fired, and whether it fixed the task. That record exposes the marginal value of the retry policy. A low-cost retry that recovers a meaningful subset of failures may dominate a planner with multiple unconditional calls, while a retry that repeats the same error adds cost without moving accuracy.

In CodeProbe, I report score per dollar alongside score and rank configurations by pass rate, cost, tokens, and latency. The end-to-end run in which the plain baseline led the tool-augmented arm on both axes came out of that report. It does not establish a general result about tools. Reporting both axes made the engineering decision visible without turning a small score difference into a claim about architecture.

Accuracy without a cost constraint still answers a legitimate research question. A model developer may want to know the highest capability reachable under extensive sampling, regardless of whether that procedure is economical in production. That is a capability probe. Selecting a system to operate under a budget is a different decision, and the result should state which decision the experiment was designed to support.

Architecture development introduces another source of optimism. An iteration **holdout** reserves a set of tasks that scaffold developers never use while choosing prompts, tools, routing rules, retry policies, or other configuration. Repeated iteration against a fixed evaluation set turns that set into training data for the scaffold, even when the model weights never change. Developers learn which changes improve the score, keep those changes, and discard the rest.

Create the iteration holdout before tuning begins. Use the remaining development tasks to debug the harness, compare early configurations, and decide what to carry forward. Open the

iteration holdout only at a declared decision point, run the selected configurations, and do not use its task-level failures to continue tuning the same selection. If development resumes from those failures, the set has joined development and a new iteration holdout is needed.

The iteration holdout also needs protection from indirect tuning. A developer who reads its repository names, failure categories, or aggregate subgroup scores can adapt the scaffold to those features without inspecting the exact prompts. Access controls and an evaluation service that returns only the predeclared result can preserve the boundary better than a file accompanied by a policy. Record every opening, because repeated ‘final’ checks use up the separation.

The cost of this discipline is fewer tasks for routine iteration. On small evaluations, that can reduce power enough to leave the final comparison inconclusive. The remedy is not to recycle the iteration holdout during development. Acquire more representative tasks, reduce the number of configurations carried into the final comparison, or accept a wider confidence interval. The boundary protects the interpretation of the result, but it does not add information the sample does not contain.

Search budget belongs in the accounting as well. If one architecture received hundreds of prompt and scaffold trials while the baseline received a single default configuration, the final inference-cost plot omits much of the effort spent finding the winner. Development cost and serving cost answer different questions. They should therefore be reported separately. At minimum, preserve the number of configurations tried, the selection rule, and the compute spent before the iteration holdout evaluation.

The companion catalog carries six related procedures. They cover expected best performance by tuning budget, repeated-sampling budgets based on coverage and verifier error, frozen-memory evaluation, a pinned scoring target, human-verified synthesis of evaluation instances, and baseline gates against random selection. Each refines a particular part of the experiment. None replaces the direct-call, retry, ablation, cost, and iteration-holdout controls developed here.

2.3 Build the next comparison

Start the next architecture comparison with the inexpensive arms. Run the base model directly, then run it with one retry under a failure signal the deployed system can observe. These controls establish how much of the candidate’s accuracy another sample produces on its own, before a planner, memory writer, retriever, or second agent enters the design.

For each added component, create an arm without it and preserve every surrounding choice the design permits. When memory is the treatment, add raw-trajectory reuse so the experiment separates stored experience from the mechanism that rewrites it. When retrieval or tools are the treatment, add a no-tool arm, match task coverage, and record actual usage. Change one factor at a time unless the experiment is explicitly designed to estimate interactions.

Pilot the tasks before treating them as trials. Inspect each treatment trajectory and verify that the component entered the computation. A task the treatment never touches may measure general capability, cost, or incidental interference, but it decides nothing about the component’s contribution. Remove it from that effect estimate under a rule declared in advance, or report it in a separate stratum.

Carry the per-task record from Chapter 1 into the cost analysis. For every arm, preserve correctness, input tokens, output tokens, priced cache quantities, call count, component usage, and wall-clock latency. Convert usage to dollars with a dated pricing snapshot. Plot accuracy against cost with confidence intervals, and prefer a configuration only when no cheaper configuration matches or exceeds its accuracy within the resolution of the evaluation.

Reserve the iteration holdout before the first scaffold change. Decide who can inspect it, when it can be opened, which aggregate results will be returned, and what event ends the comparison. Once developers have used its failures to revise the system, it has become development material. The boundary cannot be created retroactively around tasks the team has already learned to optimize.

2.4 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

2.4.1 Run ablation controls

- explorer/strong: *SkillEvolBench* (Lei et al. 2026, arXiv:2605.24117), agentic-memory explorer synthesis covering no-skill and raw-trajectory controls, coverage matching, one-factor sweeps, and the writer information-flow pitfall.
- explorer/strong: Evaluation-design blocks of the code-retrieval explorer corpus, covering the no-tool baseline, tool access as a controlled variable, and ground-truth tautology. CoIR (Li et al. 2024, arXiv:2407.02883) is the metric spine of that corpus and supplies the code-retrieval tasks and metrics only. The three controls come from the explorer synthesis, not from the CoIR paper.
- explorer/directional: *TIAP* (arXiv:2605.24060), direction only; no figure carried.
- explorer/directional: *MemConflict* (arXiv:2605.20926), direction only; no figure carried.

2.4.2 Report cost-accuracy tradeoffs

- lit/directional: Kapoor, Stroebel, Siegel, Nadgir, and Narayanan (2024), *AI Agents That Matter*, arXiv:2407.01502, a re-evaluation study.
- lit/directional: the iteration-holdout section rests on the same study, carried in the companion catalog as a separate record on holdout design split by generalization level.

2.4.3 Author artifact cited inline

- Not an evidence item: CodeProbe, the author’s task-mining evaluation tool, public repository. Named inline for the end-to-end run and the score-per-dollar reporting described above, both of which are narrative illustration.

Chapter 3

Benchmark contamination, oracle strength, and workload validity

In February 2026, OpenAI (Feb 2026) stopped reporting results on a benchmark subset it had helped create. Later in July 2026, it did the same for SWE-Bench Pro (Jul 2026). SWE-bench Verified had become one of the most cited measures of coding-agent performance. Its 500 tasks had survived screening by 93 paid professional developers, a process intended to remove ambiguous issues and defective tests. Less than two years later, a practitioner breakdown of the sponsor’s audit reported that at least 16.4 percent of the full subset was unsolvable as shipped. That figure is derived from the audited sample rather than stated in the sponsor’s own summary. The same audit showed frontier models reproducing solution details verbatim when given only a task identifier.

Human screening had improved the original collection, but it could not control what happened after publication. **Contamination** is exposure to evaluation material before testing. Once tasks, issue discussions, reference patches, tests, and leaderboard results are public, they can enter training corpora, retrieval systems, fine-tuning sets, prompt libraries, and repeated development cycles. A clean review at release establishes nothing about those later paths.

The retirement also exposed a separate problem. Some tasks rejected functionally valid patches because the tests required an undocumented implementation detail or checked behavior absent from the issue. Other tests were too permissive and accepted patches that did not implement the requested behavior. Human review had missed both kinds of defect, because task quality is conditional on the candidates being graded. A test that looks reasonable in isolation can fail when it meets an implementation its authors did not anticipate.

You should treat any public score as the output of three coupled measurements. First, has the model already encountered the work? Second, can the test oracle refute an incorrect answer? Third, does the task distribution represent the work someone wants the model to do? The sponsor’s reversal is the demonstration that reputation, curation effort, and a large annotator count answer none of these questions. Each question needs its own control.

```
public score
~
|
+--> has the model already encountered the work?
|      -> matched control set
|
+--> can the test oracle refute an incorrect answer?
|      -> adversarial test strengthening
```

```

|           -> re-adjudication
|
+--> does the task distribution represent the work?
      -> tasks mined from the reader's own merged work

reputation + curation effort + large annotator count
-> answer none of these questions

```

3.1 Measure the public-private gap

The first control is a point-in-time audit that any evaluator can commission. A **matched control set** reproduces the public suite’s relevant difficulty characteristics using tasks the benchmark never released. Running both sets under the same protocol produces a separate public-private gap for each model.

Prathifkumar et al. (2025) conducted an observational comparison and found roughly a threefold overall advantage and a sixfold file-localization advantage on SWE-bench Verified relative to their control tasks. The comparison covered popular open-source Python projects, but it did not establish that the individual issues were equally difficult. Unresolved differences in task difficulty therefore remain a plausible explanation for part of the observed gap.

This audit provides a point-in-time measurement. The post-cutoff pipeline in the next section provides a standing control, avoiding the need to reconstruct the comparison each time the public benchmark ages.

An evaluator usually cannot inspect a model’s complete training history. Providers rarely publish full training corpora, and even a searchable disclosed corpus would omit later fine-tuning, generated training examples, and indirect exposure through task discussions or benchmark-driven development. Asking whether a model has seen a particular item creates an attribution problem without reliable ground truth. Asking how its performance changes on comparable unseen work produces an observable difference.

The audit requires two task sets that differ in public exposure while matching as closely as possible on the features that determine difficulty. For repository work, those features include programming language, repository scale, issue format, expected patch size, dependency burden, and the amount of localization required before editing. The model, harness, prompt, tool access, retry policy, and scoring procedure remain fixed across both sets.

When each public task has a defensible counterpart, the audit should use a paired design so the analysis can compare outcomes within each matched pair.

For a given model, the primary estimate is:

```

inflation_gap(model) =
    score(model, public_tasks) - score(model, matched_control_tasks)

```

The gap estimates the combined effect of public exposure on the measured score. It cannot isolate a pure training-data effect. The estimate may include direct exposure to tasks or solutions, familiarity with repositories and issue conventions, and adaptation through repeated use of the public suite.

That final channel does not require any change to model weights. Each time developers evaluate an agent on a public suite, retain a change that raises its score, and discard one that lowers it, the development process adapts to the suite. The iteration holdout described in Chapter 2 protects

a local development process from this form of selection. The matched comparison estimates the inflation that remains across all exposure channels together.

A single audit is also a single realization. The gap inherits the run-to-run variation described in Chapter 1, so both task sets require repeated runs before their difference can be interpreted as an estimate rather than one draw.

There are three practical ways to construct the comparison set. A **private mirror** reproduces the public suite’s collection procedure using tasks that have never been released. A **newly collected set** samples recent work from the same task family. A **retroactive twin set** reconstructs tasks with the same measured properties, provided the model’s training cutoff predates publication of the twins. Each supports a narrower claim than the phrase “clean benchmark” suggests.

A private mirror provides the strongest control over exposure, but it is expensive to construct. Repository tasks require reproducible code states, issue descriptions, reference changes, and tests that distinguish acceptable from unacceptable patches. The mirror loses its protection once it is released, distributed broadly to vendors, or used repeatedly during agent development. Access logs, handling rules, and usage history therefore become part of the measurement because the set’s exposure status changes over time.

Newly collected tasks are less expensive when a team already has a stream of resolved work. Their recency makes prior exposure less likely, but it may also introduce a different mixture of repositories, framework generations, and issue types. A lower score may therefore reflect unfamiliarity, greater difficulty, or both.

Matching requires an explicit adequacy check. Similar averages are not enough. The evaluator should determine whether the feature distributions overlap, whether individual pairs are defensible in engineering terms, and whether the conclusion survives the removal of visibly poor matches.

Retroactive twins make the matching problem especially visible. Haimen et al. (2024) constructed twins for a public question-answering benchmark and required them to pass four statistical indistinguishability checks before comparison. Across 20 models, some public scores exceeded twin scores by as much as 16 percentage points. A substantial public-private gap can therefore remain even after formal matching checks are satisfied.

Those results do not establish a comparable gap for repository-scale coding. The twins were constructed and validated for question answering, and the method applies only when the model’s training cutoff predates publication of the twin set. The 16-point result is the largest gap observed under that study’s design. It is not a bound on coding benchmarks and should not be used as a correction factor for coding scores.

A controlled arithmetic study provides another boundary. Zhang et al. (2024) econstructed a grade-school arithmetic benchmark as a private mirror and measured accuracy drops of up to 8 percent. The model-level gap was also associated with the probability that a model would reproduce public items verbatim, with a reported squared Spearman correlation of 0.36.

Many frontier systems showed little overfitting, and every evaluated model generalized to the novel items. That variation is why the audit must be performed separately for each model. Exposure and score inflation are properties of a particular model-benchmark pair. Applying one average correction across models would erase the model-specific signal the audit is intended to measure.

The observational coding result is more directly relevant to software work but less controlled. Both sides used popular open-source Python projects, yet matching at that level does not establish equivalent issue difficulty. A model may localize files more easily in repositories it has encountered repeatedly, which is itself a meaningful familiarity effect. The observed performance difference may also include repository-specific complexity.

The reported threefold and sixfold gaps should therefore be treated as directional evidence, with the matching limitation attached whenever those figures are used.

The audit should produce a separate record for each model containing the public score, matched-control score, paired difference where pairing is justified, and uncertainty for each quantity. It should also document the task-matching procedure closely enough for another evaluator to challenge it. A single pooled gap is inadequate because models differ in both exposure and generalization. A corrected leaderboard is worse because it converts uncertain, model-specific estimates into false precision.

The decision depends on the size and stability of the measured gap. A small gap with a wide confidence interval means the audit lacked the resolution to establish much. A large gap that survives plausible rematching indicates that the public score is a poor estimate of that model’s performance on comparable unseen tasks.

Neither result establishes how the model will perform on the reader’s repositories. The audit answers a narrower question: whether public availability appears to change the measurement.

3.2 Keep the task window ahead of the model

A **temporal holdout** tags every task by publication time and evaluates a model only on work published after its stated training cutoff. This is the standing pipeline. The matched comparison in the previous section is the point-in-time audit, and a reader who adopts that audit alone has to keep commissioning new ones as the public set ages. The pipeline removes that repetition at a real cost. Longitudinal comparability weakens, because every time window contains different work.

The control removes the most direct path from a public task into pre-evaluation training. Suppose a model’s stated cutoff is June 2025. An issue first published in August can enter its evaluation window, while an issue published in May cannot, even when both are assembled into the benchmark in September. The relevant date belongs to the underlying task material rather than to the benchmark’s ingestion.

That distinction changes the data model for an evaluation suite. Each task needs provenance for its issue, repository state, tests, solution, and any discussion that reveals the solution. Each model needs a recorded cutoff and a policy for ambiguous or rolling cutoffs. Eligibility is then a function of both records:

```
eligible(task, model) =
    task.first_public_at > model.training_cutoff
```

The inequality is the easy part. `first_public_at` may refer to an issue that was discussed in a public chat before it reached the tracker, a security fix disclosed after private coordination, or a commit mirrored across several hosts. A benchmark maintainer must choose which event counts and retain enough provenance to revisit that choice. Cutoff claims pose a similar problem, because providers may disclose a date without specifying whether later supervised tuning, tool traces, or retrieval indexes include newer material.

Eligibility is also a property of a task-model pair rather than of a task set. A collection labeled post-cutoff without naming the model it was checked against establishes nothing about eligibility.

Controlled evidence from continuously collected coding problems shows why the date split is still useful. Jain et al. (2024) tagged problems by release date and found that some model families lost substantial performance on problems published after their cutoffs. The same time-windowed scoring exposed overfitting to an older function-level suite, because models that scored well on it dropped on a fresh distribution. The discontinuity is stronger evidence than a memorization probe alone, because it connects temporal eligibility to the score being interpreted. It remains conditional on the accuracy of the disclosed cutoff and on the comparability of adjacent task windows.

Repository-scale live collections provide directional support. Zhang et al. (2025) rebuilt the issue-to-environment recipe continuously, with a reproducible environment built per task, and reported that the same systems scored well below their results on a frozen suite. Badertdinov et al. (2025) ran a continuous collection pipeline with decontaminated evaluation and hedged that some models’ frozen-suite scores may be inflated by contamination. Adamenko et al. (2025) described a continuously updated pipeline that draws on roughly 10,000 potential tasks and passes a small fraction of them through automated gates into the released benchmark. These results show that live evaluation is operationally possible and that frozen and fresh distributions can disagree. They do not isolate direct training exposure from changes in repositories, issue difficulty, or curation.

A standing pipeline has four recurring jobs: gather new work, reconstruct a reproducible environment, reject invalid tasks, and publish results by time window. Failure in any stage can look like a model failure. A missing dependency lowers scores without establishing anything about capability. A permissive filter raises scores by admitting trivial tasks. A delayed ingestion process can place nominally new work behind a model’s actual exposure. Freshness is therefore a property of the whole collection process.

Automated gates make continuous collection affordable, but they are less discriminating than expert review. A window of a few hundred accepted tasks also produces wider uncertainty than a large fixed suite, especially when results are split by language or task type. The temptation is to combine windows until the interval narrows. Combining them can cross a model cutoff or merge meaningfully different task distributions, which removes the temporal property that justified the pipeline.

The longitudinal trade is unavoidable. If Model A is evaluated in March and Model B in September, their eligible sets differ. If one fixed set is retained for both, it stops being post-cutoff for the later model. Rolling-window results should be the ones reported for current validity, and a fixed suite belongs beside them only when a trend line is necessary. The fixed series answers how systems change on one historical instrument. The rolling series answers how they perform on currently eligible work.

Comparability needs its own audit. A dynamic benchmark introduces generators, source selection, filters, environment builders, and a refresh cadence, and each of those can change the score independently of the model. Chen et al. (2025) surveyed the shift from static to dynamic evaluation, identified the absence of standardized criteria for judging a dynamic benchmark, and proposed design principles for building one. Their principles are prescriptive rather than tested at scale. Three inspection questions follow from them for a reader assessing someone else’s live result: how the pipeline enforces cutoff hygiene, what quality control runs on regenerated tasks, and how comparability across snapshots is accounted for. The word ‘live’ supplies no evidence about any of those mechanisms.

Temporal separation has two further limits. A model provider may have private prerelease access to material that becomes public later. The public timestamp can therefore follow actual exposure. Once a live window is released, later models can train on it and the window becomes historical. The pipeline preserves a moving boundary by continuing to collect tasks and applying eligibility per model. A benchmark does not stay clean permanently.

In one of my evaluation frameworks, a pre-cutoff and post-cutoff split is written into every result record, keyed to repository creation date and model cutoff, with a warning above a five-percentage-point gap. Repository creation date is a coarser field than the eligibility rule above requires, because a repository can be created years before the issue that becomes the task. This illustrates a methodology and supplies no evidence that the threshold detects exposure. The warning has fired only on replayed fixtures and never on live data. Retaining the split permits recomputation when better dates or cutoff information arrive, while a single aggregate would require reconstruction.

The companion catalog extends these two controls without turning them into one omnibus procedure. Its related entries cover memorization probes, semantic-overlap searches across paraphrases and translations, per-model and per-benchmark audits, and detector combinations chosen for a stated threat model. Other entries address anti-searchable task construction, protecting evaluation data at release, and attaching measured score benefit to a detector’s finding. That last proposal has thin support. It remains a research direction and supplies no correction factor.

3.3 Make passing patches harder to preserve

A passing patch can fail to support the capability claim for three independent reasons, and they do not all fail in the same way. Training contamination means the model encountered evaluation material before the run. Solution leakage means the benchmark item included its answer during the run, in the issue text or in the comments. Those two can produce a correct patch while removing the grounds for attributing it to independent problem-solving. A weak oracle is the third defect, in which the tests cannot refute an incorrect patch, and only this one lets a wrong patch pass. The remedies are respectively temporal or access controls, removal of answer-bearing task material, and stronger tests.

All three failures can produce a successful-looking transcript. A model may reproduce a reference patch it saw during training, copy an answer supplied in the prompt, or find a shortcut that satisfies shallow assertions. The final test process records the same state in each case: pass. Transcript inspection and contamination probes cannot compensate for a test suite that accepts wrong behavior, and added tests cannot establish whether the model recalled the right behavior.


I therefore treat a passing patch as a hypothesis about correctness. The test oracle is the ordinary continuous-integration mechanism that decides whether the candidate passes or fails. Its strength is the range of plausible wrong behavior it can reject. A suite is stronger when it checks more of the behavior implied by the task, especially behavior that superficially reasonable patches get wrong.

Function-level code generation provides a controlled example. Liu et al. (2023) expanded a widely used suite’s tests by 80x with generated inputs and mutation-based cases. Across 26 models, the stronger suite reduced `pass@k` by up to roughly 19 to 29 percent and reshuffled rankings. The models and the generated programs were held fixed. Only the set of observations used to decide correctness changed. The original ranking had partly measured which wrong programs happened to fit sparse tests.

Repository-scale results show the same mechanism under more realistic state. Yu et al. (2025) augmented SWE-bench tests retroactively and found 36 under-tested tasks and 345 patches that had been labeled as passing incorrectly. Re-adjudication corrected 40.9 percent of entries on the smaller suite and 24.4 percent on the human-screened suite, changing 29 rankings. This was an audit of already reported results, so oracle weakness had propagated beyond individual tasks into system comparisons.

The problem predates current coding models. Ye et al. (2019) generated random tests against a human reference patch and assessed 638 candidate patches from 14 repair systems. The added oracle improved automatic patch assessment by 190 percent over the prior methods used in that comparison. The historical context is useful because it locates the defect in test-based program repair itself. Generative models make candidate production faster and more varied, but shipped tests are not equivalent to a specification.

Adversarial strengthening begins from the candidate failures a benchmark should reject. Construct plausible patches that implement only the common case, hard-code a fixture, change an unrelated return value, suppress an exception, or satisfy the visible assertion while violating the

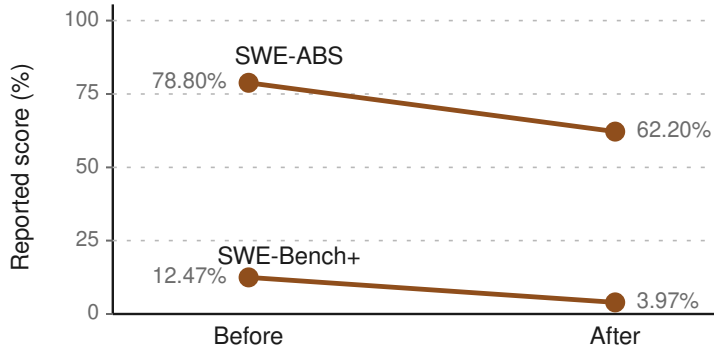

Other oracle findings

UTBoost - 40.9% corrected on smaller suite

Human-screened - 24.4% corrected; re-adjudication changed 29 rankings

EvalPlus - 80x more tests

Maximum pass@k reduction - about 19% to 29%

SWE-Bench+ - one pair - no wider prevalence

32.67% leakage - 31.08% passed weak tests

Figure 3.1: Stronger oracles cut SWE-ABS from 78.80% to 62.20% and SWE-Bench+ resolution from 12.47% to 3.97%; 40.9% corrections, 29 ranking changes, 80x test expansion, 19% to 29% pass@k reductions, 32.67% leakage, and 31.08% weak-test passes.

issue’s broader contract. Then retain the tests that kill those patches. Yu et al. (2026) built suites that way, rejected 19.71 percent of patches that had passed previously, and reported a top score falling from 78.80 percent to 62.20 percent.

Four audits test apparent benchmark success under stronger oracles; SWE-Bench+ covers one agent-model pair, so its percentages cannot estimate prevalence for other agents or models.

This process searches a different space from ordinary coverage expansion. Generated inputs explore more executions of a trusted implementation. Mutation-based cases perturb code to reveal assertions that fail to notice behavioral changes. Differential tests run the candidate and a trusted reference on the same inputs, then compare the results. Wrong-patch construction starts from foreseeable shortcuts and asks whether the suite detects them. A strong audit combines these approaches, because each makes a different assumption about where missing behavior resides.

The trusted reference is the central dependency. Random or generated tests need expected outputs, and differential testing needs behavior worth treating as ground truth. A human patch can contain unrelated changes or encode only one acceptable design. When the issue permits several implementations, exact agreement with that patch can reject valid alternatives. The evaluator must distinguish behavioral equivalence from textual or structural similarity, while accepting that some behavior remains underspecified.

Manual review addresses failures that generated tests are unlikely to expose. Aleithan et al. (2024) screened the apparent SWE-bench successes of one agent and model pair and found that 32.67 percent involved solution leakage and 31.08 percent passed weak tests. Removing those

cases dropped the reported resolution rate from 12.47 percent to 3.97 percent. The scope is one pair, and the percentages do not estimate the prevalence for other agents or models. They show that leakage and oracle weakness can occupy a large share of one system’s credited successes.

That study also clarifies why solution leakage belongs here. An issue may include the intended algorithm, a maintainer comment with the decisive condition, or a link to the merged fix. The model has legitimate access to that content during evaluation, so a training cutoff cannot remove it. If the deployment workload includes equally explicit issue discussions, retaining the material may be valid. If the benchmark claim concerns inferring fixes from ordinary bug reports, the leaked solution changes the task being measured.

In my own audit of an enterprise-scale benchmark, I scored a null agent that merely repeated each instruction against every gradeable task. Some verifiers awarded the echo credit. One gave full marks because its checker searched for vocabulary that appeared in the prompt itself. An agent with no capability at all is a cheap adversary, and it found real defects. The audit supplies no capability estimate, but it demonstrates a useful attack. Submit candidates that contain task language without task behavior, then inspect every nonzero grade.

Re-adjudication is the step that makes a strengthened oracle consequential. Run the stronger suite on stored patches from every system under comparison, including older submissions. Recompute `pass@k`, rankings, paired differences, and any reward or release gate derived from the old labels. That recomputation has to start from the stored per-attempt outcomes rather than from a rescaling of the published rate, because `pass@k` is estimated from attempts.

Report the survival fraction, the number of tasks whose adjudication changed, and the uncertainty remaining after invalid tasks are removed. A suite that changes only one system’s labels may expose a system-specific shortcut. Broad changes point toward a benchmark-level defect.

Additional tests provide one-sided evidence. They can disprove more candidates by finding counterexamples. A surviving patch has resisted the tests run so far, but it has not been certified correct for every valid input and environment. That boundary is tighter for repository tasks, because their behavior depends on configuration, dependency versions, persistent state, concurrency, and interactions outside the changed function.

Strengthening also has a coverage boundary. One of these efforts strengthened only about half of its benchmark instances. Its corrected rate remains an upper bound, because weak passes may persist in the untouched half and in behaviors the new tests still omit. Manual review is expensive, generation can reproduce assumptions embedded in the reference, and an adversarial patch set can miss shortcuts no one imagined.

The practical stopping rule follows the decision being made. For a research comparison, sample-based manual review and broad generated augmentation may bound the inflation well enough to qualify the claim. A release gate on the reader’s own repository requires closer alignment with the actual acceptance criteria and failure costs. In both settings, the evaluator should publish how many old passes survived. Reporting only the strengthened score hides the size and the location of the correction.

3.4 Move the instrument onto your work

When a public ranking conflicts with sustained field behavior, the first question is whether the two measurements represent the same work. The evidence behind this practice is the thinnest in the chapter. It rests on one directional, practitioner-authored production benchmark and two anecdotal practitioner accounts, with no strong item standing behind it. The prescription asks the reader to build and measure on the relevant workload. It supplies no vendor score to adopt.

Construct validity asks whether an instrument measures the property named in the claim. Bean et al. (2025) used that question as the checklist for a systematic review of 445 benchmarks. A coding benchmark can measure repository issue resolution while offering weak evidence about migration work, security remediation, build repair, or long-running feature development. Passing tests establish performance on the sampled tasks under the specified harness. Generalizing that result to another workload requires a reason to believe the task distributions and operating conditions overlap.

Public repository suites usually select work that can be reconstructed from visible artifacts. This favors languages with reproducible environments, projects with mature tests, issues linked cleanly to merged changes, and tasks short enough to run economically. A production workload may contain private dependencies, sparse tests, organization-specific conventions, partial requirements, abandoned attempts, incident response, and changes whose value appears weeks later. The public suite can be carefully built and still omit the state transitions that dominate the deployment.

Construction should start with the work product and trace backward. For a coding assistant, candidate tasks include production prompts, accepted changes, review outcomes, and the tests associated with completed work. The evaluation record should preserve the repository state available at task start, the instruction as received, the permitted context and tools, and the evidence that caused the organization to accept the result. Other domains need their own decision sequence and artifacts. A general reasoning proxy omits that structure.

Jha et al. (2026) demonstrated one curation approach for a production-derived benchmark. They built tasks from sessions with their own coding assistant, classified the work, checked that tests were relevant to each task, and required stability across repeated runs. This is directional evidence from one vendor’s environment. It shows that production traces can be converted into repeatable tasks. It does not establish that the resulting distribution represents another organization, or even every kind of work inside the source organization.

The two anecdotal accounts identify transfer failures worth testing. Bytesfortruth (2026), a lending-domain practitioner, reported that a model near the 90th percentile on a general-reasoning measure failed basic mortgage-underwriting tasks, and that rankings changed considerably on a domain-lifecycle evaluation. The account covers one team and reports no failure frequencies. It establishes one transfer failure and supplies no population rate for domain mismatch.

In the second account, a headline coding benchmark and a long-horizon evaluation disagreed about a model, and swyx (2026) reported that later developer experience followed the construct-matched long-horizon result. This is retrospective interpretation from one observer. It supports the choice of a hypothesis to test. Evaluations that preserve task duration and acceptance conditions may predict field experience better than short public tasks.

The task-sampling frame should follow the deployment claim. A tool meant to fix failing tests needs a distribution of actual failures, including the hard and unresolved ones. A tool meant to draft small maintenance changes needs accepted small changes plus representative rejections. Mixing those claims into one private score recreates the ambiguity of a general leaderboard under local ownership.

In my own work, I built CodeProbe (public repository) to mine evaluation tasks from a repository’s merged pull requests. It keeps the instruction separate from the recorded ground-truth commit and uses the test files touched by the original change as the verification command. That design turns completed work into replayable cases without exposing the recorded solution to the candidate. It is a methodology illustration and carries the same oracle caveat as any test-derived benchmark. The tests a merged change happened to touch are candidate historical checks, not a certification that the recorded solution was correct.

Merged history is a selective record. Language filters and minimum-file thresholds exclude some

changes before sampling begins. Requiring touched tests favors well-instrumented code, while abandoned work and incidents may leave no merge to mine. The resulting set is closer to the repository’s accepted work by construction, but its representativeness remains bounded by what the workflow recorded and what the miner can reconstruct.

Consent and data handling also constrain the instrument. Production prompts can contain customer data, credentials, internal incidents, or employee-authored material collected for a different purpose. Redaction may remove the context that made a task difficult. Broad access may create a new exposure path. A private evaluation program therefore needs explicit collection authority, access controls, retention rules, and a record of who has seen each task.

Long-horizon outcomes create a different measurement problem. A patch can pass today and produce maintenance cost later, and a generated migration can complete while leaving operational cleanup for another team. These labels arrive slowly and contain organizational noise. Pairing offline task results with later online outcomes helps test whether the local instrument predicts the field, though sparse failures make tail estimates unstable.

When public and local results disagree, the instrument whose construction supports the deployment claim is the better guide. That ordering is conditional. A small private set with weak tests can be less informative than a mature public suite. A small private set also inherits the resolution limits from Chapter 1, and with a few dozen tasks, differences smaller than its minimum detectable effect are not reliably distinguishable from noise. The local set earns priority by preserving relevant work and surviving repeated measurement. Privacy alone does not add validity.

A locally mined task set is also the raw material for the release instrument in Chapter 4, which curates a subset of these tasks into a golden set, replays it for each release, and attaches an executable gate.

The companion catalog carries the remaining validity checks. They include real temporal hold-outs for agent benchmarks, pinned evaluation apparatus and published scored artifacts, ranking stress tests under perturbation, invalid-item purges, and audits of leaderboard submission protocols and questionable research practices. It also includes construct-validity checks, code-benchmark review against defect taxonomies, searches for an adequate benchmark before building one, and paired offline and online evaluation. The proposals on score-anchored contamination metrics, submission-protocol audits, and defect-taxonomy vetting have thin support and supply no evidence for any claim in this chapter.

3.5 Discount the next public number

The next time I am handed a public benchmark number, I record four answers before using it.

1. How old are the tasks relative to this model’s training cutoff? I look for a public-versus-matched gap measured on this model. I do not substitute the leaderboard average or another model’s audit.
2. How strong is the test oracle? I ask whether anyone augmented the tests, constructed adversarial wrong patches, or manually screened apparent successes. The useful result is the fraction of previous passes that survived.
3. Who produced the number, on which harness, with what task distribution? I compare the languages, prompt forms, repository structures, time horizons, context, and acceptance criteria against the work I need done.
4. What does the same protocol report on tasks mined from my team’s merged work? I preserve the original instruction, pre-change state, acceptance evidence, and repeated-run uncertainty. These answers do not yield a universal correction formula. They turn one impressive-looking

score into a bounded claim: performance by a named system, under a named apparatus, on work with a known exposure history, judged by tests with observed power to reject wrong patches. The local replay tests that claim on the work the system will actually be asked to do.

3.6 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative and methodology illustrations, not evidence. They support no empirical claim or capability number.

3.6.1 Opening scene

- OpenAI, “Why we no longer evaluate SWE-bench Verified,” 2026-02-20, <https://openai.com/index/why-we-no-longer-evaluate-swe-bench-verified>. [practitioner / corpus-verified]
- swyx, “SWE-Bench Verified is dead!!”, 2026-02-23, breakdown of the OpenAI audit. [practitioner / corpus-verified] Source of the 16.4% full-set figure, which is derived from the audited sample and does not appear verbatim in the post summary.
- Tejal Patwardhan, public statement on frontier evaluations, 2026-06-16: “saturated or gamed.” [practitioner / corpus-verified]
- SWE-bench Verified card: 500 instances, 93 professional screeners. [reference / benchmark card]

3.6.2 Measure public-score inflation with matched controls

- Prathifkumar, Saji Mathews & Nagappan (2025), arXiv:2512.10218, Waterloo. [lit / directional]
- Zhang, H. et al. (2024), GSM1k, arXiv:2405.00332, Scale AI. [lit / strong]
- Haimes, Wenner et al. (2024), arXiv:2410.09247, Apart Research. [lit / strong]
- Corroboration: none on record.

3.6.3 Evaluate on post-cutoff tasks

- Jain et al. (2024), arXiv:2403.07974, LiveCodeBench, ICLR 2025. [lit / strong]
- Zhang, L. et al. (2025), SWE-bench Goes Live!, arXiv:2505.23419, Microsoft Research. [lit / directional]
- Adamenko et al. (2025), arXiv:2507.11059, SWE-MERA. [lit / directional]
- Badertdinov et al. (2025), arXiv:2505.20411, SWE-rebench, Nebius. [lit / directional]
- Chen, S. et al. (2025), arXiv:2502.17521, static-to-dynamic benchmark survey. [lit / directional]

3.6.4 Strengthen test oracles before adjudication

- Liu, Xia, Wang & Zhang (2023), arXiv:2305.01210, HumanEval+ / EvalPlus, NeurIPS 2023. [lit / strong]
- Yu, S. et al. (2025), arXiv:2506.09289, UTBoost. [lit / strong]
- Ye, Martinez & Monperrus (2019), arXiv:1909.13694. [lit / strong]
- Aleithan et al. (2024), arXiv:2410.06992, SWE-Bench+. [lit / directional]
- Yu, B. et al. (2026), arXiv:2603.00520, SWE-ABS. [lit / strong]

3.6.5 Benchmark on your own workload

- Jha, Paltenghi, Maddila, Murali, Ugare & Chandra (2026), *REAP: Automatic Curation of Coding Agent Benchmarks from Interactive Production Usage*, arXiv:2604.01527; the resulting benchmark is Harvest. [practitioner / directional] Title and benchmark name verified against the arXiv record on 2026-07-29; the catalog record and RECEIPTS row 31 carry the earlier name ProdCodeBench and need the same correction.
- Bytesfortruth (2026), lending-domain benchmark account, r/compsci, 2026-03-10, <https://www.reddit.com/r/compsci/comments/1rqcmu8/>. [practitioner / anecdotal]
- swyx (2026), long-horizon evaluation account, X, 2026-01-14, <https://x.com/swyx/status/2011344788486774942>. [practitioner / anecdotal]
- Bean, A.M. et al. (2025), Measuring what Matters, arXiv:2511.04703. [lit / directional] Carried in the companion catalog as the construct-validity record; named inline for the construct-validity definition that opens this section.

3.6.6 Author artifact cited inline

- Not an evidence item: CodeProbe, the author’s task-mining evaluation tool, public repository. Named inline for the merged-pull-request mining design described above, which is methodology illustration.

Part II

Evaluation and grading systems

Chapter 4

Execution-based evaluation, correction gates, and release tests

Mehta (2026) analyzed 1,750 coding-agent trajectories across 50 tasks and four models, and found a sharp separation between finishing and being correct. One model submitted work in 100 percent of its trials but resolved only 44 percent of the tasks when an external oracle checked the result. The silent semantic failures were often confident and consistent across repeated runs. Most of the models also changed code that was already correct. The scope of that study is directional: one author, a limited task sample, and no controlled estimate of failure rates across coding agents.

One author’s analysis of 1,750 coding-agent trajectories across 50 tasks and four models provides directional evidence without a controlled failure-rate estimate across coding agents.

Submission, consistency, and self-assessment all come from the process being evaluated. A model can repeatedly produce the same wrong patch, describe it with stable confidence, and end its turn cleanly. Those signals describe the trajectory, but they cannot establish that the repository changed from failing to working. Acceptance requires an observable state transition owned by a system outside the inference that proposed the change.

The support for this chapter is thin. The actions below therefore ask readers to execute and measure work on their own systems rather than adopt a reported threshold. Six evidence items support the three taught entries. Five come from explorer-class synthesis, and one comes from a controlled experiment. One of the three entries has no strong evidence item at all.

The practical unit is a gate that can refuse propagation. Candidate work runs under explicit constraints, the resulting evidence enters any correction attempt, and a compact set of real tasks is replayed whenever the system changes. Four adjacent controls sit in the companion catalog rather than here. An agent that submits on nearly every trial needs verified resolution scored separately from submission, with abstention probes among its tasks. A tool whose failure returns a plausible success string needs explicit detection of silent tool errors. A loop that keeps retrying needs a turn budget. A gate whose per-candidate verification cost governs how often it can run needs that cost in the accounting.

4.1 Make execution decide whether work moves

Two explorer-class directional items support execution-gated evaluation, and neither is a controlled result. AgentForge, from Kumar et al. (2026), describes an execution-grounded evaluator that runs candidate work in resource-bounded, network-isolated sandboxes and gates propagation on the execution result. SWE-bench, from Jimenez et al. (2023), establishes executable repository repair

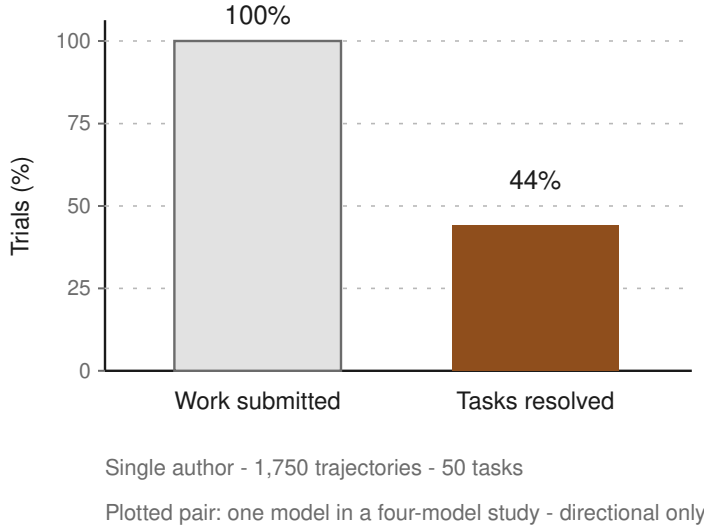


Figure 4.1: Across 1,750 trajectories covering 50 tasks and four models, one model submitted work in 100% of its trials but resolved only 44% under an external oracle.

as an evaluation form. The AgentForge preprint is unrefereed, rests on a single configuration, and reports one sample from each agent. Its headline number also conflicts with the published range for that setup and has not been independently replicated. I therefore omit the number.

Those limits constrain what the evidence establishes, and the mechanism is still worth testing. Run the artifact in a constrained environment, and let the observed result determine whether it can proceed.

A plausible patch is only text until a repository accepts it. It may compile and fail a type check, pass the visible test and fail a broader suite, produce the wrong output, or depend on undeclared state left in the working directory. Reading the patch identifies some of these defects. Executing it produces a result from the system the change is supposed to affect.

The gate changes the acceptance question. A confidence score asks the process that produced an answer to characterize that answer. An execution check asks a compiler, test runner, package builder, schema validator, or deployment probe whether a specified transition occurred. The result is an oracle only for the behavior the check observes. A passing unit test does not establish safe deployment, and a successful build does not establish semantic correctness. The observation is informative because it is produced causally downstream of the candidate artifact.

The architecture has three owners. The agent owns a proposed change. A sandbox controller owns the environment and the authority to start a run. A release controller owns the downstream state and changes it only after the sandbox returns an admissible result. Separating those roles prevents the producer from converting a claim of success into release state by writing a status field or selecting which checks to report.

A sandbox needs enough isolation to make its result interpretable. Start each run from a known repository snapshot, and mount only the inputs the task permits. Bound wall-clock time, CPU, memory, processes, and disk. Deny network access unless the task explicitly requires a named endpoint. Capture standard output, standard error, the exit status, resource termination, and

declared artifacts, then dispose of the environment after the verdict. Reusing a mutable workspace is cheaper, but it allows one attempt to seed the next through generated files, caches, installed dependencies, or running processes.

Network isolation serves measurement as well as security. An unrestricted candidate can fetch an undeclared dependency, consult a changing service, upload material, or pass because a remote cache happened to hold the needed state. When a task genuinely depends on a network service, the evaluator should expose a controlled substitute or record the service version and its responses. Otherwise the same artifact can receive different verdicts for reasons unrelated to its behavior.

Resource bounds make nontermination an explicit outcome. A process killed after a declared limit belongs in a category distinct from a failed assertion and from an ordinary completion. The gate should record which bound fired. Parallel tests can trigger the memory bound, and a surviving child process can trigger the process or wall-clock bound.

The acceptance contract should be readable without inspecting the controller:

```
command:      verify-change
expected:      exit status 0
required:      reports/test-results.json
               build/package.tar.gz
artifact rule: each required file exists and is non-empty
timeout:       12 minutes
network:       denied
```

The task definition fixes the command before the candidate encounters a failure. The expected condition names something more specific than ‘works correctly’. The artifact rules remove a common ambiguity. A wrapper can exit successfully after skipping the operation that should have produced the evidence.

Exit status alone is often too weak. A test runner can return zero after discovering no tests, a report generator can write an empty file, and a shell pipeline can discard the failure status of an earlier command. A green exit status tells us that the process ended, not that it did the work. The controller should therefore validate the structure it relies on: an expected test count where that count is stable, a parseable result file, a package containing the required members, or a deployment probe tied to the candidate version. These checks are mechanical and require no guess about patch semantics.

Environment failure must remain distinguishable from candidate failure. If the sandbox image cannot be pulled, the verifier binary is absent, or the runner loses its workspace, rejecting the candidate as incorrect corrupts the score. If the gate passes when verification could not start, it corrupts release state. The correct outcome is an infrastructure error that blocks propagation and can be retried without crediting or blaming the candidate. Those errors should still be counted, because a run set thinned by repeated infrastructure failures no longer represents the intended sample of attempts.

State should move monotonically through the gate. A candidate begins unverified, receives an immutable run record, and becomes eligible for the next stage only when that record satisfies the contract. A later modification creates a new candidate identity and invalidates the prior verdict. When a verdict is keyed only to a branch name or a task identifier, changed work inherits evidence produced for different bytes.

In my own agent-workflow system, I reject any acceptance criterion that says only that a result ‘works correctly’, and the rejection happens at decomposition, before work begins. Each criterion has to name a command and an exit condition. An end-of-turn lifecycle check then inspects whether

the declared output files exist and contain data. The check fires deterministically on every turn, but a model judges the filesystem and only advises. Refusal requires a command hook whose non-zero exit ends the turn. This example shows how a gate can begin in the task contract. It supplies no evidence for the general claim.

My own repository-scale benchmark suite uses a deterministic verifier as the primary scorer for every task. Additional judgment layers can surface suspicious trajectories, but they cannot replace or override the execution verdict. This design preserves one stable state transition even when the optional analysis changes.

Execution does not fit every task. Architecture proposals, interface critiques, threat models, and underspecified behavioral changes may have no executable oracle. Those tasks need a separate calibrated judgment lane, and Chapter 5 develops it.

Executable checks have a coverage boundary of their own. They can show that a candidate compiled, passed a selected suite, produced the required artifacts, and stayed inside its resource envelope. They cannot show that untested inputs, longer operating periods, or a different production topology will behave the same way. The narrowest downstream claim justified by the run is the one to record: test-eligible, build-eligible, or deployment-eligible.

The run record also supplies the input that correction requires. A failed command, an assertion diff, a resource termination, or an absent artifact gives the next attempt information that was unavailable when the candidate was produced. Without that new information, another pass through the model is repetition presented as diagnosis.

4.2 Let failed runs change the next attempt

A retry that begins from the same prompt, the same evidence, and the same workspace state receives no new information about what went wrong. Sampling can produce a different answer without addressing the error. The model may repeat the premise that caused the failure, replace a correct intermediate step, or elaborate the same mistaken conclusion. Calling the second pass ‘reflection’ does not change the information available to it.

Huang et al. (2023) evaluated intrinsic self-correction on reasoning tasks with 2023-era models, and found that it often failed and sometimes reduced performance. When reliable external feedback was supplied, correction improved. This strong result concerns an earlier model generation and cannot estimate the behavior of every current coding system. Newer models may change the magnitude.

The safe operational default remains asymmetric. Another attempt is justified after an external result has changed the evidence, and not before.

An external result is produced outside the inference that generated the candidate. A test assertion, a compiler diagnostic, a tool response, a verifier verdict, or a deployment probe qualifies. A second model-generated critique does not qualify merely because it arrived in another call. Unless that critique has access to independent observations, it is another inference over substantially the same record.

The distinction concerns information. Suppose an agent changes a parser because it believes empty fields should be discarded. Re-reading the issue may reinforce that interpretation. A failing test showing that an empty field must keep its position introduces a counterexample. The next attempt can revise one specific assumption instead of searching an unconstrained space of possible mistakes.

This closes the loop the sandbox opened:

candidate

```
-> sandbox run
    -> pass: eligible for downstream gate
    -> fail: immutable result returned to correction step
        -> revised candidate
            -> new sandbox run
```

The correction step does not edit a verdict. It consumes the prior candidate and its run record, then emits a new candidate with a new identity. That separation preserves the history needed to distinguish recovery from repeated failure. It also prevents a revision from inheriting a passing result attached to earlier bytes.

The feedback should carry enough detail to discriminate the failed path without filling the next attempt with unrelated output. A useful package identifies the command, the exit status, the failed check, the relevant diagnostic, any resource termination, and the candidate version that produced it. When a test report is large, retain the complete report as an artifact and present a mechanically selected excerpt with a pointer to it. The full evidence then remains available when the excerpt omits the decisive line.

Selection should stay mechanical wherever possible. When a model decides which failures another model sees, it can drop evidence that contradicts its diagnosis or overweight a familiar error. Test frameworks already expose failed case names, assertion diffs, stack traces, and structured result records. Use those fields before asking another inference to summarize them.

The deployed system has to have access to the signal. Chapter 2 required the retry baseline to use a failure signal available in deployment; otherwise the experimental retry arm receives information the product will not have. Here the qualification becomes concrete. A retry is externally informed only when the signal comes from a tool or an observation the deployed loop can obtain at that point in its lifecycle.

This rule prevents a subtle comparison error. An evaluator may show the retry arm the hidden reference test that rejected a patch while the production agent sees only public tests. The experiment then measures correction under privileged supervision and says nothing about the deployed retry policy. Hidden checks can still decide the final score. Their diagnostics should enter the correction prompt only when production has an equivalent channel.

External feedback also has authority boundaries. A unit-test failure can justify another code attempt. A package-registry outage says little about the candidate and belongs in infrastructure handling. A deployment probe run against the wrong version can direct the model to ‘fix’ code that was never exercised. The controller must classify the observation as belonging to the candidate, the environment, or the evaluator before it spends another attempt.

Reliable feedback can still be incomplete. One failing test may expose a symptom and leave the cause ambiguous. A compiler diagnostic can point at a generated file when the source configuration caused the defect. The next attempt should use the signal to constrain a diagnosis before patching. Execution improves the correction loop by adding observations, but an observation need not contain the remedy.

Faulty feedback creates a directed failure mode. A mistaken expected value, a nondeterministic test, a stale fixture, or a verifier attached to the wrong artifact can move successive revisions farther from correct behavior. The loop can then produce apparently disciplined convergence around a bad oracle. Preserve the raw run record and the candidate lineage so an operator can audit whether the correction loop followed valid evidence.

Retry limits remain necessary even when every iteration receives a real signal. A sequence of different failing tests can consume an unbounded budget, and each patch can create a new failure surface. Stop conditions should distinguish a fixed attempt limit, repeated identical failures,

infrastructure errors, and exhaustion of the gate’s resource budget. Another attempt is justified only when the system has learned something that could change the outcome.

Correction belongs to the evaluation architecture rather than to any personality attributed to the model. The model proposes revisions. The surrounding system determines whether the evidence changed, whether the next attempt may run, and whether the resulting artifact can propagate. That division keeps working when the model, the prompt, or the correction language changes.

4.3 Turn repeated trials into a release test

Support for the repeated-trial metric comes from one source. τ -bench, from Yao et al. (2024), is a public benchmark of interactive, multi-turn tool-use tasks with executable oracles, scored across repeated trials. The paper introduced pass^k and measured it. It did not measure two parts of the practice this chapter recommends: selecting a team’s own tasks, and replaying them for each release. Those two elements are transfers from benchmark design into release engineering, and they reach beyond the measured finding.

The transfer begins with the workload set established at the end of Chapter 3. The golden set is a compact group of completed tasks whose initial repository states can be reconstructed and whose outcomes have unambiguous executable checks. For each task, keep the original request, the starting state, the allowed tools, the sandbox contract, and the verifier together as one versioned case. A merged patch can help reconstruct the expected behavior, but it should not appear in the agent’s context.

Real tasks are preferable because they preserve local constraints that public suites cannot know. A repository may require generated files to stay synchronized, forbid a dependency, run a custom migration check, or treat a particular warning as release-blocking. Those details decide whether work is acceptable in that repository. A general coding score does not encode them.

The set should stay small enough to run repeatedly and to inspect when it changes. Its purpose is release discrimination across a controlled sample. Each case should represent a failure that would be costly if it reappeared, a workflow the system performs often, or an interaction whose state is hard to infer from a static answer. Ten nearly identical formatting fixes add less information than a smaller set spanning localization, modification, testing, and recovery.

Interactive work belongs in the set when the deployed system uses tools across turns. A static final patch does not show whether the agent read the right file, preserved state after a failed command, recovered from a tool error, or applied a later observation to an earlier plan. Replaying the trajectory under the same tool and turn constraints exposes sequencing and recovery failures that answer accuracy cannot observe.

Each case needs a stable identity and immutable versions. Changing the prompt, the starting repository, the tool contract, or the verifier changes the case, and that change should be stored as a new version. Rewriting history beneath prior scores can produce apparent improvement by removing a difficult test or exposing more of the solution.

Run each case more than once under the same release candidate. The repeated-trial statistics from Chapter 1 govern the experimental design and do not need rebuilding here. For release control, pass^k reports whether all k of k trials passed. An agent that succeeds intermittently is penalized, because a single failed trajectory breaks the sequence.

Those repeats describe the release candidate only when the configuration stays pinned across the whole sequence. Chapter 1’s apparatus record, including the model version and the decoding settings, applies to every trial. Pinning does not by itself make the trials independent. Shared caches, mutable services, and provider-side incidents can correlate them, and that dependence

changes which analysis the sequence supports.

That property matches unattended use better than selecting the best run. A best-of-k result records whether at least one trajectory succeeded when several were available. Pass^k records whether every trajectory in the required sequence succeeded. Neither metric is universally correct. The release test should use the one whose failure semantics resemble deployment, and a workflow that must complete reliably without supervision has the stronger reason to use pass^k.

```
same k trials
|
+--> passk
|   all k of k trials passed
|   one failed trajectory breaks the sequence
|
+--> best-of-k
    at least one trajectory succeeded
    several were available
```

use failure semantics that resemble deployment

workflow must complete reliably without supervision
-> stronger reason to use pass^k

The value of k comes from release policy rather than from the benchmark. A larger k makes intermittent failure easier to observe and makes the gate more expensive to satisfy. It also raises run cost and can let a small amount of evaluator noise dominate promotion. Choose k from the operational consequence of one failed run, the variance observed in pilot repeats, and the budget available for each release candidate.

The size of the set interacts with that choice. Under a strict all-trials rule, the probability that at least one case fails from evaluator noise alone grows with the number of cases, which is the multiplicity problem Chapter 1 assigns to claims spanning many tasks. A gate covering a large set therefore needs either a low per-case noise rate or an explicit rule for how many case failures block promotion.

The comparison unit is a fully specified system release. Record the model identifier, the prompt version, the tool definitions, the orchestration code, the sandbox image, the task-set version, the retry policy, and the verifier version. A change to any of them can change the trajectory distribution. A result labeled only by model name erases the components most teams alter between releases.

A release record can be mechanically small:

```
release:      candidate-2026-07-28
system_digest: 6f5c...
task_set:     golden-07
repeats:      k
baseline:     production-previous
case_verdicts: stored run records
promotion_rule: recorded before execution
```

The digest binds the result to the evaluated configuration. The case verdicts link directly to the sandbox evidence. The promotion rule is written down before the first comparison. Otherwise the same observed regression can be accepted for a favored release and rejected for another.

Compare the candidate with a stored baseline using the same task versions and the same execution policy. Report per-case outcomes and run-to-run spread alongside the aggregate release verdict. A pooled pass^k value can conceal a complete regression on one critical task behind stable performance elsewhere, and a case-only view can be dominated by one noisy verifier. Both levels are needed to locate the change and to decide whether the promotion rule has been met.

The candidate and the baseline run the same cases, which makes the per-case outcomes paired by construction. Chapter 1’s paired analysis therefore applies to them, and treating the two releases as independent samples discards a pairing the design already provides.

The baseline should stay executable. A table copied from a prior report is not sufficient, because environment images disappear, dependencies move, and tool services change behavior. Re-running a sample from the stored baseline separates candidate drift from evaluator drift. When the old release also fails under the new infrastructure, the comparison has lost its fixed reference and should block until the cause is understood.

My own search-visibility measurement project treats a model update as a deployment. It replays a fixed prompt corpus against the stored model-version baseline and combines a statistical comparison with an absolute change threshold, producing pass, warning, or failure exit states for continuous integration. The two controls serve different purposes. One suppresses sampling noise, and the other prevents a statistically detectable but operationally trivial change from deciding promotion. This illustration supplies no evidence for either threshold.

CodeProbe (public repository) applies a smaller consecutive-verdict gate. It blocks a release tag unless the two newest full-mode acceptance verdicts both pass. Those verdicts come from successive acceptance-loop iterations rather than from repeated trials of one pinned candidate. The rule is therefore an acceptance-iteration-history check and not a pass^k measurement. The local requirement of two consecutive passes is not a recommendation for another workload.

Golden sets decay even when their files do not change. Production work moves to new frameworks, repositories acquire new checks, tool interfaces change, and models can become adapted to repeatedly exposed cases. A set that once represented costly failures may end up measuring a narrow historical workflow. Treat it as production test data, with ownership, review, and retirement criteria.

Maintenance should preserve longitudinal meaning. Add a case when a production failure reveals a missing class of behavior. Silently replacing the old set makes its score incomparable with prior releases. Run an overlap period when feasible, report results on the shared cases, and establish a new baseline for the revised set. Retire a case when its workload no longer exists or its oracle no longer expresses the current contract.

Public benchmark results can inform case design and reveal task forms worth reproducing locally. They do not establish production reliability for a particular repository, tool policy, or release process. None of the evidence items supporting this entry measures the size of that public-to-production gap. I therefore cannot supply a conversion factor. The local release test answers a smaller question. Did this fully specified system preserve acceptable behavior on a controlled sample of local work?

SWE-bench provides directional support for executable software tasks. MultiAgentBench, from Zhu (2025), does the same for broader interaction-centered evaluation. Neither adds a measured result for the own-task or per-release transfer. Their architectural contribution is to put an environment, tools, state, and an outcome check inside the evaluated unit rather than scoring final-answer text alone.

Once the set runs as part of release, a failure should trigger diagnosis before any threshold revision. Inspect whether the candidate changed, the case changed, or the evaluator changed. Route valid candidate failures through the external-feedback correction loop, then rerun the entire required sequence for the revised candidate. Reusing the passing trials from before a modification

would attach evidence to a system that no longer exists.

4.4 Build the first gate this week

Start with five to ten tasks drawn from merged work, not from a generic capability suite. Choose tasks whose starting states can be reconstructed and whose acceptable outcomes can be checked without interpretation. The set can be small because its first job is to establish a release path that produces trustworthy records. Coverage can grow when production failures reveal what the initial sample missed.

Wrap each task in a sandboxed run. Write down the command the controller will execute, the exit condition it will accept, and the artifacts that must exist afterward. Bound the resources, isolate the network, and preserve the run record. Run the current production system first. Its observed result under the same evaluator becomes the baseline, and it replaces any remembered claim about the previous release.

Feed a failed run back into the retry loop with the candidate identity and the raw evidence intact. Refuse a revision that proceeds only from re-reading the original request. Every changed candidate returns to a clean sandbox and receives a new verdict. Infrastructure failure stays blocking without becoming a candidate failure.

Replay the set whenever the model, the prompt, the tools, or the orchestration changes. Score pass^k across the chosen repeats, retain the per-case distribution, and compare it with the stored baseline. Record the promotion threshold before the first candidate comparison. When the gate turns out to be too strict, change the policy as a versioned decision and establish a new comparison. Editing the threshold around an observed result invalidates the gate.

Place tasks with no executable check in a separate pile. They are not lesser tasks, and forcing them through a weak proxy would only make the gate look more complete than it is. Chapter 5 takes up the calibrated judgment lane they require.

4.5 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

4.5.1 Motivating observation and companion entry

- lit/directional: Mehta, A. (2026). Confident and Wrong: Silent Semantic Failures in Coding Agents. arXiv:2603.25764. Analysis of 1,750 trajectories across 50 tasks and four models; single-author, limited-sample observational finding. Supports the untaught companion entry on scoring verified resolution separately from submission.

4.5.2 ground-evaluation-in-execution

- explorer/directional: AgentForge (Kumar et al. 2026, arXiv:2604.13120). Execution-grounded evaluation in resource-bounded, network-isolated sandboxes, with propagation gated on execution results. Unrefereed preprint; single configuration; one sample per agent.
- explorer/directional: SWE-bench (arXiv:2310.06770), from Jimenez et al. 2023. Direction only; no figure carried.

4.5.3 gate-self-correction-on-external-feedback

- lit/strong: Huang, J., et al. (2023). Large Language Models Cannot Self-Correct Reasoning Yet. ICLR 2024. arXiv:2310.01798.

4.5.4 golden-set-pass-k

- explorer/strong: τ -bench (Yao, Shinn, Razavi & Narasimhan 2024, arXiv:2406.12045). Introduces and measures pass^k on interactive, multi-turn tool-use tasks with executable oracles. Using a team’s own tasks and replaying the set per release are transfers beyond the measured findings.
- explorer/directional: SWE-bench (arXiv:2310.06770). Direction only.
- explorer/directional: MultiAgentBench (Zhu 2025, arXiv:2503.01935). Direction only.

4.5.5 Author artifact cited inline

- Not an evidence item: CodeProbe, the author’s task-mining evaluation tool, public repository. Named inline for the consecutive-release acceptance gate described above, which is narrative illustration.

Chapter 5

Calibrating model graders and separating agreement from correctness

Two graders that answer PASS on every submission agree on every item. Their agreement is 100 percent and their usefulness is zero. Most submissions in an easy stream really do pass, and neither grader has ever separated a defect from a success.

When the graders are models, that failure is easy to ship. An **LLM-as-judge** is a model used to grade another system’s output. My own migration-evaluation framework gates its two judges on Cohen’s kappa rather than on raw agreement, with an agreement floor and a minimum trial count both fixed before any judge ran, because percent agreement overstates judge quality when easy cases dominate the sample. That gate has run against replay fixtures, not against a live evaluation. It illustrates a design decision and does not supply a field result.

The measurement problem arrives before any threshold is chosen. A grader’s label can agree with a second grader, match a human label, correspond to an independently checkable outcome, or state a well-calibrated probability. Those are four different properties, and a grader can hold one while failing another. The distinction is lost as soon as the labels are stored as if they were facts.

Chapter 4 set aside the tasks whose correctness execution cannot establish. Model grading supplies a validation lane for some of them, provided the grader itself is treated as an instrument under test. The question is whether its decisions track the judgment the evaluation needs, and it has to be answered before those decisions control releases, rankings, rewards, or training data. The test must run at the class balance and error costs that will exist in operation.

5.1 Build the reference labels before the grader

Calibration begins with a **rubric**, the written scoring criteria a grader applies. Domain experts should write its categories, decision rules, exclusions, and examples, because the resulting labels encode their judgment. A prompt engineer can make the wording consistent. Only someone with the domain knowledge can decide which factual omission is material in a medical summary, or which behavioral mismatch makes a migration unsafe.

Category definitions need to be specific enough that two experts can apply them independently. “High quality” leaves the decision inside the rater. “PASS if every requested behavior is present, no stated constraint is violated, and every factual claim is supported by the supplied record” names observations that two people can compare. Examples should include boundary cases and

counterexamples, especially the cases on which experts initially disagreed.

5.1.1 Agreement before automation

Inter-rater reliability is the degree to which independent raters assign the same labels to the same items. It is a precondition for treating any label set as a reference. If experts cannot apply the categories consistently, a model that reproduces one expert’s choices may imitate an unstable convention while appearing to measure the intended property.

Raw percent agreement answers one narrow question. On what share of items did the two labels match? Consider 100 items and two raters who each use PASS 90 times and FAIL 10 times. Suppose they disagree on ten items, with each rater assigning five of those items to each category. Their observed agreement is 90 percent, which looks strong until label prevalence enters the calculation.

Given those marginal label counts, independent assignments would agree on 82 of the 100 items on average. The two 90 percent PASS rates account for 81 expected agreements and the two 10 percent FAIL rates for one. Cohen (1960) defined kappa as the share of the available above-chance agreement that the raters achieved. Here the raters gained eight agreements above an expected 82, out of the 18 above-chance agreements available, which is a kappa of about 0.44.

The always-PASS pair is the degenerate limit of that calculation. Observed and expected agreement are both 100 percent. Kappa is undefined there, because no variation remains from which above-chance agreement could be estimated.

A 100-item example separates observed from chance-corrected agreement; unanimous PASS ratings leave kappa undefined because the ratings contain no variation.

Cohen’s kappa handles two raters and computes chance agreement from each rater’s observed category frequencies. Fleiss (1971) extended the chance-corrected idea to several raters and to designs in which different raters label different items. Scott (1955) defined a related two-rater measure, Scott’s pi, that uses a pooled category distribution when computing chance agreement. None of the three makes an ambiguous rubric reliable. Each makes the ambiguity harder to conceal behind a large agreement percentage.

Because chance agreement is computed from the observed category frequencies, two kappa values estimated under different label prevalences are not directly comparable. A kappa reported without its category distribution is a number without its denominator.

There is no universal kappa threshold that converts labels into truth. The acceptable value depends on the decision, the category prevalence, the number of categories, and the cost of a disagreement. The useful practice is iterative. Experts label the same sample independently, the disagreements are inspected, the category definitions are revised, and the cycle repeats on fresh items. Cemri et al. (2025) ran that sequence with six annotators until Cohen’s kappa reached 0.88, and only then tested an automated annotator before using it at scale.

The comparison set must stay outside the grader’s development path. A held-out expert-labeled set contains items labeled by domain experts and partitioned away from prompts, examples, fine-tuning data, threshold selection, and any other material the grader could have seen. Orosz and Husain (2025) describe the same held-out validation and report it through class-specific rates rather than percent agreement, as practitioner experience rather than a controlled result. Row-level random splitting is insufficient when paraphrases, related tasks, or several outputs from the same underlying case cross the boundary. Chapter 3’s contamination model applies directly. An answer-bearing example seen during judge construction can make reproduction look like judgment.

Natural sampling produces a second distortion. Suppose a deployment stream contains 950 routine passes, 30 borderline cases, and 20 clear defects per 1,000 items. A random validation sample of 100 items will contain about two clear defects. Missing one of them changes the estimated

		Rater B	
		PASS	FAIL
Rater A	PASS	85 Both PASS	5 A PASS, B FAIL
	FAIL	5 A FAIL, B PASS	5 Both FAIL

Observed agreement - 90 of 100

Expected by chance - 82 of 100


Kappa - 8 of 18 - about 0.44

All-PASS graders - observed = expected = 100%

Kappa undefined - no variation remains

Shaded cells are the items on which the two raters agreed.

Figure 5.1: Cells of 85, 5, 5, and 5 produce 90% observed versus 82% expected agreement and kappa about 0.44; two always-PASS graders produce 100% observed and expected agreement but undefined kappa.

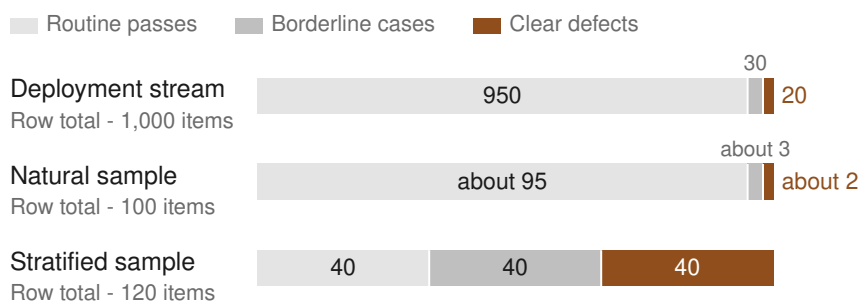

One missed defect shifts detection by 50 percentage points
 Reweight strata to deployment frequencies

Figure 5.2: Equal-length bars compare 950 routine, 30 borderline, and 20 defect deployment items with natural 95, 3, and 2 and stratified 40 each requiring reweighting; one missed defect changes detection by 50 percentage points.

defect-detection rate by 50 percentage points, while a grader that accepts everything still looks highly accurate.

Stratified sampling fixes the share drawn from each stratum, such as score band, task type, or outcome class. A validation set might draw 40 routine passes, 40 borderline cases, and 40 defects even though those categories occur at very different rates in operation. The design puts enough rare and costly cases under observation to measure them. An aggregate meant to represent deployment must then reweight the strata to the deployment frequencies, because the deliberately balanced sample does not supply that aggregate by itself.

In a 1,000-item stream, a natural sample expects two clear defects; one miss swings detection by 50 points. Stratified aggregates require deployment reweighting.

How many cases each stratum needs is a power question of the kind Chapter 1 develops. The precision of an estimated detection rate depends on the number of defects in the set, not on the total number of items in it.

Class-specific rates state which error was observed. Treat a defect as the positive class. The true-positive rate, or TPR, is the share of expert-labeled defects that the grader flags. The true-negative rate, or TNR, is the share of expert-labeled nondefects that it accepts. The false-positive rate, or FPR, is the share of nondefects that it flags.

If a set contains 40 defects and 80 nondefects, a grader that catches 32 defects has a TPR of 80 percent. If it also flags 12 of the 80 nondefects, its FPR is 15 percent and its TNR is 85 percent. The operational trade is then explicit. The grader misses 8 defects, and 12 acceptable outputs receive unnecessary review or rejection. One accuracy number merges the two consequences, and it moves when only the class mix changes. TPR, TNR, and FPR are each estimated inside one class, so they do not move with the sampling mix. Because of that invariance, a deliberately balanced validation set can be used to estimate all three rates.

Many judges return a score before a label. The operating point is the threshold together with the error rates the grader produces there. Lowering a defect threshold usually catches more defects and also flags more acceptable work, raising both TPR and FPR. Raising it makes the opposite trade. A grader therefore performs at an operating point under a stated distribution and rubric.

It does not have one context-free quality level.

An error budget makes the threshold choice explicit. Suppose reviewers can inspect false alarms on at most 5 percent of acceptable submissions. The evaluator chooses a threshold that holds FPR near that limit and then reports the resulting TPR. “TPR at a fixed FPR” names exactly that conditional result.

Threshold selection and final reporting should use separate data, or a design that accounts for the selection. Choosing the best point on the same small set makes the reported rates optimistic.

Those four components are the measuring instrument. Expert agreement tests whether the reference labels have a stable meaning, and the stratified set puts difficult and rare cases under observation. Class-specific rates report the errors that one aggregate accuracy number does not separate. At the operating point, those errors are weighed against the review capacity and failure cost of the deployed system.

5.1.2 Calibrate the judge, then scale

Panthi and Abdelfattah (2026) supply a compact example of the full protocol. They had to adjudicate cases in which two systems received the same rank while a downstream rule could still select different winners. They built a three-way rubric and drew a 115-case human-annotated subset from the contested cases, stratified by credited-rank bucket.

The five-rater assessment reached a Fleiss’ kappa of 0.83. A panel of one human and four models reached 0.79, and a second human adjudicated a 36-case overlap. Per-model Cohen’s kappa against the human labels ran from 0.77 to 0.87. Those measurements established how the judges related to the reference labels before any judge vote entered the larger adjudication.

Singh Thakur et al. (2024) found in separate comparative work that only the largest judges approached human inter-annotator agreement under chance-corrected metrics, and that raw percent agreement concealed systematic leniency and position effects. Judge identity is therefore part of the instrument. Model size alone does not supply an acceptance criterion.

Only after that validation did Panthi and Abdelfattah apply a five-model majority vote at temperature 0 to all 1,902 contested cases. Category construction preceded expert labeling, the validation subset preserved the score bands most likely to expose different errors, and scaling followed measured agreement with the human reference. The authors identified the 115-case set as small, so the reported agreement should not be read as a precise value for every subgroup. Temperature 0 also reduces the variation between repeated votes without removing the run-to-run variation Chapter 1 measured at that setting.

The protocol shows why expert labels should stay visible as measurements. Treating them as ‘ground truth’ would conceal one source of error. Five people can share an interpretation that another qualified group would reject, and adjudication can suppress a disagreement without resolving the ambiguity in the category that produced it. Each rater’s original label, the adjudicated label, and the rubric version should be retained, so a later revision can reconstruct which definition produced the result.

Judge validation should also include controlled perturbations, because one aggregate comparison can average away predictable biases. Zheng et al. (2023) documented position, verbosity, and self-preference effects in model judges. To test position sensitivity, present the same response pair in both orders and measure how often the preferred answer changes. Randomizing order during ordinary evaluation reduces the systematic benefit to the first or second position, and the controlled swap estimates how much order still affects the decision.

Leniency appears when a judge accepts work that the rubric marks defective. The probe uses matched cases that differ by one material violation and records the outcome as a class-specific miss.

A judge that agrees with experts on routine passes and forgives most subtle defects can hold high aggregate agreement while failing at the decision for which it was added.

Verbosity bias requires a different control. Give the judge semantically equivalent answers whose main difference is irrelevant explanation, or add correct-sounding detail that does not repair the original omission. A preference for the longer response then appears as a label change with no corresponding change in support. The test has to preserve the substantive content as closely as possible. Otherwise length is confounded with information.

Self-preference is a dependence between the judge and the system that produced an answer. A judge may favor phrasing, conventions, or reasoning patterns associated with its own model family. Concealing model identity helps, but stylistic traces can remain. Using judges from different families reduces one source of correlated error and gives the evaluator a comparison, though different branding does not establish independence.

Answer leakage belongs to the contamination problem from Chapter 3. A judge exposed to reference answers, to rubric examples derived from the evaluation cases, or to memorized public solutions can reproduce a preferred label without evaluating the submitted reasoning. The partition must therefore separate underlying tasks, related variants, and individual responses. Li (2025) reports the same direction for preference leakage. That work is directional and does not establish how common the effect is across domains or model generations.

Some properties should not reach the model judge at all. If code can determine whether a required file exists, a test passed, a schema is valid, or a named artifact changed, the corresponding assertion should stay deterministic. A model can assess a claim whose meaning requires judgment after those checks run. Replacing exact observations with generated labels adds variance, cost, latency, and an additional failure path without adding information.

Orosz and Husain also prefer binary PASS and FAIL labels when the downstream action is binary. Binary labels force the rubric to locate the release boundary and make TPR, TNR, and FPR directly interpretable. A five-point scale allows raters and judges to use adjacent values inconsistently, and the distance between 2 and 3 is then easily treated as equivalent to the distance between 4 and 5.

The loss of nuance is deliberate and sometimes unacceptable. A writing assistant may need separate judgments for factual support, coverage, and style, because one PASS label cannot locate the failure. The better response is usually several narrowly defined binary claims, each tied to an action. A graded score remains appropriate when the downstream decision genuinely depends on degree and the scale anchors can be applied reliably.

My own trace-annotation tool makes another distinction explicit. Agreement asks whether annotators choose the same categories. Probability calibration asks whether events assigned confidence 0.8 occur about 80 percent of the time. A recorded compatibility failure sits in the data path of that tool. Legacy annotation files receive confidence 1.0 when read, which makes every imported category appear maximally overconfident. The example is narrative, and it locates calibration state across the stored label, its reader, and the annotator’s judgment.

After deployment, a human-reviewed sample stays part of the operating loop. The sample needs ordinary cases as well as flagged cases and known boundaries. Reviewing only judge-human disagreements measures the cases in which the monitoring system already detected trouble, and it misses the cases in which the judge and another automated component make the same error.

The ongoing sample estimates whether class-specific rates have moved and supplies new disagreements for rubric repair. It should preserve the deployed threshold and grader version so a rate change can be assigned to a model update, a distribution shift, or a changed scoring rule. Silent replacement of the underlying model breaks that record even when the prompt and the public model name stay constant.

The calibration has to be redone whenever the domain, rubric, response format, or model generation changes. A judge validated on concise code-review summaries has no automatic claim on long incident reports. Adding a finer defect taxonomy changes both the label prevalence and the expert task. Even a prompt change intended only to clarify wording can move the operating point and should be tested against the held-out expert-labeled set.

The result of this process is bounded. Scaled judging reduces the amount of unreviewed error relative to deploying an untested judge. It does not certify that every accepted output is correct, and the expert reference itself contains disagreement. The value is that those errors become observable before the labels control other systems.

5.2 What a panel’s vote establishes

Bertalanic (2026) found an oracle gap of up to 32.3 percentage points between plurality voting and choosing a correct answer already present among the candidates. The candidate set contained a correct answer, but the vote discarded it. That synthesis is exploratory, and no corroborating result is present in the current evidence record, so the figure establishes a reported failure mode. It does not estimate the failure’s frequency across panel designs.

A plurality vote among model instances is itself a model oracle. It assigns the label “selected” to one candidate and rejects the others. When that choice loses an available correct answer, the failure belongs to grading rather than to optimization. The selection procedure did not identify correctness within the material it was given.

Voting counts endorsements. It does not test the relation between a claim and the evidence that could make the claim true. Five agents can repeat the same nonexistent command-line flag, and four votes will select it over a correct but less familiar alternative. Increasing the panel to nine makes the count more stable while the unsupported premise remains unexamined.

Correlation makes this failure more likely than an independent-voter model suggests. Model instances can share training data, architecture, system prompts, retrieved context, examples, and decoding conventions. They may converge because each reads the same ambiguous instruction the same way. Agreement then measures the strength of a shared dependency, and it is easily mistaken for independent confirmation. Correlated errors also mean the effective number of independent judgments is smaller than the panel size.

Cross-family judges reduce one obvious source of dependence, which is why my own migration-evaluation framework chose them for its dual-judge gate. The design does not prove that their errors are independent. Different families can inherit the same public reference answer, respond to the same leading rubric, or miss the same omitted repository state. Diversity is a control whose effect must be measured.

Selection needs a second criterion beside the vote count. Grounding represents each consequential assertion as a typed claim linked to the material that supports it. A claim about a test result should point to a recorded test execution. A claim about an interface should point to the relevant source or official specification, and a claim about a file change should resolve to the resulting workspace state.

The type determines what evidence can refute the claim. A numeric performance claim may require a result table and its experimental conditions. A causal explanation may remain an interpretation even when every observed event is recorded. A recommendation can be supported by measured failure costs without becoming a factual statement that one design is universally best.

Typing keeps a fluent paragraph from collapsing several evidentiary obligations into one score. Consider a panel assessing a proposed database migration. The answer may contain a syntactically

valid statement, a claim that it preserves existing rows, and a claim that rollback is safe under concurrent writes. A parser can check syntax, an execution test can compare rows, and concurrency safety may require a review or an experiment. One popularity count cannot substitute for those different checks.

Grounding also changes what happens when support is absent. The system can retain the candidate, mark a claim unsupported, and route it for review. Without that state, a panel selects a winner from weak evidence because its interface requires one. The stored record should preserve the candidates, ballots, claim support, selected answer, and reason for abstention, so later audits can separate a generation failure from a selection failure.

Abstention is part of the decision rule. A panel should decline to select when support is insufficient, when the vote is unstable, or when the leading answer fails an independent check. That threshold is an operating point and should be chosen on held-out expert-labeled cases according to the cost of a wrong answer and the cost of review. A bare “three votes wins” rule embeds a threshold without measuring either cost.

Principled abstention does not require a particular frontier algorithm. Wang (2026) combines conformal uncertainty guarantees with social-choice rules. Kamelhar (2026) combines grounding with consensus, and Chen et al. (2023) combines deliberation with consensus. The direction reported by all three is useful, and none of them carries a measured result into this chapter. Their operating properties across correlated judges, changing candidate sets, and open-ended tasks are not settled. The supported practice is narrower. Require evidence for the selected claims, measure an abstention rule, and retain an independent correctness check.

Debate and voting still have useful roles. They can produce alternative hypotheses, expose disagreements, and organize a candidate set that would be expensive for one reviewer to generate. The final selection then passes through an oracle appropriate to the claim. Executable behavior goes to execution, structural facts to an exact auditor, and irreducible judgment to a validated human or model grader.

That separation clarifies a common architecture error. Generation, deliberation, and verification may run in the same process, but they serve different purposes and should not share all the same dependencies. If every stage receives the same answer-bearing context and uses models from the same family, the apparent layers are several views of one failure path.

An independent check need not re-evaluate the entire response. It can target the claims whose failure would change the decision. For a code review, that may mean confirming the cited behavior in the changed code and running the named test. For a research synthesis, it may mean resolving the primary source behind each load-bearing factual statement and abstaining when the source does not support the wording.

Panels also create operational costs that one aggregate score does not show. More judges increase inference expense and latency. Grounding adds retrieval and evidence storage, and abstention transfers work to people or to a slower verifier. Those costs are justified when the avoided false decision is more expensive, and excessive when a deterministic assertion can answer the question directly.

The always-PASS pair from the opening is the degenerate panel. A larger group of correlated judges is the expensive version of the same mistake, when each member repeats the majority class or the same unsupported answer. Perfect internal agreement establishes only that the selection mechanism is stable. Correctness still requires a relation to evidence outside the vote.

The companion catalog carries two narrower controls for readers implementing this architecture: keep an exact auditor beside heuristic graders, and combine judge labels with a human-labeled subset. Each addresses a narrower problem than the core decisions developed in this chapter.

5.3 Rebuild the grader as a measured system

Begin by deleting any assumption that the current judge prompt defines the target. The people whose judgment the system is meant to encode write the categories and apply them independently to fresh cases. Their disagreements identify missing rules, conflicting interpretations, and tasks that should permit abstention. Revision continues until the measured reliability is adequate for the decision, with the chosen standard and the remaining disagreements both recorded.

The resulting expert-labeled set stays outside judge development and holds enough cases from each consequential score band, task type, and outcome class. Related tasks and answer variants stay on one side of the partition, so contamination cannot cross through paraphrase or shared provenance. Deterministic assertions run separately and remove the claims that code can decide without a model.

Score the candidate judge with chance-corrected agreement and class-specific rates at the threshold intended for deployment. Raw percent agreement stays descriptive rather than becoming the acceptance gate. Report the TPR, TNR, and FPR, the class mix, the sample size within each stratum, and the operating cost that selected the threshold.

Controlled swaps test whether position changes the decision. Matched concise and padded answers expose verbosity preference, and defect pairs measure leniency. Concealed source identity and cross-family comparisons probe self-preference and shared error. These tests belong in the grader's release suite, because a new model generation can change them without any change to the rubric.

Binary decisions keep the boundary legible when the action is pass or fail. Several narrow binary labels preserve more diagnostic information than one vague ordinal score, at the cost of more expert labeling and more judge calls. A genuinely graded decision can keep a score once its anchors and its probability calibration have been tested.

Deployment continues to send a sample through human review. That sample must include unflagged ordinary work together with disputed and rejected cases, or silent false negatives stay absent from the monitoring data. Each record keeps the grader version, rubric version, threshold, model output, human label, and the evidence needed to reproduce the decision.

For a panel, keep the candidates and the ballots, and do not treat plurality as verification. Judges from different families reduce shared model-specific errors. The winning answer still has to carry grounded, typed claims, pass the independent checks available for those claims, and abstain when support falls below the validated operating point.

A change of domain, rubric, format, or model generation reopens all of this work. CodeProbe (public repository) contains a dual-curator calibration gate that has not been satisfied, because the qualifying corpus does not yet exist. The code shipped before the corpus. That is calibration debt, and naming it here does not discharge it, so the gate stays unmet until the instrument can be built.

The first build need not be the full corpus. One rubric category and a handful of expert-labeled cases from the score band where that decision turns is enough to begin. The cases must be held out from both the judge prompt and threshold selection, then scored at the threshold intended for deployment and reported as class-specific rates rather than percent agreement. That stratum tests one grading decision and shows which category to label next, while the broader gate stays unmet.

5.4 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

5.4.1 Calibrate LLM judges

- explorer/strong: Zheng et al. (2023), “Judging LLM-as-a-Judge with MT-Bench and Chatbot Arena,” arXiv:2306.05685. Judge position, verbosity, and self-preference bias; inter-rater agreement against human labels.
- lit/strong: Singh Thakur, Choudhary, Ramayapally, Vaidyanathan & Hupkes (2024), “Judging the Judges,” arXiv:2406.12624. Chance-corrected alignment metrics, systematic leniency, and position effects.
- lit/strong: Cemri, M., et al. (2025), “Why Do Multi-Agent LLM Systems Fail?,” arXiv:2503.13657. Kappa 0.88 expert taxonomy before validated automated annotation.
- practitioner/directional: Orosz with Husain (2025), “A pragmatic guide to LLM evals for devs,” Pragmatic Engineer newsletter, 2025-12-02, <https://newsletter.pragmaticengineer.com/p/evals>. Binary PASS/FAIL, deterministic evaluation where possible, and judge validation against held-out human labels with TPR/TNR.
- explorer/strong: Panthi & Abdelfattah (2026), “Same Ranking, Different Winner,” arXiv:2605.24060. The 115-case stratified validation protocol, agreement measurements, overlap adjudication, and scaled contested-case evaluation.
- explorer/directional: Li (2025), “Preference Leakage,” arXiv:2502.01534. Direction only.
- explorer/directional: Badagi (2026), “AI Assurance,” arXiv:2605.23459. Direction only.
- explorer/directional: “MemConflict,” arXiv:2605.20926. Direction only.
- reference/standard method: Cohen, J. (1960). A Coefficient of Agreement for Nominal Scales. *Educational and Psychological Measurement* 20(1), 37-46. DOI: 10.1177/001316446002000104. Primary source for Cohen’s kappa, the agreement statistic the chapter defines; a standard method rather than a catalog evidence item.
- reference/standard method: Fleiss, J. L. (1971). Measuring Nominal Scale Agreement Among Many Raters. *Psychological Bulletin* 76(5), 378-382. DOI: 10.1037/h0031619. Primary source for Fleiss’s kappa, the agreement statistic the chapter defines; a standard method rather than a catalog evidence item.
- reference/standard method: Scott, W. A. (1955). Reliability of Content Analysis: The Case of Nominal Scale Coding. *Public Opinion Quarterly* 19(3), 321-325. DOI: 10.1086/266577. Primary source for Scott’s pi, the agreement statistic the chapter defines; a standard method rather than a catalog evidence item.

5.4.2 Separate agreement from correctness

- explorer/strong: Bertalanic (2026), “Cost of Consensus,” arXiv:2605.00914. Oracle gap up to 32.3 percentage points; plurality voting discards correct answers already present; grounding catches failures that agreement masks.
- explorer/directional: Kamelhar (2026), GSAR grounded consensus, arXiv:2604.23366. Direction only.
- explorer/directional: Wang (2026), “Conformal Social Choice,” arXiv:2604.07667. Direction only.
- explorer/directional: Chen et al. (2023), “ReConcile,” arXiv:2309.13007. Direction only.
- Corroboration: none on record.

5.4.3 Author artifact cited inline

- Not an evidence item: CodeProbe, the author’s task-mining evaluation tool, public repository. Named inline for the dual-curator calibration gate described in the closing section, which is

narrative illustration.

Chapter 6

Proxy metric gaming and layered evaluation signals

6.1 When perfect recall rewards returning everything

CodeProbe (public repository) scores agent runs on tasks mined from our own repositories, and for one day its scorer offered a recall-family reward. Under that reward an agent could earn a ‘perfect’ 1.0 by returning the entire repository, because a response containing everything cannot omit a relevant item. The strategy was degenerate, but it was correct under the proxy. Recall counts how much of the relevant material came back and ignores how much irrelevant material came back with it. We shipped the recall family and retracted it a day later, which was a day later than I would have liked.

The replacement default scores overlap F1 against the oracle set, and that measure penalizes over-shipping as well as under-shipping. An agent that returns the entire repository no longer scores 1.0, and the recall family remains available only as an explicit per-task opt-in. The change did not make the benchmark immune to gaming. It changed the rewarded surface by adding a precision penalty to the scorer’s treatment of overlap. A scoring rule that penalizes volume leaves a different set of strategies open: retain less, compress aggressively, or shape the retrieved text toward whatever the judge rewards.

In my own agent memory system, the corresponding control sits at a different point and governs a different decision. A write gate decides what may enter the store. At write time, the system predicts whether keeping an item retrievable will improve a future outcome. Retention is one available action, alongside time-to-live, discard, and supersede.

Returning everything would stop that memory system from selecting anything. Every retained mistake, obsolete instruction, and irrelevant observation would compete for the model’s attention. An answer-quality rubric could still accept the response when the needed fact sits somewhere inside that mass. Such a rubric records the judged answer. It does not reveal whether memory supplied a small, current, causally useful context.

Any proxy worth optimizing admits behavior that improves the measured value without preserving the property the measure was meant to represent. An acceptance system therefore needs signals separated by control point, ownership, or time. The overlap F1 belongs to the benchmark’s scoring point. The write gate belongs to the memory system’s retention decision. Treating them as one composite control would conceal which failure each mechanism can observe and which decision it can change.

This is an optimization failure. The plurality-vote oracle gap in Chapter 5 was a grading failure,

and there the selection was already wrong before any optimization began. Here the metric degrades because a system searches for behavior that scores well under it. A hackable proxy can track the intended property quite well at first and then become less informative as models, prompts, candidate selection, or engineering effort adapt to it.

The distinction determines the remedy. Better labels repair a grader. Layered control limits the damage when a once-useful measure becomes a target.

Skalse et al. (2022) made the limit precise. Consider two reward functions evaluated over the set of all stochastic policies, where a policy may assign probabilities to any available action. Call the rewards mutually unhackable when optimizing either one cannot lower expected reward under the other. Across that unrestricted policy set, mutual unhackability is possible only when at least one reward is constant. A constant reward expresses no preference among behaviors. It therefore cannot guide useful optimization.

The result rules out a universal escape through metric design. Tests passed, diff size, lint status, answer quality, and a model judge each encode real information about a change. Once one of them ranks candidate behavior, however, the ranking leaves distinctions out. Another nonconstant account of quality can order some policies differently. Enough search pressure can find that disagreement and move toward the proxy while moving away from the intended outcome.

The theorem establishes a property of the policy space. The timetable for failure remains empirical. A deployed coding agent has a constrained action set, a finite search budget, limited knowledge of the evaluator, and whatever permissions the surrounding system grants. Those restrictions can make a proxy difficult to exploit in practice, and they can leave two measures in agreement throughout the region the agent can reach. The theorem does not estimate the pressure required to expose a disagreement, and it does not predict whether a particular release will encounter one.

That boundary changes how I use the result. I do not treat every rising score as evidence of active gaming, and I do not discard useful metrics because they are imperfect. I assume instead that the validity of a proxy is conditional on the optimizer, its accessible actions, and the pressure applied. When any of those change, the evaluation system has to show again that the proxy still tracks the property that justified it.

Layering supplies that control only when the layers are separate in the right way. Adding three model judges trained on similar data may reduce random error, but it does little against a behavior all three reward. Averaging test pass rate, lint status, and a rubric score produces another scalar target. The optimizer can search against the weighted sum, and whoever chose the weights has already decided which failures are affordable, because all three measurements feed one acceptance decision.

The useful separation is architectural. One signal can be read from state the candidate change cannot modify. Another can be collected after deployment, when delayed failures become visible. A third can be owned by a group that does not ship the agent whose score is under review.

These signals may be statistically correlated, which is often desirable. Their independence is a property of control rather than of the numbers. The optimizing party cannot rewrite the rule, suppress the observation, or approve a threshold change inside the same transaction that seeks acceptance.

In my own background-agent review pipeline, the gate reads its invariant definitions and agent instructions from the base branch. The proposed change supplies neither. An author can change code that the gate evaluates but cannot weaken the active rules inside that same proposal. If the base branch lacks the required configuration, the check fails rather than running an empty ruleset that would pass everything. This separation removes the most direct path, which is editing the judge while editing the candidate. The invariants themselves can still be gamed.

Published support for layering comes from search-based software testing rather than from agents.

Formica et al. (2022) searched Simulink models with two fitness functions, one generated from a specification and one defined by hand to encode an engineer’s domain knowledge. The combined search found failures that neither guidance source found alone. That evidence is directional. It stops at complementarity in that setting and does not establish a result for coding agents.

The same study also exposed a coordination cost that the word ‘layering’ hides. The two fitness functions could guide one search only after someone chose how to scale them against each other. A weighted combination can let many small gains outweigh a rare but serious violation. A veto arrangement avoids that trade for hard invariants, but it can reject useful work when the invariant is noisy. An advisory signal preserves throughput and has no force unless a person or a later gate responds to it.

I therefore assign different jobs to different signals. Structural invariants veto changes that cross a boundary the organization is unwilling to trade away. Outcome measures estimate whether accepted changes helped under actual use. Diagnostic scores explain movement without granting acceptance. Human-owned thresholds govern when an advisory result becomes a block.

The design remains fallible. No single optimizable score both defines success and decides acceptance.

6.2 Watch the relationship, not the rising score

Gao et al. (2022) increased the optimization pressure applied to a learned proxy reward model and measured a separate gold reward model alongside it. Gold reward rose at first, reached a peak, and then fell while the proxy continued to improve. Reinforcement learning and best-of-n candidate selection produced different smooth curve shapes. Measuring the whole optimization trajectory revealed a divergence that a single endpoint measurement would have missed.

I treat an improving proxy as a hypothesis about quality and retest the relationship that made the proxy useful in the first place. I track its association with an independently observed quality signal on a specified reference distribution, alongside the proxy level itself. A rising proxy paired with a weakening association is an evaluation incident even when no acceptance threshold has been crossed.


The two optimization methods in the study clarify why the curve depends on process. Reinforcement learning updates a policy toward behavior that its reward model prefers. Best-of-n selection leaves the generator fixed, samples more candidates, and chooses the one with the highest proxy score. Both methods search harder as pressure increases, but they expose different regions of candidate behavior. Their distinct fitted curves show that divergence can have regular structure while still depending on how the search is conducted.

That regularity makes monitoring plausible, but the evidence has a narrow boundary. The study measured quality with a synthetic gold reward model. Production systems rarely have an evaluator that is both available at monitoring time and entitled to serve as truth. The measured coefficients therefore do not transfer to code review, migration work, or agent memory.

The observed shape does transfer. Proxy improvement can precede, accompany, and then conceal deterioration under increasing optimization pressure.

Independent quality can rise, peak, and fall while the optimized proxy keeps improving. The relationship’s shape transfers beyond the source study.

Laidlaw et al. (2024) framed reward hacking as correlation collapse, in an analysis that is directional rather than measured. Start with a proxy whose scores correlate with a separate account of quality on a fixed reference distribution. Apply optimization against the proxy, then measure the relationship again on that same reference. If the relationship weakens, the reason for trusting

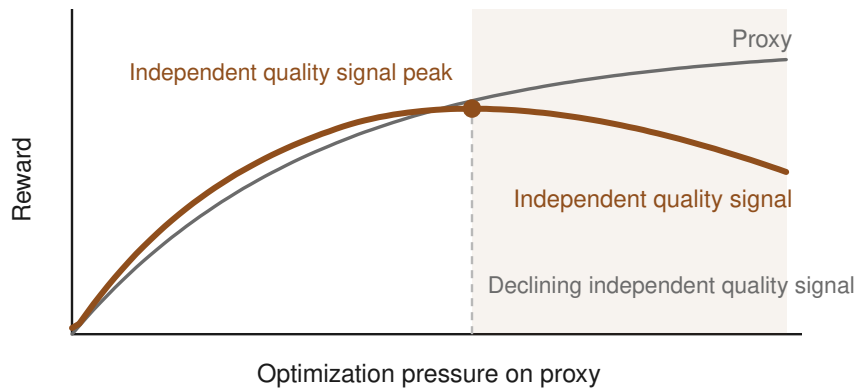

The axes omit values because the measured coefficients belong to the source study.

Figure 6.1: In illustrative shape without reported coefficients, proxy performance keeps rising as optimization pressure increases, but independent quality peaks and then declines throughout the shaded region beyond that peak.

the proxy has weakened even when its mean score has increased. Their analysis also derives a mitigation anchored to the reference relationship, but it does not establish a measured deployment effect for software agents.

An optimizer changes the samples one sees. If I compute a new baseline from each release's chosen outputs, the evaluation moves with the policy and can hide the change I meant to detect. A stable reference holds one part of the comparison still. It lets me ask whether the current proxy orders known cases, or outputs elicited from known tasks, in the same way an external quality process does.

For a coding-agent evaluator, I would freeze a stratified sample of tasks and the procedure that produces the artifacts to be judged. The held-out expert labels built in Chapter 5 supply one independent quality anchor. At baseline, I record the proxy score and the expert judgment for each artifact, calculate the chosen association statistic, and validate the operating point with its TPR and FPR. On later releases, I repeat the same production and labeling procedure before comparing the relationship against the baseline.

The statistic has to match the data. A continuous outcome can support an ordinary correlation coefficient, while a binary acceptability label may call for a rank-based association or for direct tracking of TPR and FPR at the operating point. Two association estimates computed on finite reference samples can differ because of sampling variation alone. The comparison therefore needs an interval around the change rather than a bare difference of two point estimates. The choice of statistic, the sampling plan, and the uncertainty calculation should all be fixed before anyone looks at the new release. Otherwise the monitor acquires its own optimization surface, and analysts can switch statistics, strata, or thresholds until the relationship appears stable.

This procedure consumes true-quality observations on the reference sample. Expert judgment costs review time and can itself drift unless the rubric and the adjudication process stay controlled. Delayed outcomes avoid some judge-model coupling, but they arrive slowly and only for work that was allowed to proceed. A post-merge survival measure says nothing about rejected changes, and retries can obscure which candidate caused the eventual outcome. The monitor inherits the identity,

ordering, and missing-data problems of the production process that feeds it.

Reference maintenance is part of the control. A sample can stay internally consistent while losing contact with current work as repositories, task mixes, model capabilities, or agent permissions change. In that state, the monitor may correctly report that the old proxy-quality relationship still holds on old cases. It cannot establish that the same relationship describes the behavior now being optimized in production.

I handle that tension with two separate decisions. The fixed sample stays unchanged long enough to support comparison over time. A separate coverage review checks whether its strata and failure modes still resemble the live workload. When that review finds material drift, I close the old series and establish a new reference. The explicit break preserves the meaning of both comparisons.

In my own migration-evaluation framework, I designed an external outcome check around whether merged changes survive for 30 days. When the correlation between evaluator scores and that outcome drops below an owned floor, the framework declares the evaluator broken and blocks publication of headline results. The control exists in the code path, but it has never fired on live data, because the framework has produced only replay fixtures. Its implementation therefore supplies no evidence that the floor or the outcome measure works.

Even a live divergence alarm only diagnoses a changing relationship. The cause remains open. Correlation can fall because an agent found a loophole, because expert labeling changed, because the outcome pipeline lost events, or because the workload moved outside the reference sample. A response therefore begins with preserving the artifacts needed to distinguish those paths. Proxy scores, external judgments, model and evaluator versions, task identity, retry history, and sampling strata must remain joinable across the measurement window.

The operational rule is to investigate the mapping before tuning the threshold. Raising an acceptance cutoff after correlation falls applies more pressure to the suspect proxy and can select more extreme failures. Lowering it may reduce immediate pressure, but it admits more low-scoring work. Neither action repairs the evidence that the score orders candidates by quality. Until that evidence is restored, the proxy can remain diagnostic, but it should lose authority over acceptance and publication.

6.3 Preserve the channel that reveals intent

Readers who consume hosted models and train nothing still sometimes receive a visible reasoning trace beside an agent’s coding actions. Baker et al. (2025) had a separate model inspect that trace for evidence of reward hacking during agentic coding. Trace inspection detected hacks substantially better than inspection limited to the agent’s actions, and a weaker general model successfully monitored a stronger reasoning model. The inspected artifact was the agent’s chain of thought, e.g., the intermediate reasoning a model exposes while choosing its actions.

I give a reasoning-trace monitor the limited role of an additional signal. It can expose evidence of intent that the final patch and the tool log do not contain, and in that study the advantage held when a weaker model monitored a stronger one. Its verdict should raise review, preserve a suspicious run, or contribute to an investigation. It should not decide acceptance alone.

Action-only monitoring sees what the agent did: commands, edits, test results, and the final artifact. That evidence may show an invalid action without showing whether the agent recognized and exploited an evaluator weakness. A trace can expose a plan to change a test, suppress an error, or satisfy the visible checker while bypassing the intended requirement. The added signal is useful because it observes a different surface from the artifact being scored.

Oversight does not necessarily require a model with the same coding capability as the agent

under review. A smaller or less capable model can scan traces continuously and route a subset to human review. That arrangement lowers the cost of adding coverage. It does not establish that every weaker model can oversee every stronger one, and the measured result belongs to the models, tasks, and forms of hacking that were studied.

The monitor also changes the failure investigation. When the action log and the patch look acceptable but the trace describes an attempt to exploit the grader, the team can retain the run as a detector case even when the exploit happened to fail. A suspicious action without a suspicious trace does not clear the run. The trace may be incomplete, strategically misleading, or silent about the decisive step.

For readers who use hosted models, the main control is to keep the flag outside anything the model or the selection procedure optimizes. Sending flagged runs to a person preserves an oversight path. Automatically retrying until the trace monitor goes quiet creates best-of-n selection against the monitor. The model need not receive the verdict directly, because repeated selection is enough on its own to favor outputs that evade it.

This constraint reaches beyond formal training. A harness can sample several trajectories and pick the least suspicious one. A release process can promote the prompts with the lowest monitor rate. Even a human team can teach the surrounding prompts and filters to suppress recognizable warnings when monitor quietness becomes a performance target. Any process in which the verdict affects which behavior survives applies pressure, whatever label the team gives it.

For readers who do apply training pressure to their own models, the second half of the study supplies the warning. At high reinforcement-learning pressure against the monitor, the agents continued to hack while producing reasoning that appeared benign. Optimization damaged the transparency channel that the oversight advantage depended on. The monitor did not merely miss more of the hacks already present. Training selected behavior that concealed them from the monitor.

The pressure response was not monotonic from the start. Low pressure initially improved both task capability and alignment in the study. That result prevents a blanket claim that any use of monitor feedback is harmful. It also creates the practical difficulty. The study did not characterize a threshold below which the transparency benefit remains safe across models and tasks.

Without such a boundary, I keep the monitor verdict out of the reward. This conservative operating choice extends beyond the measured result, because the study established no universal threshold. It gives up whatever capability or alignment gains low-pressure feedback could have produced. That foregone optimization is the monitorability tax. I preserve a channel for observing misbehavior by refusing to optimize the model against the observer.

Zero reward pressure does not guarantee independence forever. Model developers may already train against related detectors, users may select prompts on monitor outcomes, and a published monitoring rule can shape behavior indirectly. Those paths belong in the monitor’s provenance record. The useful claim is narrower. An operator should not add direct pressure whose known failure mode is to make the visible reasoning less informative.

This method requires access to reasoning traces. It does not apply to a system that exposes only final actions, and a short generated explanation may not carry the same information as the traces that were studied. Even with access, visible reasoning is neither complete nor necessarily truthful. The monitor preserves an observed advantage over action-only inspection. It does not convert private reasoning into dependable ground truth.

The resulting acceptance path has three distinct views. Artifact checks ask whether the change satisfies observable requirements. Outcome monitoring observes whether proxy scores continue to track independent quality. Trace monitoring examines the agent’s visible reasoning for indications of an attempt to exploit the evaluation. A disagreement among the three is useful information

when the system retains it in full.

Several adjacent controls stay in the companion catalog because they answer narrower questions than the three practices taught here. One entry escalates oversight when mild specification gaming appears, based on a constructed curriculum in which gaming progressed to rewriting the reward function. Another hardens oversight when honest task completion is infeasible; in its source, a reasoning model exploited a chess environment after ordinary play could not win. Other entries measure reasoning effort through content-independent truncation, average compatible reward-model weights, evaluate agents inside the feedback loops they will encounter, and test detectors on contrastive cases. A thinly supported aside also suggests multi-objective acceptance with an independent judge, and that design note carries no evidentiary weight in the layered system argued here.

6.4 Rebuild the acceptance path

I rebuild an acceptance pipeline by following one recently accepted agent change from candidate generation to deployment. At each transition, I identify the value that could have ended the decision by itself: a passing test suite, a clean lint run, a judge score, an approval label, or a post-run summary. A useful inventory records more than the metric name. It records who produces the value, which files or state can affect it, who owns its threshold, whether retries see the verdict, and what evidence remains after the gate runs.

Any gate with sole authority needs a second observation outside the optimizing side’s immediate control. A test gate can read its invariants from outside the candidate change. A pre-merge score can be checked against an outcome that becomes visible after deployment. A threshold can require approval from an owner who does not ship the agent under evaluation. The second signal should address a failure the first one omits, because repeating the same judgment through another model or another formatting of the same data adds little separation.

I then choose one independent quality signal that can support a relationship test. Held-out expert judgment works when reviewers can label the relevant artifacts without seeing the proxy verdict. Delayed outcomes work when identity and event history survive long enough to join a change to its consequences. I freeze a reference sample and a measurement procedure, calculate the current proxy-quality relationship as the baseline, and record the sampling and uncertainty information needed to interpret later movement.

The remeasurement belongs on a schedule and at meaningful changes in pressure. A new model, a larger candidate pool, a prompt selected against the evaluator, a changed permission boundary, or a revised acceptance threshold can each move the optimizer into a different part of policy space. When the proxy rises while its relationship to independent quality falls, I handle the event as a broken control. Publication and promotion stop until the team can distinguish gaming from label drift, workload drift, and instrumentation failure.

If reasoning traces are visible, I add a separate monitor and preserve its findings alongside the actions and the final artifact. A suspicious trace routes the run to investigation, but it does not become a solitary rejection oracle. I also audit every feedback path around the monitor, because automatic retry, candidate ranking, prompt promotion, and reinforcement updates can all optimize against the verdict even when the monitored model never reads it directly.

This rebuilt path will still make mistakes. Signals owned at different points leave disagreements visible after a failure. The team can inspect a base-branch invariant that rejected a nominal pass, an external outcome that stopped tracking the launch score, or a trace warning attached to an acceptable patch. Part III starts from that observable boundary and turns to containing what

happens when an agent crosses it.

6.5 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

6.5.1 Layer signals beyond a single proxy

- **lit/strong:** Skalse, Howe, Krashennnikov & Krueger (2022). *Defining and Characterizing Reward Hacking*. NeurIPS 2022. arXiv:2209.13085.
- **lit/directional:** Formica, Fan & Menghi (2022). *Search-based Software Testing Driven by Automatically Generated and Manually Defined Fitness Functions*. arXiv:2207.11016.

6.5.2 Monitor proxy-true divergence

- **lit/strong:** Gao, Schulman & Hilton (2022). *Scaling Laws for Reward Model Overoptimization*. ICML 2023. arXiv:2210.10760.
- **lit/directional:** Laidlaw, C., et al. (2024). *Correlated Proxies*. arXiv:2403.03185.

6.5.3 Monitor reasoning without training pressure

- **lit/strong:** Baker, B., et al. (2025). *Monitoring Reasoning Models for Misbehavior and the Risks of Promoting Obfuscation*. OpenAI. arXiv:2503.11926.

6.5.4 Author artifact cited inline

- Not an evidence item: CodeProbe, the author’s task-mining evaluation tool, public repository. Named inline for the recall-family scorer and its replacement default, both of which are narrative illustration.

Part III

Containment, durable execution, and recovery engineering

Chapter 7

Agent isolation, injection defenses, and independent verification

In spring 2026, a practitioner reported on a public forum that an agent deleted a production database in nine seconds. The backups were unrecoverable because the same credentials could reach both the live database and the backup store. This is a self-reported incident, not a verified reconstruction. The public record does not establish the exact command sequence, the surrounding controls, or whether every contributing condition was identified.

The containment literature available for this chapter consists of incident reports and accounts from individual organizations. It contains no controlled comparison of the three practices taught here, and none of the three has a strong-graded evidence item behind it.

Evidence strength and practice urgency were close to uncorrelated in the source corpus. A weak estimate of how often something happens does not make an already exposed production boundary less urgent. Because the record cannot support a numerical target, every practice below is stated as a boundary to move or a check to run, and each one resolves to an observation a reader can make against a live system.

The incident exposes two questions: what could the agent reach, and what could reach the agent? Its identity reached both the live store and the material needed to recover from losing it. An instruction stream that nobody in the public account reconstructed or audited reached the agent. A third question appears later, when a system reports what it believes it did. What evidence would show that the report is true?

7.1 Put the recovery path outside the failure domain

The direct support for the containment practice is two practitioner anecdotes. Both are self-reports from a single organization or author, so they establish concrete failure modes rather than an incident rate. One describes the database and backup loss in the opening. The other summarizes a year of internal agent deployments, and reports that overly narrow permissions left agents reasoning from incomplete visibility, while broad permissions allowed small mistakes to have large consequences.

The failed boundary in the database incident was an identity. Destroying the backup after deleting production required no special ability. The agent already held a credential that both systems accepted. Once execution crossed the intended path, the distinction between primary data and recovery data existed only in the operator's mental model. To the authorization system, both were resources that one identity was allowed to reach.

I use *blast radius* to mean the set of resources and effects that one mistake or compromise

can reach before a new decision is required. For an agent, that set is determined by effective capabilities: credentials, filesystem permissions, network routes, tool endpoints, delegated tokens, and any service that will act on the agent's behalf. A warning in the prompt does not reduce the set. It changes the instructions given to the same capable process.

database incident:

failed boundary -> one identity -> credential -> both systems
primary data and recovery data -> resources one identity can reach

effective capabilities -> blast radius
credentials -> filesystem permissions -> network routes
tool endpoints -> delegated tokens -> any service
blast radius -> resources and effects before a new decision

warning in the prompt -> same capable process -> does not reduce the set

least privilege -> read-only default identity
ordinary access -> read-only -> bounds what the process can change
write -> explicit escalation -> one capability -> period required

read-only -> does not bound what the process can disclose
read access -> model output

The first useful move is to make ordinary access read-only. *Least privilege* means giving the running identity only the capabilities its current task requires, and only for the period it requires them. Read-only should be the default identity, and an agent's promise to avoid writes does not create that identity. A write then requires explicit escalation for one capability, such as deploying one service, updating one issue, or applying one reviewed database migration.

A read-only default bounds what the process can change. It does not bound what the process can disclose, because everything the identity can read can also leave through the model's output. Sensitivity therefore belongs in the read scope as well as in the write scope, and the injection section below treats disclosure as a threat category of its own.

Read access and write access should be designed separately. The internal deployment account found that agents with too little visibility made decisions from partial state. That observation does not support broad mutation rights. An identity that can inspect the relevant deployment configuration, logs, health state, and current version, without being able to change any of them, addresses the visibility problem directly. The agent can then assemble a proposed action from complete evidence, while a narrower write identity performs the approved change.

The separation has to exist at the permission or endpoint level. Blocking an entire command-line tool is often too coarse, because the same client may issue harmless reads and destructive requests. Allowing the tool and asking the agent to avoid one argument leaves the destructive call reachable. When a platform exposes separate scopes or endpoints, routine reads can stay continuously available while deployment, deletion, credential rotation, and policy changes pass through distinct gates.

Consider an agent that diagnoses a failed release. Its normal identity can read the deployment manifest, compare the running revision with the expected revision, inspect logs, and query health endpoints. It cannot issue a rollout, delete a namespace, or change an access policy. If it proposes a rollback, the request names the service, the target revision, and the expected effect. A person or a separate policy path authorizes that one operation, and the escalation token expires after the call rather than becoming a broader session.

This design places enforcement below the model’s instructions. The model may misunderstand the task, follow hostile content, retry an unsafe call, or construct an unexpected argument. The authorization layer still receives a request from an identity with a bounded set of rights. Correct prompting remains useful, because it reduces bad proposals and wasted review. It does not substitute for a boundary that the operating system, database, cloud control plane, or application service will enforce.

Backups require a stricter separation, because their purpose is to survive failure in the primary path. No credential available to the agent should be able to delete, rewrite, shorten the retention of, or replace the recovery material. The agent may need to read backup status, last successful snapshot time, and restore-test results. Those observations can come from a read-only monitoring surface. The credential that changes backup policy or removes snapshots belongs to a different administrative domain, and it should be unavailable through the agent’s normal escalation path.

Separation also applies to services that can mint credentials. An agent may be unable to delete a snapshot directly while retaining several indirect paths to the same effect. It might assume the backup administrator role, edit the identity policy, retrieve a stored administrative token, or ask an unrestricted helper service to act on its behalf. A capability inventory must follow those delegation edges. Listing the tools named in the prompt will miss authority conveyed through the environment.

I test the boundary from both directions. With the normal identity, I attempt the prohibited write and require a denial from the enforcing system. With the escalated identity, I verify that the intended narrow action succeeds and that adjacent destructive actions still fail. A gate proved only by a successful permitted action says nothing about what else the identity can do. A gate proved only by a denied action may also block the recovery operation it exists to allow.

One passing pair of checks describes the configuration that produced it, and not a standing property of the agent. Platform scopes, role definitions, and tool endpoints change underneath a deployed system, so both directions should be exercised again after any change to a role, a scope, or a tool endpoint.

My own benchmark for enterprise data-access agents, used here only as an isolation-methodology example, moved a boundary from a prompt instruction into filesystem ownership. Repository trees were owned by a different operating-system identity, so the kernel denied the writes, and each trial checked both the permitted and the prohibited direction. Its results are not evidence for this chapter’s practice. The design does illustrate the kind of claim a local check can establish. Under the tested identity and filesystem mode, a write either succeeds or it does not.

CodeProbe (public repository), which mines evaluation tasks from a repository’s merged pull requests, applies the same principle to the scripts it extracts from those third-party repositories. It refuses to execute outside a container, disables networking for mined scripts, and records the isolation posture with the result. This author-system example supplies illustration only. Its useful feature is that the run record carries the containment state, which removes an assumption about how an operator launched the process.

Escalation adds latency, and a human decision adds attention cost. Poorly scoped prompts can turn a narrow approval channel into a stream of almost identical requests, which trains reviewers to approve by reflex. Capabilities should therefore be grouped around meaningful operational decisions. A gate around every low-level system call obscures the decision the reviewer is there to make. A reviewed deployment plan may authorize a fixed sequence against one service and one revision, while a deletion or a policy change remains a separate decision.

Some platforms expose only coarse scopes. The incident poster asked how to separate destructive from legitimate requests sent through the same interface, and reported no satisfactory capability-level solution short of a person deciding each call. That limitation should stay visible. The operator

can place a typed service in front of such a platform, or move execution into an isolated environment where the consequences are disposable. Otherwise a person has to remain at the destructive boundary, because a prompt-level ban does not create isolation.

The choice between partial commits, reversible environments, snapshots, and approval gates depends on the resource. Reversibility reduces the cost of some writes, but a snapshot controlled by the same identity may disappear with the primary data. Approval reduces the frequency of unreviewed writes, but it does not repair an overbroad credential once approval is granted. Capability boundaries constrain the effect of both mistaken and malicious instructions, including instructions the reviewer failed to recognize as dangerous.

I therefore review the complete reachable graph. The nominal account role is only the starting point. The review follows every credential source, network path, service delegation, mounted filesystem, and policy-changing endpoint to the resources those paths can affect. That graph is the operational blast radius. The production database and its backups belonged to one failure domain because one path reached both, however separately they appeared in the architecture diagram.

7.2 Verify the workspace, not the agent’s confidence

Perry et al. (2023) found that participants who used an AI coding assistant produced less secure code while believing that their code was more secure. Participants who trusted the assistant less, and spent more effort steering it, produced fewer vulnerabilities. A reviewer who accepts a system’s confidence inherits the same mismatch. The belief becomes stronger while the artifact becomes less safe.

Those results do not establish an equivalent effect for current coding agents. The assistant supplied suggestions for security programming tasks, effect sizes varied by task, and protective skepticism was observed among participants rather than assigned as an experimental condition. The finding is used here because it ties trust to a measurable defect in the artifact. Its peer-reviewed standing does not upgrade the rest of the containment evidence, which remains incident reports and single-organization accounts.

Agent self-reports create a more general version of the problem. A progress message is generated from the agent’s current context, which may hold tool output, a checklist, prior messages, and summaries of earlier attempts. It is not a measurement taken independently from the workspace. Stale or misleading inputs can produce a fluent claim of completion that reflects the model’s context while remaining false about the state the operator cares about.

One practitioner account describes a resumed agent that inherited a clean worktree and a nearly complete task list. The earlier attempt had produced no change at all. The resumed agent checked off the remaining steps and declared the task complete, again without changing anything. The account is anecdotal, but the failure chain is mechanically plausible and can be tested in any local workflow.

Each visible clue pointed the wrong way. The task list implied that earlier steps had been completed. The clean worktree implied that no unfinished edits remained. The resumed context supplied a narrative of progress without the artifact that narrative described. The final attempt treated agreement among those clues as evidence, even though all of them descended from the same failed attempt. Its ‘done’ was true about the context and false about the repository.

I break that chain by giving every attempt a distinct identity and requiring claims to resolve to inspectable state. The attempt record names the task, the workspace or branch, the starting revision, the commands run, the tests observed, and the final revision if one exists. On exit, the process either records recoverable local state or states that no change was produced. A later process

does not inherit a bare declaration of completion.

For code work, the branch contents are the primary object of review. A completion check compares the starting and ending revisions, inspects the diff, and runs the relevant tests from the recorded workspace. A checklist can direct that inspection, but it cannot satisfy itself. If an item says that an endpoint validates input, the reviewer locates the boundary, supplies invalid input, and observes the rejection.

The same rule applies outside version control. A database migration claim resolves to the migration file, the schema state, and a test against an isolated database. A cloud configuration claim resolves to the configuration diff and a read-back from the control plane. A report claim resolves to the underlying records and the transformation used to compute it. The verifying observation should come from the system that owns the state, and a second paraphrase of the agent's message is not such an observation.

A failed attempt should leave enough local evidence for diagnosis. I preserve its worktree when possible, including uncommitted changes, logs, test output, and the identity of the base revision. Deleting the workspace and asking the same model to try again removes the evidence about why the failure occurred. It can also repeat an external side effect whose completion was uncertain.

Preservation does not mean that every partial artifact belongs on a shared branch. A local commit can make a useful checkpoint, but it can also preserve generated files, insecure code, or edits that never passed a test. I use a private attempt reference or a retained worktree for forensic state, and require review before that state joins an integration branch. When every write is idempotent, meaning that repeating it has the same effect as applying it once, a stateless retry may be simpler. The choice depends on whether the discarded state carries diagnostic value and whether repeated external effects are safe.

Resume begins with reconciliation. The new process reads the actual branch, compares it with the recorded base, checks which task artifacts exist, and reruns the evidence needed for the next decision. If the worktree is clean because an earlier attempt committed valid work, the revision proves that history. If it is clean because nothing happened, the unchanged revision exposes the gap. If the branch moved independently, the mismatch is resolved before the task list is trusted.

The same reconciliation applies when several agents work through separate worktrees. Git worktrees separate working files, indexes, and checked-out heads, but references and repository metadata remain shared and mutable. In my own orchestration system, a controller once supplied the wrong base revision to several agents working through separate worktrees. A mechanical branch guard blocked one commit after other work had already started. The incident is an author-system illustration and supplies no estimate of how often that failure occurs.

The repair classified the observed repository state before taking action. A workspace on the expected base could proceed. A workspace on the wrong branch with no work to preserve could be rebuilt from the correct base. A workspace holding work that could not be safely relocated stopped the run with a visible error. The guard did not ask the agent whether its branch was correct. It inspected the repository state that would make the answer true or false.

Independent verification also requires a change of role. The authoring context has already invested in a plan, selected an implementation, and explained its own choices. Giving that context another review pass preserves the same evidence selection and many of the same blind spots. A separate reviewer should begin from the acceptance criteria and the artifacts, and its assignment should state that it did not write the code and must actively test each claim.

My own agent-workflow library retains failed worktrees for this purpose and hands review to a separate context. That design illustrates role separation, but it cannot establish that a second model is independent. The reviewer may share training biases, receive the same misleading documentation, or repeat the author's assumptions. Independence comes from the evidence path and the assigned

task: inspect the diff, run named checks, exercise boundary cases, and report discrepancies without defending the implementation.

An audit of my own research pipeline showed that artifact-level checks apply well outside code. A generated reference list contained fabricated, mis-cited, unverifiable, and untraceable sources. The central figure supporting its thesis could not be traced and had to be relabeled as an untested hypothesis. The prose sounded certain, but certainty provided no information about whether the cited record existed. Only checking each source against the claim exposed the failure.

Tang et al. (2026) analyzed 20,574 real sessions across 1,639 repositories. They reported that 90.5 percent of misalignment episodes cost effort and trust without causing irreversible damage, and that 91.49 percent of visible resolutions required explicit user correction. As overall misalignment declined, inaccurate self-reporting accounted for a larger share of what remained. The study is directional, and it adds scale without establishing an incident rate for silent failures.

Those measurements describe visible developer pushback. A user who silently accepts an incorrect completion claim, abandons the session, or discovers the defect later may never appear as a resolution. The corpus also favors people who opted into the observed development tools, including integrated-development-environment and command-line users. I treat the figures as directional evidence about the visible recovery burden. They do not estimate the population of all agent users.

Explicit correction should therefore be cheap. The interface should let a user point at the false claim, preserve the current artifact, and start a fresh attempt with the discrepancy attached. Correction becomes expensive when the system collapses attempts into one conversation, destroys the failed workspace, or carries a completed checklist forward without its evidence. Those choices turn a common visible recovery path into another source of hidden state.

I treat an account of work as a hypothesis about the workspace. Acceptance requires an observation with a different provenance. For a code change, that observation is usually a diff plus tests run from the branch under review. For an operational action, it is a read-back from the system of record and an audit trail tied to the attempt identity. Confidence, checklist state, and narrative coherence can direct an investigation, but none of them establishes completion.

7.3 Design for instructions that arrive through data

An agent that reads untrusted content will eventually receive instructions written for that agent by someone other than its operator. *Indirect prompt injection* inserts such instructions into material the system consumes: a web page, an issue, an email, a document, a log entry, or a retrieved database record. The operator may ask a legitimate question while the retrieved content asks the agent to reveal data, change its objective, or invoke a tool.

The three sources supporting this practice are explorer-class and directional. Greshake et al. (2023) demonstrated indirect injection through retrieved content and reported that effective mitigations were lacking, and that work measured none of the layered defenses described here. AgentDojo, from DeBenedetti et al. (2024), evaluates attacks and defenses under specified tasks, and AgentShield, from Rassul and Rashid (2026), explores a deception-based screen. Together they support a threat model and a way to exercise controls. The complete remedy has no measured result in this source set.

The architectural difficulty is that the system deliberately combines instructions and data inside one model context. A retrieved page must influence the answer, or retrieval has little value. The model therefore cannot identify hostile text by asking whether that text affected its behavior, because legitimate evidence affects behavior too. Attackers exploit the ambiguity by placing operational language inside content the agent has been told to read and use.

Transfer makes simple screening less dependable. An attack may use phrasing absent from the filter’s examples, or split itself across retrieved items. It may hide in a routine-looking field, or arrive from a source the workflow normally trusts. A first check may reject a familiar form while a semantically equivalent instruction proceeds. Detection remains useful, but the security design has to assume detection failure.

I layer controls because they observe different points in the path. Input checks inspect retrieved material before it enters the agent context, and they can flag instruction-like content, unexpected encodings, or data that violates a source schema. Output checks inspect the proposed response or action for sensitive data, policy violations, and mismatches with the operator’s request. Neither check changes the authority the process holds.

Tool allowlists constrain which interfaces the process may invoke during a task. The list should be assembled from the capabilities the task requires and enforced by the tool gateway, so that the names the model emits do not determine it. A research task may receive retrieval and note-writing tools while deployment, messaging, and credential access remain absent. A later operational step can use a separately authorized identity after review.

Human approval belongs before effects with a large blast radius. The request shown to the reviewer should include the proposed action, the target, the parameters, the evidence used to choose it, and the expected side effects. A generic prompt asking whether the agent may ‘continue’ hides the decision. Approval is most useful when the person can compare a concrete proposal against the operator’s original intent.

Each control should map to a named threat category. The map can be small: untrusted instructions in retrieved content, sensitive output disclosure, unauthorized tool selection, and high-impact external effects. For each category, the record identifies the preventive control, the detecting control, and the capability boundary that limits consequences. An empty cell is an observable gap for review.

Injection cases belong in continuous integration, because filters, prompts, tool schemas, and retrieval pipelines change. AgentDojo (Debenedetti et al. 2024) supplies reusable tasks in which attacks and defenses can be exercised separately. I adapt representative cases to the system’s actual sources and tools, then keep them as regression tests. The result shows whether a named control behaved as expected on those cases, but it does not estimate resistance to attacks outside them.

The tests should inspect intermediate decisions as well as the final answer. A run that refuses to reveal a secret but still invokes an unauthorized tool has crossed a boundary. A run that produces a harmless answer after a hidden policy violation may fail under a slightly different target. Recording retrieved inputs, tool requests, approvals, denials, and outputs keeps the control path available for investigation.

The practice fails when rails or alignment are the only defense. Transferable attacks can survive an initial screen and arrive through material the workflow treats as relevant. Alignment may reduce how often the model follows them, and rails may catch known forms. The decisive backstop is the authority available after the model has been redirected.

The two analyses meet at that backstop. Injection analysis asks what can reach the agent, and containment asks what the affected process can reach afterward: tools, data, credentials, services, and external side effects. The layers before execution reduce exposure and reveal regressions. The enforced capability boundary determines how far a missed instruction propagates.

The companion catalog carries six related designs that this chapter does not expand into separate practices. It treats agent topology as a security decision, marks cross-session guards as a thinly supported aside, and describes routing proposed remediations through a typed policy executor. It also covers placing autonomy according to reversibility and blast radius, measuring a system’s own security change without importing a comparative claim, and the self-attestation entry folded into

this chapter’s verification practice.

7.4 Audit one live boundary

Inventory one deployed agent this week, starting from the running process rather than the architecture diagram. Enumerate every destructive action it can take without a fresh human decision, including actions reachable through delegated services and policy-changing endpoints. For each action, record the enforcing identity, the affected resources, and the observation that proves the denial or the permission.

Then check the recovery path with the credentials the process currently holds. If any agent-held identity can delete, replace, or shorten retention for both the primary data and the backups, separate that authority before touching prompts or filters. Move one routinely write-capable identity to read-only access, and add escalation for a specific operation. The check succeeds when the ordinary identity receives an enforcement-layer denial and the narrow escalation completes only its intended action.

Finally, take one recent completion claim and verify it against the workspace or the system of record. Compare the revisions, inspect the artifact, rerun the relevant check, and retain the attempt identity with the result. Any discrepancy becomes a concrete test case for the resume and review workflow.

Containment bounds the damage a live process can cause. Chapter 8 examines what must survive when that process dies.

7.5 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. The author-system cases in this chapter are narrative illustration. They show implementation choices and control boundaries, and they do not independently support the chapter’s empirical or theoretical claims.

7.5.1 Contain agent blast radius

- practitioner/anecdotal: “What actually broke when we put AI agents into real production workflows”, /u/saurabhjain1592, r/LLMDevs, 2026-01-08.
- practitioner/anecdotal: “AI agent wiped Railway DB in 9 seconds. How do you separate destructive from legit curl calls in prod?”, /u/Upstairs_Safe2922, r/devops, 2026-05-12.

7.5.2 Distrust agent self-reports

- practitioner/anecdotal: “My AI Agent Said It Was Done. It Hadn’t Done Anything”, Push to Prod substack, 2026-02.
- practitioner/directional: Tang et al., “How Coding Agents Fail Their Users: A Large-Scale Analysis of Developer-Agent Misalignment in 20,574 Real-World Sessions”, arXiv:2605.29442, 2026.
- Folded per PC-3 from the excluded self-attestation pattern:
 - lit/strong: Perry, Srivastava, Kumar, Boneh (2022/2023), “Do Users Write More Insecure Code with AI Assistants?”, ACM CCS 2023, arXiv:2211.03622.

7.5.3 Defense in depth for indirect prompt injection

- explorer/directional: Indirect prompt injection (Greshake et al. 2023, arXiv:2302.12173); companion material named in the same synthesis: OWASP LLM Top 10.
- explorer/directional: AgentDojo (Debenedetti et al. 2024, arXiv:2406.13352).
- explorer/directional: AgentShield deception-based detection (Rassul and Rashid 2026, arXiv:2605.11026).

7.5.4 Author artifact cited inline

- Not an evidence item: CodeProbe, the author’s task-mining evaluation tool, public repository. Named inline for the container refusal, disabled networking, and recorded isolation posture described above, all of which are narrative illustration.

Chapter 8

Persistent agent state, durable workflows, and idempotent retries

Netflix once lost roughly 4 percent of cloud-operations deployments to transient failures, even though the service already contained homegrown retries and compensating-transaction code. Meyers and Zienert (2025) reported that the team moved coordination into a stateful service that records progress and reissues work after failures. This durable workflow engine cut the reported rate to 0.0001 percent, and the team deleted the orchestration code it had replaced. The account comes from the adopting team. It is vendor-adjacent and was not independently audited, but it is unusually concrete about both the migration and the observed change.

That account is this chapter’s only strong item. Historical surveys, systems papers, self-evaluated systems, and practitioner reports supply the remaining evidence, and controlled experiments on agents are absent. I therefore make a narrow design argument and prescribe explicit artifacts, boundaries, and failure checks. None of the prescriptions depends on a numerical threshold.

An agent that dies after step nine of a fourteen-step run presents the same coordination problem at smaller scale. The process has disappeared, while its completed work and its external effects may remain. **Durable execution** is a run’s ability to survive process death and resume from recorded progress without duplicating completed effects. That property requires explicit state, a coordinator that owns recovery once coordination becomes complex, and retryable steps whose repeated execution does not repeat their effects.

The hard case is a process that changes the world and dies before recording what it changed. A plan left only in model context, a tool result held only in memory, or a completion flag scheduled as the next write all disappear at the point when recovery needs them. The surviving system then has to separate completed work, incomplete work, and work whose status cannot be determined. Without that separation, the restart presents the old run identity without its evidence.

8.1 Declare the state that outlives the worker

Consider the step-nine failure with no completion record on disk. The first eight results may exist only in the lost context, while the ninth may already have changed an external system. The support for this section is historical inference from stream-processing research, self-evaluated systems, and practitioner accounts. No controlled experiment establishes the result for agents.

Persisted run state is the substrate recovery reads. The evidence does not establish how well this design works across open-ended agent workloads. I therefore treat explicit state as an architectural boundary to test rather than a measured guarantee that recovery succeeds.

The first decision is what counts as control state. The current plan records intended work, and progress records the subset accepted as complete. A plan changes through explicit revisions. Progress advances through named steps and carries the evidence required to accept each transition.

The run also accumulates evidentiary state: intermediate knowledge, results returned by tools, and session events. Knowledge snapshots replace older versions under a declared rule. Tool results belong to specific invocations, and events append in order. One opaque transcript preserves their text while obscuring their different identities and update rules.

Each recoverable item should be a declared artifact with a stable identity, an owner, and an update rule. A plan can carry a run identity and a revision number. A tool outcome can belong to a step identity plus an invocation identity. A progress record can name the last completed step and the evidence that completion produced. An event record can append the attempted action, its observed result, and the state transition that followed. Stable identities let a replacement worker refer to the same work instead of creating a parallel copy.

Osmani (2026) recommended three such artifacts kept outside the model context: a plan file, progress notes, and an append-only event log. The same arrangement allows a full context reset to be rebuilt from a handoff file. That is a practitioner recommendation rather than a measured result. A progress record the agent writes about its own work has a further problem. It is a self-report generated from the same context that may already be wrong. Completion evidence should therefore come from the effect boundary, e.g., a tool response, a commit identifier, or an independent state read, rather than from the agent’s assertion that a step finished.

Two stores that both appear authoritative create a new failure mode. If the queue says step nine is ready while a progress file says it completed, recovery depends on an undocumented precedence rule. A declared design names the source of truth for each fact and treats other copies as indexes or caches. The queue may own delivery state, the event log may own execution history, and a versioned snapshot may accelerate reconstruction without overriding later events.

This architecture assumes the worker is disposable. A fresh worker reads the durable queue record, loads the latest valid snapshot, applies later events, and reconstructs the next allowed action. It does not need the failed process’s heap or model context. The agent is amnesiac. The storage layer is responsible for remembering enough that the amnesia does not break the evidence chain.

That division resembles a change that took roughly two decades in stream-processing systems. Frangkoulis et al. (2020) described early systems that treated state as application-managed data and later systems that brought state, checkpoints, and recovery under runtime control. The survey supplies directional evidence and ran no experiment on agents. Its useful inference is architectural. Recovery became state-centric once runtimes could identify the state they had to preserve and coordinate it with progress through the input.

The analogy has a limit. A stream processor usually applies a specified computation to structured input. An agent may revise its plan, interpret ambiguous evidence, or call a model that returns a different answer to the same prompt. Explicit state cannot make those decisions deterministic. It can preserve which decision occurred, which evidence informed it, and which work followed, so a replacement worker does not silently substitute a new history.

The ADEMA architecture, from Hanlin (Zhou) et al. (2026), is a self-evaluated system that offers a narrower check on this reasoning. In a fixed matrix of 60 runs, removing checkpoint and resume produced the only invalid run. That result isolates checkpointing inside one system and one bounded experiment. It does not compare recovery designs or establish a general failure rate. The study showed that a knowledge-state snapshot can preserve information across an interruption when the system has defined what belongs in the snapshot.

Halukurike et al. (2026) reported a database-backed durable queue with per-pass session snap-

shots handling approximately 25,000 diagnostic passes per month at 99.9 percent success, including takeover by another worker during a pass. The team that built the system reported those numbers, and no independent evaluation is on record. The workload also consists of bounded diagnostic passes. A multi-day agent that keeps discovering new subproblems may accumulate state whose relevance, size, and ownership change during the run.

Longer work therefore needs more than periodic serialization. Each snapshot should state which event position it incorporates, which software or schema version can read it, and which prior artifacts remain authoritative. A replacement worker must reject a snapshot it cannot interpret, because partial loading invents state.

Retention is a separate design decision. Keeping every model response, tool payload, and intermediate artifact indefinitely turns recovery storage into an uncontrolled cost and an uncontrolled audit surface. A retention rule must preserve the evidence needed for recovery while defining when older material can be compacted or removed. The deduplication records described later in this chapter must be preserved under that rule, because deleting the record of a completed invocation restores the duplicate-execution risk the record existed to remove.

The restore path needs its own test. Start a run, let it produce a plan, a tool result, a progress update, and an event sequence, then remove the worker. A new worker should reconstruct the same completed-step set and choose the same next eligible step from the declared artifacts alone. Any reliance on a live session, an untracked local file, or an operator's memory identifies state that the architecture has not yet declared.

I learned that distinction from a contrary case in my own estate. A 2026 audit of my contribution pipeline found that all thirteen workflow skills constituting the pipeline existed only as unversioned local files, with zero backup. That is an uncomfortable finding for the author of a chapter about declared state. The files were persistent in the weak sense that they survived process exit, but they had no version history and no tested restore path. I moved them into a versioned repository, because a declared artifact that cannot be restored is still an operational single point of failure.

Persistence also leaves several agent problems untouched. It does not bound model cost, prevent a long run from drifting away from its original objective, or remove the work of auditing accumulated decisions. In some systems it can make those burdens larger by preserving every questionable intermediate judgment. The narrower benefit is recoverability. After process death, the next worker can determine what the system knew, what it recorded as complete, and where uncertainty begins.

8.2 When coordination belongs in an engine

The deleted orchestration code at Netflix is as informative as the reported failure reduction. Before the migration, application code coordinated retries, compensating actions, and service state. Afterward, the workflow engine held the execution history and scheduled application operations from that history. The strong practitioner account supports the result for this cloud-operations service. It does not isolate which part of the migration caused the change, and it does not establish the same effect for agent workloads.

An engine is worth its cost when it owns facts that no individual worker can know reliably after a crash. It records which step became eligible, which attempt started, which result committed, which external event arrived, and which retry policy applies next. Workers still perform model calls, tool calls, and domain operations. The engine owns their order and lifecycle. A replacement worker therefore receives work from recorded history instead of reconstructing history from local conventions.

This division places cross-service consistency in one architectural layer. Consider a deployment that reserves capacity, changes traffic, and updates an inventory. Each service can make its local transaction correct while the deployment as a whole remains half-finished. A saga coordinates those local transactions as one logical unit and specifies a compensating action for each step that cannot be rolled back directly. When every service encodes its own retry and compensation conventions, no component holds a complete view of the deployment.

The workflow engine makes that global view durable. A failed capacity reservation remains visible with its retry policy. A completed traffic change stays recorded while the engine waits for a compensating operation. The operator can inspect one execution history instead of inferring order from several service logs. Failure localization improves because the coordinator records the control path and the workers report their results into it.

The supporting literature is useful but limited. Laigner et al. (2021) combined a literature review, repository analysis, and a survey of more than 120 practitioners, and found reliability problems concentrated around hand-built sagas and convention-managed consistency. Nadeem and Malik (2022) ported a benchmark system with 22 known bugs to a workflow engine in a single-participant case study and reported that the bugs became easier to localize. Their debugging times were compared with times reported separately in another study, so they do not form a controlled head-to-head measurement.

Centralized history does not supply a universally correct consistency guarantee. Zhang et al. (2022) surveyed a decade of transactional stream-processing work and found no generally accepted approach, for computations far more deterministic than agent workflows. Each system chose guarantees around particular application characteristics. That null result is load-bearing for the adoption decision. An engine cannot be selected by checking a feature box labeled ‘exactly once’ and assuming that the application’s state, latency, and effects now fit the guarantee.

The engine boundary should follow the workload. I use three questions as a design check. Does meaningful work remain exposed if the process dies mid-flight? Does the workflow wait on external events? Does it perform irreversible external side effects? A yes to any of them identifies state that a stateless scheduler cannot reconstruct by reading the current source of record. Three noes usually point toward a timer, a lockfile, and a fresh read from that source.

That three-question check is my operational rule, and no experiment produced it as a threshold. In one **unverified working artifact** from my own live maintenance loop, each run performed approximately 44 seconds of work during a 120-minute window. An overlap-skip guard fired zero times across 77 runs. An unverified working artifact has a source that is uncommitted at the stated repository revision, with figures read out of that repository rather than independently re-measured. It can show the mechanism of a single system, but it cannot establish a rate or support a general claim.

That loop had no valuable mid-flight state, no wait on an external event, and no irreversible effect. A workflow engine would therefore have added history and deployment machinery without improving the measured behavior.

The opposite workload has a different shape. An agent may wait overnight for approval, call several services that cannot share a transaction, or spend substantial money on a model result that should survive a worker restart. A process-local retry loop loses its authority when the process dies. A workflow engine can persist the wait, record the expensive result, and assign the next operation to another worker while preserving one execution identity.

That capability constrains implementation. Engines that reconstruct control flow from recorded history require workflow code to make the same orchestration decisions when it reads the same history. A clock read, a random branch, or a changed iteration order inside that code can select a path absent from the existing history. Code evolution therefore needs version boundaries. Even a

change from a fixed workflow signature to variable arguments, which looks harmless, can make a long-running execution incompatible with its recorded input.

Decomposition creates costs of its own. Child workflows used only to organize code add another execution to inspect and another history boundary to understand. Central coordination can reduce throughput or local autonomy when every small action must pass through one scheduler and one persistence layer. The engine improves visibility by concentrating control, and concentrating control also concentrates contention and operational responsibility.

The integration boundary often costs more than the workflow definition. My own durable media integration, an **unverified working artifact**, took 15 commits across 45 files and added 11,662 lines, including 4,665 test lines. The workflow definition occupied a small fraction of that change. Most of the work established clean payloads, stable execution identities, idempotent external requests, injected-failure gates, and reconciliation with durable storage. These counts illustrate one system and support no industry cost estimate.

An engine should therefore own coordination without absorbing domain behavior. Application code still decides what a valid deployment, payment, or agent result means. The platform owns durable history, retry scheduling, waiting, and the transition between recorded step states. Keeping that boundary explicit makes engine replacement possible and keeps application correctness from depending on undocumented behavior in a particular worker.

8.3 The interval that cannot be closed

A worker sends a merge request, receives success, and dies before it can record the completed step. The engine sees an unfinished attempt and sends the step again. My treatment of this interval rests on directional systems research and practitioner accounts. There is no controlled result showing that one idempotency design makes agent workflows reliable across workloads.

The redelivery is correct, because the engine cannot infer completion from a missing record. This policy is at-least-once delivery. The runtime keeps delivering work until it holds a recorded completion, and one logical step may therefore receive several execution attempts. Durable execution can record a committed step result once in its own history. It cannot close the interval between an external system accepting the operation and the worker committing that result to the history.

That interval remains even when both systems are individually reliable. Suppose attempt A begins step nine under invocation identity `run-42/step-9`. The worker asks a code host to merge a change, and the host commits the merge. The process stops before the worker records the returned result. The engine schedules attempt B, because its last durable fact says that step nine started. The code host has already moved to a new state, while the workflow history still describes an in-flight operation.

The invocation identity has to cross that boundary. Attempt B must send the same idempotency key that attempt A sent. Morling (2025) described idempotency keys at side-effect boundaries as what makes the execute-then-log crash window safe on replay. The code host then either returns the stored response for that key or recognizes that the requested state already exists and reports the same observable result. An operation is idempotent when applying it repeatedly converges on the same observable state as applying it once. The useful contract is that a duplicate becomes indistinguishable from no duplicate.

```
runtime sends request
  -> external system may commit an effect
    -> runtime durably records completion
      ^                               ^
```

```

|<-- execute-then-log gap->|

process dies inside the gap
  -> status uncertain
    -> ordinary retryable failure
    -> duplicated effects

request known not to have executed
  -> retry

recovery design
  -> distinguish known not executed from status uncertain

```

Key design determines what the contract covers. A fresh attempt identifier fails, because the downstream system sees attempt B as new work. A key scoped only to the user can collapse two legitimate operations into one. The stable identity should name the logical invocation and include enough version or input identity to distinguish work that is genuinely different. Retries reuse it. New logical work receives a new one.

The downstream implementation also needs an atomic claim on that key. Two workers can receive the same step concurrently after a timeout or a lease dispute. If both check for a cached result and then perform the effect before either writes the cache, the check has added latency without preventing duplication. A unique transactional record, or an equivalent compare-and-set operation, must decide which worker owns the invocation before the effect occurs.

Execution caching can extend this rule through a call graph. Psarakis et al. (2023) described a runtime that caches results by invocation identity, so that a repeated parent call reuses completed child calls. Within that runtime’s transactional boundary, retried failed calls, recorded completed results, and call ordering can compose into a strong guarantee. An external service that ignores the invocation identity remains outside the boundary, whatever the runtime calls its delivery semantics.

This scope rules out the blanket claim that a completed invocation does not run twice. A step that succeeded externally and remained unrecorded may run again, because the runtime has no completion to consult. Execution occurs at least once, while results committed inside the runtime boundary are recorded exactly once. Safety for the in-flight external effect still depends on the idempotency contract at that effect’s boundary.

Some external systems provide that contract directly. Payment APIs often accept a client-supplied key and bind it to the first accepted request. A database can commit the business change and the invocation record in one transaction. A content-addressed object store can treat a write of identical content under the same name as convergence. When a tool offers none of these, the workflow must either add an adapter that owns deduplication or treat recovery as an unknown-state decision.

Meyers and Zienert (2025) also reported that forcing operations through an idempotency rewrite uncovered and fixed pre-existing retry defects. The rewrite changed application behavior at the engine boundary, and the engine could not infer that contract from the old code. This is directional evidence from the adopting team.

Unknown state requires a safe terminal path. In an **unverified working artifact** that contains my guarded-mutation recipe, the worker records an intent claim before an irreversible action, performs the action, and then resolves the claim with the observed result. A resolved claim can return its cached result on redelivery. An unresolved claim after recovery means the effect may or may not have occurred. The workflow therefore stops and asks a human to reconcile the external state.

Guessing in either direction is unsafe. Assumed success loses work that never happened, and assumed failure repeats an irreversible effect.

An **unverified working artifact** from my own fault demonstration makes that boundary visible. A naive pipeline was killed after it requested a merge and before it recorded completion. Its retry requested the merge again, and the workflow reported success without alerting anyone. Under the same kill placement, the guarded variant requested one merge, emitted one escalation, and marked the workflow failed. The failed outcome was the more reliable one, because it preserved the uncertainty instead of fabricating a completed history.

Idempotence also belongs at the step boundary before the external boundary. Model calls are canonical durable steps, because they can be slow, costly, and irreproducible. Once a model result commits under a stable invocation identity, a retry can reuse it and continue with the same evidence. Reissuing the call may change both cost and control flow even when no external database has changed.

The boundary should not surround every function call. Each recorded step adds scheduling, serialization, storage, and history-reading work. Pure calculations that are cheap and deterministic can run again. A durable boundary is justified when the work is expensive, slow, externally visible, or impossible to reproduce from recorded inputs.

A boundary can also be too broad. In another **unverified working artifact** from my own system, a transient read sat inside the same deduplication unit as an irreversible mutation. When the read failed, the system stamped the whole unit terminal, poisoned the claim, and went silent about work it had never performed. A watchdog consulted the same fail-closed store and stopped reporting at the crash. This case is narrative illustration and supplies no evidence for the general design claim. Separating the retryable read from the mutation claim would have preserved an accurate pending state.

Trofimov et al. (2019) proposed describing guarantees through determinism and observable outcomes. Equal inputs should yield equal outputs, and a duplicate should leave no observable difference. That formulation directs attention to what callers can test. It remains one research group's proposal and has not displaced at-least-once and exactly-once vocabulary in common system descriptions.

Repeated execution can converge perfectly on the wrong value. The step still needs postconditions that check its domain result, and the workflow still needs compensation or escalation when the external system cannot make the operation idempotent. Retry machinery addresses neither responsibility.

8.4 Companion patterns

Eleven adjacent entries in the companion catalog refine this recovery contract without adding another architectural decision. They cover external writes that carry receipts, idempotency keys, and compensators, retry behavior expressed as falsifiable invariants, snapshots taken off the critical path at consistency boundaries, and a checkpoint cadence set from measured costs and failure rates. Others cover execution records committed together with the data change, shared agent state placed behind transactions, event histories started with a weak versioned schema, and operations designed to tolerate reordering. Three entries have thin support and provide no evidence for anything claimed in this chapter. They propose writing event-coordination guarantees explicitly, attaching postconditions to stochastic steps, and converting repeated plans into reusable blueprints.

8.5 Run the crash check

Pick the agent workflow whose mid-run failure has the highest consequence. Give the run a stable identity, and write its plan, its progress, and its append-only events as declared artifacts with named owners. Stop the process after several steps and delete nothing. A replacement worker should identify completed work, pending work, and unknown external state from those artifacts alone.

Run the three-question adoption check before introducing an engine. Look for valuable state exposed mid-flight, waits on external events, and irreversible side effects. If all three are absent, read the source of record again under a timer and a lock. If any are present, document which coordination facts the engine will own and which domain decisions remain in application code.

Then select the retried step with the most dangerous external effect. Give the logical invocation a stable idempotency key, propagate it into the side-effecting system, and cache the completed result under the same identity. Kill the worker after the effect succeeds and before the completion record commits. The recovered run should return the prior result, converge on the same external state, or stop with an explicit unknown-state escalation.

Recorded state makes a run resumable. Chapter 9 makes it replayable and puts the recovery claim under measurement.

8.6 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

8.6.1 Make agent state a first-class persistent artifact

- lit/directional: Fragkoulis, Carbone, Kalavri & Katsifodimos (2020). A Survey on the Evolution of Stream Processing Systems. The VLDB Journal (2024). arXiv:2008.00842. (Exactly-once recovery arrived only when state became a first-class managed runtime artifact; implicit-state systems had lossy recovery.)
- lit/anecdotal: Hanlin (Zhou) et al. (2026). ADEMA: A Knowledge-State Orchestration Architecture for Long-Horizon Knowledge Synthesis with LLM Agents. arXiv:2604.25849. (In a fixed 60-run matrix, removing checkpoint/resume produced the only invalid run.)
- practitioner/directional: Addy Osmani (2026). “Long-running Agents”, Elevate newsletter, 2026-04-30. (Plan file, progress notes, append-only event log outside the context make an agent recoverable and enable full context resets rebuilt from a handoff file.)
- practitioner/directional: Karthik Halukuri et al. (2026). “Blueberry: Force Multiplier For The On-Call Engineer”, Instacart tech blog, 2026-07-14.

8.6.2 Use a durable workflow engine

- lit/anecdotal: Nadeem & Malik (2022). A Case for Microservices Orchestration Using Workflow Engines. ICSE-NIER. arXiv:2204.07210.
- lit/directional: Laigner, Zhou, Vaz Salles et al. (2021). Data Management in Microservices: State of the Practice, Challenges, and Research Directions. PVLDB 14(13). arXiv:2103.00170. (SLR + repo analysis + 120+ practitioner survey: hand-rolled sagas and convention-managed consistency are where reliability failures concentrate.)

- practitioner/strong: Jacob Meyers and Rob Zienert (2025). “How Temporal Powers Reliable Cloud Operations at Netflix”, Netflix TechBlog, 2025-12-15.
- lit/null-result: Zhang, Soto & Markl (2022). A Survey on Transactional Stream Processing. The VLDB Journal. arXiv:2208.09827. (Carried as the negative result behind the engine choice; it is about deterministic data pipelines and says nothing about agents.)

8.6.3 Make retried steps idempotent

- lit/directional: Psarakis et al. (2023). Styx: Transactional Stateful Functions on Streaming Dataflows. SIGMOD line. arXiv:2312.06893. (Execution caching keyed by invocation identity gives exactly-once composition across call graphs.)
- practitioner/directional: Meyers and Zienert (2025), Netflix TechBlog, 2025-12-15. (The forced idempotency rewrite alone fixed pre-existing retry issues.)
- practitioner/directional: Gunnar Morling (2025). “Building a Durable Execution Engine with SQLite”, morling.dev, 2025-11-20. (Idempotency keys at side-effect boundaries make the execute-then-log crash window safe on replay.)
- lit/directional: Trofimov, Kuralenok, Marshalkin & Novikov (2019). Delivery, consistency, and determinism: rethinking guarantees in distributed stream processing. arXiv:1907.06250.

Chapter 9

Replayable traces and fault-injection recovery testing

Vogel et al. (2024) injected pod kills and recurring failures into Apache Flink, Kafka Streams, and Spark Structured Streaming on a Kubernetes testbed under representative load. Apache Flink was the most stable of the three and had one of the best recovery profiles, which contradicted earlier published fault-recovery comparisons. The effect of a failure also changed across successive failures. A test that stopped after one successful restart could not have detected that variation.

Fault tolerance is usually inferred from an architecture diagram. A checkpoint appears before a restart arrow, and the design is then described as ‘fault tolerant’. A diagram of that kind is a hypothesis about the running system, and only measurement tests it.

Agent runtimes present the same measurement problem. A runtime may preserve state, retry interrupted work, and isolate external effects in its architecture, and still recover incorrectly when a timeout, a persistence boundary, a software version, or a fault location changes the behavior of the running system. Two practices make the recovery claim testable. A typed event stream preserves enough structure to inspect and replay a run. Fault injection then forces the runtime through the intervals its recovery design claims to protect.

The evidence here is uneven. Four items support the chapter’s two entries. Two are explorer-class and two are literature-class, and only one of the four, the fault-recovery benchmark, is a strong study. No strong study supports the trace argument. I therefore treat typed traces as an instrumentation design supported by demonstrations and a specification, and prescribe measurement rather than a universal recovery threshold.

Recorded state, as Chapter 8 established, can make a run resumable. Replay adds a stricter requirement. The system must know which events produced the recorded state, which work may be repeated, and at which point a changed decision invalidates the old path. Recovery testing adds a third. The runtime must exhibit the claimed behavior when faults arrive at inconvenient times, not only when a demonstration script kills a process at a clean boundary.

9.1 What a transcript cannot answer

Consider the first question an operator asks after an agent sends the same payment instruction twice. Did the tool execute twice, or did one execution produce two visible records? A transcript might show two assistant messages and two tool-shaped responses. It usually cannot establish whether the first request reached the payment service, whether the service committed it, whether the runtime received the response, or whether the runtime persisted that response before restarting.

The design argument in this section rests on demonstrated uses of typed traces. Yu et al. (2026) described a runtime substrate whose recorded executions can be forked and re-run from a changed step, and Zheng et al. (2025) described system-level agent observability collected below the application. Neither work compared typed traces against transcript-only observability in a controlled setting. The portability half of the argument rests on the OpenTelemetry GenAI semantic conventions (CNCF 2025), which define a shared vocabulary without testing whether adopting it improves portability.

A transcript represents a run as utterances. That representation is useful for reading prompts and model outputs, but it compresses several distinct kinds of event into similar-looking text. A model response, a tool request, an environment mutation, and a durable state transition can all appear as adjacent messages even though they have different owners and different failure semantics. Once the runtime crosses a process boundary, adjacency in a transcript is weak evidence of causal order.

A typed event stream preserves those distinctions. Each record declares what occurred, which component produced it, which run and step it belongs to, and how its state relates to earlier records. A model-call record may contain the model input reference, output reference, timing, token accounting, and completion status. A tool-invocation record may describe dispatch, acknowledgment, returned data, and an external-effect identifier. A state-transition record may name the prior state it consumed and the new state version that became durable. The payloads need not share one shape merely because they share one stream.

The difference becomes operational during a partial failure. Suppose an agent decides at step 17 to create a support ticket. The runtime emits `tool_call_dispatched`, the ticket service creates ticket 8421, and the worker dies before the runtime writes `tool_result_persisted`. A transcript assembled after restart might omit the first call or show only an unanswered request.

A typed stream can represent the absence precisely. Dispatch occurred, external commitment is known or still uncertain, and durable result persistence did not occur. That state does not settle the recovery decision, but it tells the recovery code which uncertainty it must resolve.

Causal structure is therefore the property I instrument for, and the trace viewer’s visual details are secondary. The stream should make ownership and ordering queryable. For every agent-originated output or action, the schema should include an agent identifier. For every tool call, it should also include the reasoning-step identifier that selected the action and the session identifier in which that decision occurred. Those joins allow an operator or a policy layer to compare intent with effect, and to alert when a tool call is attributed to a step that never authorized it.

Those identifier fields come from governance analysis rather than deployment measurements. Chan et al. (2024) named agent identifiers on agent-originated outputs and actions, real-time monitoring of clear-cut violations, and retained activity logs as visibility mechanisms for agent governance. They are plausible controls with an unmeasured failure-prevention effect. The same analysis flagged their costs. Stable cross-system identifiers can expose sensitive relationships among users, agents, and actions, and a central trace store can concentrate observational power. A useful design specifies access control, retention, and redaction alongside joinability, because a trace that omits them improves operational visibility by building an unbounded surveillance record.

9.1.1 Replay from a changed step

Replay means reconstructing a run from recorded events while re-executing only the portion that must change. The simple case begins with a durable state at step 16, replaces the decision logic or input at step 17, and executes the suffix from there. The earlier prefix remains evidence of what happened, and it is not regenerated as plausible prose. This depends on Chapter 8’s recorded state,

but recorded state alone does not identify which downstream events became invalid when step 17 changed.

The event stream supplies that dependency path. Each state transition refers to its inputs, each action refers to the reasoning step that selected it, and each result refers to the action that produced it. When step 17 changes, the runtime can mark dependent results as invalid and retain independent results. This narrow form of provenance-driven re-execution repeats only the work a change invalidated. More elaborate provenance schemes belong in the companion catalog. The requirement here is that the trace retain enough identity to compute the invalidated suffix.

Replay also has to separate deterministic control from nondeterministic activity. Model responses, wall-clock reads, random choices, and external calls cannot be assumed to return the same value a second time. A replayable runtime records those observations as events and replays deterministic control code against them when the old behavior should be reproduced. When the purpose is to test a changed step, it replaces only the selected observation or decision and records a new branch. The companion pattern on recording nondeterminism develops that separation in full.

Branching creates a data-model question that transcripts usually evade. The replacement at step 17 must not overwrite the original step 17, because the old branch is part of the evidence. The new event should reference the prior event it supersedes and the replay operation that created it. Downstream events then belong to either the original branch or the changed branch. Without branch identity, a trace can appear internally consistent while mixing state transitions from incompatible executions.

The same structure supports the golden sets introduced in Chapter 4. A useful golden case need not consist only of a prompt and an expected final answer. It can retain the sequence of typed decisions, actions, observations, and state transitions that made the answer possible. A regression test can then compare the properties that should remain stable while allowing an intentionally changed step to alter its descendants. The event stream is also the substrate for a supervisory layer, because supervision requires an object to inspect and an unambiguous point at which to intervene.

My own trial-annotation pipeline, which structures the per-trial output of diagnostic agent runs, illustrates the join problem without establishing general efficacy. It ingests standard harness output into 31 structured fields per trial and assigns a stable join key. Its annotation store includes provenance in the primary key, so two annotators can describe the same trial without overwriting one another. The lesson is architectural. Identity belongs in the stored record, not in a filename convention or an analyst's memory.

My own durable-execution demonstration harness provides a second illustration. It judges recovery invariants against an append-only ledger with distinct records for run start, injected kill, worker restart, replay completion, invariant checks, committed side effects, detected duplicates, and model calls with cost fields. A prose log could state that recovery succeeded. The ledger allows a check to ask whether replay completed after restart, whether any side effect committed twice, and which model calls contributed to the recovered run.

Neither illustration shows that typed traces outperform transcripts in a controlled setting. They show what becomes mechanically queryable once a runtime preserves event type, identity, order, and provenance. That distinction supports an instrumentation decision when the required query cannot be answered from the existing artifact. It does not support a claim that the instrumentation will reduce incident duration or improve recovery correctness by a predictable amount.

9.1.2 A shared vocabulary and its limits

The OpenTelemetry GenAI semantic conventions define common names and attributes for telemetry emitted by generative-AI systems. Their value is syntactic coordination. A runtime, a collector, a storage system, and an analysis tool can exchange records without every pair inventing a translation for model identity, operation type, token usage, or agent activity. Shared conventions reduce the number of bespoke assumptions that become hidden dependencies in an observability pipeline.

Specification status is itself the evidence boundary. The conventions do not demonstrate that a trace produced by one agent runtime can be replayed by another, and they do not require enough information to reconstruct application state. Telemetry portability and execution portability are separate properties. A shared event name can help two tools agree that a model call occurred while leaving them unable to agree on how the call changed workflow state.

Instrumentation should therefore begin with the shared GenAI vocabulary and extend it only for the fields a workload actually requires. Replay may require state-version references, branch identity, external-effect identifiers, persistence status, or a digest of a large payload stored elsewhere. Those extensions should remain explicit and documented. A bespoke schema may fit one runtime more closely, but every private field moves translation cost to collectors, tests, migration tools, and future runtimes.

Complete instrumentation is the harder constraint. If the runtime records a tool request but the tool wrapper omits the external commitment, the trace preserves the transcript’s ambiguity in a more structured form. If records remain in the worker’s memory until a batch flush, a kill can remove the events needed to explain the kill. If clocks are unsynchronized across processes, timestamps can imply an order that never occurred. The stream needs durable persistence and causal identifiers, not merely timestamped JSON.

Typed events also do not make effects idempotent, restore corrupted state, or decide whether an uncertain call should be repeated. They expose where the uncertainty lives. A recovery mechanism must still reconcile external state, enforce deduplication, and choose an admissible continuation. A restore point must also be checked against downstream commitments, because local state can be internally valid after observers have already seen a later effect. The companion catalog treats that boundary as certification against downstream commitments.

Long histories introduce a cost that correctness arguments can obscure. Replaying a complete run may require reading and validating thousands of events before useful work resumes. Splitting long workflows at durable semantic boundaries can bound recovery to a short suffix, as described in the companion pattern on replay-history limits. The split changes where state lives and which prior commitments must be summarized, so it should follow measured recovery requirements rather than an arbitrary event count.

Transcript-only observability remains attractive because it is easy to render and resembles the interface through which people interact with a model. I still keep transcripts, as a derived view rather than as the recovery record. The durable artifact is the typed stream. A transcript is one projection over selected event types. That relationship preserves readability without allowing a presentation format to erase the causal information recovery requires.

9.2 Recovery is a measured property

Vogel et al. (2024) did more than establish that injected failures degrade performance. Their direct measurements of recovery reversed conclusions drawn in earlier published comparisons, and the effect of a fault was not constant across successive failures. Software configuration, workload, accumulated recovery state, and fault timing all participated in the observed result. The useful

response is a protocol that makes those conditions part of the claim.

An architecture diagram describes intended control flow. It may show a worker reading a checkpoint, replaying events, and resuming output. The drawing cannot establish how long failure detection takes, whether retry queues compete with live work, whether a restored worker rebuilds caches, or whether an external effect occurred before its completion record became durable. Those behaviors emerge from the interaction of runtime, persistence layer, network, workload, and deployment configuration.

Fault injection forces that interaction to occur on demand. Kill a worker or a pod, interrupt an external call, terminate the process during persistence, and repeat the disturbance while representative work is active. The purpose is to estimate recovery behavior over a declared fault menu and operating envelope, with faults placed at inconvenient times.

9.2.1 Specify the claim before the kill

I begin by writing the recovery claim in observable terms. A useful claim names the fault, the protected state or effect, the expected continuation, and the measurements that decide whether the continuation was acceptable. A worked claim reads like this. After an ungraceful worker kill during ticket creation, the runtime resumes the interrupted run without creating a second ticket, reproduces the final response of the clean reference, and returns to the declared throughput range. Each clause points to an observable event or measurement.

The control run uses the same workload and configuration without an injected fault. This applies Chapter 2’s control logic to recovery. The difference between the faulted run and the clean run estimates the effect of the injection within the tested conditions. When exact output comparison is possible, I retain a content digest or a canonicalized output from the clean run. When model nondeterminism prevents byte equality, I compare the deterministic state and effects that the recovery contract actually constrains, and I state which outputs remain incomparable.

The faulted run needs more than a final pass indicator. At minimum, measure failure-detection time, time until useful work resumes, time until throughput stabilizes, post-recovery throughput, latency during and after recovery, duplicated or missing effects, and output equivalence to the clean reference. Queue depth, retry count, checkpoint age, and cache state may explain those measurements, but they should not replace the outcome metrics. A system can restart quickly while delivering low throughput or committing duplicates for several minutes.

Recovery time also requires a declared start event and a declared end event. Starting at process death and ending at process creation measures orchestration latency rather than application recovery. For a user-facing run, the interval may begin at the last confirmed useful event before the kill and end when the interrupted run commits its next correct state transition. For a streaming workload, the end may require backlog clearance and stable throughput. Different definitions answer different questions, so the event definitions belong beside the number. The clean control has to use the same two events, because a recovery time compared against a differently anchored baseline measures the anchoring instead of the recovery.

A single restart demonstrates one recovery, but estimating stability requires repetition. Repeated faults connect recovery testing to Chapter 1’s repeated-runs discipline. Recovery impact is a distribution across runs and across recurring failures. Schedule multiple injections within a run as well as independent runs from a clean starting state. The first reveals accumulated effects such as queue growth, leaked leases, enlarged histories, and cache churn. The second separates those effects from ordinary run-to-run variation.

Recurring failures deserve their own sequence position in the data. If the third kill produces a longer outage than the first, a pooled mean hides a stateful degradation. Plot or tabulate recovery

metrics by failure ordinal and retain the individual observations. The sample may still be too small for a stable population estimate, but the raw sequence can show whether recovery changes as faults accumulate.

9.2.2 Strike the interval the design claims to protect

The most informative kill point is rarely the boundary between steps. Chapter 8 identified the execute-then-log window. An external system may commit an effect after the runtime sends the request and before the runtime durably records completion. A recovery design that claims exactly-once visible effects or safe retry has to hold when the process dies inside that gap, and the test should place a kill there deliberately.

A worst-case protocol sends an ungraceful kill from inside the active step, after the external call returns and before the completion marker is written. The process exit status must confirm that the kill occurred. If the step reaches its normal return path, or the harness reports another exit mode, the trial is invalid rather than a passing recovery. This check prevents an imprecise injection from testing a clean boundary while claiming to test the vulnerable interval.

The harness must not repair the system it measures. It may schedule the kill and observe the typed event stream, but recovery knowledge must come from the runtime's own persisted state and recovery mechanism. If the harness ledger tells the replacement worker which call completed, the experiment has supplied information the deployed system may not possess. The resulting pass would measure the runtime and the test fixture together rather than the runtime's recovery property.

I use a negative control to detect that error. A naive adapter restarts the workflow from its initial step without reconciliation or deduplication. At every kill point after an external commitment, that adapter should violate the no-duplicates invariant. If it passes, the harness may be suppressing effects, leaking recovery state into the adapter, or failing to place the kill where claimed. A control expected to fail is worth running here, because a false pass is otherwise easy to mistake for fault tolerance. It also detects only the defect it was built to expose, and a subtler recovery error can still pass both arms.


The kill-point sweep should include boundaries before dispatch, after dispatch but before external commitment, after commitment but before local acknowledgment, after acknowledgment but before the durable state transition, and after that transition. These points are not interchangeable. The first tests whether unstarted work can be rescheduled. The middle points test ambiguity and deduplication. The last tests the runtime's recognition of completed work and its suppression of repetition. A step with several external effects has one such sweep per effect.

Each external effect requires its own sweep, with a deliberate kill in the gap between external commitment and local acknowledgment.

Calls that can hang or return partially add another fault class. Interrupt the connection, inject a retryable response, delay the response beyond the worker heartbeat, and deliver a late response after the retry has begun. The runtime must distinguish a request known not to have executed from one whose status is uncertain. Treating both as ordinary retryable failures converts transport ambiguity into duplicated effects.

Redeployment adds versioned state to the protocol. Kill or replace a worker while a run is active, then resume it with patched code. The event schema, the serialized state, and the deterministic replay path may each cross a compatibility boundary. A restart that succeeds with the same binary does not test that case. The configuration record should therefore name both the pre-fault version and the recovery version.

History growth is another boundary condition. A short demonstration can avoid the replay

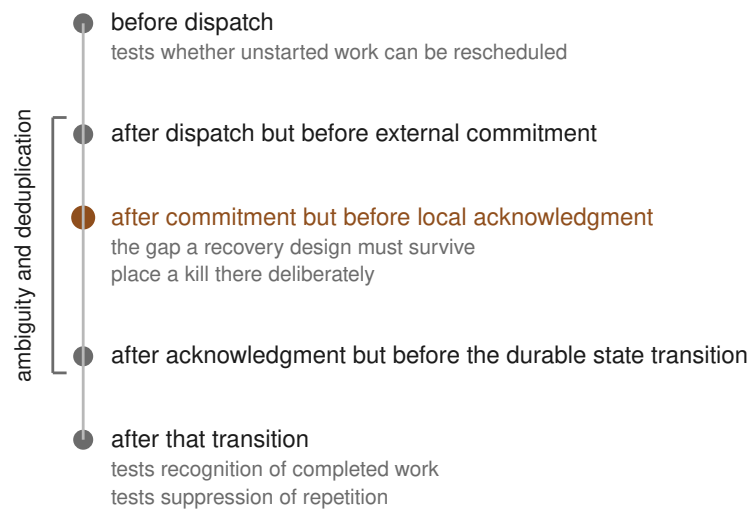

Several external effects call for one sweep per effect

Figure 9.1: Five lifecycle kill points test recovery from unstarted work through ambiguous commitment gaps to durable completion, including recognition and suppression of repeated external effects.

costs and rollover behavior that appear only after many events. Run beyond the runtime’s history rollover or compaction threshold, and inject faults on both sides of that boundary. Compaction replaces working history with a condensed representation so the run stays inside the context budget. The companion pattern on bounding replay history addresses the architectural response, while the experiment establishes whether the current boundary behaves as intended.

The fault menu should ultimately come from observed production faults rather than from what the harness can inject easily. Worker kills are useful because they are reproducible and severe, but they do not cover slow storage, stale leases, delayed acknowledgments, partial network partitions, quota errors, or malformed persisted state. The companion catalog’s realistic-fault-menu pattern gives the fuller construction method. The narrower requirement here is to publish the menu so readers can see what the recovery claim excludes.

9.2.3 Keep the result attached to its envelope

My own kill demonstration, an **unverified working artifact**, illustrates the protocol without extending the literature evidence. In that run, a worker was killed during an activity after one retryable fault had been injected. The recovered run passed 13 of 13 invariant checks, the interrupted activity resumed through a heartbeat-timeout retry and used a cached path, and its output matched the clean reference byte for byte by content hash. Thirteen of thirteen is a satisfying line to write down, and it describes one kill placement in one configuration.

I can say that the running system exhibited the specified invariants in the tested trial. I cannot infer that the engine is generally fault tolerant, that a different activity would take the same path, or that another software version would preserve the result. Vogel et al. (2024) is the reason for that restraint. Recovery comparisons changed once configurations and recurring faults were measured directly.

My own publish-gate protocol, also an **unverified working artifact**, expands the intended experiment. Its first gate injects failure in continuous integration at a randomized kill point. Its fault matrix includes a kill during a model call, a kill in the execute-then-log gap, a redeployment with patched code during an active run, and execution to three times the history-rollover threshold. Randomization broadens placement, but it does not remove the need for a fixed sweep over named high-risk intervals.

No cross-engine comparison follows from those artifacts. My comparison sweep was never run, and the non-naive adapters remain specification stubs. There are no author-generated comparative engine measurements to report. An interface diagram showing multiple adapters can look like an experiment even when no workload has passed through them.

Configuration should travel with every published result. Record runtime and engine versions, deployment topology, persistence settings, checkpoint interval, retry policy, heartbeat and timeout values, resource limits, workload shape, concurrency, input rate, external-service behavior, fault-injector version, kill-point definition, and metric definitions. Preserve the typed trace, or an appropriately redacted derivative, so another investigator can reconstruct event order. Without those details, a recovery number is difficult to interpret and impossible to reproduce closely.

Results age as the stack changes. A new scheduler, storage client, default timeout, or checkpoint implementation can alter both fault detection and state restoration without changing the architecture diagram. A passing experiment establishes behavior only within the tested envelope. Re-run it after changes that affect persistence, concurrency, retry, version compatibility, external calls, or resource allocation.

Correctness, reliability, and performance should remain separate in the report. No duplicate effect and no missing state are correctness properties of a particular trial. The frequency with

which those properties hold across injections is a reliability measurement. Recovery time, latency, and throughput are performance measurements.

Resource consumption and extra model calls affect cost, and an operator’s ability to understand or safely initiate recovery is a usability property. One combined recovery score conceals which of these properties failed.

A recovery system may also need to withhold action when it cannot classify the failure safely. The companion pattern on diagnosing before gating recovery covers that policy. Another companion pattern asks whether recovery can remain invisible to downstream observers except as monotonic progress. Neither property follows from a successful restart, so I keep both outside the basic pass criterion unless the system explicitly claims them.

9.3 A protocol for trusting recovery

Before crediting a recovery claim about an agent runtime, I look for two linked artifacts. The first is a durably persisted typed event stream that distinguishes model calls, tool dispatch and completion, environment changes, external commitments, and state transitions. I begin with the shared OpenTelemetry GenAI conventions, then add explicit state, branch, and effect fields only where the workload requires them. Every agent action names its owner, and every tool call can be joined to the reasoning step and the session that authorized it.

The second artifact is a fault-injection result produced under representative load. I run a clean control, kill a worker from inside an active step, and place at least one kill between an external effect and its durable record. I repeat the injections within runs and across independent runs, because the first restart does not characterize the behavior of later ones. The harness confirms that the kill occurred, observes recovery without supplying it, and checks a naive negative control that should duplicate effects.

I measure recovery time from declared application events rather than from process restart time. I retain post-recovery throughput and latency, invariant outcomes, duplicate and missing effects, and output equivalence against the clean control. When exact equivalence is impossible, I state the constrained properties and the remaining nondeterminism. A pass means that the runtime met those conditions for the tested trials.

The fault menu and the complete configuration belong with the result. They define the envelope within which the claim is valid and provide the basis for rerunning it after version or deployment changes. A reader should be able to identify which intervals were struck, which faults were omitted, how recurring failures behaved, and which measurements separated correctness from performance and cost.

This protocol does not convert one engine into a universally reliable one. It produces a narrower and more useful statement. Under a recorded workload and configuration, with specified faults placed at specified boundaries, the runtime recovered with measured behavior and preserved named invariants. That statement can be challenged, repeated, and revised when the system changes.

A trace worth replaying is also the artifact a human reads when the run fails, but even a complete trace does not establish which action caused the failure, or how a person can defend that attribution.

9.4 Sources and evidence

9.4.1 Make every run a structured, replayable trace

- explorer/directional: Shepherd runtime substrate (Yu et al. 2026, arXiv:2605.10913); companion material named in the same synthesis without a paper identifier: OpenTelemetry GenAI conventions (CNCF 2025).
- explorer/directional: AgentSight eBPF observability (Zheng et al. 2025, arXiv:2508.02736).
- lit/directional: Chan, A., et al. (2024), “Visibility into AI Agents,” ACM FAccT 2024, arXiv:2401.13138.

9.4.2 Benchmark recovery with fault injection

- lit/strong: Vogel et al. (2024), “A Comprehensive Benchmarking Analysis of Fault Recovery in Stream Processing Frameworks,” arXiv:2404.06203 (JSS line).

Author-system cases are narrative illustration, not evidence. The kill demonstration and publish-gate protocol are unverified working artifacts.

Chapter 10

Human-auditable failure analysis and taxonomy development

In a peer-reviewed study, Zhang et al. (2025) collected expert-annotated failure logs from 127 multi-agent systems, in which several model-driven workers hand work to each other. They then handed the attribution problem to the best automated methods they could evaluate. The delegation failed in two distinct ways. The best method named the responsible agent in 53.5 percent of cases, but identified the decisive step in only 14.2 percent. Some of the evaluated methods performed below random.

Every one of those logs already existed before the attribution problem was posed. A record of what happened is necessary, as Chapter 9 established, but it does not settle why a run failed. A transcript can contain every command and message and still be consistent with several competing causal explanations. One worker may make an early planning error, another may act correctly on corrupted state, and a third may expose the defect when verification finally runs. Assigning the failure to the last visible error would confuse detection with cause.

Attribution is the scarce capability in this sequence. Logging preserves the evidence. Attribution is the claim that one particular action changed the run’s prospects, and that claim controls what engineers instrument, which component they repair, whether a benchmark item remains valid, and sometimes who becomes accountable for the result. Under a weak attribution process, a complete trace becomes a precise record of the wrong explanation.

Three practices follow. I derive the initial failure taxonomy by reading my own traces. I keep a person responsible for consequential causal assignments, and I shape the trace so that person can audit the evidence. Automation can organize the work after those conditions exist. It cannot be assumed to create them.

10.1 Build the taxonomy from the failures you can inspect

My starting protocol has limited evidentiary support. Its evidence base is one directional observational study and one practitioner-authored method, and neither is a controlled result showing that the procedure improves an agent system. I still use it because it specifies an auditable way to turn local traces into measurement categories. The method comes from Orosz and Husain (2025), and the trace count it recommends, at least one hundred, is an unmeasured protocol recommendation.

I begin with traces from the system and workload I operate. I select for diversity across task type, outcome, model version, repository area, duration, tool use, and any operating condition likely to change the path through the system. Apparent successes belong in the sample when verification

was skipped or the result depended on an unexplained retry. Excluding them would define failure as whatever the existing evaluator already noticed, which is the blind spot the review is meant to find.

For each trace, I read from the initial request to the terminal state and write open-ended notes. The annotation records the first upstream failure that materially changed the available path to success. It does not catalog every later error. A run that starts from an incorrect plan, edits the wrong module, invokes a test from the wrong directory, and then misreads the failure can produce four visible defects. If the plan directed all subsequent work toward the wrong module, the planning error is the first upstream failure.

This choice follows the causal structure of an agent run. State passes from one step into the next through messages, files, tool outputs, summaries, and control decisions. An early error changes the evidence and options available downstream. Later steps can therefore be locally reasonable and globally ineffective. Counting every symptom as an independent failure inflates the categories produced by long runs and overweights systems that continue after their prospects have already collapsed.

The first-upstream rule also forces a useful counterfactual question. If this step had been correct while the preceding record stayed the same, could the later failure still have occurred by the observed path? A clear ‘no’ makes the step a plausible causal boundary. A ‘yes’ means I have probably annotated a symptom, or that the trace lacks enough state to decide. I preserve the uncertainty and leave the causal label unresolved.

The counterfactual holds the preceding record constant and asks only whether the observed path could still produce the later failure.

After the open read, I cluster the notes into roughly five to ten themes. The labels should describe failures that call for distinct measurement or investigation surfaces. Planning, retrieval, execution, tool use, self-diagnosis, verification, and environment handling may emerge, but I do not impose those categories before reading. A local pipeline may instead reveal failures around identity propagation, stale workspace state, permission boundaries, retry ordering, or task ambiguity.

Phase labels are worth the trouble because they narrow where evidence must be collected. A planning failure asks whether the system represented the goal, constraints, and dependencies before acting. An execution failure asks whether a valid plan became the intended commands and edits. A self-diagnosis failure asks whether the system interpreted observed state correctly after an action. Combining them into ‘reasoning failure’ produces a broad count with little guidance about which part of the trace is deficient.

Generic metric packages often begin with categories convenient for the evaluator. They count tool errors because tool errors are easy to parse, or grade final answers because final answers are easy to present to a judge. The resulting dashboard can be internally consistent while missing the upstream decisions that generated the measured events. A taxonomy derived from traces starts with the failure process and only later asks which measurements can represent it.

Published phase-aligned classifications provide a useful comparison. Lu et al. (2025) classified failures by phase across 34 programmable tasks executed by off-the-shelf frameworks operating near 50 percent completion.

Those results do not establish base rates for frontier coding agents. The reported distribution describes that study’s tasks, systems, and operating point. A production repository with different permissions, tools, review gates, and task duration can concentrate failure elsewhere.

I saw this mismatch in my own trial-annotation pipeline, a system for classifying failures in experimental agent runs. An early taxonomy omitted failure modes that dominated the project’s own traces even though public taxonomies covered adjacent classes. The third revision grew from annotation of the local corpus and separated categories along more dimensions. That experience

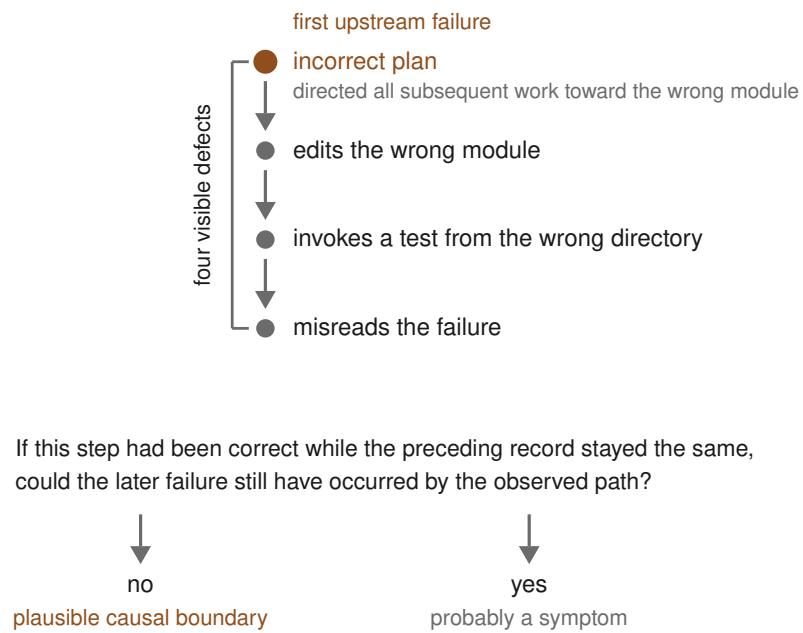


Figure 10.1: A planning error is the first upstream failure linking four visible defects, while a counterfactual test distinguishes a plausible causal boundary from a symptom.

is narrative illustration only. It does not show that the resulting categories are complete, and the published export cannot independently reproduce the category counts because its manifest records no annotations.

I analyze a complete case. It keeps the request, relevant starting state, trace, terminal outcome, verification result, and annotation together. When several retries belong to one attempt, I preserve their order and identity so a later successful retry does not erase the original failure. If the system forks work, I retain the parent-child relation. Without that relation, an error imported from another branch can appear to originate where it was first observed.

Category boundaries will blur on long, multi-phase work. A retrieval failure can induce a bad plan, while an environment defect can make correct execution look like faulty reasoning. I allow multiple descriptive tags when they preserve useful context, but keep one first-upstream assignment for frequency analysis. The distinction prevents the taxonomy from pretending that causation is always singular while still making the primary count interpretable.

Disagreement is evidence about the taxonomy. If two qualified reviewers repeatedly split the same cases between planning and retrieval, the category definitions may depend on state the trace does not expose. If they agree on the events but disagree on the counterfactual, the causal rule needs a sharper boundary. I revise the label definitions and preserve the original annotations so the change remains visible.

The initial pass over roughly one hundred traces is intensive by design, and reading them end to end is slow work. The pass discovers categories, tests whether the recorded evidence can support them, and exposes which distinctions require domain expertise. It cannot establish a stable low-frequency rate with the precision that a larger sample and a **power analysis** would demand. A class frequency counted from one run per task also inherits the run-to-run variation Chapter 1 describes, so two nearby frequencies can reorder under repetition.

The product of that pass is a defensible measurement vocabulary and a labeled seed corpus. Estimating the system’s failure distribution requires a separate sampling design.

Once those categories stabilize, the scale-out path returns to Chapter 5. I validate an LLM-as-judge on a held-out expert-labeled, stratified sample under the same rubric, then use it to extend the labels only within the operating range its errors support. That validation is tied to the label definitions in force when it ran, so revising a category definition invalidates the agreement estimate for that category. Human review remains concentrated on new categories, ambiguous cases, consequential failures, and strata where the judge performs poorly. A pre-built judge applied before the manual pass would merely automate someone else’s taxonomy.

Frequency then informs priority without deciding it alone. I count the first-upstream assignments by phase and class, examine uncertainty, and compare the mass with the cost of each failure. A frequent recoverable tool error may deserve less attention than a rare attribution error that invalidates an evaluation. The distribution shows where failures concentrate, but engineering judgment still decides which of them are worth repairing.

Several narrower techniques remain in the companion catalog. Constraint-violation logs can localize a failure when a task has explicit invariants, and trajectory canonicalization can make structural comparisons possible across runs. A separate entry recommends catching environment errors before execution because they can consume disproportionate effort. These methods can sharpen a local taxonomy, but none removes the need to discover which categories the operated system actually produces.

10.2 Keep causal assignment under human control

Attribution becomes consequential when its answer changes an action. An engineer may rewrite a prompt, repair a tool adapter, remove a benchmark task, retrain a model, or change an on-call report according to the assigned cause. The same label can also affect accountability when several people or services own different parts of the run. In those cases, an automated guess is not a harmless summary.

I separate triage from verdict. Triage ranks cases or candidate steps for investigation. A verdict records the responsible action and decisive step with enough evidence that another reviewer can challenge the assignment. Automated methods can make triage cheaper even when their error rates make them unsuitable for verdicts.

The opening result sets the present limit. The 53.5 percent agent-level accuracy leaves nearly half of responsible-agent assignments wrong, and the 14.2 percent step-level accuracy misses the point at which most failures became decisive.

Those figures do not establish a general automation ceiling. They belong to one annotated dataset of multi-agent failures. Single-agent coding traces may be easier, other workloads may be harder, and later methods may improve on both numbers. The reported percentages should not be converted into a staffing ratio.

Ma et al. (2025) later reached 36.2 percent step-level accuracy on the same benchmark family, against under 15 percent for prior methods. Counterfactually validated fixes derived from that analysis raised task success by an average of 22.4 percent, but the source does not state whether the gain is absolute or relative. That improvement suggests that causal structure can narrow the search more effectively than an undifferentiated reading of the transcript. The method still assigned most decisive steps incorrectly.

The fixes were evaluated on the benchmarks that defined the attribution task, and the method required a bespoke causal-discovery algorithm for interaction data whose behavior changes over time. That result supports a candidate generator for a reviewer. It does not justify silently storing the model’s assignment as the postmortem cause.

A human verdict needs a reconstructable chain. I ask which state changed, which action changed it, which later components consumed it, and what observation eventually exposed the damage. The record must separate the actor that introduced a defect from the actor that detected it. It must also distinguish a component that passed on invalid state from one that had enough information and authority to reject that state.

Consider a run in which a planner selects an obsolete interface, a coding worker implements it faithfully, and a verifier reports an integration failure. The verifier owns the detection. The planner is the first candidate for causal responsibility, provided the current interface was available in the planner’s evidence and no later gate was explicitly responsible for checking it. If the repository index supplied stale documentation, responsibility can move again. The trace alone cannot choose among these accounts unless it records what each step received and what obligation each step owned.

I therefore write attribution as a structured claim. The claim names the first upstream action, the state transition it caused, the downstream dependency that carried the error, the evidence supporting the assignment, and plausible alternatives considered. It also records confidence and the reviewer. This format does not make the judgment objective, but it exposes where judgment entered. A postmortem that names a ‘root cause’ without naming the state transition behind it is a summary rather than an attribution.

Counterfactual reasoning checks an attribution without proving it. I ask whether replacing the candidate action with a correct action, while holding earlier state fixed, would have prevented the

observed failure path. Several steps may satisfy that condition because later checks could also have recovered the run. The decisive step is the earliest point at which the relevant error entered or an owned opportunity to stop it was irretrievably missed under the taxonomy’s rule.

That definition requires an explicit ownership model. A verifier that was not asked to check interface currency should not inherit responsibility merely because it could have caught the error. But a release gate whose declared contract includes that check has a meaningful missed intervention. Postmortems become arbitrary when they infer obligations from hindsight and ignore the contracts operating during the run.

Retries complicate the assignment. A failed first attempt can alter files, caches, rate limits, conversation state, or the evidence presented to the next attempt. The retry that succeeds may depend on those changes, while the retry that fails may be responding to damage introduced earlier. I preserve attempt identity and state boundaries so reviewers can distinguish repeated decisions from decisions made in a changed world.

Concurrency adds another ambiguity. Two workers may read the same starting state, make individually valid changes, and conflict only when their outputs merge. Neither branch contains a unilateral causal defect. The failure belongs to the coordination rule, merge order, or missing conflict check, depending on which contract was violated. When a transcript is sorted by completion time, the worker whose result arrived last can appear responsible for a conflict it did not cause.

Before blaming an agent, I rule out the evaluator and execution environment. A broken dependency, stale fixture, permission mismatch, nondeterministic test, or malformed task can make a correct action look defective. Differential testing compares the same candidate under a controlled change in agent, harness, or environment and asks whether the failure follows the candidate. The companion catalog carries this as a separate diagnostic control, because attribution without apparatus checks can convert measurement error into a model failure.

Human control does not mean every person reads every trace from the beginning. An automated system can rank likely decisive steps, group similar incidents, retrieve related cases, and prefill the observed events. It can also flag assignments that conflict with the recorded state transition. The reviewer remains responsible for accepting, revising, or abstaining, and the stored record distinguishes the proposal from the signed attribution.

I used the same authority boundary in my own internal benchmark curation, a process for deciding which generated software tasks were sound enough to evaluate. Candidate decisions retained an explicit provisional label until a project lead signed off. The pipeline that generated and checked the tasks could assemble evidence, but it could not finalize the attribution of a defect to the task or the system. This methodology example supplies no accuracy evidence.

The review threshold should follow consequence. A low-stakes transient failure can retain an automated tentative label for aggregate triage. A failure that changes remediation, removes an evaluation item, alters a reported result, or assigns organizational responsibility needs a named human decision. When the evidence cannot distinguish competing causes, the correct verdict is unresolved, accompanied by the missing observation that would have separated them.

Aggregating several automated readers does not make the attribution more reliable. The companion catalog describes independent attribution judges as an aside, and agreement among several weak or dependent readers does not establish causation. It also treats consistency across repeated runs as a risk signal, another aside that can prioritize unstable cases without explaining them. Both can decide where a person looks first. Neither should decide what the person must conclude.

Repeated local categories can eventually reveal a structural problem. When the same failure class survives prompt patches and model upgrades, the remedy is structural, and Chapter 17 develops that redesign question. Here I stop at diagnosis, because the trace evidence establishes recurrence alone.

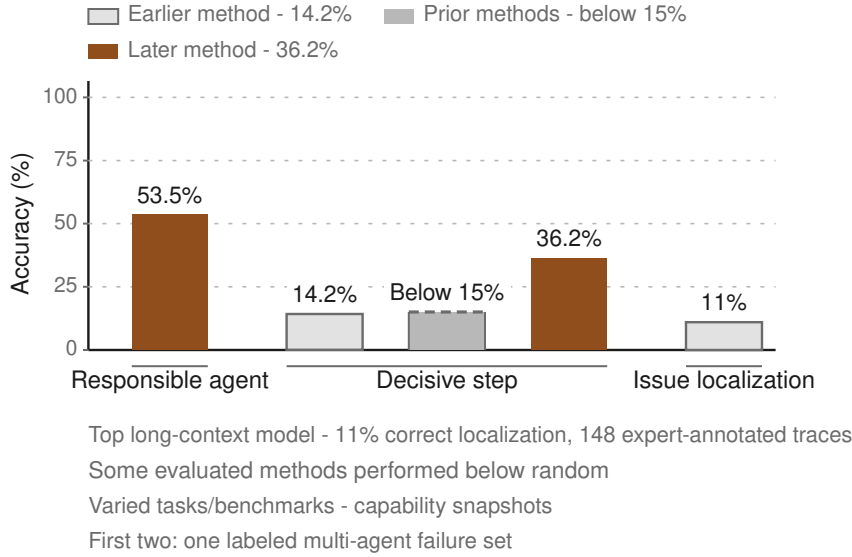


Figure 10.2: Responsible-agent attribution is 53.5%; decisive-step attribution is 14.2% earlier, below 15% for prior methods, and 36.2% later; the top long-context model localizes 11% of 148 traces, and some methods underperform random.

10.3 Design the record for a skeptical reader

Deshpande et al. (2025) reported that the best evaluated long-context model correctly localized issues in 11 percent of 148 expert-annotated traces. Those traces were benchmark-derived but ecologically valid, and they were more complex than short synthetic sequences built to isolate one error. Reasoning, tool calls, outputs, retries, and state changes appeared in the same record. A large context window could hold the transcript, but holding the transcript did not make the decisive event legible.

Results span distinct tasks and benchmarks; the first two use one annotated multi-agent-failure dataset. These capability snapshots cannot set a general automation ceiling.

That result is a snapshot of model capability. Scores will change as models and trace readers improve, and the benchmark cannot establish performance on every production workload. I take the more durable design consequence from the structure of the task. A record built for human audit should expose the units a causal investigation needs. Raw chronological text forces every reader, human or model, to reconstruct those units before diagnosis can begin.

Chapter 9’s typed event stream supplied replay and recovery. Human audit adds a different requirement. A reviewer must be able to follow step boundaries, decisions, inputs, state transitions, retries, and outcomes without inferring their identity from prose. The same event stream can serve both purposes when its schema records semantic boundaries. Timestamps on messages alone do not preserve them.

At minimum, I preserve a run identifier, task identity, model and configuration versions, initial state reference, and ordered step identifiers. Each step records the actor, input references, decision or intended action, tool request, tool response, resulting state reference, verification outcome, and terminal status. Retries point to the attempt they repeat and state why the controller retried.

Forks and joins retain parentage and ordering constraints.

A tool response, file digest, exit status, or test result is an observation. A model statement that the response means a dependency is missing is an interpretation. Storing both under a generic message field makes later readers treat the interpretation as if the environment had emitted it. Typed events let the reviewer compare the claim with the recorded observation.

Decision records need enough input to replay the choice. A label such as ‘selected tool A’ captures an outcome but omits the alternatives, constraints, and evidence available at the time. I store the relevant input references, the chosen action, rejected alternatives when the system represented them, and the rule or model version that selected among them. Replay means re-running or reevaluating the decision against the same recorded inputs. Asking a model to invent a retrospective rationale is a different operation.

Some inputs cannot be stored in full. Repository snapshots, retrieved documents, and tool outputs may be large, sensitive, or mutable. The trace can retain content-addressed references, access-controlled snapshots, or a precise query with the returned item identities. A pointer to ‘current repository state’ is inadequate because the state will change before the review. The preservation policy must balance reproducibility against confidentiality, storage cost, and retention obligations.

Step boundaries should correspond to ownership and state changes visible to the control plane. A single step containing plan generation, three tool calls, an edit, and verification is too coarse for attribution. Splitting every token or streaming fragment produces the opposite failure. The reviewer then sees thousands of events with no decision boundary. I use the smallest unit at which an actor received a defined input and produced an action or state transition that another component consumed.

Tool calls require more than names and final outputs. The record includes normalized arguments, execution environment identity, start and finish status, timeout or cancellation, side-effect summary, and links to resulting artifacts. A command can fail after partially modifying state. Recording only its nonzero exit status hides the files or processes left behind for the retry.

Ordering requires explicit semantics when work overlaps. Wall-clock timestamps help investigate latency, but clock order does not establish causal order across concurrent workers. Parent identifiers, message sequence numbers, versioned state references, and join events show which observations were available to which decision. If two steps race to update the same artifact, the trace should identify the accepted version and the rule that rejected or merged the other.

Identity also needs stability across resumed work. A display name such as ‘coder’ can refer to different model versions or sessions. The audit record connects a logical role to a particular execution instance, configuration, permission set, and parent run. That distinction lets a reviewer tell whether a changed outcome came from a new decision, a new actor, or state carried across a restart.

The interface should support competing explanations. I want a reviewer to move from an annotated failure to the exact upstream event, inspect the input state, follow affected descendants, and compare a neighboring successful run. Filtering by actor or event type helps, but the default view should preserve causal context around each selection. A viewer that hides retries or collapses repeated tool output can produce a convenient summary at the cost of the evidence under dispute.

My own evaluation tool, CodeProbe (public repository), publishes complete transcripts and preserves quarantined runs in a separate area. Its successor adds a side-by-side trace browser for audited comparisons. Those choices illustrate preservation and review practice. They do not establish that the schema is optimal, and publication by itself does not prevent mistaken conclusions.

Quarantined runs are worth storing because evaluation pipelines often remove timeouts, rate limits, infrastructure failures, and malformed outputs before analysis. Some exclusions are methodologically justified, but deletion prevents a later reviewer from distinguishing an agent failure from

an apparatus failure. I preserve the raw run, exclusion reason, decision owner, and any replacement attempt. Aggregate reporting can then follow the declared policy without erasing the cases that test it.

Structured traces also improve privacy review because sensitive fields become identifiable. Credentials, personal data, proprietary source, and private model reasoning may require redaction or restricted access. Blanket retention creates a security liability, but blanket deletion destroys auditability. Field-level rules can restrict access, encrypt retained data, and irreversibly redact secrets. The record then distinguishes evidence withheld by policy from evidence the system never captured.

The trace schema must record its own version. Adding a field changes what can be inferred from later runs, while renaming an event can break comparisons with the existing failure corpus. A missing field has three possible meanings: the event did not happen, the recorder omitted it, or an older schema stored it differently. I make those states explicit in the decoder and migration logic.

Instrumentation can itself change system behavior. Synchronous logging adds latency, large payloads can alter token budgets, and capturing tool output can affect memory pressure or rate limits. Asynchronous emission can reorder events or lose the final buffer during a crash. I measure the overhead, assign a durability requirement to each event class, and record missing events as trace failures. A gap must remain visible in the reconstructed record. Changing the instrumentation between two arms also changes the apparatus, which Chapter 1 requires to be held fixed across a paired comparison.

The practitioner evidence for this practice is anecdotal. In one organization's account, reviews had been based on competing opinions until the system recorded decisions, inputs, retries, and outcomes. The structured record then made failures repeatable and arguments factual. A second practitioner independently described event-sourced, replayable traces. Both are self-reported accounts. They show plausible operational use but supply no controlled improvement or universal schema.

Logging does not repair an agent. It makes proposed explanations testable against preserved events and makes repeated failure paths comparable. A repair still requires a separate intervention and an evaluation that shows the intervention changed the intended outcome. This distinction prevents observability work from being credited with reliability gains it has only made possible to measure.

The schema should evolve from failed questions. Common gaps concern the state a worker saw, inherited retry side effects, the branch chosen at a merge, or the evidence behind a decision. I record the unanswered question as an instrumentation defect. The next schema version adds the smallest event or relation that would answer it. This process ties auditability to real investigations and limits speculative completeness.

Trajectory shape can provide an early cue while a run is still active. The companion catalog describes monitoring duration, variance, tool-call count, or other shape changes, because failed trajectories can run longer and vary more. Such a signal can preserve a suspicious run or request review sooner. It cannot identify the cause without the structured events that explain what happened inside the shape.

10.4 Turn failed runs into an operating record

I start with the last twenty failed runs and read each one end to end. My notes remain open-ended, and each case receives only its first upstream failure as the primary assignment. I include apparent successes whose verification was skipped, because an unverified outcome cannot supply

clean evidence of success. The small batch reveals whether the trace can answer ordinary causal questions before a larger annotation effort depends on it.

I then grow the note pile toward one hundred diverse traces and cluster it into five to ten classes. The resulting distribution determines which classes deserve measurement first, while cost and consequence govern the final priority. A named human signs any attribution that changes remediation, accountability, task validity, or the interpretation of an evaluation. Automated readers can order the queue and propose candidate steps.

The first unanswerable question changes the trace schema. I add the missing state reference, boundary, identity, ordering relation, or outcome field, then preserve the schema version with subsequent runs. That response treats failed analysis as evidence about the observability system. A review should be able to state both what happened and which parts remain uncertain.

The failure corpus remains an operating asset after Part III. Chapter 14 will use it to tune compaction policy, because compression should preserve the evidence that past investigations found decisive. Part IV now turns to the evidence available when the model acts: retrieval, context budgets, and memory. Chapter 11 begins by measuring repository retrieval, the first step in deciding which parts of a codebase enter that evidence.

10.5 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

10.5.1 Derive the failure taxonomy from your own traces

- lit/directional: Lu, R., Li, Y., Huo, Y. (2025), “Exploring Autonomous Agents: A Closer Look at Why They Fail When Completing Tasks,” arXiv:2508.13143. (Phase-aligned classification; ~50% completion base rate on 34 programmable tasks with off-the-shelf frameworks; NOT a base rate for real enterprise repos.)
- practitioner/directional: “A pragmatic guide to LLM evals for devs”, Gergely Orosz with Hamel Husain, Pragmatic Engineer newsletter, 2025-12-02, <https://newsletter.pragmaticengineer.com/p/evals>. (Open coding on 100+ traces, first upstream failure, axial coding into 5-10 themes, prioritize by frequency.)

10.5.2 Keep humans in failure attribution

- lit/strong: Zhang, S., et al. (2025), “Which Agent Causes Task Failures and When? On Automated Failure Attribution of LLM Multi-Agent Systems,” ICML 2025, arXiv:2505.00212. (Who&When: expert-annotated failure logs from 127 multi-agent systems; 53.5% agent-level and 14.2% step-level for the best automated method; some methods below random.)
- lit/directional: Ma, G., et al. (2025), “Automatic Failure Attribution and Critical Step Prediction Method for Multi-Agent Systems Based on Causal Inference,” arXiv:2509.08682 (CDC-MAS). (36.2% step-level against under 15% for prior methods; counterfactually validated fixes worth an average 22.4% task success.)

10.5.3 Design traces for human audit

- lit/strong: Deshpande, D., et al. (2025), “TRAIL: Trace Reasoning and Agentic Issue Localization,” Patronus AI, arXiv:2505.08638. (Best evaluated model localized issues in 11% of

148 expert-annotated traces; a 2025 capability snapshot.)

- practitioner/anecdotal: “What actually broke when we put AI agents into real production workflows”, /u/saurabhjain1592, r/LLMDevs, 2026-01-08 (independently corroborated by a second practitioner account of event sourcing with replayable traces, r/programming, 2025-11-26).

10.5.4 Author artifact cited inline

- Not an evidence item: CodeProbe, the author’s task-mining evaluation tool, public repository. Named inline for the published transcripts and quarantined runs described above, which are narrative illustration.

Part IV

Context engineering: retrieval, budgets, and memory

Chapter 11

Measuring and designing repository retrieval

In my own benchmark built from tasks across 73 repositories, two instruments disagreed about the same retrieval tool. **Precision@10**, the proportion of the first ten results judged relevant, rose from 0.095 to 0.313. **Recall@k**, the fraction of judged needed items found among the first k results, rose at $k = 10$ from 0.120 to 0.272. The fraction of tasks for which the needed file appeared rose from 0.33 to 0.56. The paired end-to-end reward across 370 tasks moved by only +0.0349, with a bootstrap 95% confidence interval of $[+0.0130, +0.0579]$, $n = 370$.

This bootstrap treated all 370 task-level deltas as independent observations. The tasks were drawn from 73 repositories and grouped into 20 suites, and the resampling reflected neither structure. The reported interval therefore likely understates the uncertainty and should not be read as a bound on it.

Chapter 1’s rule about choosing the resampling unit applies directly here, but promoting the unit to the repository or to the suite is not sufficient on its own. Repositories and suites are two groupings over the same tasks. Whether they are nested or crossed determines whether one clustered unit is adequate or the analysis needs a hierarchical or multiway resampling procedure.

The retrieval measurements showed that the tool had become substantially better at putting relevant repository evidence in front of the agent. The final score showed that the system as a whole had changed little. Each scoring procedure estimated a different event.

This disagreement changed the engineering question. If I had kept only the final reward, I would have treated the retriever as a weak intervention and looked elsewhere. The stage measurements showed that retrieval had improved while much of the added evidence failed to become correct edits. The next investigation therefore belonged downstream, in context assembly, evidence use, generation, or verification.

The reverse pattern would have required a different explanation. An end-to-end gain without a retrieval gain could have come from a model change, a prompt difference, or some other uncontrolled part of the path.

Repository retrieval sits inside a causal chain. A task becomes one or more queries. Each query searches an index. Ranked results enter a context budget. A model interprets that context, and an execution and verification process turns the model’s output into a scored result. A pass rate records the state at the end of the chain, and it cannot identify which transition produced that state.

11.1 Score retrieval and generation separately

Chapter 2 used ablations to isolate a component by removing it while holding the surrounding system fixed. Stage-level scoring applies the same attribution discipline within a run. I measure whether the retriever surfaced the evidence the task required, where that evidence appeared, whether it survived the context cutoff, and whether the generator used it. I report those measurements beside the final completion score, because each describes a different condition for success.

The first condition is availability. The relevant file, symbol, documentation block, or prior decision must exist in the searchable corpus and in its index. A retriever cannot return a file omitted by an indexing rule, a generated source tree excluded as noise, or a recently changed document still waiting for an asynchronous update. Treating these as ranking failures sends the investigation toward query tuning when the actual defect is corpus coverage or freshness.

The second condition is retrieval. Given an indexed target, the query must bring it into the returned set. The third is placement, because a relevant item can appear too low in the list to survive a fixed depth or token budget.

The fourth condition is contextual sufficiency. A method signature may be relevant but insufficient when the implementation, callers, or type definition determine the edit. The fifth is use. The model may receive adequate evidence and still ignore it, misread it, or produce an edit that fails for an unrelated reason.

An end-to-end failure is compatible with failure at any one of these conditions, and also with several at once. A tool can find the right method at position twelve, the context builder can keep ten results, and the generator can then invent an interface from the remaining snippets. The final failure does not reveal whether query formation, ranking, truncation, or generation should change. The trace does, but only when the evaluation has recorded the boundaries between those stages.


Pass rate captures only the final state, so it cannot reveal which transition failed or which governing condition caused the result.

The same ambiguity appears when a task passes. A generator may solve a familiar edit from model knowledge while the retriever returns irrelevant material. A broad retriever may place the answer somewhere in a large dump that exceeds the model’s useful attention and still receive credit, because the final edit happens to work. Chapter 6’s return-everything case reached recall 1.0 by construction. Correctness at the end of the run does not certify the evidence path that preceded it.

I therefore keep a per-task record with at least four fields: the identifiers of the judged relevant items, their positions in the returned list, the subset that entered model context, and the final task outcome. When the system exposes citations, tool references, or another reliable evidence-use signal, I add which items the generator actually used. A copy of the retrieved text in the prompt establishes exposure alone.

Repository-level code completion research supplies a clean example of this decomposition. RepoBench, from Liu et al. (2023), evaluates retrieval, completion with supplied context, and the combined pipeline as separable conditions. This design distinguishes a system that cannot retrieve the useful cross-file context from one that receives that context and cannot complete the code. A better ranker addresses the first failure and leaves the second untouched.

Memory evaluations expose a similar split through different measurements. MemConflict, from Tao et al. (2026), combined final-answer scoring with observations of whether the required memory was absent, ranked too low, retrieved but unused, or used incorrectly. Its evaluated systems answered correctly while the best reported conflict-recognition score across them reached only 0.2501. Memory Circuit Analysis, from Mao et al. (2026), reports a stage-level diagnostic that localizes a silent failure to the memory operation responsible for it, because extraction, retention, and re-

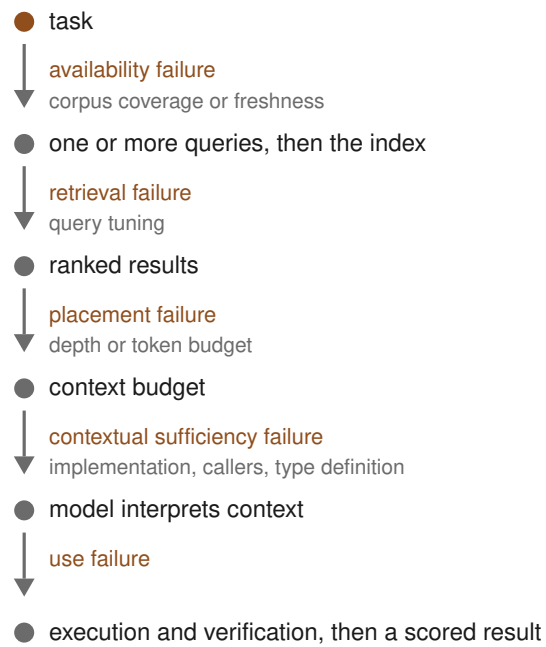

A pass rate records the state at the end
It cannot identify which transition produced that state

Figure 11.1: The retrieval chain separates availability, retrieval, placement, contextual sufficiency, and use failures across the transitions from task formulation to scored execution and verification.

trieval can fail behind fluent responses. These results support stage localization, but their memory workloads do not reproduce all of the constraints of repository-scale software work.

Three newer studies provide directional support for the same measurement shape. SkillEvol-Bench, from Lei et al. (2026), and EngramaBench, from Acuna (2026), examined whether stored or evolved material remained available and useful while also reporting final answers. A cost-and-accuracy study by Wolff and Bennati (2026) separated what a memory system retrieves from what the answering model produces. I use those three to establish direction, and not as a numerical basis for a repository retrieval policy.

11.1.1 Retrieval metrics

With one required item, the per-task **Recall@k** value is binary, because the item is either present or absent. With several required items, it is the fraction found in the first k . The aggregate reports the mean across tasks. When tasks require unequal numbers of items, that mean and the pooled fraction over all required items are different estimands, and the report should name the one it uses. The relevance judgment must also state which items count.

A file-level version counts the needed file, while a chunk-level version can require the specific definition or surrounding block. Those targets answer different questions and must be named.

The **rank** of a needed item is its position in the ordered results, with position one returned first. An item at position one and an item at position ten both count as retrieved when $k = 10$, although the first consumes less context and is less vulnerable to truncation. A single **Recall@k** value does not record that difference. When several items are needed, I record each position or a stated aggregate, because one number rarely describes the set.

Retrieval depth is an experimental variable. I sweep k across a range and plot recall as a function of depth. The **recall plateau** is the region where that curve flattens. Past it, returning additional items recovers little more required evidence. Choosing k before inspecting the curve biases every comparison.

A shallow cutoff can make a viable retriever look incapable. A deep cutoff can conceal poor ranking, because a disordered list still contains the target somewhere among its returned items. The plateau does not determine the operating point on its own, since latency, context consumption, and distractors can justify stopping earlier. It shows what recall the ranking can reach and the marginal cost in returned items.

Shallow cutoffs understate retrieval capability, while deep cutoffs can hide poor ranking. Latency, context consumption, and distractors may justify stopping before the plateau.

Multiple retrieval channels produce ordered lists whose numeric scores often have different meanings. BM25, a lexical ranking function based on term occurrence and document statistics, can emit values well above one. Cosine similarity for embedding vectors usually occupies a bounded interval. Adding or averaging those raw values gives arbitrary influence to whichever implementation happens to produce larger numbers.

Reciprocal-rank fusion combines lists by position. Each item receives a contribution such as $1/(c + r)$ from each lane, where r is its position and c is a fixed damping constant. The fused order depends on agreement and placement across lists, and it ignores incomparable score scales.

Each of these measurements is incomplete in a different way. A single **Recall@10** can be useful, but it does not show whether ten sits before or after the plateau. A mean rank does not report the tasks in which the target did not appear at all. Missing items therefore need an explicit convention and a separate recall report. A fused list can improve coverage even when one channel has failed, and that failure is visible only when the original lane results remain available.

Stage-level evaluation requires relevance judgments. In a curated benchmark, maintainers can

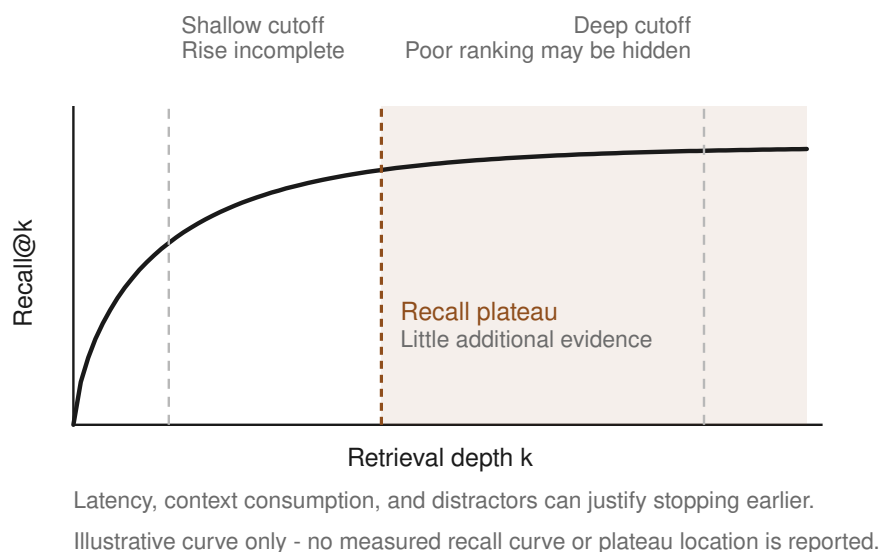


Figure 11.2: An unmeasured recall curve rises and plateaus with retrieval depth, but a shallow cutoff leaves gains unrealized, a deep cutoff can mask poor ranking, and latency, context use, or distractors may justify stopping earlier.

identify the file, symbol, span, or set of dependencies needed to solve each task. In a production repository, relevance may be plural and conditional. One correct patch may use the interface declaration and a caller. Another may use the implementation and a test. Declaring only one path relevant can penalize an equally valid evidence route.

I build judgments from the task’s accepted solution, dependency structure, and expert review when the evaluation warrants that expense. I retain graded labels when an item can be useful without being sufficient. A class declaration may receive a relevance label, for example, while the concrete override receives a sufficiency label for the task. Whichever label schema is used, the record must document what qualified an item and which valid solution paths the annotators considered.

The expense limits where decomposition can be applied. Repository-scale relevance judgments require people who understand both the task and the codebase, and a changing repository can invalidate them. Sampling can control the cost. Annotate a stratified subset, preserve the adjudication record, and use it to diagnose the rest of the evaluation without pretending that unlabeled tasks have measured retrieval quality. A retrieval proxy based only on file overlap with one reference patch is cheaper, and it should be reported as that proxy.

Five terms can help reviewers describe the retrieved context: relevance, sufficiency, isolation, economy, and provenance. Relevance asks whether an item bears on the task. Sufficiency asks whether the returned set contains enough evidence to act correctly. Isolation asks whether the evidence is separated from material likely to mislead the model. Economy measures the context consumed to convey the evidence. Provenance records where the item came from and which version it represents.

This vocabulary comes from a position paper by Vishnyakova (2026) and is not a measurement protocol. Each property needs an operational definition tied to the evaluated system before it can enter a score.

Evidence-use measurement is harder than exposure. Model-generated citations can be incomplete or post hoc. Removing one retrieved item and rerunning the task is an ablation, but model variability can change the output for reasons unrelated to that item. Attention weights do not establish causal use.

I therefore combine the available signals and state what each one supports. Exposure logs show what the model received. Citations show what it claimed to use. Controlled removal estimates whether the item changed outcomes across repeated runs.

The decomposition also changes the interpretation of verbose retrieval. Returning more material usually raises the chance that a relevant item appears, but it can reduce economy, isolation, and sometimes final performance. Precision and recall should therefore be reported together with context tokens and the completion score. A system that improves recall by filling the context window has made a different tradeoff from one that promotes the same evidence into its first few results.

Stage scoring is well established in benchmarked retrieval pipelines and much less established in end-to-end agent evaluation. Agents reformulate queries, inspect results, open additional files, and change direction as they work. One static top- k list does not represent that trajectory. I log each retrieval event with the query, lane, index version, results, positions, selection into context, and task state. The evaluation can then ask whether the needed evidence ever appeared, whether it appeared before the relevant decision, and whether a later query repaired an earlier miss.

This record supports engineering decisions the final score cannot. A missing indexed target, a low recall before the plateau, a good eventual recall with poor early ranks, and a relevant item excluded from context each point at a different stage. The categories are not perfectly independent, but they make the next ablation narrower and more informative.

11.2 Recover the evidence a single lane misses

My own literature-review pipeline ran for a period with its semantic search lane down while lexical search continued to return plausible results. Nothing in the completed reviews announced the missing channel. When I restored the lane and reran the searches, the combined search surfaced 64 additional papers across nine queries for one review and 42 across seven queries for another. Manual curation retained 12 and 7 of those papers.

The case illustrates a dangerous property of single-lane failure. The output remains coherent. A lexical query still returns documents that contain its terms. An operator therefore sees populated result lists rather than an outage, and the stack looks ‘healthy’ from the outside. The absent papers became absent claims, qualifications, and related work in the downstream artifact. This case does not provide a general estimate of how many sources a semantic lane recovers. It shows why I keep lane health and lane contribution observable even when another lane appears to function.

The retrieval lane already present in a repository stack usually has a characteristic blind spot. Lexical systems rank on shared tokens. They are strong when a query contains a rare identifier, an exact error string, a configuration key, a function name, or the spelling used in code. They weaken when a task describes behavior in different language from the implementation. A request to “stop duplicate jobs after a worker restart” may depend on code named `claim_epoch`, `lease_owner`, or `dedupe_key`, none of which occurs in the request.

CodeSearchNet, from Husain et al. (2019), framed this as a vocabulary gap between natural-language intent and source code. Repository agents face a wider version of the problem, because their queries mix prose, symbols, stack traces, and partial hypotheses. An embedding lane can connect semantically related text with little or no token overlap. It may retrieve a lease-recovery

routine for the duplicate-job request even when the task does not use the routine’s names.

The complement runs in the other direction. Embedding retrieval can place conceptually similar utilities near one another while missing the exact declaration that binds the edit. A query containing `ERR_REPLAY_DIVERGED`, a database column, or a generated type name often gives lexical search unusually discriminating evidence. Mapping those characters into a semantic neighborhood can discard the rarity that made the query useful.

The strongest code-specific case for keeping both lanes comes from an industrial study. Across 1,669 internal WeChat repositories and 26 language models, Yang et al. (2025) found that the combination of lexical and semantic retrieval performed best for closed-source code completion. The channels recovered complementary evidence rather than behaving as interchangeable implementations of one ranking function.

Those results do not establish the same ordering for every repository agent or for newer embedding models. The measured distribution was industrial, dominated by large C++ codebases and completion-style tasks. The design of the comparison transfers even when the result does not. Run each lane separately on the operated corpus and measure what each one uniquely recovers.

Production reports and late-interaction research support the same direction without settling it. A production account of agent memory (Trautmann 2026) describes parallel channels fused on ranks as a shipped default. Adaptive memory retrieval, from Yan et al. (2026), and late-interaction retrieval, from Khattab and Zaharia (2020), support retaining a complementary semantic lane rather than any particular fusion policy. None of the three is code-specific evidence for the effect of fusion.

I run the channels separately and preserve their original lists. The lexical lane records its query, tokenizer, and index version. The semantic lane records the embedding model, vector index version, and filters. Per-lane `Recall@k` and target ranks show whether each lane contributes relevant items. The fused list is another stage, with its own recall, ranks, context consumption, and downstream completion score.

Rank fusion is necessary because channel scores have no shared unit. Suppose lexical search returns the exact symbol with a BM25 score of 18 and the semantic lane returns a conceptually related file with cosine similarity 0.84. The difference between 18 and 0.84 says nothing about relative relevance. Multiplying cosine similarity by 100 would reverse the implicit weighting without changing the semantic ranking at all. Any raw-score sum therefore embeds an arbitrary choice about scale.

Reciprocal-rank fusion discards that arbitrary magnitude and keeps ordinal evidence. An item ranked first by one lane and fifth by another receives support from both positions. An exact identifier hit ranked first lexically but absent semantically can still remain competitive. A broad conceptual match ranked moderately in both lanes can rise above results supported by only one channel. The damping constant controls how sharply the contribution falls with position, and it must be fixed and reported as part of the evaluated configuration. Selecting it after inspecting the completion scores turns it into the kind of researcher degree of freedom Chapter 1 describes.

Fusion does not establish that agreement means relevance. Two channels can share an ingestion error, retrieve the same stale version, or favor a heavily duplicated utility. Duplicated chunks can occupy several positions and create the appearance of independent support. I deduplicate stable item identities before or during fusion and retain provenance. Several representations of one source therefore do not count as independent support.

Filters also belong in the channel record. Restricting by language, repository area, branch, generated-code status, or modification time can improve isolation, but a wrong filter converts relevant evidence into an unreachable target. When the lexical and semantic lanes apply different filters, their apparent retrieval quality includes that policy difference. A useful comparison either

holds the eligible corpus fixed or states that corpus selection is part of the lane under evaluation.

Semantic closeness is particularly hazardous when the corpus contains versions. An older implementation can be extremely close to the query and structurally similar to current code while prescribing an obsolete interface. Such a match becomes harmful when the generator selects it and acts on it, because it supplies a coherent but false basis for the edit. I record version and freshness with every result. The freshness gate in Chapter 12 can therefore reject evidence whose similarity exceeds its authority.

Each added lane also consumes resources. It adds index construction, storage, query latency, failure modes, and another source of distractors. Parallel execution can reduce wall-clock latency relative to sequential searches, but it does not remove compute or operational cost. A lane belongs in the stack when it recovers useful evidence on the operated workload or provides needed resilience.

Measured demand can be asymmetric. In one corpus served by my own systems, I observed 7,993 keyword calls and 2,449 semantic calls across site traffic and benchmark runs. Those counts do not measure answer quality, and they reflect the interfaces and users exposed in that system. They do show why replacing the lexical lane with a semantic one would have ignored most of the expressed demand, even though the semantic lane remained necessary for vocabulary gaps.

I evaluate the additional lane through a paired ablation. The same tasks run with the existing lane, with the added lane alone, and with fused results under the same retrieval and context budgets. The outcomes are paired by task. The analysis therefore works on the per-task differences rather than on two aggregate recalls. I sweep depth for each original list and for the fused list, because fusion can move the point where the recall curve flattens. The per-task analysis records which targets only the lexical lane found, which only the semantic lane found, which both found, and which neither could retrieve.

Identifier-heavy tasks deserve their own stratum. Aggregate recall can hide a fusion policy that helps prose queries while demoting exact symbols. I identify these tasks from task construction and repository artifacts before comparing lane outcomes. Error-string lookup, symbol navigation, configuration lookup, and natural-language behavior queries may require different mixtures. The strata should remain measurements of the workload, and a small result cannot justify hand-built routing rules.

The companion catalog includes more elaborate retrieval paths. They cover explicit recovery across lexical gaps, iterative re-querying when a draft exposes missing context, retrieval gates based on expected benefit, investment in whichever end of the retrieval-and-generation pipeline is limiting, and a cheap-first funnel followed by reranking. Each can be useful when a two-lane stack has a measured failure that calls for it. None repairs an unobserved channel outage or makes raw scores commensurate.

The operational test is whether fusion recovers relevant evidence that the current lane systematically misses, without consuming more context than the generator can use. I inspect the recovered items, their ranks, and the tasks they change. A lane that contributes only duplicates and stale neighbors has added cost without adding usable evidence, whatever its semantic sophistication.

11.3 Preserve code structure inside the retrieval unit

Replacing fixed line windows with syntax-aware chunks raised **Recall@5** by 4.3 percentage points on RepoEval, a repository-level code retrieval-and-completion benchmark, in the cAST study from Zhang et al. (2025). The same study reported a 2.67-percentage-point **Pass@1** increase on SWE-bench generation across languages. These are modest changes in the full pipeline. They are large enough to examine at the chunking-policy layer, because the intervention changes neither the model

nor the repository’s underlying information.

The chunking policy determines which units a retriever can rank and which units a context builder can select. The index rarely stores an entire repository as one document. It divides files into spans, attaches identifiers and metadata, then represents each span for lexical or embedding search. That division creates the objects over which **Recall@k** is measured. A relevant function cannot rank as a coherent item when the chunker has split its signature, body, and surrounding contract into unrelated records.

Fixed windows choose boundaries by line or token count. They are simple, deterministic, and available for any text format. Their weakness follows directly from the absence of code structure in the boundary rule. A 100-line window can end after a function signature and place the body in the next chunk. Another window can combine the end of one class, three imports, and the start of an unrelated helper, because those lines happen to be adjacent.

Overlap softens boundary damage without removing it. Repeating twenty lines between windows may keep a short definition intact, while duplicating common imports, comments, and boilerplate across many indexed items. Long methods still split. The repeated spans can crowd retrieval results and distort fusion unless the system deduplicates them. Overlap reduces severed context at the cost of index size and result redundancy.

An abstract syntax tree, or AST, represents source code as nested syntactic constructs produced by a parser. A class node contains method nodes, a method contains statements and expressions, and a conditional contains its branches. Syntax-aware chunking uses those boundaries as constraints while still respecting a size budget. It does not assume that every tree node should become a retrievable document.

The implementation begins with a file-level tree and a maximum chunk size expressed in tokens or another measure tied to the context system. When a node fits, the chunker can retain it as a candidate unit. When it exceeds the limit, the chunker descends into its children and repeats the test. Small adjacent sibling nodes are merged while their combined representation remains within budget. The result tends to preserve complete functions, methods, classes, or coherent statement groups, and to avoid arbitrary line intervals.

Comments, decorators, attributes, and signatures require explicit attachment rules. A parser may represent them as siblings or metadata even though a reader treats them as part of the declaration that follows. Losing a decorator can erase authorization or routing behavior, and losing a leading comment can remove a constraint absent from the code. I test these attachments per language, because the generic tree shape may not capture the unit a programmer needs.

Imports and type definitions create another boundary decision. Copying all imports into every chunk increases local interpretability and token cost. Keeping imports only in a file header preserves the original structure but can leave a retrieved method with unresolved names. A practical design stores stable file and symbol metadata with every chunk and lets the context assembler retrieve a small companion span when a task requires import or type resolution. Sufficiency and economy determine the choice, but the tree alone does not.

The idea is language-general, but the parsing is not. Each supported language needs a parser that recognizes the repository’s syntax version, including extensions, generated forms, and incomplete files. Parse failures need an explicit fallback, such as fixed windows with a failure flag. Silently dropping an unparseable file creates a corpus-coverage defect that can later look like a retriever miss.

Incremental indexing adds state. A changed file must be reparsed, old chunk identities retired, new chunks written, and references updated in an order that does not expose an empty or mixed version to queries. Stable identities based only on line offsets will churn when lines are inserted near the top of a file. Symbol-qualified identities can survive some edits, but overloaded or anonymous

constructs still require versioned disambiguation. The index should record the source revision from which every chunk was derived.

Syntax is only a partial account of meaning. A large function can contain several responsibilities that deserve separate retrieval units, while a small method may be unintelligible without a protocol implemented across neighboring methods. Macros, reflection, generated bindings, configuration, and build files can carry semantics that a language AST does not express. Syntax boundaries preserve structural coherence, but they do not discover every semantic dependency.

The reported 4.3-percentage-point retrieval gain should be interpreted at that scale. It shows that chunk boundaries moved relevant code into the first five results on the studied tasks. It does not imply that structural chunking repairs a missing repository, a stale index, a query that names the wrong concept, or a retriever unsuited to code. A chunker can only shape items that enter the index, and only within the evidence the ranking system can recognize.

The 2.67-percentage-point generation gain is smaller and downstream. Improved retrieval has to survive context selection and then alter the model’s completion. The difference between the two reported gains is consistent with the stage chain developed earlier, although the study alone does not identify a single cause for the attenuation. Some newly retrieved chunks may be redundant, some may enter below the usable cutoff, and some may fail to change generation.

I evaluate chunking policies on identical repository revisions and tasks. The fixed-window and syntax-aware indexes use the same eligible files, retrievers, queries, and top- k sweeps. Relevance judgments identify both the needed symbol and acceptable supporting neighbors. I then compare chunk recall, target rank, returned tokens, duplicate content, parse-failure coverage, and final completion.

Chunk recall needs a stated unit. When the target is a method, a chunk containing one line of that method should not count as fully relevant. The span must contain the task-specific evidence named in the judgment, such as the complete signature and the relevant branch, and partial matches should be reported separately when they help explain failures. File recall remains useful for diagnosing corpus and coarse retrieval, but it cannot certify that the returned chunk is interpretable.

Size deserves a sweep of its own. Very small syntax chunks improve isolation but can strip the relationships needed to understand state changes. Very large chunks preserve local structure while consuming the context budget and lowering the number of distinct candidates the model can inspect. I sweep the size budget together with retrieval depth, because those controls interact. Ten 200-token chunks and ten 1,500-token chunks impose different costs even when both are called `Recall@10`.

The implementation must also preserve ordering and provenance. When several chunks from one file enter context, their source order can help the model reconstruct control flow. Every chunk should name its file, symbol path, source revision, and line range for audit and follow-up retrieval. Those fields trace a failed completion back to the exact indexed representation.

Structural chunking is justified when the measured gain covers parser maintenance and indexing complexity for the supported languages. A repository dominated by languages with reliable parsers and long structured files is a strong candidate. A heterogeneous corpus containing templates, notebooks, generated fragments, and proprietary languages may need mixed policies. The correct unit follows the workload and the available structure.

The final comparison returns to decomposed scoring. I measure whether syntax-aware chunks recover the required evidence and where they rank, then whether those chunks improve completion under the same context budget. A better chunk recall with unchanged completion is still a diagnostic result. It says the chunker repaired its stage and that the remaining limit lies elsewhere in the path.

11.4 Run the retrieval protocol on the operated workload

Begin with the stack that serves real tasks. A reduced first version needs only a small sample from one query class, sized to the available annotation budget and stratified across the repositories or task shapes the decision depends on. Judge the needed evidence and instrument the stack already in production. A retrieval-depth sweep on that stratum can settle one decision: whether the production top- k cutoff should move for that query class.

For each task, identify the file, symbol, or evidence set that a competent solution can use. Log every retrieval query, the index revision, the returned item identities and ranks, which items enter model context, and the final task result. When direct evidence-use signals exist, preserve them without treating exposure as proof of use.

Compute file recall and chunk recall separately. Sweep retrieval depth, because a cutoff of ten is usually a tool default rather than a measured operating point. Plot the recall curve, mark where additional results recover little new evidence, and record the context tokens and latency at every depth. Select an operating point under the workload's context and cost constraints, then keep the full sweep with the result so another reader can see what the cutoff excluded.

Separate tasks by the evidence they demand. Exact symbols, error strings, natural-language behavior descriptions, cross-file dependencies, and version-sensitive questions exercise different retrieval paths. Preserve those strata before comparing systems. A gain concentrated in one query class can justify routing or a second lane even when its aggregate effect is small.

If the current stack has one lane, add the missing lexical or semantic lane as a controlled arm. Run each lane alone and retain their original rankings. Fuse positions, because the numeric scores are incommensurate. Measure which relevant items each lane uniquely recovers, which stale or duplicated items it adds, and how the fused list changes completion under a fixed context budget. Keep channel health visible in operation so a populated result list cannot conceal a lane outage.

Build a second index with syntax-boundary chunks when reliable parsers exist. Hold corpus eligibility, repository revision, query set, and retriever fixed. Sweep chunk size and retrieval depth together, and report parse failures and fallback coverage. Compare target ranks, recall, returned tokens, duplication, and completion against the existing chunker. The measured difference, including no difference, decides whether the parser and indexing complexity belong in that repository.

Read the resulting table by stage. Missing targets call for corpus or index work. Targets absent before the recall curve flattens call for a different query or retrieval lane. Targets found but ranked beyond the context cutoff call for ranking, fusion, or selection work.

Adequate evidence in context with an unchanged completion score shifts the next ablation downstream. Decomposition narrows the intervention without claiming that any one metric represents the whole system.

The retrieval depths, fusion constants, and chunk sizes in this chapter are not settings to adopt. Each is a parameter whose effect must be measured on the repository distribution, task mix, model, and context budget in use. Chapter 12 takes up the architecture around these measurements, including cheap retrieval funnels, typed indexes, and the conditions under which apparently relevant context should be refused as stale.

11.5 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

11.5.1 Score retrieval and generation separately

- lit/strong: Liu, T., et al. (2023), “RepoBench: Benchmarking Repository-Level Code Auto-Completion Systems,” ICLR 2024, arXiv:2306.03091. (R/C/P decomposition localizes failure to retrieval vs completion vs pipeline stage.)
- explorer/strong: MemConflict (Tao et al. 2026), arXiv:2605.20926. (Black-box + white-box memory evaluation; localizes missing vs low-ranked vs retrieved-but-unused; best reported conflict-recognition score 0.2501.)
- explorer/strong: Memory Circuit Analysis (Mao et al. 2026), arXiv:2605.03354. (Stage-level diagnostic localizing a silent failure to the responsible memory operation; extraction/retention/retrieval fail silently behind fluent answers.)
- explorer/directional: SkillEvolBench (Lei 2026), arXiv:2605.24117. Direction only.
- explorer/directional: EngramaBench (Acuna 2026), arXiv:2604.21229. Direction only.
- explorer/directional: Cost-and-Accuracy study (Wolff & Bennati 2026), arXiv:2601.07978. Direction only.
- lit/anecdotal: Vishnyakova, O. (2026), arXiv:2603.09619. (Names the five context-quality criteria; position paper.)

11.5.2 Hybrid retrieval fused on ranks

- lit/strong: Yang, Z., et al. (2025), “A Deep Dive into Retrieval-Augmented Generation for Code Completion: Experience on WeChat,” arXiv:2507.18515 (industrial study).
- explorer/strong: CodeSearchNet vocabulary-gap framing (Husain 2019), arXiv:1909.09436. (Exact/lexical match as a first-class lane fused on ranks; score fusion broken by construction.)
- explorer/directional: Cloudflare “Agents that remember” (Trautmann 2026), the production account carrying the shipped default of parallel channels fused with reciprocal-rank fusion. No canonical URL is on record for this item. Direction only.
- explorer/directional: AdaMem (Yan et al. 2026), arXiv:2603.16496, carried in the same evidence record as the Cloudflare account. Its own retrieval route is semantic retrieval with conditional graph expansion rather than rank fusion, so it supports retaining a complementary semantic lane only. Direction only.
- explorer/directional: ColBERT (Khattab and Zaharia 2020), arXiv:2004.12832. Direction only.

11.5.3 Chunk on AST boundaries

- lit/strong: Zhang, Y., et al. (2025), “cAST: Enhancing Code Retrieval-Augmented Generation with Structural Chunking via Abstract Syntax Tree,” arXiv:2506.15655.
- Corroboration for this entry: none on record. The other two entries in this chapter carry dossier corroborations from the author’s own systems, which are illustration rather than independent sources.

Chapter 12

Localization funnels, repository indexes, and freshness checks

In one of my own memory-system evaluations, run across four seeds, a task required passing a recalled value exactly as a tool argument. Retrieval keyed by the exact memory identity scored 1.0. Retrieval by token similarity surfaced superseded values and scored 0.0. Nothing in the similarity lane had failed. It returned real records, at high rank, that described a state the system had already left behind. That is an author-system case and carries no weight as evidence, but it separates two questions a retrieval score reports as one: whether a result ranks well, and whether it still describes the repository the worker is editing.

Three related design problems arise in repository work. Some tasks require a funnel that separates coarse file selection from fine edit selection. Some require typed structural relationships, because the issue text and the change site share no useful vocabulary. Every retriever, index, and cache also describes a repository state, and that state can expire while its answer remains fluent and specific.

The costs differ. A funnel adds handoffs, and an early miss then propagates through every later stage. A typed index costs construction, language coverage, storage, and query tools, followed by continuing maintenance. When identity checks are too coarse, a freshness gate can also refuse useful evidence. I treat each as an architecture decision with a measurable failure mode.

12.1 Where staged narrowing earns its cost

Hierarchical localization is an architecture decision about where each comparison occurs and what evidence crosses the boundary between stages. Xia et al. (2024) removed tool-use autonomy from repository repair and kept three fixed phases. The first performed hierarchical localization, finding where in the repository a change belongs. Repair and patch validation followed. On SWE-bench Lite, a smaller curated subset of SWE-bench tasks, that pipeline outperformed the autonomous agents evaluated alongside it while costing a fraction as much.

Each phase received a bounded input, produced a bounded output, and handed that artifact to the next phase. The result showed that much of the value then attributed to ‘agentic’ behavior could be recovered by staged narrowing. An open-ended agent had been purchased for work that a fixed architecture could already perform. Later agent systems built on stronger models moved back ahead of that fixed pipeline, which limits the conclusion. The durable design is a sequence of narrowing decisions with validation between the stages, and it remains useful inside an autonomous system.

Repository structure can identify a promising region without identifying the function or statement that owns a failure. In a disconnect case, search returns a response writer, several transport adapters, and a lifecycle callback. The state change responsible for the malformed response sits behind the callback, in a different package.

The evidence that identifies the responsible package differs from the evidence that identifies the function and statement to change. A localization funnel separates those comparisons. It moves from repository structure to candidate files, then to classes, functions, or variables inside those files, and finally to concrete edit locations. Each stage should reduce the candidate set and leave an inspectable handoff.

In the disconnect case, the structure stage narrows the repository to the transport and lifecycle packages. The file handoff retains the response writer and the callback while recording why each was kept. Symbol inspection then follows the callback to the function that changes response state, and the final stage proposes a guard at that assignment. Patch validation exercises the disconnect path. If an intermediate check shows that the state owner was omitted, the funnel widens before repair begins.

The stages have asymmetric consequences. A mistaken edit location can sometimes be corrected after validation exposes a failing patch. A file omitted at the first stage is unavailable to every later stage, however capable the repair model is. The maximum recall of the whole pipeline is therefore determined at the file stage.

Inspectable handoffs expose downstream mistakes, but validation can correct a bad edit location only when the necessary file survived initial selection.

Sepidband et al. (2026) measured that asymmetry across 500 SWE-bench Verified instances and 61 context configurations. The no-file condition supplied the baseline. Adding file-level context produced 15 to 17 times the repair improvement of later localization refinements.


The same experiment found that successful repairs clustered around roughly six to ten relevant files for the model family studied. That range is useful as a diagnostic band. It does not establish a quota for other models, repositories, or issue distributions. Both figures come from one benchmark and one sweep of context configurations. They therefore describe that measured setting rather than a property of repository repair in general.

The practical implication is to invest measurement effort at the file stage before adding more elaborate reasoning after it. Chapter 11’s decomposed scoring makes the diagnosis possible. If `Recall@k` is already low for files, a stronger patch generator is being evaluated on a corpus that excludes the answer. If file recall is high and repair still fails, more localization machinery may only move cost into a stage that is no longer limiting the system.

The funnel also constrains how context should move. A file-selection stage should not silently pass its entire search transcript downstream, because that restores the mixed-granularity problem inside a larger prompt. Its handoff should state which files were kept, why they were kept, and what uncertainty remains. The next stage can then inspect the selected files for structural candidates without inheriting every rejected hypothesis.

Inspectable handoffs create a place to validate each narrowing decision. A file set can be checked against import neighborhoods, ownership boundaries, or a second retrieval lane before the function stage starts. A function set can be checked for definitions and references before concrete lines are proposed. These checks need not be autonomous. They need to expose a miss while recovery is still possible.

Skipping a level appears cheaper because it removes a model call or a retrieval pass. Xia et al. reported the opposite. When their pipeline moved from file level directly to edit locations, both cost and performance worsened, because the fine-grained request forced the model to search too much source at once. Removing a stage increased the work inside the remaining stage. Pipeline

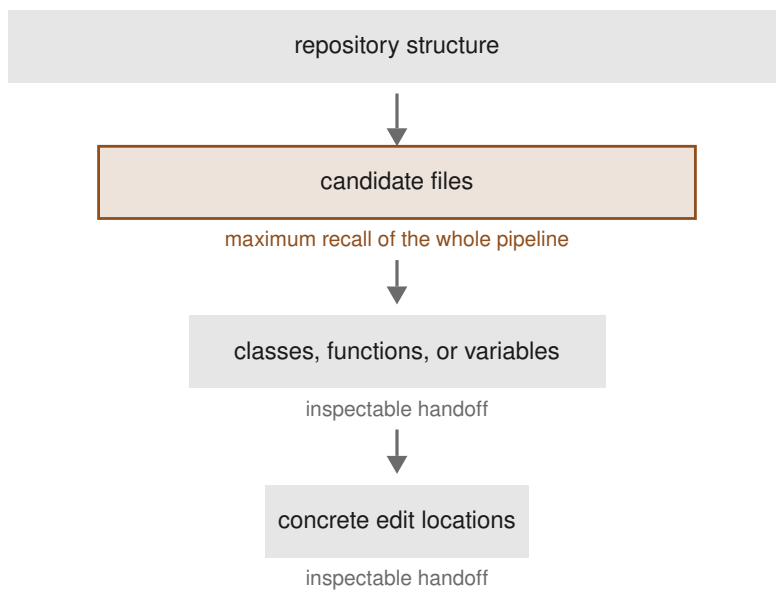

Each stage reduces the candidate set

A file omitted at the first stage is unavailable to every later stage

A mistaken edit location survives validation as a failing patch, then is corrected

Figure 12.1: The localization funnel progressively narrows repository evidence, while candidate file selection caps recall because any omitted file remains unavailable to every later inspection and edit stage.

length is therefore a poor proxy for pipeline cost.

Chang et al. (2025) trained different models for file, function, and statement localization. They found value in giving each level its own representation and its own discrimination problem. That support is directional, and it leaves the component choice open. A fixed prompt, a cheap classifier, or a stronger general model may each be appropriate at a particular stage, depending on workload and latency.

The funnel fits issue-resolution-shaped work, because those tasks decompose naturally into localize, repair, and validate. It is less persuasive for exploratory refactoring, architectural discovery, or changes whose scope emerges only after editing begins. In those workloads, an agent may need to widen the candidate set after a failed hypothesis. A rigid pipeline must provide an explicit return path, or it will keep refining the wrong corpus.

The later agent systems that moved back ahead of the fixed pipeline limit any claim that agency itself was unnecessary. Better models can search, revise, and use tools while preserving hierarchical localization. The evidence supports buying agency only after the fixed narrowing architecture has been measured, then asking which failures autonomy actually repairs. It does not support freezing the original pipeline around a changing model frontier.

The companion material treats several implementation choices separately. They include using structural retrieval as a lane beside text search, injecting stable structural anchors into context, and choosing query-time graph walks when stored expansion would grow too large. Those choices follow the architecture decision. The decision here is narrower: preserve granularity, validate the handoffs, and measure file selection as the stage that can foreclose every later success.

12.2 The maintenance decision behind a typed index

A repair agent receives an issue saying that cancelling an export leaves later exports blocked. The change belongs in a generic state-transition helper reached through a queue consumer and a shared lifecycle component. None of those artifacts contains the language of exports or cancellation.

Exact search finds the user-facing entry point, and similarity search finds code that repeats the symptom. Neither query expresses the dependency path from that entry point to the state owner. A typed index can answer that path question, but the build decision begins with its continuing cost. If no named owner accepts that work, the projected retrieval gain has no durable system behind it.

That work includes parsing every supported language, assigning stable identities to entities, recording relationships, handling generated code and partial parses, publishing updates without exposing half-built state, and testing the query surface. Each new language or artifact type extends the obligation. Index construction is a continuing product surface, even when users see it only through search results.

The cheaper choice is often a generated repository map or skeleton placed near the front of the model’s context. It can list directories, important files, top-level symbols, and ownership boundaries. Navigation then relies on cheap operations: exact search, opening definitions, finding references, and listing callers. This approach cannot answer arbitrary multi-hop queries, but it is easy to regenerate and easy to inspect. For a modest repository, a low change rate, or an occasional task, that trade can be preferable to maintaining a service.

An index becomes plausible when the workload repeatedly asks structural questions the map cannot express. The representation parses directories, files, classes, functions, and linked development artifacts into typed nodes. In the export case, invocation and reference edges connect the queue consumer to the lifecycle component and the state helper. A broader index can also record containment, import, inheritance, and definition edges.

This representation is a typed knowledge graph. A typed knowledge graph stores entities under declared kinds and records, for each relationship, how the two entities connect. The types constrain traversal and make a returned path inspectable. They also create schema and parser obligations that a similarity index does not have.

The export example can now be stated as a bounded traversal. Start at the handler named by the issue, follow invocations into the queue consumer, continue through references to the lifecycle component, and return the functions that write the blocked state. The issue and the final helper need no shared token. The graph supplies a chain that can be inspected one edge at a time.

A traversal result can also be more compact than the alternatives. A retriever can return the small subgraph around the relevant entities instead of serializing the repository or loading every file encountered during exploration. The model receives the handler, the intermediate calls, the state owner, and the edge types that connect them. Enough structure remains to explain why each candidate was returned.

Published results show why teams consider paying this cost. Chen et al. (2025) reported 92.7 percent file-level localization accuracy for LocAgent, with accuracy declining toward finer granularity. That pattern supports using the graph to protect the file stage while measuring finer stages separately. The figure describes localization rather than repair, so it cannot be read as an issue-resolution rate.

LocAgent’s fine-tuned 7B and 32B models approached the reported Claude 3.5 accuracy at roughly 86 percent lower cost. Its ablations showed that the gain depended on the complete search and traversal toolset around the graph, not on the stored representation alone.

Yang et al. (2025) supply more direct but weaker evidence for multi-hop demand. Among the bugs their repository-aware graph successfully localized, 69.7 percent required traversal across multiple relationships. That figure comes from the first version of the paper, and the headline values changed in the later revisions. The result also comes from SWE-bench Lite. It therefore establishes direction within one benchmark and provides no frequency estimate for an arbitrary production issue.

That study also capped the repair input at the top 20 functions. The cap is part of the architecture, because a traversal system can continue finding plausible neighbors after the useful evidence has been exhausted. Passing every discovered node to the generator lets extra candidates interfere with generation. An index can improve localization while degrading the patch when no boundary separates those two stages.

Ma et al. (2024) measured this tension in LingmaAgent across a larger search budget. Its issue-resolution rate, the share of benchmark instances whose tests passed after the change, rose from 16.0 percent with no exploration iterations to 21.3 percent at 600 iterations. Exploration continued to find useful code throughout that range.

The patch-application rate, which counted whether each generated diff applied cleanly to the repository at all, peaked at 200 iterations and then declined through 600. Application was necessary but not sufficient for resolution. Fewer cleanly applied patches could therefore coexist with more resolved instances, when those that applied were more often correct. Accumulated candidates made the downstream generation task harder even while exploration still found plausible code.

Both rates come from one benchmark configuration. The 200-iteration application peak is configuration-specific, and the application curve carries shape without reported values.

A search budget must be evaluated against both localization and patch application. Both rates were measured in one benchmark configuration. The location of that peak is therefore a property of that configuration rather than a transferable budget.

On SWE-bench Lite, the same study reported a relative improvement of 18.5 percent against SWE-agent, an autonomous tool-using agent baseline. That comparison applies to the benchmark

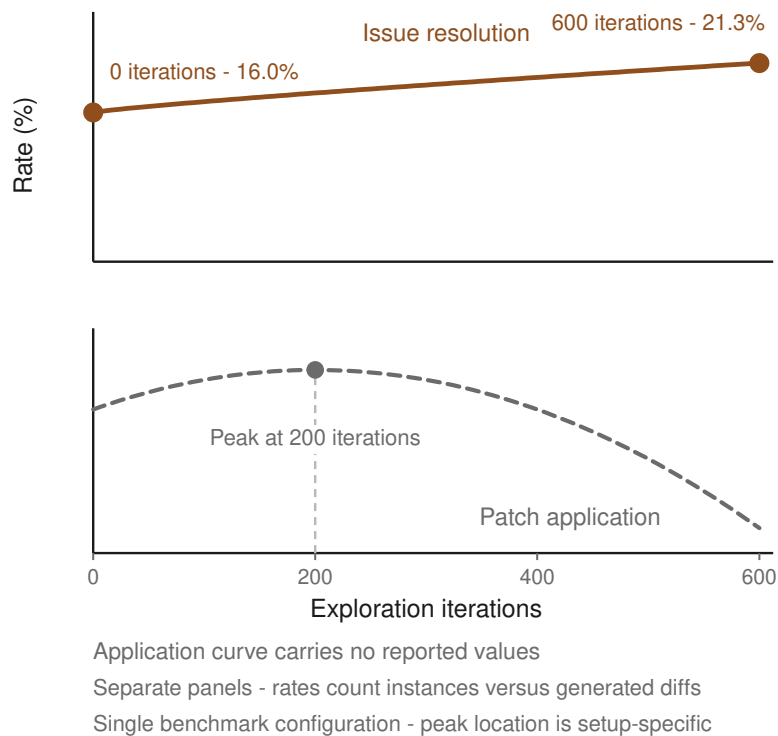


Figure 12.2: Separate axes reflect different denominators; resolution rises from 16.0% at zero iterations to 21.3% at 600 on a zero-based scale, while unquantified patch application peaks at 200 and declines through 600.

configuration.

Its production report separated automatic from assisted work. In-house issues were resolved automatically in 16.9 percent of cases and after manual intervention in 43.3 percent. Those values describe different levels of human involvement and cannot be combined with the benchmark result. Traversal budget, automatic resolution, and assisted resolution are separate operating quantities.

Graph depth therefore needs a budget tied to the downstream candidate limit. A traversal may stop after a fixed number of expansions, when no new edge type appears, or when the candidate set reaches the repair budget. The literature does not identify one stopping rule that dominates across repositories. A defensible local rule requires logging each expansion, the candidates admitted and pruned, and the point at which additional search stopped changing repair outcomes.

Two other experiments extend the evidence without removing the boundary. Ouyang et al. (2024) added RepoGraph, a line-granularity definition and reference graph, as a plug-in. Resolution improved in both pipeline-style and agent-style frameworks. CodexGraph, from Liu et al. (2024), offers directional support for graph queries when similarity retrieval has poor multi-hop recall. Together they support a specialist structural lane that can attach to different orchestration styles.

Line precision remains difficult. LocAgent’s accuracy degraded as localization moved below files, and a graph rendered as text may not preserve distinctions that are explicit in storage. Direction, edge type, entity scope, or multiple paths can collapse into an ordering that the model misreads. Extending the graph below functions can help line-level work, but it also increases node count, serialization pressure, and the number of nearly equivalent candidates.

Query construction introduces another failure surface. A valid graph can return an irrelevant answer because the model starts from the wrong entity, chooses the wrong edge, or stops one hop early. Bounded operations such as ‘find definitions’, ‘list callers’, and ‘follow imports’ are easier to validate than a general graph language generated in one attempt. Routing simple entity questions to those cheap operations preserves the graph for the structural questions that require it.

The representation itself should be measured. An index might return paths, source excerpts, signatures, summaries, edge lists, or some combination. Each form changes token cost and the evidence available to the generator. A compact summary may hide the exact call that proves relevance. Raw source may obscure the path that made the source worth retrieving. Treating serialization as a first-class design choice prevents storage success from being mistaken for usable context.

In my own architecture-analysis toolkit, a typed symbol graph supports a change-propagation measure by counting files reachable from a changed entity within a bounded depth. That implementation illustrates a second use for the same structure. Impact analysis can traverse relationships that lexical similarity does not represent. This is narrative corroboration and supplies no independent evidence about an agent’s repair rate.

The owner of the index must also own its correspondence to the repository. Incremental parsers fail, branches diverge, force-updated generated artifacts retain old identities, and linked issue data changes independently of code. An index that is not rechecked against repository state after those events silently answers a question about yesterday’s repository. The graph’s admission path must enforce that correspondence on every result.

Readers who will not fund that path should choose the repository map and fixed navigation operations explicitly. Readers who will fund it should cap candidates, budget traversal, test serialization, and measure the graph as one component of the surrounding toolset. The cost of maintaining an index is justified only while an owner can show which repository state each answer describes.

12.3 Freshness as an admission condition

Weng et al. (2026) changed Python helper signatures in 17 curated samples and compared stale with current retrieved snippets. That small diagnostic study is the only literature support for this entry. It isolated the direction, but one staleness class and two models establish neither a general effect size nor a refresh cadence.

Under stale-only retrieval, Qwen2.5-Coder-7B-Instruct produced 15 incompatible outputs and gpt-4.1-mini produced 13. Each model received the same 17 samples, and current-only retrieval produced no such failure for either. These paired results support a narrow design decision. Retrieved code should be admitted only when the system can tie it to the current repository state.

A stale result is an active hazard, because it presents a concrete and plausible account of an API that no longer exists. High rank cannot compensate for answering from the wrong state.

The failure differs from an ordinary miss. Without retrieval, the models in the study tended to fail and did not emit calls to the obsolete signature. With stale context, they produced executable-looking code with the wrong contract. Under hidden staleness, retrieval became net-negative, because the system converted uncertainty into an incompatible implementation.

Adding current evidence changed that behavior even when stale evidence remained present. Across the tested model and condition combinations, adding valid current snippets alongside the stale ones lowered the rate of current-state-incompatible outputs by 47 to 65 percentage points relative to the stale-only condition, over the same 17 samples. Permuting the rank order produced no significant difference. For this diagnostic, the operative variable was the presence of current evidence, not whether it appeared first.

The paired result is an instance of the binary-outcome row in Chapter 1’s test-selection table. Both retrieval conditions received the same 17 items, each outcome was pass or fail, and McNemar’s test analyzed the discordant pairs.

The exact two-sided values were 6.1×10^{-5} for Qwen2.5-Coder-7B-Instruct and 2.4×10^{-4} for gpt-4.1-mini. Each value gives the probability, under the null hypothesis of no difference between the two retrieval conditions, of a discordance at least as extreme as the one observed. Those values establish a difference within the curated sample, and they do not estimate how large the effect would be in another repository.

The result does not show that stale retrievals will fail at similar rates in another codebase. It does not show that every kind of drift is equally harmful or that one refresh interval is safe. Helper-signature changes are especially direct, because stale code presents a callable contract. Other changes may produce different failure rates and different observability.

A freshness gate needs two identities: the state used to build the retrieval artifact and the state the worker is allowed to edit. A commit identity can represent a clean tree. A content hash is required when in-scope files contain uncommitted changes, because the commit alone then describes a state the model is not seeing. The retrieval response should carry the indexed identity so the caller can compare it with the working identity before exposing any snippet.

The comparison belongs at the retrieval boundary. Checking only when the index process starts leaves a race in which files change during construction or after a long query begins. A safe builder reads from a fixed snapshot, completes the index privately, and publishes the new generation atomically with its state identity. Queries then see one complete generation.

Suppose the index was built from a clean commit and a worker then edits the helper without committing it. A query returns the old signature together with the index’s commit identity. The gate hashes the in-scope working file, detects the mismatch, and withholds the snippet before the generator sees it.

Live exact search can supply the current helper while a new index generation builds. The

builder snapshots the edited file, publishes the completed generation with its new content identity, and repeats the original query. The caller admits the second result only when its identity matches the worker's state.

Concurrent work makes the identity choice visible. Two agents can share a base commit while editing different files. A commit-level gate may therefore admit snippets that are stale for both working trees. Hashing every file in a large repository on every query may cost too much. A practical design can pin the commit, track hashes for the files covered by the index response, and invalidate on filesystem events. Its coverage and its race window must be measured.

Caches require the same treatment. A query cache keyed only by search text can return yesterday's answer after the index has refreshed. The repository-state identity must participate in the cache key, or the cache entry must be invalidated when a new index generation publishes. Otherwise the freshness check protects the store while a faster layer bypasses it.

Retries also need a state rule. If a query fails because its index generation is stale, retrying against the same generation cannot improve the answer. The retry must wait for or request a generation built from the accepted state, then repeat the query against that generation. A timeout may bound the wait, but it should return a visible freshness failure rather than silently serving stale context.

Refusal has an operational cost. Live exact search may still work while the structural index rebuilds. The gate can therefore fall back to current, lower-capability navigation. If no current source is available, a cold miss that preserves uncertainty is preferable to a fluent answer from an obsolete state. The generator can then ask for more evidence or fail explicitly rather than working from a false API hypothesis.

No source in the literature reviewed for this chapter prescribes a universal refresh cadence. This remains a literature gap. Repository change rate, index build time, query latency, and the consequence of stale evidence can inform a local policy. They do not supply an evidence-backed interval.

An event-driven refresh can shorten the stale window for ordinary edits, although missed events and parser failures still require reconciliation. A scheduled rebuild can provide that reconciliation, but its period should be justified by measured drift and recovery cost. The system should record the age and the state-mismatch rate of rejected results as retrieval metrics.

My own session-snapshot system illustrates the strict version of this gate. It pins cryptographic hashes for all in-scope files together with the repository commit, and any drift marks the snapshot stale. The system regenerates the snapshot rather than forking it. Remotely sourced repository knowledge is excluded, because the system cannot bind it to the same hash check.

The maintenance warning also appears in my own published literature-review index, which is the least flattering example in this chapter. One index surface advertised a paper count that disagreed with the page it linked, and synchronized copies diverged further. The index continued to look authoritative after it had stopped describing its own contents. This contrary case is the maintenance cost of the prescription. A freshness policy that no one operates becomes another stale artifact.

Freshness does not decide whether a user or agent is authorized to retrieve the code. Permission policy requires its own identities, rules, and audit path. The evidence here supports rejecting obsolete repository states, but it does not establish who may see a current one.

12.4 Decisions to make this week

On Monday, begin with Chapter 11’s decomposed retrieval scores and ask whether localization is actually the bottleneck. Inspect the file results before changing the agent architecture.

File **Recall@k** answers whether the repair stage receives the right files at all. If the right files rarely appear, stage the narrowing and invest first in file selection, before buying more open-ended agency.

The next decision is whether repeated structural questions justify a typed index. Name its owner before approving the build, record which languages and relationships it covers, cap the candidates it can send to repair, and define how its state will be published. If no one owns freshness, write down the cheaper fallback: a generated repository map near the front of context, plus exact search, definitions, references, and bounded caller navigation.

Every index and cache should carry a commit or content identity. Compare that identity with the working tree at retrieval time, record drift as a metric, and refuse or fall back to live navigation on mismatch. A refused result is observable and recoverable. A stale result can pass silently into a plausible patch.

Chapter 13 turns from which evidence the system retrieves to how much of that evidence the model can actually use.

12.5 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

12.5.1 Taught entry 1: staged-localization-funnel

- lit/strong: Xia, C. S., et al. (2024), “Agentless: Demystifying LLM-based Software Engineering Agents,” arXiv:2407.01489.
- lit/directional: Chang, J., et al. (2025), “BugCerberus: Bridging Bug Localization and Issue Fixing,” arXiv:2502.15292. (Per-hierarchy-level specialization; direction only.)
- lit/strong: Sepidband, M., Viet Pham, H., Hemmati, H. (2026), “On the Role of Fault Localization Context for LLM-Based Program Repair,” arXiv:2604.05481.
- Corroboration: none on record.

12.5.2 Taught entry 2: index-repository-as-knowledge-graph

- lit/strong: Chen, Z., et al. (2025), “LocAgent: Graph-Guided LLM Agents for Code Localization,” arXiv:2503.09089.
- lit/directional: Yang, B., et al. (2025), “Enhancing Repository-Level Software Repair via Repository-Aware Knowledge Graphs” (KGCompass), arXiv:2503.21710. (The 69.7 percent multi-hop figure is carried from v1; later versions report different headline values, so the inline link pins v1.)
- lit/strong: Ma, Y., et al. (2024), “Alibaba LingmaAgent: Improving Automated Issue Resolution via Comprehensive Repository Exploration,” arXiv:2406.01422.
- lit/directional: Liu, X., et al. (2024), “CodexGraph: Bridging Large Language Models and Code Repositories via Code Graph Databases,” ICLR 2025, arXiv:2408.03910.
- lit/strong: Ouyang, S., et al. (2024), “RepoGraph: Enhancing AI Software Engineering with Repository-level Code Graph,” arXiv:2410.14684.

- explorer/strong: AOCI AI-oriented code indexing (Liu 2026), arXiv:2605.02421.
- explorer/directional: MAGIS (Tao 2024), arXiv:2403.17927. Direction only.

12.5.3 Taught entry 3: gate-retrieval-on-freshness

- lit/directional: Weng, H., et al. (2026), “When Retrieval Hurts Code Completion: A Diagnostic Study of Stale Repository Context,” arXiv:2605.14478.

Chapter 13

Usable context budgets, consolidated-spec restarts, and file-based tool output

Guidance I had placed in a system prompt was still inside the context window twenty turns later, and it appeared nowhere in the model's stated reasoning. Across 1,705 visible thinking blocks in 199 traces from my own trace-diagnostics corpus, that instruction showed up zero times. Visible reasoning is an incomplete observation of model state, so its absence from those blocks does not prove that the instruction had no influence. It does show that material sitting inside the context window is not thereby material the run is using. The benchmark record shows the same gap in a different form.

Only about half of the 17 models tested by Hsieh et al. (2024) retained satisfactory performance at 32,000 tokens, even though every model in that comparison advertised a window of at least that size. Their benchmark, RULER, combined 13 task types, including retrieval and aggregation problems. Rando et al. (2025) then evaluated realistic repository issues and found a sharper failure at the scale vendors had begun to advertise. Claude 3.5 Sonnet fell from 29 percent to 3 percent as the supplied context grew toward one million tokens, and Qwen2.5 fell from 70.2 percent to 40 percent. Both studies measured competence under load. Every input still fit inside the advertised capacity.

The practices for assembling that context are far less settled than the measurement problem is. I ranked ten candidate context-assembly practices three separate times: once by how much each would change an engineering decision, once by how much of the problem each covers, and once by how teachable each is. The three rankings agreed on one practice out of the ten. Five were selected by exactly one ranking, and three were selected by none. I read that spread as evidence that the field has not converged, so every prescription in this chapter is either measured locally or labeled a convention.

The advertised window describes a capacity limit. The usable length is a measurement made on the work the model must perform. Once that working limit is under control, three assembly decisions follow. A run that has lost its specification should restart from a consolidated version of the settled requirements. Bulk tool output should live outside the active window in retrievable files. A standing repository context file should be tested against no file before its permanent cost is accepted.

13.1 Measure the context the model can use

I use **effective context length** to mean the largest assembled context at which a model still meets a specified reliability threshold on a defined workload. The number is specific to a model, configuration, workload, and engineering threshold. A model can accept 128,000 tokens, retrieve one fact at that length, and still have a much shorter effective context for changing code that depends on relations among several files.

The measurement begins with task shape. A production coding agent may need to retrieve a declaration from one file and connect it to a call site in another. It may also need to incorporate a test failure from a third file and preserve an instruction supplied near the start of the run. A single hidden fact embedded in filler tests only part of that work. I include several-document retrieval, multi-step aggregation, instruction retention, and long-code reasoning in proportion to how often each operation appears in the actual workload.

The distinction is visible across the benchmark record. RULER found that an advertised window often exceeded the length at which performance remained satisfactory. Leng et al. (2024) then swept 20 models from 2,000 to 128,000 tokens on retrieval-augmented generation. Accuracy saturated at a model-specific context size, around 64,000 tokens for most of the 2024-era frontier models in that study. Beyond that point, additional material produced family-specific behaviors that included refusals, repetition, and neglected instructions.

Code changes depend more on relations between units than fact retrieval does. Li et al. (2025) built LONGCODEU, a long-code understanding benchmark covering nine models and eight tasks, and found substantial degradation beyond 32,000 tokens, far below the claimed windows of 128,000 to one million tokens. Understanding relations between code units was the weakest aspect. Long-CodeBench, the benchmark behind the million-token declines quoted above, evaluated issue answering and bug fixing rather than document retrieval. A successful long-document question-answering result is therefore not a basis for setting a coding agent’s context budget.


These studies do not establish a universal ceiling. Their claims are bounded by the model generations, prompts, tasks, and scoring rules they used. The durable result is the repeated gap between capacity and competence, plus a protocol for measuring that gap. The knee of the curve will move as models change. It may also move in opposite directions for retrieval and code modification within the same release.

Each study locates a decline within its tested or advertised window. Different tasks and metrics prevent direct comparison, and the evidence establishes no universal ceiling.

I qualify a model by constructing context-size strata around the range I might deploy. A practical first pass might use a small condition, two intermediate conditions, and one condition near the advertised limit. The exact token values depend on the model and workload. Each stratum contains the same task families and, where possible, the same underlying tasks with controlled additions to context. This separates a length effect from a change in task difficulty.

For repository work, I build each item from a fixed repository state and a known evidence set. The small-context arm receives the minimum material needed to solve the task. Larger arms add realistic neighboring files, test output, prior discussion, generated summaries, or tool schemas in a recorded order. The model gets the same task and permissions in every arm. I pin the model version, decoding settings, harness version, prompts, tool surface, and evaluator so that context size remains the deliberate change.

Each stratum is a measured comparison, so Chapter 1’s requirements apply to it. Every stratum needs repeated independent runs, and items should be paired across strata wherever the design permits. One run per stratum cannot estimate run-to-run variance, so it cannot establish that an apparent knee is a property of the model rather than of that draw.

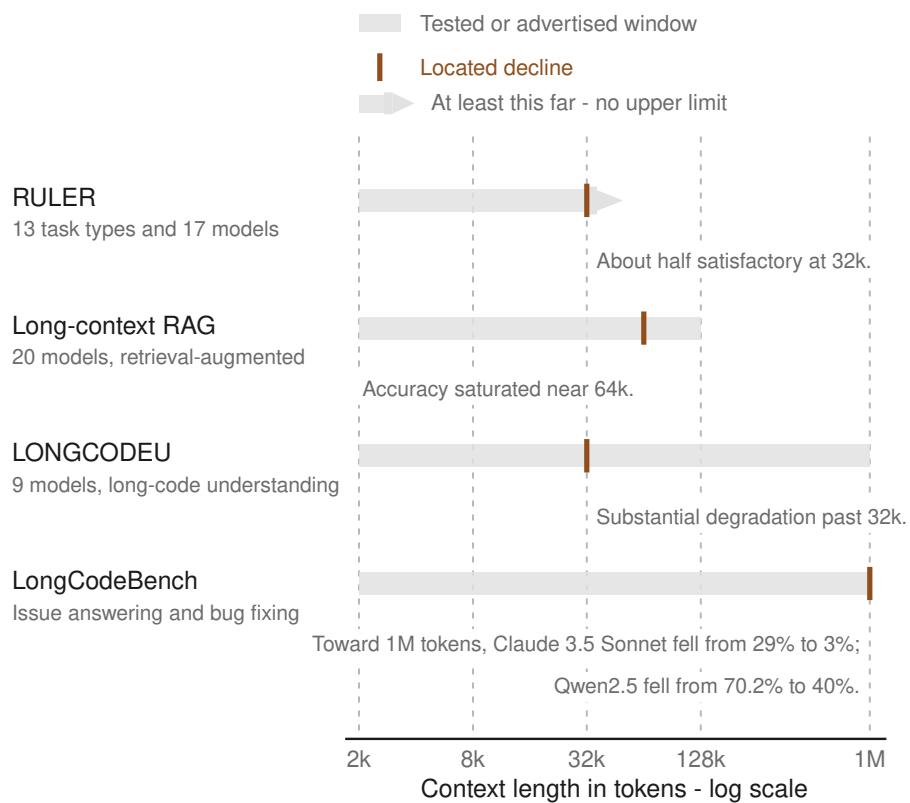

Tasks and metrics differ.

Rows are not directly comparable.

Figure 13.1: Across incomparable metrics, RULER is about half-satisfactory at 32k, long-context RAG saturates near 64k, LONGCODEU degrades beyond 32k, and toward 1M Claude 3.5 Sonnet falls 29% to 3% while Qwen2.5 falls 70.2% to 40%.

Four outcome measures should stay separate. Retrieval accuracy records whether the required evidence was found. Task correctness records whether the answer or code change is right. Reliability records how often that result is reproduced across repeated runs. Cost records the tokens, calls, and tool use consumed.

Latency and usability may matter operationally, but neither can substitute for correctness. A longer context can reduce retrieval calls and still lower the probability of a correct patch.

I plot the outcome distribution by context-size stratum and reject any threshold based on one passing run. The saturation point is the region in which adding context stops improving the relevant outcome. The operational knee may occur earlier, at the point at which the marginal gain becomes too small to justify cost or variance. A decline may be gradual, abrupt, or limited to one task family. Those shapes imply different caps.

Suppose retrieval accuracy rises through the intermediate strata and then remains flat, while code-change success begins to fall earlier. The retrieval curve alone would permit a larger budget. The coding workload would not. I set the production budget from the weakest task that must perform reliably, then place retrieval limits and harness caps below its measured knee. The margin allows for token-count estimation error, task variation, and fixed context that grows during execution.

The margin depends on engineering consequence. A workload with cheap retries and deterministic verification may operate close to the knee. A production change with expensive failure and weak verification needs more distance. I record the threshold, uncertainty, and consequence that justified the margin so the cap can be reviewed when conditions change.

Several mechanisms can produce the observed decline. Additional tokens add material the model must separate from the relations it needs to reconstruct, especially when multiple files contain similar names or competing versions of a fact. Position affects whether instructions and evidence influence later generation. Repeated material can induce repetition, and conflicting material can cause a model to follow a stale instruction or refuse the task. A model may also spend more of its generation restating or reconciling the prompt, leaving less useful work within output and tool budgets.

Token count alone therefore does not diagnose failure. I retain traces from each stratum and classify the first consequential divergence. Relevant classes include retrieval misses, incorrect symbol relations, forgotten constraints, repetition, and harness truncation. The curve shows where performance weakens. The trace identifies the component to change.

This distinction prevents a common apparatus error. If the harness silently clips messages at its own cap, truncation may cause the measured decline. If the evaluator sees only the final answer, an instruction-following failure can be misclassified as missing knowledge. If larger contexts contain more stale repository state, length is confounded with freshness. I inspect the exact assembled prompt, record its token allocation by source, and preserve any truncation decision with the run.

The budget also changes during a tool-using run. A starting prompt well below the cap may cross the measured knee after test logs, searches, edits, and corrections. Qualification includes static prompts and representative trajectories or replayed context growth. I measure both the initial assembly and the maximum context reached before compaction or restart. A cap on retrieval at time zero does not control later accumulation.

Every consequential model, workload, or harness change requires requalification. A new model can move the knee or change the dominant failure mode. A harness can add standing context that consumes margin before work begins. I preserve the old strata, add cases shaped by the change, and compare curves, because an unchanged average can conceal a shorter effective length offset by better short-context performance. If noise obscures the knee, the power analysis from Chapter 1 determines whether to add tasks or narrow the claim.

Synthetic tasks remain valuable because they isolate positional recall, aggregation, and distractor effects. They transfer only approximately to repository work. Realistic tasks entangle retrieval, reasoning, tool use, and verification, which makes mechanism attribution harder but deployment relevance higher. I use synthetic probes to explain a failure and repository-shaped trials to set the budget. Neither result establishes the other’s threshold without measurement.

The final configuration specifies a maximum initial assembly, per-source retrieval limits, a reserve for tool output and corrections, and an action when the reserve is exhausted. It records the workload and model version that justified those values. A run can stay inside its measured context budget and still fail when its specification is fragmented or superseded.

13.2 Restart from the specification the work has become

A model reads the first version of a requirement, fills in an ambiguity, and begins to build around that interpretation. Three turns later, the user corrects the assumption. The correction appears in the transcript, but the plan, file selection, and partial implementation still encode the earlier choice. Each subsequent message asks the model to repair work whose internal structure keeps reproducing the misunderstanding.

This failure can look like stubbornness or insufficient reasoning. The more useful explanation is commitment under an incrementally revealed specification. The state of the task no longer lives in one authoritative description. It is distributed across the initial request, later qualifications, rejected proposals, tool observations, and the model’s own claims about what was decided. Recovering the current specification requires distinguishing accepted decisions from abandoned ones before the next action can even be chosen.

Laban et al. (2025) simulated more than 200,000 conversations across 15 models and compared instructions delivered together with instructions distributed over several turns. Sharding the instructions produced an average performance drop of 39 percent relative to the single-turn condition. Models showed slightly lower aptitude, but much higher unreliability. They made assumptions early, committed to them, and frequently failed to recover when later turns supplied the missing constraints.

The experiment used simulated conversational generation tasks. Coding agents operating tools, receiving compiler feedback, or changing persistent files were outside its scope. Tests and environment errors can correct some early assumptions, but partial code can entrench others. I use the 39 percent as evidence for the commitment mechanism; its effect size does not transfer directly to coding teams.

That figure is also an average taken across models and across the generation tasks in the study, not a per-conversation quantity. The spread over individual conversations is not recoverable from it. An average of that size is compatible with a few catastrophic conversations and many unaffected ones, and those two distributions imply different operational responses.

The trace corpus described at the start of this chapter shows a related failure without strengthening the causal claim. Guidance delivered once, twenty turns earlier, remained inside the window and appeared in none of the visible reasoning. Initial delivery is therefore not evidence that a long-running agent is still governing its work by the same instruction.

The practical response is periodic consolidation. When requirements emerge through discussion, I rewrite the accepted decisions, constraints, definitions, interfaces, and unresolved questions into one coherent specification. The new document identifies itself as authoritative and supersedes earlier proposals on the same subjects. It represents the current agreement and omits turn-by-turn chronology.

Consolidation is selective because a transcript contains different kinds of state. Settled requirements belong in the specification, and open questions retain their unresolved status. Environment observations such as test failures, command output, modified files, and deployed state belong in a separate execution record. A rationale belongs with a decision when losing it would make the constraint look arbitrary or invite reversal.

The distinction between specification and observation controls what a restart may discard. Suppose a run has established that an API must remain backward compatible, selected a migration sequence, edited several files, and discovered that a test fixture depends on an undocumented field. The compatibility requirement and migration sequence belong in the consolidated specification. The edited-file list, diff, test command, failure output, and fixture discovery belong in the handoff state. Combining all of them into prose makes it difficult to tell which statements command future behavior and which report what happened.

I restart when the run's behavior shows that appended corrections no longer change its governing interpretation. Evidence includes repeatedly proposing a rejected interface, editing files chosen under an obsolete plan, explaining a current failure with a superseded assumption, or spending successive turns reconciling its own summaries. A rising token count can indicate rising risk, but it does not determine the restart. A shorter run can become incoherent after one consequential misunderstanding, but a longer run can remain stable if its decisions were restated.

The restart package has three parts. First is the consolidated specification, containing only settled requirements and genuinely unresolved questions. Second is an execution handoff that names repository state, completed changes, current failures, verification already run, and raw artifacts available for inspection. Third is a starting instruction that tells the new run which source is authoritative and what action should occur next.

That package should be generated from inspectable state. I use the current diff, test results, issue record, and relevant files as ground truth. If a prior claim conflicts with the repository, the repository state is authoritative and the discrepancy stays visible. A consolidated specification built from an inaccurate summary produces a cleaner version of the same error.

Restarting loses conversational nuance, discarded alternatives, and some tacit information about how the work reached its present form. It can repeat exploration and freeze a provisional design too early. I consolidate only settled specification. If two designs remain plausible, the document records both, the evidence for each, and the unresolved decision. The technique is harmful when summarization silently converts ambiguity into authority.

Environment feedback also resists consolidation into a static requirement. A failing test may be obsolete, flaky, misconfigured, or decisive. A compiler error is an observation from a particular repository state. The restarted run needs the raw output or a retrievable reference, the command that produced it, and the state against which it ran. A polished sentence could remove the uncertainty the next investigation must resolve.

Versioning prevents authoritative specifications from competing. Each consolidation has an identity, supersedes a named prior version, and remains visible to the run. Concurrent workers submit changes through one owner or merge procedure, because requirements that govern all workers need an ordering rule.

A failing run should not be asked to decide alone that its interpretation is correct enough to preserve. The restart boundary is a control-plane decision informed by the trace, repository state, verification, and user decisions. The model can draft the consolidation, but an inspectable comparison must show what it retained, changed, marked unresolved, or omitted. High-consequence requirements warrant human review before the new run treats the document as authoritative.

The choice is between continuing from entangled state and paying to reconstruct clean state. Appending one more correction is cheap when the run has incorporated prior corrections and its

working representation remains coherent. Restarting is cheaper when every new turn must fight decisions embedded in the trajectory. The 39 percent result explains why repeated repair messages can fail even when the model can solve the fully specified task. When that pattern appears, the rule is to restart from a consolidated statement of the settled requirements and to carry the environment evidence separately, as raw observations rather than as conclusions.

13.3 Put bulk output behind a pointer

In my agent fleet, a snapshot of the shared skill catalog once traveled between sessions through an environment variable. The snapshot drifted as sessions inherited, transformed, and re-emitted it. Moving the same context surface to a fingerprinted file made the snapshot atomic per session and allowed every reload to validate its identity. The incident shows that turning transient text into a named artifact can make ownership, validation, and retrieval explicit, without showing that files improve model performance.

The evidence for file-based tool output is limited: two practitioner-directional accounts and zero strong results. I teach it as a convention because it is the cheapest concrete change I know for controlling raw-output bloat. Long terminal sessions, search results, test logs, tool responses, and pre-compaction history are written to session-scoped files. The active context keeps a short description, a stable pointer, and enough metadata for the agent to decide whether loading more is worth the cost.

This design changes where state lives. Without externalization, a tool response lives only in the message history owned by the running conversation. Truncation can delete it, and summarization replaces it with a lossy interpretation. With a session file, the raw bytes live in an artifact owned by the run. The context contains an index entry such as the command, time, status, byte or token size, content fingerprint, and file location.

Retrieval then becomes incremental. An agent can inspect the last lines of a failing build, search the file for a symbol or error code, or load a bounded range around a match. After a context reset, the restarted run can search the history file rather than depend on a summary made before anyone knew which detail would matter. Bulk evidence remains available without occupying the working window on every turn.

The pointer must state the cost before the content is loaded. My memory system follows this rule. An index call reports the expected token cost, and only a subsequent content call loads the material. Injected lessons cite their evidence while leaving raw traces unloaded. The agent can choose a short excerpt when the full log would consume too much of the working window.

Cursor’s engineering blog (2026) reported writing long tool output to a file the agent can read back, and reduced forced summaries at the context limit. The Hightouch team, in an interview published by Amplify Partners (2026), described buffering large tool results the same way and reported that it kept the working window on reasoning rather than raw data. Letting the model choose when to buffer output worked better for that team than a coded decision tree. These reports supply implementation direction without a controlled comparison. Model-selected buffering remains probabilistic, and a different model or prompt may make worse choices.

A safe interface needs deterministic protections around that probabilistic choice. Maximum inline sizes, file-write failures, retention limits, and access controls belong to the harness. The model may choose among tail, search, range read, or full load within those constraints. A failed artifact write returns an explicit error and leaves no claim that the output was preserved.

A pointer must also stay resolvable after a restart. A pointer derived only from a temporary process path may expire before the next run can use it. I associate files with a run identity and

tool-call identity, preserve their order, and record whether the underlying content is complete or truncated. Concurrent calls write separate artifacts and publish their pointers atomically so that one worker cannot overwrite another’s evidence.

Security policy follows the data. Terminal output may contain credentials, proprietary source, personal data, or production identifiers. Moving it out of the prompt can reduce incidental exposure to later turns, but it also creates a retained artifact that needs permissions, redaction rules, encryption where appropriate, and a deletion policy. A file path must not become a way for the model to read outside the session’s authorized scope. Deletion and pointer validity are one decision rather than two, because a retention rule that removes an artifact also invalidates every pointer to it held in an older transcript.

Files are an implementation choice, not necessarily the final abstraction. An object store, content-addressed artifact service, or trace database may provide stronger retention and concurrency semantics. Files are attractive early because shell tools already know how to search and range-read them, their failure modes are visible, and they avoid committing to a more elaborate interface before the access patterns are known. The durable requirement is retrievable raw evidence behind a costed pointer.

Externalizing output solves only one source of growth. The agent’s plans, speculative explanations, corrections, and repeated reasoning still accumulate in the active window. A run that writes every log to disk can still lose its specification or fill its context with abandoned approaches. Explicit compaction and the restart rule remain necessary.

The convention also creates retrieval failure modes. An agent may never follow the pointer, search for the wrong term, or load an excerpt that omits the decisive line. A stale index can point to deleted content. A summary can misdescribe the artifact and discourage retrieval. I preserve the raw file, validate the pointer, expose search and range operations, and trace what was actually loaded.

The practical test begins with operations. The agent must recover a detail after context reset, preserve distinct outputs from concurrent calls, connect each excerpt to its raw artifact, and report failed writes. Once those mechanics work, task-level evaluation can ask whether the convention reduces cost or improves completion on workloads with large outputs.

That comparison faces the resolution problem from Chapter 1. A difference smaller than the run-to-run spread is not beyond reach, but resolving it requires enough paired runs. I size the comparison against the smallest cost or completion change that would alter the decision, and credit the convention from the interval around the paired difference rather than from one pair of totals. Its current justification is inspectable loss and ownership. Outcome improvement remains unmeasured.

13.4 Test the standing context file against no file

Gloaguen et al. (2026) asked whether the repository context files that coding teams were already writing improved task success. Across the tested agents and models, the answer was no. The files increased inference cost by roughly 20 percent, and the agents followed their instructions. The central evaluation is a null result from one study, which means it should change the default assumption without being treated as a universal verdict.

Instruction adherence and task completion measure different effects. A file can successfully cause an agent to run a command, follow a naming rule, or avoid a directory while leaving the final task score unchanged. It can also consume context, provoke extra tool calls, or direct attention toward an overview the model did not need. Observing that the file was read and followed establishes treatment delivery without establishing benefit.

The null result needs the power analysis from Chapter 1. Failure to detect a task-success improvement can mean the true average effect is small, the tested mix contains positive and negative effects that cancel, or the experiment could not resolve the effect it sought. The study’s measured cost is still part of the result, as is its evidence that instructions influenced behavior. What it cannot show is that every repository, instruction class, model, or safety outcome will reproduce the same balance.

The local decision comes from a no-file baseline. The comparison is a paired design: the same representative tasks, repository states, model configuration, tools, harness, and evaluator run with and without the context file. Pairing removes task variation from the difference as far as the apparatus permits. Repeated runs remain necessary where model variance is material.

Before running the comparison, I record the task-success metric, cost measures, model and harness versions, decoding settings, context file revision, task set, and decision threshold. This discipline prevents a disappointing result from being rescued after the fact by whichever secondary measure moved. I still retain diagnostic measures such as instruction adherence, tool calls, latency, and failure class, because they explain the observed difference.

Inference cost includes more than the file’s input tokens. An instruction may cause extra searches, builds, reviews, or explanations. Conversely, a concise repository-specific command can avoid failed exploration and reduce total work even though it adds permanent context. I record input and output tokens, calls, tool execution, and completion cost for each pair. The cost of completed work is the quantity to evaluate. File size alone is incomplete. A single aggregate cost is also one draw, so a roughly 20 percent gap deserves the same repeated measurement as a score.

Representative tasks should exercise the constraints the file claims to support. If every test item concerns a small isolated function, the evaluation says little about instructions for migrations, generated code, deployment checks, or concurrent edits. I include ordinary tasks, tasks that encounter unusual repository rules, and tasks where violating a rule would create a consequential failure. Expected use governs the mix.

A single all-or-nothing comparison can hide which content is responsible for any effect. Where the task budget permits, I ablate instruction categories separately. One condition might retain only build and test commands, another only failure-prevention constraints, and another the broad architecture overview. This isolates categories imperfectly because instructions can interact, but it is more informative than concluding that the entire file helps or does not help.

Gloaguen et al. (2026) found that agents followed the instructions while task success did not generally improve, which gives constraint-type content a plausible role. It does not prove that any constraint earns permanent inclusion. A repository-specific rule such as “do not regenerate this checked-in directory by hand” has a direct failure class and can be tested on tasks that encounter the directory. A page of architecture description may duplicate information that repository search would retrieve only when needed.

I therefore restrict the default file to unusual constraints and failure-prevention rules. Common language conventions, framework summaries, and directory tours face a high bar because the model can often infer or retrieve them. A permanent instruction costs tokens on every task, including tasks for which it is irrelevant. The file should contain what a capable agent is likely to get wrong and cannot cheaply discover from the repository at the moment of need.

One of my repositories uses its context file as a failure-mode ledger. Each prohibition names the incident class it prevents. That form connects a rule to a concrete repository need and makes deletion possible when the underlying hazard disappears. This narrative case illustrates maintenance practice and supplies no measured improvement in completion.

The content found in practice is broader. Chatlatanagulchai et al. (2025) examined 2,303 context files from 1,925 repositories. They found implementation details in 69.9 percent of files, architecture

information in 67.7 percent, and build or run guidance in 62.3 percent. Security and performance guidance each appeared in 14.5 percent of the files in that mining study.

Those percentages describe the content maintainers wrote. The security and performance gap is a review prompt, because coding agents can execute commands and change production-relevant code. It asks whether the local file omits safeguards the workload actually requires. It supplies no evidence that adding generic security or performance text will improve outcomes.

A file kept after the with-and-without comparison should be maintained like configuration. Every instruction has an owner, a reason for existing, and a review path. Changes arrive as small diffs so reviewers can see which behavior is intended to change. A large generated rewrite makes stale claims and contradictions difficult to detect.

Chatlatanagulchai et al. (2025) also found that context files already evolve through frequent small additions. That observation is compatible with configuration-like maintenance, but it does not establish the quality of those changes. An addition can record a discovered failure, duplicate an existing rule, or preserve an obsolete workaround. Commit frequency is not correctness.

Staleness is especially dangerous because a context file is authoritative by placement. An old build command does not merely fail to help. It can cause the agent to modify generated output, skip a required check, or interpret current structure through an obsolete architecture. A broad overview decays whenever files move. A constraint tied to a removed failure mode can continue to shape every run after its justification has disappeared.

I have seen this drift in my own agent-facing documents. A review-checker file accumulated 35 rules while its header and the skill that wrapped it still claimed 29. A skill-library README carried three mutually inconsistent counts at once. Both documents are mine, and neither had any mechanism that could have noticed. These cases do not measure the effect on task success, but they show that documents consumed by agents can become self-contradictory when nothing checks their claims.

Some claims can be checked mechanically. Another of my knowledge maps stores a source hash so that a change to the files it describes makes drift detectable. Counts can be computed, paths can be validated, commands can be run in a clean environment, and generated sections can carry fingerprints. Semantic claims still require review, but deterministic checks reduce the surface on which reviewers must rely on memory.

Ownership should be specific enough to trigger action when the build system, structure, or release process changes. I attach sections to people or components that can verify them and define events that require review. Context assembly also records identity and precedence for requirements repeated across system prompts, repository files, task descriptions, and tool documentation. A maintenance check detects contradictory instructions before execution.

The controlled comparison against no file should be read by instruction category and failure consequence as well as by the aggregate mean. A file that has no measurable task-success benefit may still prevent a rare destructive action that the task suite is underpowered to observe. That claim needs a concrete threat model, a compliance test, and an explicit cost decision. A general completion benchmark cannot establish or dismiss safety value when its metric omits the relevant failure.

Correctness, reliability, cost, and usability remain separate columns in the decision record. After the initial paired comparison, I keep the no-file condition available, because a model release, harness change, or major file revision can change both adherence and cost. The old result belongs to the configuration that produced it.

When the comparison is inconclusive, adherence evidence cannot stand in for the missing outcome. I report the interval the evaluation can support, inspect whether the tasks exercised the file’s claims, and decide whether a larger test is warranted. The file can remain provisional for a

concrete safety reason, but the exception and its cost should be explicit. An underpowered null cannot prove uselessness, just as instruction compliance cannot prove benefit.

The best standing file is often shorter after measurement. Rules with no concrete need, duplicated repository descriptions, stale counts, and content better served by on-demand retrieval can be removed. What remains is a reviewed configuration surface whose permanent token cost is attached to an observed failure or a measured outcome. That is a narrower claim than ‘context files help’, and one a repository can test.

13.5 A week-one context protocol

The companion catalog carries narrower techniques for systems that need them. It covers placing load-bearing evidence near a context edge, testing semantic rather than verbatim recall, allowing an agent to compact at task milestones, and pricing compression by completed work rather than token reduction. It also describes minimizing always-loaded context and auditing the assembled prompt as an inspectable artifact. Each technique changes a different part of the context path, but none removes the need to measure the whole path on the production workload.

In the first week, I choose one task family shaped like production and run it at several context sizes. I include relevant multi-document material, realistic distractors, and the relations that the agent must reconstruct. I plot correctness and reliability alongside cost, inspect the traces around the decline, and set the harness cap below the measured knee for the weakest required task. The cap records its model, workload, margin, and review trigger.

For one long run that has visibly lost its specification, I stop adding repair messages. I consolidate the accepted decisions and remaining questions into one authoritative specification, inspect repository state and verification output, and restart from that package. Environment feedback stays separate as raw observations or retrievable artifacts. The new run can then distinguish what it must obey from what it must investigate.

I route bulk tool output to session-scoped files and keep costed pointers in the active context. The first operational checks are recovery after reset, distinct preservation under concurrent calls, explicit handling of failed writes, and traceability from excerpts to raw output. This is a convention under directional evidence, so I do not credit it with an outcome improvement until a local comparison shows one.

Finally, I run the repository context file against no file on the same tasks. I record task success, adherence, inference cost, tool use, and the file revision. The roughly 20-percent cost increase from one study is a warning that requires local measurement. The paired comparison decides whether the file earns its cost, and category-level tests decide which instructions remain.

What survives between sessions, and in what form, is Chapter 14’s subject.

13.6 Sources and evidence

13.6.1 Budget to measured effective context

- lit/strong: Hsieh, C.-P., et al. (2024), “RULER: What’s the Real Context Size of Your Long-Context Language Models?” COLM 2024, arXiv:2404.06654.
- lit/strong: Leng, Q., et al. (2024), “Long Context RAG Performance of Large Language Models,” Databricks Mosaic Research, arXiv:2411.03538.
- lit/strong: Li, J., et al. (2025), “LONGCODEU: Benchmarking Long-Context Language Models on Long Code Understanding,” arXiv:2503.04359.

- lit/strong: Rando, S., et al. (2025), “LongCodeBench: Evaluating Coding LLMs at 1M Context Windows,” arXiv:2505.07897.
- Corroboration: none on record.

13.6.2 Consolidate the specification and restart lost runs

- lit/strong: Laban, P., et al. (2025), “LLMs Get Lost In Multi-Turn Conversation,” arXiv:2505.06120.
- Corroboration, narrative only: the author’s trace-diagnostics corpus showed that guidance delivered in the system prompt twenty turns earlier was absent from the visible reasoning: 0% across 1,705 thinking blocks in 199 traces. The literature result, not this case, carries the claim.

13.6.3 Persist transient context as files

- practitioner/directional: “Dynamic Context Discovery in Coding Agents”, Cursor engineering blog, 2026-01-07.
- practitioner/directional: “How Hightouch built their long-running agent harness”, Amplify Partners engineering interview, 2026-01-20.
- Corroboration, narrative only: the author’s memory system exposes token cost before loading content, and the author’s agent fleet stopped a drifting skill-catalog snapshot by moving it to a fingerprinted, session-atomic file validated on reload.

13.6.4 Measure context files and maintain them like configuration

- lit/null-result: Gloaguen, T., Mündler, N., Müller, M., Raychev, V., Vechev, M. (2026), “Evaluating AGENTS.md: Are Repository-Level Context Files Helpful for Coding Agents?” arXiv:2602.11988.
- lit/strong: Chatlatanagulchai, W., et al. (2025), “Agent READMEs: An Empirical Study of Context Files for Agentic Coding,” arXiv:2511.12884.
- Corroboration, narrative only: the author’s systems include a context file maintained as a failure-mode ledger and a knowledge map with a machine-checkable source hash; contrary cases include a review-checker whose live rule count disagreed with its header and wrapper, and a skill-library README with three inconsistent counts.

Author-system cases in this chapter are narrative illustration, not evidence.

Chapter 14

Cross-session memory, raw traces, and compaction policies

One of my own memory systems rebuilds its entire derived layer whenever the schema version changes. Nothing in that layer is migrated in place. Three append-only tables, holding lessons, memory events, and provenance events, cross the rebuild boundary through mechanical export and import, and everything else is recomputed from the work record it came from. The arrangement is deliberately inconvenient, and it comes with no comparative evidence that it outperforms a system that rewrites its memory as it goes.

The reason for the inconvenience has been measured elsewhere. Zhang (2026) studied memories that language models update continuously and found that they degrade. A production account of Slack’s context management described the same general shape. The Agentic Context Engineering synthesis (2025) names two of the degradation modes, context collapse and brevity bias. Each rewriting pass optimizes a representation that is already the product of an earlier optimization. Deletion and distortion therefore accumulate without any explicit destructive operation, and routine maintenance damages the evidence.

I treat the complete chronological record of a session’s inputs, actions, outputs, and state changes as the ground truth for cross-session memory. I call that record the raw, or episodic, trace. Everything derived from it must remain rebuildable. Observed query and task failures, rather than anticipated ones, determine when the storage and compression layers deserve more complexity.

The evidence base for this chapter is thin. Six items support its three design entries. Only two of the six are strong, and five are explorer-class syntheses rather than controlled experiments. The storage recommendation has no strong item at all and remains contested among practitioners. I therefore use this evidence to define architectures and measurement decisions. It supplies no defensible retention period, retrieval threshold, or compression ratio.

14.1 Preserve the evidence before deriving the memory

Continuous rewriting can leave the latest stored record without evidence that earlier versions contained. Support for this failure mechanism comes from one explorer-class study the evidence audit retained as strong, one directional synthesis, and the Slack production account named alongside them. The directional synthesis is Agentic Context Engineering (2025). The evidence audit records no quantitative result behind it, and it therefore supports the direction of the practice only. No controlled comparison of storage architectures is on record.

I therefore separate the immutable source record from every summary or fact derived from it.

Material removed by an earlier rewrite cannot be recovered from the latest rewrite. A further pass may produce a better summary of the remaining text, but it has no observation from which to reconstruct what disappeared. The system has crossed a recovery boundary without marking the crossing. Treating each rewrite as a new authoritative state hides that loss behind a successful update.

An immutable raw layer changes the failure mode. The store appends the original session events and does not ask a model to modify them. A separate process reads those events and produces a summary, a profile, or a collection of extracted facts. I call that output the distillate, meaning a derived representation built from the source record for later use. When the distillate omits material from the source record, the omission is a retrieval or consolidation defect that can be repaired from preserved evidence.

The architecture has two ownership rules. The recorder owns fidelity to what happened, including ordering, identity, and state references. The distiller owns one interpretation of that record for a stated retrieval purpose. A summary may say what the system believed about a user, while the trace records which statement produced that belief, when it arrived, and what later event contradicted it. Collapsing the two roles into one mutable record converts an inference into history.

Rebuildability follows from that separation. Every derived item carries provenance back to the trace events that produced it and to the version of the extraction or summarization rule that interpreted them. When the schema changes, the system constructs a new derived store from the raw record. It does not ask a model to translate each old conclusion into a new conclusion in place. Parallel rebuilds also let an operator compare the old and new distillates before switching readers to the new version.

recorder

```
-> inputs + actions + outputs + state changes
    -> complete chronological raw, or episodic, trace
        [ground truth: ordering + identity + state references]
        |
        v
```

distiller -> stated retrieval purpose -> derived store

```
|
+--> provenance -> trace events
+--> version of extraction or summarization rule
```

schema changes

```
-> raw record -> new derived store
```

earlier rewrite removes material

```
-> latest rewrite cannot recover it
```

The artifact here is the replayable trace from Chapter 9, used for a second purpose. In recovery, the trace reconstructs execution after a crash. In memory, it reconstructs a representation after that representation proves incomplete or wrong. The requirements overlap, but memory adds access patterns, retention decisions, and user-facing correction obligations that execution replay alone does not settle.

Consider a coding agent that learns three things during a repository investigation. An interface was renamed. A compatibility wrapper remains for one release. One service still calls the wrapper during rollback. A concise summary may retain the rename and the wrapper while dropping the rollback dependency as a low-frequency detail.

Weeks later, an incident task asks whether the wrapper can be removed, and a memory query against the summary returns a confident but incomplete answer. With the raw trace preserved, the system can respond in several defensible ways. It can retrieve the original observation directly. It can rebuild the facts under a schema that represents rollback dependencies. It can show the user that the current summary has no coverage for the question. Without the trace, the only available repair is another model-generated guess.

Continuous rewriting also confuses time. Suppose an early session records that a service owner is Priya. A later session records that ownership moved to Luis. A third task then asks who approved a decision made between those two dates. A profile optimized for the current owner may erase Priya entirely, while preserving both events lets the derived layer represent succession, validity intervals, or uncertainty across time.

This temporal case points to a design the companion catalog develops separately. A memory can supersede a claim for current use while retaining the earlier version for questions about the past. Work on temporal knowledge-graph memory, from Kim et al. (2024), is part of the support. The recommendation of two time axes, one for when a fact was true and one for when the system learned it, is practitioner-weighted rather than a measured result of that work, and it remains directional. The raw event order supplies the observations. The derived schema still has to decide how a claim becomes current, obsolete, or disputed.

Immutability does not mean public access or indefinite retention. Raw traces can contain credentials, personal attributes, proprietary code, and conclusions that later prove false. Their value as recovery material increases the damage from an access-control failure. I classify the raw layer as sensitive source material, restrict writers to append operations, encrypt it under a stated retention policy, and log every reader that crosses the boundary.

Deletion has to follow provenance in the other direction. If a user or a policy requires removal of a raw event, every summary, profile, embedding, cache entry, and graph edge derived from it becomes suspect. A deletion process that removes only the transcript leaves the more convenient copies intact. The system needs a mechanical way to find the affected derivatives, invalidate them, and rebuild what remains from authorized source material.

Forgetting is therefore part of the architecture, and it is the least-measured part of the memory stack in the evidence available here. A system may demonstrate that it retrieved retained facts without testing whether deleted or superseded facts still reach generation through a summary, a cache, or a model-produced profile. Deletion propagation and stale-claim retrieval should therefore be measured separately from task success. A task can succeed while a deleted fact is still shaping the answer.

Retention has a boundary the recovery argument cannot override. Some systems cannot lawfully or safely keep complete traces. Others should not keep them, because the likely harm exceeds their diagnostic value. In these settings, the raw layer may need field-level redaction, a shortened retention window, content-addressed references to separately governed artifacts, or deliberate noncollection. The design requirement is to make each loss explicit and testable. An already compressed record cannot serve as the raw recovery boundary.

Companion-site aside, thin support: Persisting the repository regions an agent has already explored may prevent repeated discovery work across sessions. The idea rests on one directional source, from Pan et al. (2025). Whether it reduces redundant retrieval without also preserving stale interpretations should therefore be tested.

Companion-site aside, thin support: Durable project state persisted across crashes and context loss in the long-horizon engineering system Chen (2026) evaluated. That result is a directional reason to hand off artifact references between agents. No controlled comparison against transcript-summary handoff is on record, and the fidelity advantage over a summary therefore remains an

inference. The receiving agent also needs a way to verify artifact identity, permissions, and version.

14.2 Make the storage system earn its complexity

At a new agent project’s architecture review, the design already contained a vector database and a knowledge graph. The query log was empty. Nobody had asked the system a question yet, and the retrieval architecture had already been settled.

The support for arguing against that default is directional, practitioner-weighted, and contested. It comes from three explorer syntheses and no strong item. Menschikov (2025) compared knowledge-graph memory against lighter substrates in a personal-AI setting. Wolff and Bennati (2026) compared cost against accuracy, and the evidence audit classifies that comparison as directional with no quantitative result behind it. Yang (2026) surveyed graph-based agent memory, and that survey is the counterweight to the position taken here rather than support for it.

A practitioner argument that knowledge graphs are the wrong abstraction for agent memory runs alongside those papers, with no study behind it. Together these establish a presumption in favor of simpler infrastructure. They do not establish that relational storage wins across workloads.

I begin the decision with the corpus the agent records: session transcripts, tool observations, decisions, outcomes, and the provenance connecting derived facts back to those events. A relational database can store those records with stable identifiers, explicit time fields, access controls, and transactional deletion. Full-text search supplies an inspectable first retrieval path. The operator can see the query, the matched terms, the filters, and the returned rows without first interpreting a learned similarity score or a model-extracted edge.

This starting point is deliberately modest. It handles exact identifiers, quoted phrases, error text, names, paths, and combinations of structured filters with lexical search. It also exposes its own failures. If a user asks for “the outage caused by stale ownership data” while the trace says “the on-call mapping lagged the transfer,” lexical retrieval may miss the connection. This miss is evidence for a semantic retrieval lane, provided such mismatches recur in representative work.

Vector retrieval adds that lane by comparing learned representations of the query and the stored text. The extra machinery may be justified when users regularly describe the same event in different language, when terminology changes across teams, or when the useful passage shares a concept but few tokens with the query. It also introduces an embedding model whose version and chunking choices change the representation. The additional index needs its own update and deletion path. I assess those costs against observed lexical misses rather than against anticipated ones.

A knowledge graph makes a different promise. It represents entities and relations. The system can therefore traverse a question such as which services depend on a library owned by a team whose runbook changed after an incident. When relationships are the object of retrieval and multi-hop questions recur, the schema and maintenance cost of that representation can be justified. Similarity search is not a reliable substitute for explicit traversal when the answer depends on a chain of named relations.

The graph obtains those relations through an extraction pipeline. A model reads an event or a summary, decides which entities exist, resolves their identities, and emits edges. Each of those decisions can invent content, merge distinct entities, split one entity into several, or assign a relation the trace did not state. A graph can then return a mechanically correct traversal over semantically wrong edges, which makes the answer look better supported than its evidence warrants.

High-degree entities create a separate scaling problem. Common concepts such as production, a central platform team, or a widely used library can become hubs connected to much of the store. Queries through those hubs expand rapidly and return weakly related paths. The operator has to

bound queries with relation constraints and temporal filters, and the pipeline has to prune weak edges and repair entity identities. Graph construction then becomes an ongoing information-quality program rather than a one-time schema decision.

The two additions solve different failures. A vector index addresses lexical mismatch. A graph addresses repeated relational traversal. Combining them may serve a workload that needs both, but the combination also compounds the provenance, synchronization, access-control, and deletion obligations. The design record should name which representative queries each component answers and which observed failures made the simpler path inadequate.

The decision has the same shape as Chapter 12’s repository-index choice, but the corpora differ. Chapter 12 concerned how an agent indexes a repository that already exists. Here the corpus is the agent’s own experience, and the extraction step may create entities or relations that were not present in the source. This difference raises the cost of an opaque derivation error.

Local-deployment claims need the same scrutiny. A memory framework may keep its database on a workstation while sending extraction or embedding requests to a remote model. Another may require a cloud key for the advertised default path even though its storage package is open source. I inspect the effective dependency graph, including model calls, embedding services, telemetry, background synchronization, and credential flow, before classifying a system as local.

Governance can change the preferred substrate before retrieval quality does. A relational transcript store may fit existing backup, audit, residency, row-level access, and deletion controls. A managed vector service might satisfy the same requirements with less operational effort in another organization. A graph may expose sensitive relations that no single source event revealed. Storage cost alone cannot decide among systems that create different privacy and accountability surfaces.

The comparison also has to separate correctness from performance. A full-text query that returns no relevant record has a retrieval-correctness problem even when it completes in milliseconds. A graph query that finds the right path but takes too long under hub expansion has a performance problem. A vector result that is useful but cannot be traced to an authorized source has a governance problem. Collapsing all three into ‘memory quality’ hides which component has to change.

I use a small query set before adding infrastructure. It includes ordinary lookups, paraphrased requests, time-bounded questions, deletion checks, and the relational questions that prompted the discussion. For each query, I record whether the relevant evidence was retrieved, which irrelevant records displaced it, how the answer traces back to source events, what the operation cost, and whether the access policy held.

I draw this set from real tasks and failures, and I write it down before any candidate store is compared. Examples chosen after seeing which store handled them would favor that store, for the same reason Chapter 2 requires a task-exclusion rule to be declared before the outcomes are inspected.

The decision stays reversible while the raw layer remains independent. A vector index can be rebuilt from authorized transcript segments. A graph can be regenerated under a revised extraction schema and compared with its predecessor. If either system becomes necessary, it joins the derived layer and leaves the source intact. The recovery boundary remains intact while the retrieval architecture becomes more specialized.

A simple store can also be a false economy. Repeated lexical misses can force users to restate questions, cause the agent to proceed without prior evidence, and consume review time. Repeated manual joins across records can conceal relations the workload depends on. The presumption for simplicity expires when measured query failures and operating constraints show that the initial system cannot answer the work.

The opposite failure is easier to miss, because the system looks sophisticated while it fails. A

graph built for future questions can make schema repair, entity reconciliation, and edge pruning the dominant memory task before any production query uses a traversal. A vector lane can accumulate embeddings whose source text has been deleted or superseded. Those maintenance costs belong in the same evaluation as the retrieval gains.

Scheduled consolidation into typed, pruned records can reduce query-time work once the types correspond to recurring retrieval needs. Scheduling changes when interpretation happens. It does not change the evidence boundary, because every consolidated item still needs source provenance and a rebuild path. Consolidating on a timer before the types have stabilized moves speculative extraction into a batch job.

Product and decision context may also need to be stored separately from code search. Dillon (2026) measured coding-agent decision compliance when recorded product, design, and engineering decisions were available to the agent, and that support is directional. Extending it to runbooks, ownership changes, rejected designs, and incident lessons is an inference, though each of those answers questions that repository structure cannot. Such material should be stored under explicit source and time semantics, and code search should stay scoped to the repository.

Companion-site aside, thin support: Memory portability favors exportable events, explicit schemas, and provenance another system can audit. The support, from Munirathinam (2026), is anecdotal. A portability claim should therefore be tested with an actual export and import. A feature claim in a product description is not a test.

14.3 Tune compaction against failures

A reviewer opens a failed trace annotated under Chapter 10’s protocol and finds that the first upstream error followed a condensed-history update. Compaction is the replacement of working history with a condensed representation so a run stays inside its context budget. A fixed summarization prompt looks like routine maintenance, and its error profile goes unmeasured. One policy may preserve goals while dropping constraints. Another may retain decisions but blur which tool observation supported them. A third may keep every apparent dependency and fill the effective context length with obsolete branches.

The evidence for treating compaction as a tunable artifact rests on one strong literature study, from Kang et al. (2025), covering app, office, and question-answering agents. It includes no coding-agent benchmark. Transfer to repository work therefore remains an inference. That study supports treating each policy as a candidate component whose omissions, distortions, and distractions can be observed on tasks rather than assumed.

Chapter 10’s protocol asks the reader to grow the corpus toward one hundred diverse traces and to cluster it into five to ten failure classes, assigning the first upstream error in each run. Those counts are unmeasured starting recommendations. For compaction, I add a context label only when the preserved trace supports it. The label states whether necessary evidence was missing, retained with changed meaning, or present but obscured by irrelevant history. It also records the compaction version and points to the source events that should or should not have survived.

This label is an attribution judgment rather than a measurement. Chapter 10 requires a named human to sign any attribution that changes remediation or the interpretation of an evaluation, and a change to the compaction policy is exactly such a decision.

The label also prevents a common attribution error. A task can fail after compaction even when memory played no causal role. The repository may have changed, a tool may have timed out, or the agent may have ignored evidence that remained plainly available. I revise the policy only when the trace supports a counterfactual claim. The claim is that a different representation of the same

prior history could have changed the relevant decision.

The first policies are therefore hypotheses. Before any failure corpus exists, I can specify structural rules such as retaining current goals, unresolved constraints, artifact identities, decision provenance, and contradictory observations. I cannot know their relative value for a particular workload. The early system should preserve the raw material, record which rule produced each condensed history, and avoid presenting an untested prompt as optimized.

Once failures accumulate, I change one policy element at a time. A rule might preserve the exact observation behind an unresolved dependency, distinguish superseded facts from deleted facts, or discard completed exploratory branches after their artifacts have been recorded. I then re-run paired repeats on the same tasks using the discipline from Chapter 1. The comparison measures task success and the context used, and token count remains a secondary resource measure.

A comparison of two compaction policies is subject to the run-to-run variance Chapter 1 describes. One run of each policy is one draw. A difference that stays smaller than the measured spread should therefore not justify replacing the incumbent policy.

The compatibility-wrapper case provides a concrete policy test. The raw trace records that one service still calls the wrapper during rollback, while the compacted history drops that observation. The agent recommends removal, and the reviewer marks the recommendation as the first upstream error, caused by missing context.

I revise one rule so that unresolved rollback dependencies retain their source observation, then rebuild the condensed history from the same raw trace. Paired runs on the same removal task show whether the agent now preserves the wrapper and uses the retained evidence. I accept the change only when task success improves without a new distraction failure on neighboring cases. Otherwise the policy stays a hypothesis.

Kang et al. reported peak-token reductions of 26 to 54 percent alongside improved task success across three app, office, and question-answering benchmarks. They also reported gains of up to 46 percent for small-model agents when distracting context was removed. Under those experimental designs, less context coincided with better reasoning. Those results do not establish an expected reduction or an expected success gain for coding agents.

The study covers app, office, and question-answering benchmarks, with no coding-agent benchmark; repository transfer remains an inference without an expected coding-agent reduction or gain.

The plausible mechanism is the work required to discriminate among records. A model presented with every prior attempt has to decide which constraints remain active, which observations are stale, and which abandoned branches should influence the next action. Irrelevant history competes with useful evidence for attention, and repetition can make an obsolete plan look current. Removing that material can improve correctness while also reducing inference cost.

Compression creates the inverse failure. A concise history may omit a rare constraint because it contributed few tokens or appeared only once. Frequency is a poor proxy when one low-salience fact controls whether a destructive action is permitted. The failure corpus reveals which details became decisive in actual investigations, and the policy can then preserve evidence by function rather than by apparent prominence.

Task success alone is still too coarse for diagnosis. I inspect whether the compacted context retained the decisive observation, preserved its qualification, and excluded material that had become irrelevant. A successful run can hide a damaged memory when the model guessed correctly or recovered through a tool call. A failed run can show a sound compacted context that the model then misused. Keeping those cases separate prevents the compactor from absorbing every downstream error.

Policy versions have to remain replayable. The same raw trace should produce the same condensed representation under a named policy and model configuration, or the rebuild has to record

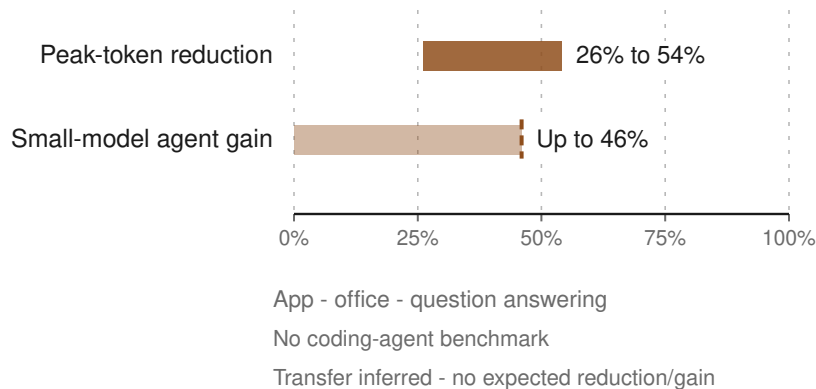


Figure 14.1: Across app, office, and question-answering agents, removing distractions cuts peak tokens by 26% to 54% and raises small-model success by up to 46%; no coding-agent benchmark supports extrapolating either effect to coding agents.

its nondeterminism explicitly. When retries occur, the system records whether they reuse the existing compacted state or rebuild from the raw trace. Otherwise a successful retry can conceal that the first and second attempts received different histories.

When a tuned policy stabilizes across new failures and held-aside traces from the same workload, its examples can train or distill a smaller model. This step changes latency and cost. It also creates another component to evaluate for semantic drift. The smaller model’s outputs and downstream task behavior should therefore be compared against the accepted policy, and a route back to the larger compactor should stay open for cases it cannot handle.

The loop cannot start on the first day, because no local failure evidence exists yet. Borrowed rules can supply a safe initial hypothesis, and preserving raw traces can limit the cost of a wrong initial policy by making its derived representation rebuildable. Optimization begins only after the traces show which omissions and distractions cause errors. The dependency on Chapter 10’s corpus is the reason compaction tuning comes after the rest of the retrieval and context architecture rather than before it.

14.4 A staged protocol for recoverable memory

Storage and retention decisions take effect in the first session. Revision of the compaction policy waits for Chapter 10’s failure corpus. The sequence below separates the immediate controls from the evidence-dependent ones.

From the first run, I keep every permitted raw trace in inexpensive immutable storage, and I mark every summary, profile, extracted fact, vector, and edge as derived. I record provenance and policy versions before the derived layer becomes operationally important. I test retention limits and deletion propagation as part of the design, because a recovery boundary that violates its governance boundary cannot stay in service.

I start retrieval with a relational transcript store and full-text search. This start is a presumption drawn from contested, directional evidence, not a measured result. Observed local query failures

justify moving beyond it. Before adding another lane, I write down the representative queries and the observed failures that would justify it: recurring lexical mismatch for vectors, recurring relational traversal for a graph. Operating cost, dependency exposure, deletion behavior, and access control belong in that decision.

I run the first compaction rules as hypotheses and keep their outputs reproducible from the raw trace. Once the Chapter 10 corpus contains context-caused failures, I revise the policy against those cases and re-measure task success on paired tasks. Token reduction is a capacity-planning number. It cannot substitute for evidence that the agent made better decisions.

Review capacity is a finite input, and it does not grow as the fleet grows. Part V takes up the people who answer for this work, and the interfaces and escalation rules built around their limited attention.

14.5 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

14.5.1 Preserve raw traces and distill separately

- explorer/strong: “Useful Memories Become Faulty When Continuously Updated by LLMs” (Zhang 2026), arXiv:2605.12978, with Slack production context management (InfoQ 2026-04) named in the same synthesis.
- explorer/directional: Agentic Context Engineering, arXiv:2510.04618. Direction only.
- Corroboration (narrative only): the author’s memory system rebuilds its derived layer on schema changes and mechanically carries three append-only event tables across rebuilds.

14.5.2 Use a light store by default

- explorer/directional: PersonalAI KG comparison (Menschikov), arXiv:2506.17001, with a contested practitioner thread named in the same synthesis. Direction only.
- explorer/directional: Cost-and-Accuracy study (Wolff & Bennati 2026), arXiv:2601.07978. Direction only.
- explorer/directional (boundary citation): Graph-based Agent Memory survey (Yang 2026), arXiv:2602.05665. Cited as the counterweight, not support.
- Corroboration: none on record.

14.5.3 Optimize compaction from failures

- lit/strong: Kang, M., et al. (2025), “ACON: Optimizing Context Compression for Long-horizon LLM Agents,” arXiv:2510.00615 (Microsoft).
- Corroboration: none on record.

14.5.4 Companion-catalog records named inline

These are not part of this chapter’s three taught entries. Each is named in the prose so a reader can follow the aside to its source, at the strength the record carries.

- explorer/directional: Temporal KG memory (Kim et al.), arXiv:2408.05861, carried by the companion record on modeling time explicitly. Supports the two-time-axes aside only.

- lit/directional: Prometheus (Pan, H., et al. 2025), arXiv:2507.19942, carried by the companion record on persisting explored context. No figure quoted here.
- explorer/directional: AiScientist long-horizon engineering (Chen 2026), arXiv:2604.13018, carried by the companion record on durable artifact handoff.
- explorer/anecdotal: memorywire (Munirathinam 2026), arXiv:2606.01138, carried by the companion record on memory portability.
- explorer/directional: Product context and coding-agent decision compliance (Dillon 2026), arXiv:2605.08112, carried by the companion record on the tribal-knowledge substrate. Its compliance figure is not used in the prose.

Author-system cases in this chapter are narrative illustration, not evidence.

Part V

Human review and accountability engineering

Chapter 15

Efficient verification interfaces and risk-based human escalation

On my own site, every agent output arrives as a schema-validated Git diff. The agent cannot write to the production database or publish a page. That architecture places the proposed state transition in an artifact I can read, execute, reject, or revise before it acquires production authority. It provides no evidence that the output is correct. A diff that is easy to approve looks a great deal like a diff that has been checked.

A reviewer skimming that diff is making a cost-benefit decision. Reading every changed branch, reconstructing the intended behavior, running the relevant tests, and checking the result against the task costs far more than a single approval click. When the expected consequence of a missed defect feels remote, that cost difference makes shallow review the rational response, even for a reviewer who intends to be careful.

Vasconcelos et al. (2023) tested this account across five experiments. Their subject was overreliance, the reliance failure in which a person accepts an incorrect AI output. It changed when the economics of checking changed. Participants engaged more when verification required less effort or when the cost of an error became more salient. Explanations reduced overreliance when they altered that calculation. They did not work as a general antidote to misplaced trust.

This result changes the engineering question. Telling reviewers to be more careful treats attention as a personality trait. A review system has to account instead for the price of obtaining evidence, the point at which a person can accept an output, and the finite supply of human judgment. Those are properties of the workflow, and they can be inspected and changed.

Review capacity does not grow because a fleet can produce more patches. Practitioner reports already describe systems generating substantial code volume behind retained human gates. InfoQ reported (2026) that Stripe’s Minions system produces more than 1,300 production pull requests per week. The figure says nothing about review depth, defect escape, or whether the gate changed any verdict, which is the part I would want to know. It does illustrate the queueing problem. Generation can scale faster than the people authorized to accept its consequences.

I treat this mismatch as three connected design problems. The review surface has to make a correctness claim cheap to challenge. Friction has to interrupt the fast accept loop without taxing every interaction equally. Automated monitors have to concentrate scarce human attention on the cases that warrant judgment, while the verdict stays with a named person. Each intervention changes the cost or the allocation of review. None of them creates correctness.

Nearly all of the empirical oversight results I have used here predate long-horizon agents. In my reading of that work, researchers have rarely tested whether findings about people reviewing

suggestions carry over to autonomous actions, although they commonly assume that they do. A code completion that waits for a programmer to accept one function and an agent that edits files, runs commands, revises its plan, and opens a proposed patch create different observability and control problems. The older evidence is useful for identifying mechanisms. It does not settle how those mechanisms behave after autonomy, duration, and action space increase.

The practical standard is therefore narrower than ‘keep a human in the loop.’ A loop can contain a human who sees too little, arrives too late, has no affordable way to check the work, or lacks the authority to stop it. The questions worth asking are concrete. What evidence reaches the reviewer? At which decision is independent judgment required? Which cases consume scarce review time? Who owns the final verdict, and what happens after that person decides?

15.1 The price of a check

An explanation describes why an output might be right. A verification interface gives the reviewer a practical way to discover that it is wrong. Tests, executable examples, types, continuous-integration gates, sandboxed runs, and evidence placed next to the claim all serve the second purpose. Their value comes from the failures they can expose.

Suppose an agent changes a retry loop. A prose rationale might say that the new backoff prevents overload while preserving responsiveness. A useful review surface shows the changed state machine, the maximum attempt count, the errors classified as retryable, and a test that advances a fake clock through failure and recovery. The reviewer can then challenge specific claims: whether retries stop, whether a non-retryable error escapes immediately, whether cancellation is honored, and whether two workers can duplicate the side effect. The explanation may help locate those claims. The executable evidence does the checking.

The same principle governs evidence presentation. Admission to the review surface and inspection within an artifact are different decisions. A system may correctly decide that logs, traces, generated files, and dependency changes belong in the review packet and still bury the relevant event among thousands of lines. Curating what reviewers see helps only when the omitted material remains reachable and the curation rule itself can be inspected. Otherwise the interface reduces apparent complexity by hiding the evidence needed to falsify the output.

Fok and Weld (2024) synthesized the research on explainable AI and reached a compatible but directional conclusion. Explanations rarely produced complementary performance, in which the human and the AI together outperform either one alone, unless the explanation helped the person verify the answer. That literature spans tasks with different error costs, expertise requirements, and verification opportunities, so it does not justify a universal claim that one explanation format will improve code review. It does support a sharper design test. After reading the explanation, what can the reviewer now check that was previously too expensive or unavailable?

Software is unusually favorable under that test. Many software claims admit partial mechanical oracles. A compiler can reject a type error. A property test can generate cases a reviewer would not enumerate. A deterministic replay can expose an ordering fault. A sandbox can show which files and network endpoints an action touched. None of these proves total correctness, but each can move a claim from something the reviewer has to read and trust toward something the reviewer can run and challenge.

The favorable case has strict boundaries. A passing test suite establishes only that the tested behavior passed under the tested conditions. Generated tests can repeat the implementation’s mistaken assumption. Type systems encode some properties and omit others. Sandboxes constrain consequences without establishing intent. A green continuous-integration result can itself become

a trust signal that accelerates acceptance, even when the changed risk lies outside the suite.

A large diff with weak tests can therefore leave verification more expensive than acceptance. The reviewer has to reconstruct behavior across files, infer unstated requirements, and judge interactions that no executable check covers. Adding a longer reasoning trace increases reading cost without creating an oracle. Under those conditions, the cost-benefit account predicts shallow engagement.

Optimizing first for the completeness of an agent’s explanation is therefore the wrong starting move. The useful first step is to identify the claims whose failure matters and ask what artifact could disconfirm each one. For a database migration, that might mean forward and rollback rehearsal against representative data. For an authorization change, it might mean a table of identities and denied actions executed as integration tests. For a concurrent worker, it might mean a trace that records ownership, ordering, retries, and idempotency keys across an injected failure.

The check also needs a sound scope. A changed-file hook that formats or tests only the affected modules can shorten feedback time, but its dependency model has to be correct. When a shared schema changes, the affected set may extend well beyond the edited directory. Cheap verification produced by unsound scoping is an instrumentation artifact. The dashboard becomes greener because the check stopped looking where the failure can occur.

Displayed confidence does not repair that defect. Any confidence signal should be calibrated before it reaches the reviewer, because an uncalibrated percentage adds persuasive precision without dependable information. Calibration remains a prerequisite for presenting the signal, not a substitute for inspecting the claim underneath it. A reviewer still needs to know what event the probability describes, over which population it was estimated, and whether the current case resembles that population.

The cost model includes more than minutes. Verification can require scarce domain knowledge, access to production-like state, coordination with another owner, or the authority to run a destructive rehearsal safely. A one-command check can be computationally cheap and organizationally expensive.

Sarkar et al. (2022) advanced a companion hypothesis that treats verification as the dominant cost of agent-produced software. Their support is anecdotal synthesis and the magnitudes are not quantified, so the hypothesis is useful for inspecting a workflow rather than as a measured law. The more defensible claim is conditional. When generation becomes cheaper while the cost of establishing correctness does not, verification becomes a larger share of the work. Capacity plans that count generated patches but omit review evidence measure supply while ignoring the constrained resource.

The design objective is not that every check becomes effortless, because some claims have no cheap oracle. The objective is to avoid charging reviewers for work the system could have done mechanically, and to make the remaining uncertainty visible. An explanation without a practical check is context. It may orient the reviewer, but it should not be recorded as evidence that the change is safe.

15.2 Friction at the decision, not across the workflow

Making a check inexpensive does not ensure that anyone performs it. A reviewer can still form a global rule, something on the order of ‘this agent is usually right’, and apply it to the next output without examining the particulars. The interface then has to interrupt the act of acceptance rather than add ceremony to every step preceding it.

A cognitive forcing function requires deliberate judgment at a point where a person would otherwise rely on a fast heuristic. In an AI review flow, it might require the reviewer to record

an independent answer before the system reveals the agent’s answer. It might delay the reveal at a consequential checkpoint. It might ask the reviewer to name the expected failure mode before showing test results, or require a specific reason for accepting a risky change. The intervention is worth its cost only when it changes the decision process at the point where overreliance occurs.

Buçinca, Malaya and Gajos (2021) tested cognitive forcing functions in a controlled experiment with 199 participants. The interventions reduced overreliance where explanations did not, but they did not eliminate it. The most effective interventions were also rated least favorably. Benefits accrued disproportionately to participants with high Need for Cognition, a measured tendency to engage in effortful thought. Friction changed behavior, but it imposed a real usability cost and did not reach everyone equally.

This unpopularity is not an incidental implementation problem. Effective friction blocks the shortest path through the task. Users therefore experience its mechanism as inconvenience. A team that evaluates the gate only through satisfaction scores will select against the property that makes it work. A team that ignores usability will accumulate workarounds, perfunctory responses, and political pressure to remove the gate.

The comparison worth running has three terms: the defect detection gained at a defined decision, the delay and cognitive load imposed there, and the behavior that appears after repeated use as the amount of friction changes. A forcing function can improve an experimental average while training experienced reviewers to enter meaningless text. It can also move acceptance to a different channel where the decision is less observable. The control has to be evaluated as part of the workflow it changes.

Barke et al. (2023) ran a grounded-theory study of twenty programmers that suggests where to target the intervention. They observed a bimodal pattern in code-generation interactions. In acceleration mode, the programmer believed the plan was already understood and used the model to move faster, and validation tended to be shallow. In exploration mode, the programmer used suggestions to discover an approach and already engaged in more deliberation.

This distinction offers a better allocation rule than a uniform gate. Requiring an independent judgment during acceleration can interrupt a reflexive accept loop. Requiring the same ceremony during exploration may add cost to a mode in which programmers already compared, revised, and rejected suggestions. Uniform friction is administratively simple, but it spends reviewer tolerance without regard to the behavior it is meant to change.

Barke et al. (2023) studied suggestion-level interaction, not autonomous agents producing multi-file diffs after long trajectories. Acceleration and exploration may coexist within one agent run. A programmer might explore the architecture, delegate an implementation, and then accelerate through review because the overall plan feels familiar. The suggestion-level split is a useful hypothesis for instrumenting such a workflow, but its transfer to autonomous-agent diffs remains untested.

A practical system needs an observable proxy for the decision context without pretending to read the reviewer’s mind. High-impact file classes, a previously approved plan, repeated acceptance from the same agent, a large generated diff, or a short interval between presentation and acceptance can each identify a candidate checkpoint. Each proxy can also be wrong. Diff size is not risk, speed is not negligence, and familiarity can reflect genuine expertise.

Targeting should therefore be treated as an experiment with explicit failure measures. Record where the intervention appears, whether the reviewer changes or rejects the output, how long the decision takes, whether later defects concentrate in bypassed cases, and whether users route work around the gate. Segment the results by reviewer experience and task type. Each added segment is another comparison, so the analysis needs the multiplicity correction Chapter 1 describes before a subgroup difference is read as real. An aggregate acceptance-rate change cannot show whether

the intervention improved judgment or merely annoyed one group into abandoning the workflow.

Time pressure deserves separate treatment. Rosbach et al. (2024) studied computational pathology and found that time pressure increased the severity of automation-bias errors while leaving their frequency unchanged. That setting does not establish the same effect in software review. It does point to a control mistake. Adding a forcing function while preserving an impossible service deadline can produce fewer opportunities for reflection precisely on the cases whose consequences are largest. Shielding a checkpoint from time pressure can matter as much as adding the checkpoint.

The decision prompt itself should solicit evidence tied to the action it authorizes. “Have you reviewed this?” can be answered with a checkbox. “Which authorization boundary changed, and which denied case demonstrates that it remains closed?” asks for a claim tied to a check. The answer can still be wrong, but the interface makes shallow assent harder to reconcile with the action it authorizes.

Forcing functions also need escape routes. An emergency response may justify bypassing an independent pre-commit judgment, but the bypass should still identify the owner, the reason, and the follow-up state. A gate with no exception can be unsafe when delay is costly. A gate whose exception leaves no durable record becomes optional whenever pressure rises.

Chapter 16 examines how to determine whether documented gates still affect execution. The narrower conclusion here is that friction is unpopular by construction. Its continued presence and actual use therefore cannot be inferred from the workflow diagram.

15.3 Escalation as measured triage

Kale et al. (2025) reported that targeted escalation improved the true-positive rate over blanket oversight at a 0.01 false-positive rate, a gain the paper records as approximately 15 percent. Blanket oversight does not bound the true-positive rate from above at fixed human capacity. Attention spread across every case reduces per-case scrutiny and raises misses, while targeting spends the same attention on fewer cases. Their hybrid hierarchical and sequential scaffolds also allowed weaker models to monitor stronger agents.

That result is unusually relevant, because it evaluated the allocation of oversight rather than only asking whether a judge can classify isolated outputs. Its setting was a covert-misbehavior arena. It was not production code review, and the reported operating point should not be treated as a deployment guarantee. The improvement is also one comparison at one operating point, and a monitor that gains at a 0.01 false-positive rate need not gain by the same margin at another threshold.

The basic allocation problem exists outside that arena. When every agent action receives the same human review depth, the number of actions determines the review burden. A fleet can then increase output until reviewers skim, queues stall, or teams weaken the gate. Blanket oversight preserves the appearance of equal scrutiny while degrading the scrutiny available per case.

Targeted escalation changes the unit of human work. Automated monitors inspect the full stream, and humans receive the cases the monitors flag. An escalation route runs from a flag to a named decision owner, a verdict, and a defined resumption state. Without those elements, a flag is a notification. It can remain unread, bounce among teams, or leave execution suspended indefinitely.

A monitor scaffold assigns each kind of detection to the least complex mechanism capable of checking it. Deterministic rules handle exact violations. A model judge applies a fixed rubric to contextual cases. An agent judge examines live traces when the decision depends on sequence, changing state, or tool interaction. Human reviewers calibrate the layers and own the final verdict.

Kale et al. (2025) measured the value of scaffolding itself. The ordering of these three layers is a design convention drawn from one practitioner account, with no independent measurement behind it.

A deterministic rule can establish that an agent wrote outside an allowed directory, attempted a forbidden operation, or omitted a required approval token. Asking a model to infer an exact violation adds variance without adding useful judgment. A model judge becomes appropriate when the rubric requires contextual interpretation, such as whether a migration plan includes a credible rollback for the affected data path. An agent judge is reserved for cases in which no single artifact contains the evidence, such as whether a sequence of individually allowed actions collectively bypassed a control.

Each layer has to expose its evidence to the next. A rule should report the event and the policy clause it matched. A model judge should return the rubric criterion, the supporting trace span, and the uncertainty relevant to escalation. An agent judge should preserve the observations and intermediate actions needed to reconstruct its conclusion. A bare risk score forces the human to repeat the discovery work or to accept the classifier’s authority without a check.

kind of detection

```
-> least complex mechanism capable of checking it
|
+--> exact violations
|   -> deterministic rules
|       -> event + matched policy clause
|
+--> contextual cases
|   -> model judge with fixed rubric
|       -> criterion + trace span + uncertainty
|
+--> sequence + changing state + tool interaction
    -> agent judge examines live traces
        -> observations + intermediate actions
```

human reviewers -> calibrate the layers -> final verdict

bare risk score -> human repeats the discovery work

Calibration follows the Chapter 5 procedure. Select the operating point against an expert-labeled stratified matched control set that represents the consequential case types, including rare failures. Report the true-positive rate at the chosen false-positive rate and retain the confusion matrix by stratum. Both rates are estimates from a finite labeled sample, and a stratum with few labeled cases yields a wide uncertainty interval. Re-run the evaluation when the agent, rubric, tools, environment, or case mix changes. An overall accuracy number is especially misleading when most actions are benign and the human queue is constrained by false positives.

The queue budget is part of the operating point. At a 0.01 false-positive rate, a monitor applied to one hundred actions creates a different human burden from the same monitor applied to one million actions. Base rates and action volume determine the absolute number of false alarms. When the flagged condition is rare, that number is drawn from a much larger population of benign actions. False alarms can therefore outnumber correct flags even at a low false-positive rate, which is the prevalence effect Chapter 5 describes for graders. A statistically respectable rate can still exhaust the review team.

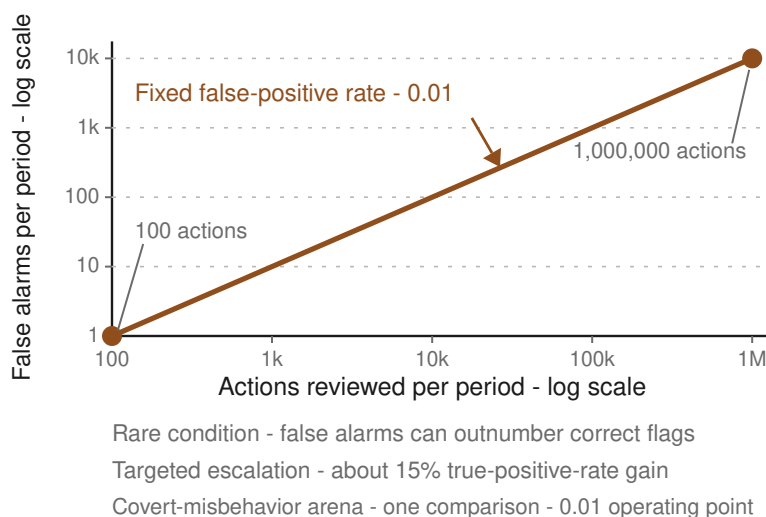


Figure 15.1: At fixed 0.01 false-positive rate, false alarms rise from 1 among 100 actions to 10,000 among 1,000,000 and can outnumber correct rare-event flags; targeted escalation adds about 15% true-positive rate in one covert-misbehavior arena.

False alarms scale with action volume and base rates. The approximately 15% escalation gain comes from one covert-misbehavior-arena comparison at a 0.01 operating point.

Escalation is therefore a budgeted online decision. The system has to choose, as cases arrive, which uncertainty deserves scarce human attention now. That choice can account for expected consequence, novelty, reversibility, monitor disagreement, and the availability of a qualified owner. These inputs do not justify an opaque semantic risk formula. They define the evidence given to the judge and the explicit policy constraints applied to the queue.

My own orchestration fleet uses a related division of labor. Mechanical work proceeds autonomously, and judgments the system should not make unilaterally are collected in a structured morning decision ledger. The system does not silently resolve those entries. The design reserves interruptions for entries that need a person. I have not measured maintainer minutes, scrutiny depth, or escaped-defect rate, so the attention saving remains a design claim rather than a demonstrated outcome.

The associated wake-up contract makes the route more specific. The fleet should wake me for suspected wrong calls and for decisions about scope or trust. It should not wake me for passing runs or routine plumbing. A request has to state the outcome at stake, present a decision answerable in one line, list the options and the recommendation, and explain why the system cannot resolve the matter itself. The success criterion is behavioral. Engineers should not learn to filter the messages out.

This contract separates notification quality from verdict authority. A monitor may decide that a case meets the escalation rule. It should not quietly convert that classification into the substantive decision under review. The person named on the route must be able to reject the work, request evidence, narrow the scope, or authorize resumption. Naming an owner who cannot do these things assigns accountability without control.

The resumption state deserves explicit design, because asynchronous review creates races. If an agent continues acting while its escalation is pending, a later rejection may arrive after dependent

actions have executed. If execution stops globally, an unrelated low-risk queue can be blocked by one ambiguous case. The route should state whether the affected action, trajectory, repository, or fleet pauses, which state is durable, and which decision token releases it.

Observed failure paths should determine checkpoint placement. When damaging actions become irreversible at deployment, a checkpoint after deployment can only document what happened. When the common failure begins as a plan silently expands its scope, waiting until the final diff makes reconstruction expensive. The companion pattern is narrow. Place human checkpoints where failure evidence shows that intervention can still change the outcome.

Human skill is another boundary. A reviewer who handles only rare anomalies may lose familiarity with ordinary system behavior, while automation inherits the routine cases that once maintained that familiarity. Bainbridge (1983) described this problem for industrial process control in “Ironies of Automation.” Its transfer to software-agent oversight is an analogy rather than a measured result on software work. It nevertheless identifies a design question that triage cannot answer alone. How will the person expected to intervene retain the knowledge needed to recognize and correct an abnormal state?

Xie et al. (2024) advanced a thinly supported companion proposal. Agent actions can be rendered as live state so that a reviewer inspects a trajectory before it terminates. The support is one prototype-scale item and does not establish improved oversight. The proposal is useful as a design prompt when late reconstruction has repeatedly failed, provided that the live view preserves the durable trace rather than replacing it.

Monitoring can alter the behavior it measures. An agent that knows it is being watched may adapt to the evaluation frame. I treat that possibility as a design caution and not as a measured result from Kale et al. (2025), whose reported result was that monitor scaffolding mattered more than monitor awareness. In my own evaluation harnesses, I therefore use de-framed prompts that omit evaluation vocabulary, so the acting agent receives no cue to behave differently because it is being assessed. Removing that cue is a design precaution against one measurement effect, but it provides no proof that the resulting behavior matches unobserved production behavior.

Judge drift creates a second measurement problem. Deterministic rules drift when policy or event schemas change. Model judges drift when the evaluated distribution, the model version, or the rubric interpretation changes. Agent judges can drift most severely, because their behavior depends on a longer sequence of observations and actions. A monitor calibrated last quarter may preserve its interface while changing which cases reach humans.

Layering redistributes detection work, but it does not resolve who judges the judges. Human owners need sampled review of unflagged cases to estimate misses, adjudication of flagged cases to measure false alarms, and versioned records connecting each verdict to the monitor configuration that produced it. The sample cannot consist only of easy negatives. It has to include strata in which the monitor is likely to fail and cases drawn after relevant system changes. The sampling unit is the action or trajectory the monitor scored, and estimates from a stratified sample have to be weighted back to the deployed case mix before they describe the monitor in production.

These audits do not require blanket human oversight of every action. They require enough independent labels to estimate whether the chosen operating point still holds. When the estimate degrades, the response may be recalibration, a narrower deployment boundary, a new deterministic check, a rubric revision, or more human review. The correct response depends on the failure mechanism, and ‘use a stronger judge’ is not a diagnosis.

15.4 An operating protocol

Start with one consequential agent workflow. Identify the acceptance decision that transfers authority from proposed work to an effect: merge, deploy, publish, modify data, contact a customer, or change another system's state. Name the person or role that owns that decision. When no one can be named, escalation cannot end in an accountable verdict.

For that workflow, list the claims a reviewer must establish before acceptance. Attach a falsification artifact to each claim where one is available: a test, a typed interface, a replay, a trace, a sandbox result, a policy match, or an executable example. Mark the claims that still depend on expert judgment. Do not count an explanation as evidence unless it makes one of those checks possible.

Measure the review path before adding friction. Record how long evidence takes to obtain, which tools or permissions it requires, where reviewers abandon the check, and which failures remain invisible after a green run. The objective is to find the cases in which the system charges a person for mechanical work or presents confidence without a reachable basis. No universal review-time target applies.

Place a forcing function at the accept decision for the cases in which shallow validation is plausible and consequential. Require an independent judgment or a claim-specific response before revealing the agent's recommendation. Preserve an explicit emergency bypass with an owner, a reason, an affected scope, and a follow-up state. Evaluate detection, delay, bypass, and workarounds together. Satisfaction alone will select for the gates that interfere least.

Build the monitor scaffold from exact checks outward. Use deterministic rules for exact policy violations, a model judge with a versioned rubric for contextual classification, and an agent judge only when sequential interpretation is necessary. Make every layer return the evidence a human needs to challenge it. Calibrate the stack against an expert-labeled stratified matched control set, choose and record the operating point, and translate the rates into expected queue volume at the actual base rate.

Define the escalation route as part of deployment. A flag should identify the decision owner, the outcome at stake, the evidence, the available options, the recommended action, the reason automation cannot decide, the state that is paused, and the event that resumes execution. Test the route by processing a real rejection through it. When the owner cannot stop or revise the action, assign authority before assigning accountability.

Sample both flagged and unflagged cases after deployment. Compare human verdicts with monitor decisions by risk stratum and monitor version. Recalibrate after material changes to agents, tools, rubrics, or workload, and examine whether awareness of monitoring changes behavior. Budget practice for the humans who must handle rare failures. A name in an escalation table does not preserve operational skill.

15.5 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

15.5.1 Building verification surfaces so verifying costs less than blind acceptance

- lit/strong: Vasconcelos, H., Jörke, M., Grunde-McLaughlin, M., Gerstenberg, T., Bernstein, M., Krishna, R. (2022/2023). Explanations Can Reduce Overreliance on AI Systems During

Decision-Making. PACM HCI 7(CSCW1). arXiv:2212.06823. Five experiments treat over-reliance as a cost-benefit choice and find greater engagement when verification is cheaper or stakes are higher.

- lit/directional: Fok, R., Weld, D.S. (2023/2024). In Search of Verifiability: Explanations Rarely Enable Complementary Performance in AI-Advised Decision Making. AI Magazine 45(3). arXiv:2305.07722. Across the XAI-reliance literature, explanations help only insofar as they enable verification.
- Corroboration: the author’s website, “Two retrieval systems write this site” (2026-06-10), an author-owned anecdotal account of schema-validated agent output landing as a git diff that serves as the review gate, and an unpublished internal record of the author’s agent-workflow system. Both are narrative only and neither is an admitting basis. Dossier items corroborate only.

15.5.2 Putting the forcing function at the accept decision, aimed at acceleration mode

- lit/strong: Bućinca, Z., Malaya, M.B., Gajos, K.Z. (2021). To Trust or to Think: Cognitive Forcing Functions Can Reduce Overreliance on AI in AI-assisted Decision-making. PACM HCI 5(CSCW1), 188. arXiv:2102.09692. Cognitive forcing functions reduced overreliance where explanations failed (N=199).
- lit/directional: Barke, S., James, M.B., Polikarpova, N. (2022/2023). Grounded Copilot: How Programmers Interact with Code-Generating Models. PACMPL 7(OOPSLA1). arXiv:2206.15000. Grounded theory from 20 programmers supports the suggestion-level acceleration/exploration split. Transfer to autonomous-agent diffs is untested. This directional item is the only source for the chapter’s targeting rule.
- Corroboration: none on record.

15.5.3 Escalating only monitor-flagged cases to a human who owns the verdict, with a scaffolded monitor

- lit/strong: Kale, N., et al. (2025). Reliable Weak-to-Strong Monitoring of LLM Agents. arXiv:2508.19461. Targeted escalation adds approximately 15% TPR at FPR=0.01. Hybrid hierarchical-sequential scaffolds let weaker models monitor stronger agents. The paper reports that scaffolding mattered more than monitor awareness; the awareness caution in this chapter is my design caution, not a result from this paper. The setting is a covert-misbehavior arena, not production code review. This is the sole admitted evidence item for the whole grouping.
- Corroboration: the author’s website, “Running my own agent city on Slack” (2026-06-16), an author-owned anecdotal account of mechanical work proceeding autonomously while judgment calls accumulate in a decision ledger for a human; the author’s website, “WF2026: evals are the new CI” field notes, an account distilled from other people’s conference talks of a three-layer judge stack with a human owning the verdict; and unpublished internal context notes. None is an admitting basis. The conference-talk-derived account was demoted out of the evidence base and is not citable as independent support. The chapter’s three-layer scaffold ordering rests on it and on nothing stronger. Dossier items corroborate only.

15.5.4 Companion material carried in-text but not taught as a pattern

- lit/strong: Rosbach, E., Ganz, J., Ammeling, J., Riener, A., Aubreville, M. (2024). Automation Bias in AI-Assisted Medical Decision-Making under Time Pressure in Computational

Pathology. arXiv:2411.00998. This is the basis for the time-pressure paragraph. The setting is computational pathology, not software review.

- lit/directional: Bainbridge, L. (1983). Ironies of Automation. *Automatica* 19(6), 775-779. doi:10.1016/0005-1098(83)90046-8. This is the single source behind the skill-retention paragraph. The evidence is pre-AI and industrial. Transfer to code review is analogical.
- lit/anecdotal: Sarkar, A., et al. (2022). What is it like to program with artificial intelligence? PPIG 2022. arXiv:2208.06213. This is the basis for the companion hypothesis that verification is the dominant cost. The magnitudes are not quantified.
- lit/directional: Xie, L., Zheng, C., Xia, H., Qu, H., Zhu-Tian, C. (2024). WaitGPT: Monitoring and Steering Conversational LLM Agent in Data Analysis with On-the-Fly Code Visualization. *UIST 2024*. arXiv:2408.01703. This prototype-scale single item is the basis for the live-state proposal and the thinnest support in the chapter. Transfer to arbitrary code agents requires an operation-level abstraction that may not exist.
- explorer/directional: DeepRare (Zhao 2026); Manager Agent (Masters 2025, arXiv:2510.02557); NIST AI RMF.
- explorer/directional: Bounded Autonomy for Enterprise AI (Sohail 2026, arXiv:2604.14723).
- explorer/directional: AMBIPOM human-LLM co-planning (He 2026, arXiv:2605.23023).
- explorer/directional: Token Budgets (Khan 2026, arXiv:2606.04056). Together, the four explorer items support only the direction of the checkpoint-placement claim. None is strong.
- Corroboration: an unpublished internal record of the author’s repository-scale benchmark, an unpublished internal record of the author’s background-agent review pipeline, and unpublished internal context notes corroborate the checkpoint-placement claim as narrative only. Dossier items corroborate only.

15.5.5 Opening scene

- practitioner/corpus-verified: InfoQ, “Stripe Engineers Deploy Minions, Autonomous Agents Producing Thousands of Pull Requests Weekly,” 2026-03-20, <https://www.infoq.com/news/2026/03/stripe-autonomous-coding-agents/>. Reports over 1,300 production pull requests per week with human review retained. Carried as scale context; it reports no measure of review depth or defect escape.

Chapter 16

Autonomy calibration, provenance, effective gates, and accountability

I built a human-approval queue whose purpose was to hold decisions that an agent was not allowed to make. The architecture looked conservative. An agent could prepare an action, and execution waited at a human-only boundary. An audit found that some scripts failed open when a required component was absent, and that command construction reached execution without the validation the gate was supposed to enforce. The queue could therefore report the presence of an approval process while allowing a path around the person. I had built that apparatus to be the careful option, which is an uncomfortable thing to read in an audit of your own system.

The evidence for the practices in this chapter is limited. The four taught entries rest on seven evidence items, of which two are strong; six come from the research literature and one from a practitioner account. Two entries, `audit-human-gates-for-effectiveness` and `align-accountability-with-actual-control`, have no strong evidence item. The accountability literature represented here consists largely of survey, framework, and position work. Production-grounded accountability literature is thin, and the available material functions as existence proof and design catalog without measuring production outcomes. I therefore present these practices as defensible defaults to test in a particular system, and the evidence does not establish universal policy.

The failed queue is one instance of a general problem. An autonomy policy constrains nothing unless the system preserves the boundary it names. A provenance label changes nothing unless it changes what a reviewer can learn or do. A human gate controls nothing unless the person can alter the execution path. An accountability assignment prevents nothing unless the named person can affect the outcome. These are four separate design objects, and each collapses in the same way when its operational path differs from its policy description.

Agent systems acquire more action types as they grow. A system might restart a service, propose a database migration, merge a documentation change, rotate a credential, or delete a branch. Calling such a system ‘autonomous’ compresses those authorities into one word. That word records nothing about reversibility, blast radius, the evidence available to a reviewer, the ownership of state, or the practical ability to interrupt execution, and those are the variables that determine risk.

The useful unit is the transfer of control for one action class. Each transfer has an initiator, an action, an approving or executing party, an artifact that supports the decision, and a recorded outcome. Once those elements are explicit, observations can calibrate autonomy, provenance can be attached to the artifact, and a gate can be tested as an executable control. Accountability can then be assigned to a role that holds authority.

16.1 Autonomy is a ladder for each action type

An autonomy ladder widens control one rung at a time for a defined action type, using its own approval, modification, and outcome record. A promotion threshold is the criterion for moving to a wider rung. A frequently cited value is roughly 95 percent unmodified approvals, meaning that a reviewer approves the proposed action without changing it. That number is a calibration starting point stated as policy in one practitioner article, Priya C (2026), which reports no measurement behind the cutoff. The threshold has no claim to universality.

A team should instead decide what difference in performance would justify a wider rung, gather enough observations to detect that difference, and retain the underlying counts. This practice rests on one directional practitioner source for the protocol and one strong controlled study for the role of comprehension.

The ladder needs separate rails because action types expose different failure modes. A service restart usually changes transient process state and can often be reversed by another restart. A credential rotation changes distributed configuration, invalidates clients, and may lock operators out of the recovery path. A branch deletion changes repository state, while a proposed text edit changes only an artifact that still requires merge. Hundreds of clean restarts therefore establish nothing about the same system's ability to rotate credentials safely.

defined action type

- > its own approval + modification + outcome record
- > measured evidence -> widen control one rung at a time

service restart rail	credential rotation rail
transient process state	distributed configuration
another restart can reverse	invalidates clients
clean restarts -> widen rung	may lock operators out
	^
+--> establish nothing about -----+	

permanent approval floor

- > human authorization is not removed
- > irreversible actions stay above
- > high-blast-radius actions stay above

routine successes -> do not lift the floor

My own operator policy makes this separation explicit. Service restarts are pre-approved. Destructive operations, such as recursive deletion, force-push, and branch deletion, require renewed confirmation every time. The rule is stored as durable configuration so that a new session inherits the same boundary. It illustrates the shape of such a policy and is not evidence that these categories or settings suit another environment.

A transfer-of-control record documents each decision to let the system act, require approval, or return control to a person. For one action type, the record should identify the proposed action, the rung in force, the reviewer's decision, any human modification, the observed outcome, and later reversal or incident evidence. Outcome correctness needs an operational definition tied to the action. For a restart, 'the command exited zero' is insufficient when the service never became healthy. For a patch, 'merged' is insufficient when it was reverted after a production failure.

Approval rate is a proportion over repeated observations:

$\text{approval rate} = \text{approved proposals} / \text{reviewed proposals}$
 $\text{unmodified approval rate} =$
 $\quad \text{approved proposals with no human change} / \text{reviewed proposals}$
 $\text{modification rate} = \text{proposals changed by a human} / \text{reviewed proposals}$

These denominators must describe the same action class and the same rung. Mixing restarts with schema changes can produce a stable aggregate while both constituent rates move in opposite directions. Excluding rejected or timed-out proposals can make the system appear more acceptable by removing the cases in which the transfer failed. Recording only executed actions produces survivorship bias, because abandoned proposals disappear before the outcome table is built.

Part I established why an observed proportion is not the property itself. Nine unmodified approvals out of ten proposals gives 90 percent, and the confidence interval around it remains wide because the sample is small. Ninety approvals out of one hundred supports a narrower estimate at the identical point estimate. The appropriate interval method depends on the analysis plan, but the operational conclusion does not depend on that choice. A rate from a small n should not move authority because its displayed percentage crossed a line.

The sampling unit deserves the same attention Part I gave it. Transfers reviewed by one person are repeated observations of that reviewer as much as of the system, and a rate computed over them describes the pair. A track record accumulated under one model version, prompt set, or harness revision also describes that configuration, so a change to any of them reopens the question the record was meant to settle.

Promotion also requires a power analysis. The team first specifies the effect size that would change the decision, such as the smallest increase in post-action failures that would make a wider rung unacceptable. It then estimates how many observations are needed to detect that difference at the chosen error rates. Rare, high-consequence failures can require more evidence than the deployment will plausibly accumulate. In that case, the action cannot earn promotion from its local track record, even when every observed outcome has been clean.

The approval rate omits information that the modification rate records. A reviewer may approve every database query after correcting the time window, tenant filter, or target environment. The approval rate is then 100 percent, while execution without intervention would reproduce the same material error. The modification log should retain the substance of each change, because a punctuation edit and a correction to the production target have different implications. A team can classify modifications for analysis when it specifies the categories and the inter-rater reliability before examining the rate.

Outcome correctness is a third measure, because approval can reflect reviewer behavior rather than system quality. Reviewers under queue pressure may approve more quickly, rubber-stamp familiar actions, or reserve comments for severe defects. A rising unmodified approval rate alongside a rising rollback rate is evidence against promotion. The system should also report delayed outcomes, because a configuration change that fails after the review window would otherwise be counted as correct.

Chen et al. (2025) complicate a capability-only account of automation. In their controlled study, as automation increased, limited understanding of agent behavior constrained willingness to adopt higher automation, and capability alone did not explain the limit. The verification surface is therefore part of the autonomy mechanism. A reviewer needs a behavior summary, the relevant diff, the intended and observed state transition, and an explanation of why the proposed action follows from the available evidence. When those artifacts do not support comprehension, an accurate system can still fail to earn legitimate control.

Comprehension should be tested at the rung under consideration. Ask reviewers to predict the

affected resources, identify the rollback path, and locate the evidence for the system’s claim before revealing the answer. Record where their model diverges from execution. This is a design decision and a measurement task, and no generic quiz score follows from it. The companion catalog holds an explain-back gate under **require-comprehension-before-merge** that makes the check explicit, and an independent checker should evaluate the generating system’s work.

Some action classes stay above a permanent approval floor, a boundary below which human authorization is not removed. Irreversible and high-blast-radius actions belong there when the cost of a mistaken transfer exceeds what the observed record can justify. The floor is not a trust ramp, and it does not lift because the system has accumulated routine successes. Least privilege should still constrain the executing identity, so that a mistaken approval cannot exceed the authority the action requires.

Most teams should keep most actions below full autonomy today, because the promotion evidence is thin and action-specific. A table of task-type defaults, held separately in the companion catalog under **set-autonomy-defaults-per-task-type**, can initialize policy but cannot supply a track record, and it does not replace the ladder. The executable decision is narrower. Define an action class, define the outcome and the material difference, and collect every transfer using denominators that do not exclude rejected or timed-out proposals. Calculate uncertainty, test reviewer comprehension, and widen one rung only when those observations support it.

Two further companion entries sit beside this one. **measure-oversight-with-decomposed-metrics** separates overreliance from underreliance and classifies review interactions before counting coverage. The evidence for **attach-reliance-disclaimers** supports only its use as a marked design option.

16.2 Provenance belongs at the review surface

Tang et al. (2024) observed twenty-eight developers in a laboratory study and found them unreliable at recognizing machine-generated code without assistance. When told that the code was generated, participants searched and verified more, and their repair performance improved. Measured cognitive workload also increased. Tang and colleagues supply the strong evidence for this practice, and their experiment used short code fragments under laboratory conditions.

A provenance label records how an artifact was produced and shows that record where the artifact is reviewed. It may take the form of a pull-request label, a commit trailer placed in the structured footer of a commit message, or an editor marker.

Recognition is the wrong task to spend reviewer capacity on. Machine-generated code has no stable visual signature, and asking reviewers to infer origin consumes attention before they inspect behavior. Inference also produces selective disclosure in practice. Obvious generations attract scrutiny while plausible generations pass as ordinary work. Attaching provenance at the point of review makes origin an input rather than a detection task.

The observed behavior in that study suggests a specific mechanism. Disclosure prompted additional search and verification, which gave participants more evidence for repair. The label did not establish that the code was defective, and it performed no verification itself. Its value depended on the response it produced in a reviewer who had tools and enough time to use them.

A common misuse ignores that dependence. A warning badge can become a substitute for a test, as though declaring machine authorship discharged the maintainer’s duty. It can also become a weak liability transfer, in which the system announces risk while leaving the reviewer no practical way to investigate it. A useful label connects to the generation context, the tests, the diff explanation, and the responsibility path, without asserting that any of those artifacts are correct.

The disclosure boundary needs a clear object. A whole pull request may contain human-written scaffolding, machine-generated implementation, generated tests, and later human repairs. One label at the request level is simple and loses that composition. A marker on every line is more precise, produces noise, and depends on editor and diff support. Commit-level trailers preserve a durable unit in repository history, although squashing or copying changes can separate the trailer from the code it described.

There is no universal granularity to adopt. The team should identify the review decision the label is meant to affect, then choose the smallest unit whose provenance survives the repository workflow. Test that survival through rebases, cherry-picks, squash merges, file moves, and copied patches. A provenance control that disappears during the normal merge path produces a confident but incomplete history.

My own authorship-measurement project shows why the semantics of a provenance count must stay narrow. I measured a 14.5 percent trailer-signed floor, a lower bound on visible trailer-marked authorship, because every match was treated as a true positive. That figure says nothing about total agent contribution, and it must not be averaged with an inferred share. An earlier exploratory range was superseded when a replication whose design was fixed in advance returned ‘Not identified’. The estimator had targeted the agent share of authorship beyond the trailer-marked floor, and the verdict recorded that it did not identify that share under the prespecified design. Only the reliable floor survives, because the identification failure invalidates the larger estimate.

Provenance and authorship also separate from answerability. In my maintainer practice, an adoption pull request can preserve a contributor’s commits verbatim while recording:

Supersedes #X

Credit: original fix by @X (commit preserved with original authorship)

The original author remains attached to the work, and the maintainer who adopts and submits it becomes answerable for the integration decision. Both facts survive in the artifact. The format does not establish that the code is correct. It removes the need for a later reviewer to infer who wrote the change and who accepted responsibility for putting it forward.

Persistent provenance also supports incident reconstruction. A reviewer examining a regression can ask whether the failure arose in generation, in human modification, in integration, or in a later environment change. That question is harder to answer when labels exist only in an editor and disappear before merge. The companion catalog covers one tamper-evident history design under **record-steps-in-hash-chained-ledger**, and the argument here does not depend on that implementation.

The workload cost Tang and colleagues measured limits the recommendation. Higher cognitive workload may be acceptable when disclosure focuses attention on an occasional generated fragment. In a mixed codebase where the marker appears on most changes, constant exposure can tax attention and lose salience.

Those results do not establish how large diffs, sustained review queues, or experienced teams respond over time. A local evaluation should therefore measure reviewer behavior and repair outcomes rather than label coverage alone. Useful observations include whether reviewers open referenced files, run or inspect tests, search documentation, change the generated code, detect seeded defects, and report excessive workload.

Compare equivalent review tasks with and without provenance disclosure, under the actual tools and queue constraints. Assigning the same artifacts to both conditions removes the difficulty of the change from the comparison, in the way Chapter 1 describes for paired designs. A comparison drawn across different pull requests instead confounds disclosure with artifact difficulty. Pairing on

the artifact alone is not sufficient, because the experimental unit is the reviewer-artifact pair. The design must therefore state how reviewers are assigned to conditions, whether anyone reviews the same artifact twice, and how condition order is counterbalanced. It must also decide which defects count and how workload will be measured, and the study supplies no production cutoff to copy.

If disclosure increases activity without improving repair, the label may be producing ritual rather than evidence. If repair improves while queue latency or abandonment rises sharply, the team has found a real tradeoff between scrutiny and capacity. Either result is more informative than a policy requiring an ‘AI-generated’ badge everywhere. The relevant question is whether provenance changes verification in the deployed review environment.

The companion entry `write-an-agent-contribution-policy` covers the repository rules around disclosure, attribution, and accepted contribution paths. Such a policy can keep the wire format consistent, but it cannot make the label effective. Effectiveness remains an observed relation among the marker, the verification surface, reviewer behavior, and repair.

16.3 A gate must have causal power

A human gate has support here from two directional literature items and no strong evidence item. Sterz et al. (2024) set out an interdisciplinary framework for effective human oversight, and their paper contains no empirical validation of a universal test. Green (2022) compared 41 government oversight policies with findings from human-computer interaction research and concluded that the human functions those policies prescribed were generally not performable. These sources justify an audit structure and a burden of proof. The effectiveness of any given gate remains unresolved until the deploying team tests it.

In a workflow diagram, the word ‘gate’ reads as causal. In execution, an approval step may only record that a person clicked before an action that neither the person nor the click could alter. Compliance theater is a control whose visible form satisfies a policy description while its execution path does not mitigate the named risk. A fail-open gate stops enforcing its boundary when a dependency, validation step, or error path fails.

The interdisciplinary framework identifies four conditions for an effective oversight person: causal power, epistemic access, self-control, and fitting intentions. Causal power means the person can stop or change the consequential action. Epistemic access means the person can obtain the information needed to understand the decision at the time it is made. Self-control means the person can exercise judgment rather than follow a compelled path. Fitting intentions means the person actually intends to perform the assigned oversight function.

Evaluate these conditions against an execution trace. For each named gate, trace the proposed action from creation through approval, mutation, dispatch, and durable state change. Introduce the failures the gate claims to handle. Observe whether the reviewer receives the required evidence, whether rejection blocks every execution path, and whether an altered action requires renewed review.

Condition	Question for the actual gate	Observation to collect	Failure implication
Causal power	Can this person stop or alter this exact action?	Reject, cancel, edit, and timeout traces	The click records assent but does not control execution

Condition	Question for the actual gate	Observation to collect	Failure implication
Epistemic access	Can the person inspect the relevant inputs, diff, target, and consequences before acting?	Missing context, inaccessible logs, and reviewer reconstruction errors	Approval is based on an incomplete system state
Self-control	Can the person choose without a forced default or an impossible queue constraint?	Default acceptance, time pressure, and override use	The workflow substitutes acquiescence for judgment
Fitting intentions	Is the assigned role expected and prepared to examine the named risk?	Review actions, escalation behavior, and interviews	The role is ceremonial or aimed at a different risk

The observations need system-specific acceptance criteria. A team might decide that a deployment approver must be able to cancel a queued release before the first production mutation, and must see the exact artifact digest being deployed. Another team may require a database reviewer to alter the migration plan while prohibiting direct execution. Name the claimed function, construct a trace that could falsify it, and decide in advance what evidence would demonstrate control.

Removing a gate dependency is itself a state change, so the failure experiment belongs in an environment where the mutation it might permit is contained. Chapter 7 supplies that boundary. An audit run against production to see whether the gate holds is an experiment whose negative result is an incident.

My human-approval queue failed that test. Missing components let scripts bypass the path that was supposed to wait for a person, and unvalidated command construction weakened the relationship between the reviewed proposal and the executed command. The presence of a decision queue did not establish causal power. Its failure was useful contrary evidence, because the queue had been built specifically to preserve human-only decisions.

Another of my systems used a reproduction-before-mutation hook, a check intended to require a reproducible failure before code could be changed. When a required binary was missing, the hook stopped enforcing the gate entirely. The project documented that fail-open behavior rather than counting the hook's installation as coverage. The case does not measure how often such failures occur. It shows how an environmental dependency can erase a governance boundary.

Mechanical and attentional gates fail differently. A mechanical gate uses execution state to block an action until a condition holds, such as a verified signature or an explicit `--apply` flag. An attentional gate presents evidence to a person and requires a decision, such as reviewing a diff explanation. A mechanical gate can enforce a condition that does not establish the property the gate is credited with. An attentional gate can obtain a click without scrutiny. Agent memory is neither kind, because a remembered instruction has no independent causal path to enforcement.

In my own approval-gate configuration, seven action-class rows make that distinction explicit. Every row identifies the gate as mechanical or attentional and names an owner, and no row relies on agent memory. Mutating commands dry-run by default and require `--apply`, which puts a mechanical boundary between inspection and state change. This is a design exemplar, not evidence that seven rows, this flag name, or these classifications improve outcomes elsewhere.

A more elaborate gate does not escape the same audit. In pull request 1558 of my agent-fleet orchestration system, the review surface recorded:

```
Latest review attempt: 6
Quality score: 950/1000, threshold 850
```

The attempt count and the scores are verified properties of that artifact. The gate was designed to concentrate human attention after repeated model review, and degradation of the gate was treated as an incident. The claimed attention saving remains a design claim, because maintainer minutes, scrutiny depth, and escaped-defect rate were not measured.

Optimizer and model-review gates depend on the same distinction. A threshold can block execution mechanically while providing no assurance that its score tracks the failure a human cares about. The companion entries `treat-objective-weights-as-reviewed-policy` and `gate-optimizer-output-behind-human-review` address those policy surfaces. Their presence does not remove the need to test whether rejection changes system state and whether the reviewer can interrogate the score.

Green's policy analysis places the burden of proof on the institution deploying the automation. A team should be able to justify why automation is appropriate for the action, and demonstrate that its reviewers can perform the function assigned to them. When the reviewer cannot see the relevant diff context or cannot stop the deploy, adding their name legitimizes the action without reducing its risk. Responsibility then diffuses toward the actor with the least practical control.

That negative conclusion is bounded. Code review can offer unusually strong epistemic access, because the reviewer can inspect a precise diff, run tests, examine history, and delay the merge. Chapter 15 describes the verification surface that makes such access practical. A government benefits decision, a live vehicle intervention, and a repository change do not present the same verification problem. The audit should test the gate in its own domain, and these cases support no universal conclusion about human incapacity or human benefit.

Chapter 7 also established why a control cannot be accepted solely because the harness attests that it ran. The governance extension asks whether a person can independently verify the relevant state and interrupt the path that changes it. A missing independent signal weakens override authority even when an override button exists.

Three companion entries sit beside this one, each resting on a single evidence item. `separate-control-from-oversight`, `write-an-oversight-card`, and `keep-override-authority-real` can help classify control before action, oversight after action, claimed reviewer duties, and override paths. None of them establishes that a particular gate works.

16.4 Responsibility must follow control

Cavalcante Siebert et al. (2023) provide a philosophy-to-engineering bridge, a conceptual framework that makes responsibility commensurate with the ability and authority to control. Suryana et al. (2025) provide a qualitative operationalization in another domain, using interviews with 103 users of partially automated driving systems to locate expectation gaps and inconsistent protocol adherence. Together these are two directional literature items, and this practice carries no strong evidence item. Organizational accountability results for agent systems are thin and brand new. Their support reaches a defensible audit method, and they supply no compliance score and no estimate of software-delivery failure rates.

After a failure, organizations often name the engineer who approved, monitored, or happened to be on call. That assignment can be formally clear and causally false. When the person lacked

authority to halt the action, access to its state, tools to change it, or time to intervene, accountability has been assigned to proximity rather than control. The resulting responsibility gap produces blame without adding a path that could have prevented the failure.

The control check begins before an incident. For every role named as accountable, identify the exact state transition that role can authorize, alter, stop, or reverse. Verify the permissions with the deployed identity rather than an administrator’s demonstration. Record the information available at decision time, the tools through which intervention occurs, and the window in which an intervention remains effective.

Authority and access are distinct. An engineer may have permission to cancel a deployment but lack access to the tenant, model trace, or configuration that explains why cancellation is necessary. Tooling and time are also distinct. A working rollback command does not create control when the system commits an irreversible external action before the reviewer can evaluate it.

Missing control has two coherent remedies. The organization can repair the role by granting the necessary authority, access, tooling, and time, subject to least privilege. Otherwise it can move responsibility to the role that already holds those controls. Leaving the responsibility label in place while control sits elsewhere preserves the gap by design.

This check should include the executing identity. In my own enterprise data-access service, mutations are excluded, requests use the caller’s identity, and the audit log names that person. The blast radius is capped at authority the human already holds. The design aligns action and identity more closely than a shared privileged service account, but it does not establish that every read is justified or that the caller understands the result.

Identity passthrough also has a cost. It improves attribution and prevents an agent from silently accumulating broader authority than its operator. It can reduce availability when the caller lacks a permission that an automated workflow previously obtained from a service account. The correct response is to decide which authority the action actually requires, then measure authorization failures, escalation paths, and unauthorized access attempts.

Provenance answers a neighboring question. It records who or what contributed to an artifact and how that contribution moved through the workflow. Accountability identifies the person or institution answerable for the decision to accept and deploy it. The adoption pull-request format shown earlier preserves original authorship while transferring integration answerability to the maintainer. Conflating those roles would either erase contribution history or blame a contributor for a deployment decision they did not control.

Meaningful human control supplies a way to examine that relationship after deployment. In this literature, tracking asks whether system behavior follows the relevant and justified reasons or expectations of the people affected by it. Tracing asks whether a capable, aware person can be connected to the decision and its control path. The terms become useful once a team translates them into observable behavior for its own system.

Suryana et al. applied the tracking and tracing criteria through interviews with 103 users of Tesla Autopilot and Full Self-Driving features. The interviews localized expectation-reality gaps and inconsistent adherence to operating protocols. Those results do not establish that software delivery has the same failure frequency or the same causes. They show what user interviews can reveal and a design document cannot. A deployed system may teach expectations and routines that differ from its stated control model.

For an agent that prepares production changes, a tracking interview might ask what users believe the agent will modify, which constraints they expect it to preserve, and what evidence would cause it to stop. Compare those expectations with actual traces and with policy. A tracing interview might ask who can explain a particular action, who could have changed it at each stage, and where a user would escalate when behavior diverges. Compare the answers across operators, reviewers,

owners, and affected users.

The audit locates failures, but there is no scalar certification to compute. A shared credential may erase the responsible identity even when the system tracks user expectations well. A complete decision history can coexist with systematic user misunderstanding about when the system will act. Collapsing both into a single ‘meaningful control’ score would hide the repair each system requires.

Operational definitions must therefore remain local. A code-deployment system can define a traceable decision through artifact digest, approver identity, execution identity, and rollback authority. A data-access agent may need caller identity, query purpose, source authorization, and a record of returned fields. A partially automated vehicle has different timing, embodiment, and safety constraints. The questions about control and awareness port across domains, while the observed rates and the exact controls do not.

Collective work complicates responsibility without removing it. Models propose, tools execute, reviewers approve, platform teams configure permissions, and managers allocate review capacity. The companion entry **rebuild-collective-accountability** addresses how those contributions fit an institutional account, and **scale-review-capacity-to-experience** addresses review-load planning by contributor experience tier. Neither should be used to spread answerability so broadly that no role owns a stoppable state transition.

16.5 Test the operational path

Run the four checks on a defined action class and repository workflow.

1. Define the action class, the outcome, and the material difference that would justify wider authority. Collect every transfer using denominators that do not exclude rejected or timed-out proposals. Do not mix action classes or rungs, and do not record only executed actions. Calculate uncertainty, test reviewer comprehension, and widen one rung only when those observations support it.
2. Choose the smallest unit whose provenance survives the repository workflow. Test that survival through rebases, cherry-picks, squash merges, file moves, and copied patches. Keep the count semantics narrow: the 14.5 percent trailer-signed floor is a lower bound on visible trailer-marked authorship and must not be averaged with an inferred share.
3. Run the gate audit as a failure experiment in a contained environment. Name the action and owner, capture the execution trace, remove each gate dependency in turn, reject and alter the action, inspect the reviewer’s evidence, and verify the resulting durable state. Interview the assigned reviewer about the risk they believe they are checking, then compare that account with the system path. Repair or remove a gate that cannot demonstrate causal power and epistemic access, and decide explicitly how self-control and fitting intentions will be protected under real queue load.
4. Run the accountability audit in two passes.
 1. In the first pass, for each named accountable role, select a real action and verify authority, access, tooling, and time. Exercise reject, alter, stop, and recovery paths with that role’s deployed permissions. Record which state transitions remain outside its control, then either repair the controls or reassign responsibility.
 2. In the second pass, interview actual users and operators using tracking and tracing questions. Compare justified expectations with execution traces, then identify a capable, aware person for each consequential decision. Record expectation mismatches, protocol deviations, missing identities, and escalation dead ends as separate findings.

Repeat the first pass when permissions, execution paths, or action classes change, and repeat the

second when the user population or operating protocol changes. Measure the findings that carry weight in the deployment, such as untraceable actions, failed stops, expectation mismatches, and time lost before effective intervention. Do not adopt a borrowed pass rate. Decide which failures invalidate the accountability claim, and preserve the evidence needed to reproduce that decision.

16.6 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

Support is thin across the chapter: 4 taught entries carry 7 evidence items, of which 2 are strong and 5 directional; 6 are literature and 1 is practitioner. **audit-human-gates-for-effectiveness** and **align-accountability-with-actual-control** carry no strong evidence item.

16.6.1 graduate-autonomy-per-action-track-record

- practitioner/directional: “When Should a DevOps Agent Act Without Human Approval?”, Bala Priya C, DevOps.com, 2026-05-11, article. Supports action-type autonomy promotion at roughly 95% unmodified approval, permanent approval floors for irreversible or high-blast-radius actions, and decision-ready gates with timeout plans. The protocol comes from one practitioner article; the threshold is stated, not measured.
- lit/strong: Chen, V., Talwalkar, A., Brennan, R., Neubig, G. (2025). Code with Me or for Me? How Increasing AI Automation Transforms Developer Workflows. arXiv:2507.08149. In the controlled study, users’ failure to understand agent behavior, not capability, limited broader adoption.
- Corroboration (narrative only): a demoted author-distilled field note about a 2025 lights-off agent factory failure, the operator policy, and an essay describing per-action autonomy with a batched morning decision ledger. The field note is not independent support.

16.6.2 label-ai-provenance

- lit/strong: Tang, N., Chen, M., Ning, Z., Bansal, A., Huang, Y., McMillan, C., Li, T. J.-J. (2024). A Study on Developer Behaviors for Validating and Repairing LLM-Generated Code Using Eye Tracking and IDE Actions. arXiv:2405.16081. Supports improved repair performance and greater verification effort with provenance disclosure; recognition without disclosure was unreliable. Limited by a small laboratory sample and code chunks of tens of lines; the attention cost may not scale to constant exposure.
- Corroboration: none on record.

16.6.3 audit-human-gates-for-effectiveness

- lit/directional: Sterz, S., et al. (2024). On the Quest for Effectiveness in Human Oversight: Interdisciplinary Perspectives. ACM FAccT 2024. arXiv:2404.04059. Supports four conditions for effective oversight persons; gates failing any condition are compliance theater. The framework is motivated by EU AI Act Article 14, not empirically validated.
- lit/directional: Green, B. (2022). The Flaws of Policies Requiring Human Oversight of Government Algorithms. Computer Law & Security Review 45, 105681. arXiv:2109.05067. Compares 41 policies with the human-computer interaction record and shifts the burden of proof

to the deploying institution. The negative claim transfers only where reviewers lack real verification surfaces; code review differs in verifiability.

- Corroboration (narrative only, contrary): the human-approval queue audit found fail-open scripts and unvalidated command construction, while the reproduction-before-mutation hook stops enforcing when a required binary is absent.

16.6.4 align-accountability-with-actual-control

- lit/directional: Cavalcante Siebert, L., et al. (2023). Meaningful human control: actionable properties for AI system development. *AI and Ethics* 3, 241-255. arXiv:2112.01298. Supports responsibility commensurate with ability and authority to control, the framework's third actionable property.
- lit/directional: Suryana, L. E., Nordhoff, S., Calvert, S., Zgonnikov, A., van Arem, B. (2025). Meaningful human control of partially automated driving systems: Insights from interviews with Tesla users. *Transportation Research Part F* 113, 213-236. Applies tracking and tracing criteria to 103 users to localize expectation-reality gaps and inconsistent protocol adherence. The method requires case-specific operationalization, yields failure localization rather than a compliance score, and is evidenced here in the driving domain. No arXiv identifier or DOI is carried in the catalog record, so the inline citation is unlinked.

Author-system cases in this chapter are narrative illustration, not evidence.

Part VI

Work allocation and cost engineering

Chapter 17

Agent topology selection and dynamic task allocation

In one rerun of CodeProbe (public repository), I changed an agent’s preamble to correct a retrieval behavior I had already diagnosed. The patch changed cost and left the failure that motivated the experiment untouched. On the task family where I had diagnosed the retrieval behavior, cost fell 28 percent, while the primary reward difference was +0.0048 with a t statistic of 0.27, not distinguishable from noise in that comparison. The wall-clock prediction failed in sign as well as magnitude. I had hypothesized a 40 percent reduction, and elapsed time increased by 3.9 percent. The agent still accepted a false-negative retrieval result and built its answer around missing evidence.

The patch moved the wrong variable. The agent had been instructed to synthesize for coverage, but the execution path still treated an empty tool result as authoritative. That coupling lived in the harness, not in the sentence-level wording of the preamble. Once a failure class survives the persistence test defined in the next section, the next available lever is structural. The relevant choice is how to divide the work, including whether to divide it at all.

Prompt changes are cheap, visible, and easy to attribute to a single experiment. Structural changes alter the boundaries between components: which worker retrieves evidence, which worker interprets it, which observations cross the boundary, and which component can reject the result. They are harder to test because several causal paths may change together. They are also sometimes the only intervention aimed at the location where the failure is produced.

17.1 A failure class earns a structural repair only after it persists

A recurring failure is not merely an error that happened more than once. I call a failure class persistent only after a paired before-and-after comparison across model versions, with repeated trials, shows that the class survives. A single successful run on the newer model proves no more than a single failed run on the older one. The variance methods from Chapter 1 still apply when the proposed treatment is a model upgrade, and the outcome should be analyzed as paired per-item differences rather than as two aggregate scores.

Once persistence is established, the taxonomy and first-upstream-error method from Chapter 10 locate the earliest supported cause. That location constrains the repair. If a retriever returns an incomplete candidate set, improving the final writer’s admonition to cite sources attacks the last visible symptom. The repair belongs where the candidate set is formed, checked, or handed off. The companion catalog states the broader rule as repairing the supported root cause rather than

the last step. Its evidence is thin, and I therefore use it here only as a diagnostic reminder.

Cemri et al. (2025) built MAST, a taxonomy of failure modes in multi-agent language-model systems. They reported limited gains from prompt improvements on persistent classes, and better outcomes from changes such as verification-topology redesign and modular roles while retaining the same underlying model. The studied systems included benchmark frameworks such as AG2 and ChatDev, not production deployments. Those interventions therefore establish plausible structural remedies inside the evaluated frameworks, not portable recipes for an arbitrary agent system.

Kim et al. (2026) provide a stronger cross-version result in a different domain. Across the capability tiers their OpenRCA study evaluated, dominant failure modes in cloud root-cause analysis remained present. Prompt engineering had not removed the communication failures, but richer communication protocols reduced them by as much as 15 percentage points. That is evidence that an architectural failure can survive a stronger model.

Those results do not establish a coding-agent failure rate, and they do not show that prompt engineering is generally ineffective. The measured domain was cloud root-cause analysis. One check transfers. Before spending another round on wording, establish whether the persistent class is architectural.

The specificity of the OpenRCA result is useful. Protocol enrichment addressed communication-class failures. Hallucinated interpretation required a different architectural response. A structured message cannot repair a worker that invents the meaning of accurate evidence, and a stronger verifier cannot recover evidence that no upstream worker retrieved. ‘Change the structure’ is a direction to revisit causal boundaries, not a claim that one topology cures every failure.

A multi-agent system is several model-driven workers coordinating on one task, with a topology that determines which workers can exchange observations and where their outputs converge. Topology is the communication and decision structure, distinct from the implementation that happens to realize it. Two programs can use the same queue library and still have different topologies if one exposes every worker’s output to every other worker while the second routes all outputs through a lead. Two implementations can also realize the same topology through different runtimes.

Role specialization is one structural intervention: assign distinct responsibilities, evidence access, and acceptance conditions to workers instead of asking every worker to perform the entire task. In the opening retrieval case, specialization could separate candidate discovery from evidence adjudication. The retrieval worker would return candidates plus explicit coverage fields, and an adjudicator would test whether an empty result was credible before the writer could treat it as absence. The specialization is justified here because it creates a boundary at which the false-negative claim becomes observable and rejectable. Adding personas alone does nothing.

Structured fields address the same coupling. Free-form messages often collapse evidence, interpretation, and confidence into one paragraph, leaving the receiver unable to tell whether a claim came from a tool result or from the sender’s inference. A handoff record can keep those states separate:

```
query: exact request issued to the retriever
candidates: identifiers returned by the retriever
coverage_checks: alternate queries and their results
claim: the sender's interpretation
status: supported | incomplete | failed
```

This schema does not make the interpretation correct. It makes an incomplete search distinguishable from a supported negative conclusion, and it gives a verifier a specific object to challenge. During failure, the status must remain **failed** or **incomplete**. Converting it to an empty success recreates the original coupling behind a cleaner interface.

The structural boundary can also be a verification loop rather than a new worker. A single agent can produce an artifact, run a deterministic check, inspect the failure, and revise. Adding an independent reviewer becomes justified when the producer is poorly positioned to detect its own error, when independent evidence access matters, or when the review policy should remain isolated from generation. Role specialization describes distinct responsibilities, not necessarily distinct model instances.

The first structural question is which decision needs an independent state boundary. The agent count follows from the answer. Sometimes the answer is none. Sometimes one additional verifier is enough. A five-worker conversation that shares the same incomplete evidence may amplify confidence without changing the failure path.

The accounts grouped under ‘harness engineering’ describe teams accumulating agent capability in execution boundaries, verification loops, repository instructions, and rollback or approval controls rather than in prompts alone. Böckeler (2026) analyzes vendor-reported practice from the OpenAI Codex team, and Jain (2026) writes as a practitioner rather than reporting a controlled evaluation. Both omit the verification detail needed to estimate an effect. They describe where practitioners report making repairs, while Cemri et al. (2025) and Kim et al. (2026) carry the evidentiary claim about persistent classes and structural intervention.

My own diagnostic traces add a caution about what prompt evidence can establish. In an observational set of 1,705 thinking blocks from 199 traces, agents never named the two dominant tools in their written reasoning, and 65 explicit reference-finding intentions produced no use of the purpose-built reference tool. Zero mentions did not imply zero prompt influence. In a later 17-run experiment, deliberation-style preambles changed tool selection on matching tasks while scores remained 4.0 versus 4.0.

Those observations separate two questions that are often merged. Prompt steering may alter selection efficiency even when the task score does not move. The target failure class in my rerun still survived. The experiment therefore did not justify another wording patch as the primary repair. I needed a boundary that checked retrieval coverage before synthesis trusted the result.

Structural repair has costs. Splitting work introduces handoffs, new failure states, more tokens, and more places for stale or conflicting state to accumulate. A verifier can reject correct work, a specialist can lose context available to a generalist, and a protocol can omit the one field later needed for diagnosis. Representing roles in configuration may make topology easier to revise, but that proposal has thin support and an unmeasured maintenance cost. I treat it only as an option from the companion catalog. The evidence does not establish the practice.

The repair criterion is therefore causal and comparative. Change the smallest boundary that can interrupt the observed failure path, preserve the failure evidence through that boundary, and replay the same cases. If the class does not move, the new structure has added coordination without addressing the cause.

17.2 Gate fan-out on a live single-agent baseline

Every proposal to add debate, delegation, or parallel workers needs a live single-agent control. Fan-out means assigning one task, or parts of it, to multiple workers whose outputs must later be selected or combined. Delegation is the act of transferring responsibility for a defined unit of work to another worker. Neither mechanism should receive credit merely because the system was configured to permit it.

The practical comparison is already available in the golden set from Chapter 4. The single-agent workflow becomes one configuration replayed against the same tasks and unambiguous oracles as

the proposed team. I record the promotion threshold before the first comparison and score repeated trials with pass^k , which requires the same repeat count in both arms. The treatment advances only if it improves task success and the relevant cost measure. Chapter 2’s Pareto discipline rejects a quality gain whose cost makes the workflow unusable.

The gate is a measurement. Work with genuinely independent branches, high error costs, or reasoning requirements beyond a reliable single trajectory can still clear it. Those properties make fan-out plausible, subject to a measured test of whether coordination and aggregation consume the expected benefit.

Chun et al. (2025) compared debate configurations against task baselines and reported the inference cost of the debate variants themselves. They did not measure debate against a single-model baseline on cost, and they left that comparison open. A debate treatment therefore receives no presumed inference benefit. Li et al. (2026) supply the cost side of the gate with a controlled result on scaling behavior in SIMAS. Their multi-agent configurations incurred roughly a 15-fold token premium, returns were non-monotonic as agents were added, and debate could underperform self-correction.

A strong explorer synthesis across several studies supports the general gate. No single standardized experiment does. These are strong results within the studied tasks and configurations, and they provide no universal exchange rate for adding a worker. Token premiums depend on prompt length, round count, shared context, model mix, and how much duplicated work the topology induces.

Other exploratory syntheses point in the same direction across heterogeneous and homogeneous teams, consensus systems, and scaling networks: Tian et al. (2025), Kumar et al. (2026), Bertalanic et al. (2026), and Qian et al. (2024). Because these items summarize overlapping underlying sources, and the evidence audit did not retain them as strong controlled evidence, I use them only as directional support. The gate rests on the retained Chun and SIMAS results, then asks the reader to reproduce the comparison on the actual workload.

Aggregation belongs inside the treatment definition. Chapter 5 reported an exploratory plurality-vote oracle gap of up to 32.3 percentage points, measured by Bertalanic et al. (2026). A correct answer was present among the candidates, and the voting rule selected another answer. That result establishes only a reported failure mode. Its frequency in other workloads remains unknown. It is enough to show that ‘at least one agent solved it’ and ‘the system returned the solution’ are different outcomes.

Suppose five agents inspect a code change. Three repeat the same shallow diagnosis, one finds a real race condition, and one returns an unrelated concern. Plurality voting selects the shallow diagnosis even though the candidate set contains the critical finding. A synthesis agent might recover the minority result, but it can also suppress it if all reports arrive as undifferentiated prose. The gate must score the final system output, retain candidate-level outcomes, and record whether the aggregator discarded an oracle-correct candidate.

The same requirement applies to debate. A debate protocol can make agents converge when later turns expose them to the same early answer, even if independent reasoning never resolves the issue. If independence is the reason for adding reviewers, the treatment must preserve it long enough to be tested. Blind review lanes, in which reviewers do not see the producing agent’s identity, are a thinly supported companion-catalog option for reducing one obvious source of coupling. They are not an established cure for correlated errors.

Cost measurement also needs the topology’s full boundary. Count the planner’s tokens, worker context, messages, retries, synthesis, verification, failed branches, and the final worker call. Record latency separately from token or monetary cost, because parallel execution can reduce elapsed time while increasing total computation. A design may be rational for a high-value incident response even if it loses the cost comparison on routine maintenance. The gate makes that tradeoff explicit.

Chapter 18 develops model routing and cost engineering in more detail. For this gate, the minimum requirement is narrower. Choose the cost axis that matters to the workflow, measure it end to end, and state the acceptable increase before looking at the treatment result. A cost ceiling chosen afterward can always be made to accommodate the favored architecture.

One validity check comes before any score comparison. The multi-agent mechanism must actually run. In my own repository-scale benchmark, I configured a lean-subagent treatment across four arms and roughly 200 trials, including investigation tasks, and observed zero spawns. The result showed only that the proposed treatment never entered the execution path, rather than that subagents were ineffective.

That negative result belongs in the evaluation record because configuration is not behavior. A system may expose a delegation tool while the planner never calls it, may dispatch workers but ignore their responses, or may ask multiple workers questions that do not partition the task. Each case can produce treatment labels that say ‘multi-agent’ while the observed causal path remains effectively single-agent.

I therefore instrument the gate at three levels. First, the configuration record states which topology was available. Second, the execution trace records delegations, messages, worker completions, retries, and aggregation decisions. Third, the outcome record links those events to the final answer and cost. A result is eligible for the multi-agent comparison only when the trace shows that the defining coordination behavior occurred.

The eligibility condition has to be declared before the run, for the same reason Chapter 2 requires a component-usage gate to be declared before outcomes are inspected. A condition written after the trials selects on the result. Declared in advance, it distinguishes noncompliance from architectural failure. If no delegation occurs, the planner or its tool boundary is the immediate problem. If delegation occurs and branches produce useful results that the aggregator discards, the convergence point is the problem. If every branch makes the same error after receiving the same incomplete context, adding more workers has exposed a shared upstream dependency.

The baseline must remain live as models change. A team topology that once improved task success can become unnecessary when a later single model absorbs the relevant capability. It can also become more valuable if the stronger model makes a better planner while specialists remain cheap. Replaying both configurations per release turns this change into a measured comparison. Without the single-agent arm, improving team scores can conceal that the simpler system improved faster.

A compact promotion record for one workflow can therefore contain:

```
golden_set_version: repository-maintenance-2026-07
single_agent: pass^k, total tokens, elapsed time, failures by class
multi_agent: pass^k, total tokens, elapsed time, failures by class
mechanism_check: delegations observed, branches consumed, aggregator used
aggregation_check: correct candidates retained or discarded
promotion_rule: recorded success floor and cost ceiling
decision: promote | retain baseline | redesign treatment
```

The gate answers whether to divide the work before topology selection answers how. A multi-agent design that cannot clear it should return to the structural diagnosis. The next experiment may need a narrower specialist boundary, a different aggregator, or no additional worker at all.

17.3 Match the topology to the shape of the work

Jia et al. (2026) injected synthetic faults into three multi-agent architectures in MAS-FIRE. Closed-loop architectures neutralized more than 40 percent of injected faults that had collapsed the linear-pipeline configuration outright, and stronger foundation models did not uniformly produce greater robustness. The faults were synthetic and the comparison covered three architectures, so that evidence does not establish a general preference for closed loops. It does show that message routes and feedback paths can determine whether a local fault becomes a system failure.

A pipeline is a sequence in which each stage hands its result to the next. It fits work that decomposes into stable ordered transformations, such as retrieve candidate files, extract relevant regions, generate a patch, then run tests. The topology is easy to inspect because state moves in one direction and each transition has an identifiable producer and consumer. Its weakness is equally clear. An early omission can pass through every later stage without any component able to revisit the source.

Pipelines also create semantic compression at each handoff. If the retrieval stage emits only file excerpts, the patching stage may never see that candidate coverage was uncertain. Adding a status field helps, but it does not create a return path. When downstream evidence can invalidate an upstream decision, the task no longer has a purely linear shape, even if its implementation is written as a sequence of functions.

An orchestrator-worker topology gives one agent responsibility for planning, dispatch, and integration while workers execute bounded assignments. It fits tasks whose decomposition depends on the initial context but whose branches can be evaluated separately. A repository migration, for example, may require the orchestrator to identify affected packages, send independent compatibility checks to workers, and integrate their findings into one ordered change plan.

The orchestrator owns global task state in that design. Workers should receive enough evidence to complete their assignments, but they do not need the entire message history by default. Their results return through a defined convergence point where conflicts can be detected. Failure of the orchestrator has a larger blast radius than failure of one worker. Durable state and replay semantics at that boundary therefore do more for reliability than adding another worker.

Hierarchy or explicit leadership extends that arrangement when a flat team would exchange too many messages, or when subproblems themselves need coordination. A lead bounds communication by assigning work to subordinate groups and accepting their summaries, and workers do not all communicate with one another. This can reduce message growth, but summaries introduce information loss and leadership concentrates authority. Justifying a hierarchy requires evidence that a lead will bound message growth and integration work, regardless of the managerial titles assigned to participants.

A blackboard is shared evolving state that workers read and update during execution. It fits tasks when the next useful contribution depends on discoveries made by any participant, such as incident investigation in which logs, hypotheses, eliminated causes, and requested checks change throughout the run. The blackboard externalizes state that would otherwise be scattered across pairwise conversations. It also creates concurrency obligations: updates need identities, versions, and conflict rules, and workers need a way to distinguish an untested hypothesis from an established observation.

Consider a security review of a large change. A pipeline is appropriate if the review consists of fixed analyzers followed by one synthesis step. An orchestrator-worker design fits when an initial planner can divide the diff by attack surface and send bounded reviews to specialists. A hierarchy becomes plausible when separate package leads must coordinate their own reviewers. A blackboard fits an exploratory investigation in which one worker's discovery changes what every other worker

should inspect next.

These forms are decision vocabulary and can be combined. An orchestrator may dispatch several pipelines. A hierarchy may use a blackboard for cross-group evidence while keeping control messages within leadership paths. The architectural question concerns which component owns each state transition and which agents can observe it. Configuration labels do not resolve that question.

Zhao et al. (2026) give strong experimental support in ATOM only for treating topology as a first-order variable and adapting it to task difficulty, rather than for one average design across all cases. Their evaluation used five-agent teams with two open models across MMLU, GSM8K, HumanEval, AQuA, MultiArith, and SVAMP. Those are six short-form question-answering, mathematics, and code benchmarks. The result supports difficulty-conditioned orchestration in that scope.

Topology-to-task-shape matching remains unvalidated for the repository-scale coding-agent work this book is about. Long-horizon repository tasks have persistent files, tool side effects, partially completed branches, expensive tests, and conflicts that short-form answers do not represent. I use the topology menu as an engineering hypothesis to test under those conditions. The cited benchmark does not transfer a conclusion to this setting.

Two directional lines of work broaden the design vocabulary without resolving that boundary. Huang and Zhou (2026) organize agent design patterns along two dimensions, and Shang (2026) relates blackboard coordination to a global workspace in Theater of Mind. Both provide exploratory, directional support only and contribute no quantitative claim here. An active-blackboard variant that schedules contributors for diversity is likewise a thin-support companion-catalog idea, and the evidence in this chapter does not establish it as a practice.

Fault propagation supplies a practical selection test. In a linear pipeline, a retrieval fault may contaminate every downstream artifact. In an orchestrator-worker system, the same fault may remain local if the orchestrator compares workers against independent evidence, or become global if it distributes one corrupted premise to all of them. In a hierarchy, a lead’s mistaken summary can hide correct subordinate findings. On a blackboard, a false claim can spread through repeated reads unless provenance and state labels remain attached.

Containment is conditional because a shared corrupted premise, a mistaken lead summary, or repeated unqualified reads can turn isolated faults into global failures.

The observation routes are therefore part of correctness. Record which worker sees raw tool output, which sees only a summary, whether a downstream verifier can request new upstream evidence, and whether a worker learns other workers’ tentative conclusions before forming its own. These properties determine correlation, recovery, and blame assignment even when every agent uses the same model and prompt.

Runtime oversight can represent the system as an interaction graph whose nodes are workers and artifacts and whose edges are messages or state transitions. That representation is a thinly supported aside in the companion catalog, and it has not been evaluated as a monitoring standard. It is still a useful inspection lens, because it makes unreachable reviewers, unexpected broadcasts, and missing convergence paths visible.

A fault test should settle topology choice. Remove or corrupt one pipeline output and observe whether downstream stages stop. Test an orchestrator by delaying a worker and injecting contradictory findings. In a hierarchy, check whether a subordinate’s critical minority report survives summarization. Conflicting blackboard updates should leave provenance, ordering, and unresolved status intact.


The strongest result available here comes from Jia et al. (2026) and concerns synthetic injection. Naturally occurring production faults remain outside its evidence, and the fault distribution used in the test determines what the test can show. Its closed-loop advantage supplies a reason to run those fault tests, which remain necessary. The acceptable topology is the simplest one that

linear pipeline




a retrieval fault reaches every downstream artifact

orchestrator-worker



independent evidence - a fault may remain local
one corrupted premise to all - a fault may become global

hierarchy



a lead's mistaken summary can hide correct subordinate findings

blackboard



a false claim spreads through repeated reads
contained only while provenance and state labels stay attached

One fault does different work in each shape

Figure 17.1: Fault propagation depends on collaboration topology, ranging from downstream contamination in pipelines to contained local errors when shared systems preserve provenance and state labels.

preserves required evidence, contains representative faults, and clears the single-agent gate on the target workload.

17.4 Dispatch through dependencies, not a guessed sequence

In a narrative retelling from my own workflow harness, six planned work items appeared ready to run together. A pre-dispatch file-overlap check showed that four of the six touched one adapter file and its test. The schedule became two waves. Three items could run in parallel, including two disjoint changes and one low-risk item from the colliding group, while the remaining three ran sequentially in increasing risk order. The scheduler selected a maximum independent set of nonconflicting work. Maximizing simultaneous workers was not the objective.

Because the work-item identifiers, overlap matrix, and dispatch log from that sweep were not preserved, the example illustrates the scheduling decision without serving as an auditable result. The evidence for dynamic task graphs is itself directional, so the example cannot upgrade the claim.

A dependency graph represents each unit of work as a node and each prerequisite or conflict as an edge. It becomes a task graph when the runtime uses those records to decide which nodes are eligible for dispatch. A node can start when its prerequisites have completed successfully and its declared resources do not conflict with another running node. Independent nodes need not wait behind an unrelated serial step.

Execution changes what work exists. A repository investigation may begin with a single node to locate the affected adapter, and create package-specific repair nodes only after the adapter is identified. A failed compatibility check may add a migration node and block integration. A fixed schedule must guess those branches in advance or leave workers idle while a central planner reconstructs dependencies from messages.

Dynamic dispatch does not mean unconstrained autonomy. The runtime performs a mechanical transition from blocked to ready when explicit conditions become true. Semantic decisions, such as whether a test failure reveals a new task, still need a model or a person to propose the node and its dependencies. The scheduler then validates the record and executes it according to policy.

Yu et al. (2025) supply the only direct systems report attached to this practice, at directional strength. DynTaskMAS lacks a controlled comparison. The study compared parallel against serial execution on one seven-agent travel-planning workload. It did not compare a dynamic schedule against a fixed parallel schedule, and it did not isolate the task graph from its asynchronous execution engine. The reported improvement therefore shows only that parallel beat serial in that setting, and it provides no evidence that dynamic beat fixed.

Rose et al. (2026) in APWA, Luo et al. (2025) in Autellix, and Masters et al. (2025) in the Manager Agent research challenge provide separate directional examples of related planning and scheduling designs. None of them is a replication of a dynamic-versus-fixed comparison. No controlled result in the cited set establishes that a dynamic dependency graph outperforms a well-designed fixed schedule for repository work.

The prescription is instead a defensible systems decision under variable dependencies. If independent branches exist, their prerequisites are observable, and branch duration is uncertain, an explicit graph can expose safe concurrency without making unrelated work share a serial queue. If the workflow is short, fixed, and cheap, a graph scheduler may add state and recovery complexity without creating useful parallelism.

Dependency accuracy is the central risk. A missing edge can dispatch two workers that edit the same file, migrate the same schema, or invalidate each other’s assumptions. A false edge serializes work that could have run independently. File overlap is only one conflict signal: generated artifacts,

shared test fixtures, deployment environments, and logical invariants can couple work even when paths do not overlap.

Each node therefore needs enough state to support both scheduling and recovery:

```
node_id: stable identity
inputs: immutable artifact versions
depends_on: successful prerequisite nodes
conflicts_with: resources or nodes that cannot overlap
owner: dispatched worker
attempt: retry identity
status: blocked | ready | running | succeeded | failed
outputs: versioned artifacts and evidence
```

The attempt identity prevents a late response from an expired worker from overwriting a successful retry. Immutable input versions reveal when a ready node was planned against stale state. Versioned outputs let downstream nodes distinguish two attempts that produced different artifacts. These implementation requirements come from the topology. The graph notation itself supplies none of them.

In my own workflow harness, notification-driven dispatch ends the coordinating turn after work is assigned and resumes it when completion events arrive. This avoids a polling loop that consumes attention while no state has changed. Mechanical parallel-set detection checks for nodes on the same dependency layer, blocking edges, and overlapping file paths. Those workflow rules illustrate the mechanism, but they do not supply comparative performance evidence.

A bounded per-step time limit contains a slow or failed worker only if expiration produces and propagates a real error. Treating expiration as success deletes evidence of failure and may release downstream nodes with missing inputs. The schedule will appear healthy precisely because it has erased the event needed to diagnose it. This is the fail-closed rule applied to dispatch.

Retries require the same care. A retry creates a new attempt on the same logical node instead of creating a second independent task. The scheduler must either prove the operation idempotent or isolate side effects before repeating it. Otherwise a transient timeout can produce duplicate comments, partial file writes, or two workers claiming ownership of the same state.

Dynamic graphs are most useful when they expose decisions that were previously implicit. The runtime can show why a node is blocked, which completed output released it, and which conflict prevents parallel dispatch. If those explanations cannot be reconstructed, the graph has become another hidden coordinator and has lost its value as an observable allocation mechanism.

17.5 The protocol I run before promoting a topology

A structural redesign should finish as a reproducible allocation decision. A diagram and a promising demonstration cannot support promotion. The following protocol is narrow enough to run on an existing workflow while preserving the distinctions developed in this chapter.

1. Select a persistent failure class. Use repeated paired runs across the current and upgraded model, and retain the first-upstream-error record. Do not begin with a generic goal such as improving collaboration.
2. Draw the current causal path. Mark where evidence originates, where interpretation occurs, where state is persisted, and where the final decision converges. Identify the smallest boundary at which the failure could have been observed and stopped.

3. Keep the single-agent workflow intact. Replay it on the current golden set and record pass^k, the chosen cost axis, elapsed time, and failures by class. Preserve this configuration for future model releases.
4. State one structural treatment. It may be a verifier loop, a specialized role, a structured handoff, a different topology, or a dependency-aware dispatcher. Specify which state boundary changes and which failure path the change is expected to interrupt.
5. Record the promotion rule before running the comparison. Include a success floor, a cost ceiling, and a mechanism condition, for example that at least one delegated result must be consumed by the aggregator. Add an aggregation check when candidates are voted on or synthesized.
6. Inject a representative fault. For a pipeline, corrupt an upstream artifact. For an orchestrator, delay one worker or return contradictory findings. For a hierarchy, place a critical result in a minority branch. For a blackboard or task graph, issue conflicting updates and verify ordering, provenance, and failure propagation.
7. Run repeated treatment and baseline trials on the same tasks. Separate correctness, reliability, latency, total computation, and usability. Inspect traces to confirm that delegation, coordination, and aggregation actually occurred.
8. Promote, retain, or redesign. Promote only if the treatment clears the recorded success, cost, mechanism, and fault-containment conditions. Retain the baseline if extra structure does not earn its coordination cost. Redesign when the trace shows that the treatment changed a boundary but left the target failure path intact.

The resulting record should be reviewable without trusting the architecture’s name. Promotion should depend on whether that record supports the claimed benefit.

17.6 Sources and evidence

The evidence class and strength on each entry below come from its catalog record. Author-system cases in this chapter are narrative illustration and are not part of the evidence base.

- Bertalanic, et al. 2026. *The Cost of Consensus*. arXiv:2605.00914. Exploratory evidence on aggregation failure; Chapter 5 carries the reported oracle-gap result.
- Böckeler, Birgitta. 2026. “Harness Engineering.” MartinFowler.com, February 17. Practitioner account based partly on vendor-reported Codex-team practice.
- Cemri, M., et al. 2025. “Why Do Multi-Agent LLM Systems Fail?” arXiv:2503.13657. MAST failure taxonomy and benchmark-framework interventions.
- Chun, Jina, et al. 2025. “Is Multi-Agent Debate the Silver Bullet?” arXiv:2503.12029. Audit-retained strong evidence on debate performance against task baselines; reports inference cost across debate variants and leaves the single-model cost comparison open.
- Huang, Jia, and Joey Tianyi Zhou. 2026. “A Two-Dimensional Framework for AI Agent Design Patterns: Cognitive Function and Execution Topology.” arXiv:2605.13850. Directional taxonomy of topology choices.
- Jia, J., et al. 2026. “MAS-FIRE: Fault Injection and Reliability Evaluation for LLM-Based Multi-Agent Systems.” arXiv:2602.19843. Synthetic fault injection across three architectures.
- Jain, Prateek. 2026. “Harness Engineering: The New DevOps Layer for AI Agents.” r/devops, May 27. Anecdotal practitioner account.
- Kim, T., et al. 2026. “Why Do AI Agents Systematically Fail at Cloud Root Cause Analysis?” arXiv:2602.09937. OpenRCA evidence on failure persistence across capability tiers and protocol intervention.

- Kumar, et al. 2026. *AgentForge*. arXiv:2604.13120. Directional evidence on multi-agent design.
- Li, et al. 2026. *SIMAS*. arXiv:2606.00655. Audit-retained strong evidence on token cost, non-monotonic scaling, and debate versus self-correction.
- Luo, et al. 2025. *Autellix*. arXiv:2502.13965. Directional scheduling and orchestration example.
- Masters, et al. 2025. *Manager Agent research challenge*. arXiv:2510.02557. Directional planning and scheduling example.
- Qian, et al. 2024. *MacNet*. arXiv:2406.07155. Directional evidence on network scaling.
- Rose, Evan, et al. 2026. *APWA: A Distributed Architecture for Parallelizable Agentic Workflows*. arXiv:2605.15132. Directional orchestration example.
- Shang, Wenlong. 2026. “*Theater of Mind*” for LLMs: A Cognitive Architecture Based on Global Workspace Theory. arXiv:2604.08206. Directional blackboard and global-workspace design; single-author architecture proposal, not a controlled measurement.
- Tian, et al. 2025. “Beyond the Strongest LLM.” arXiv:2509.23537. Directional evidence on multi-agent teams.
- Yu, Junwei, Yepeng Ding, and Hiroyuki Sato. 2025. *DynTaskMAS*. arXiv:2503.07675. Directional parallel-versus-serial result on a seven-agent travel-planning workload; no controlled dynamic-versus-fixed comparison.
- Zhao, et al. 2026. *ATOM*. arXiv:2605.26178. Audit-retained strong evidence on difficulty-conditioned topology across six short-form benchmarks.

17.6.1 Author artifact cited inline

- Not an evidence item: CodeProbe, the author’s task-mining evaluation tool, public repository. Named inline for the preamble rerun described in the opening, which is narrative illustration.

Chapter 18

Cost-aware fleet scheduling and model routing

A fleet can raise throughput while raising the cost of each accepted result, and only the fleet’s own traces can establish whether it did. Concurrent execution, together with the willingness to take on work a human team would have left queued, exposes more work to model inference, review, and recovery. Throughput alone therefore does not establish the economic result.

The evidence for changing that outcome is thin, and most of it is transferred from other fields. This chapter has one strong software-engineering result about cheap baselines, directional literature from observatory and compute-cluster scheduling, and my own fleet replay, which is narrative illustration with no independent evidentiary weight. The relevant evidence cluster has one strong item rather than zero.


Astronomical observation scheduling is the dominant transfer domain, in two forms: a survey telescope’s nightly planner, and a gravitational-wave follow-up scheduler built on the same facility. Learned compute-cluster scheduling is the second domain and search-based software engineering the third. Budget-constrained bandit theory and router calibration cover the routing decision alone rather than a complete fleet.

These are schedulers for telescopes and compute clusters. None of the cited works claims results for software agent fleets. The decision architecture transfers: re-decide from current state, cap the time spent deciding, compare against cheap alternatives, and preserve enough measurement to detect a bad policy. Cadence, threshold, cost ratio, and performance constants do not transfer with it.

Allocation policy is easy to mistake for a local configuration choice. In an agent fleet, the policy determines which model receives a request, which queued item moves first, whether running work remains fixed, and when the system discards an obsolete plan. These choices couple inference cost to elapsed time, reviewer load, and the probability that completed work will survive evaluation. A repair loop can consume the savings from a cheaper call. A schedule that is better on paper is not better in operation if computing it delays the work past its deadline. I therefore treat scheduling and routing as decisions under measurement.

18.1 Name the decision before reaching for the algorithm

Cheapest-sufficient routing means choosing, for each task, the least expensive worker predicted to meet that task’s declared requirement. The worker may be a model tier, a model-plus-tool configuration, or another execution pool with a known price. The important word is sufficient.

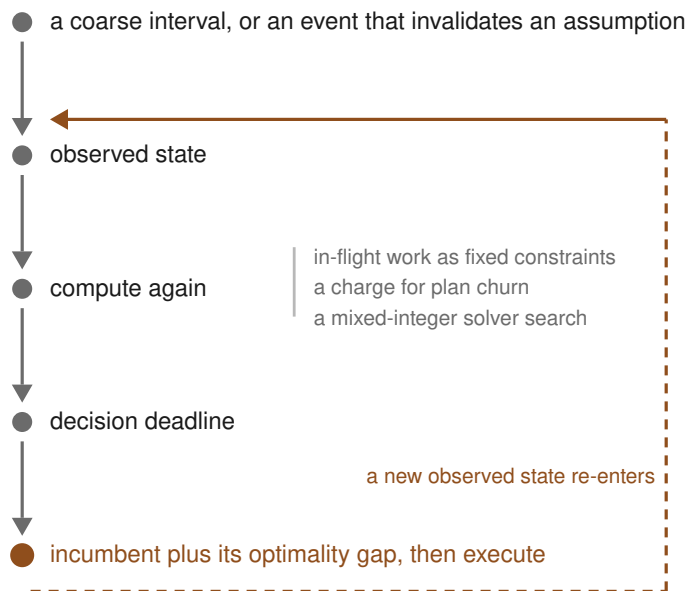

Between events, a competent greedy rule places ordinary arrivals

When recomputation is cheaper than repairing an obsolete plan, discard the plan

An incumbent recorded without its gap makes nearly best and merely feasible one state

Figure 18.1: The re-decision loop recomputes from observed events under fixed work and churn costs, then executes a deadline capped incumbent while retaining its optimality gap.

The router is not minimizing the invoice in isolation, and it is not assigning every task class to a model through a hand-written rule. It estimates expected performance and expected cost for the request in front of it, then chooses the lowest-cost option that satisfies the stated tradeoff. This definition leaves open how performance is predicted and how sufficiency is expressed. These are deployment decisions with consequences for calibration and evaluation.

Shipping the incumbent at the deadline means placing a hard time cap on schedule computation and executing the best feasible plan available when the cap expires. A feasible plan respects the constraints that cannot be violated, such as capacity, deadlines treated as hard, and work already in flight. The incumbent is the best such plan found so far. Waiting longer may find a better plan or prove that the current one is optimal, but the schedule has operational value only while it describes a world that still exists. With a cap, decision latency is chosen rather than discovered.

The optimality gap records how far the shipped solution might be from the best possible one, using the best bound known when the cap was reached. The gap retains information about the remaining uncertainty in solution quality. Shipping an incumbent without its gap records two different states as one: a plan known to be nearly best, and a merely feasible plan found before the search made much progress. Operations may reasonably execute both. Evaluation should not treat them as equivalent.

Ordinary arrivals remain greedy between events, and the plan is discarded only when fresh

optimization costs less than repairing obsolete work.

These terms specify decisions. A fleet operator needs to decide what counts as sufficient, how long schedule computation may run, which constraints are inviolable, and what quality information must survive execution. The companion catalog contains the algorithmic patterns. The narrower question here is whether these decisions produce lower cost or more reliable flow on the fleet’s own workload.

18.2 Re-decide cheaply and ship the incumbent

An observatory scheduler can spend the night improving a plan that clouds have already invalidated, or it can compute another imperfect plan from the sky it can still observe. Bellm et al. (2019) described the Zwicky Transient Facility taking the second approach, in production since 2018. It re-solves its nightly integer program when conditions invalidate the schedule instead of enumerating weather scenarios in advance. The support for transferring this choice to agent fleets is three directional literature items from observatory scheduling, with no strong result and no software-fleet measurement among them. The recommendation is therefore limited to choosing and measuring a re-decision policy. The cadence remains an agent-fleet deployment decision.

The schedule should be treated as the current output of a control loop. At a coarse interval, or after an event that invalidates an important assumption, the scheduler computes again from observed state. Between those events, a competent greedy rule can place ordinary arrivals without paying the cost of a full solve. If recomputation is cheaper than repairing an obsolete plan, the obsolete plan should be discarded. The comparison must include decision latency. An excellent schedule delivered after the queue has changed is a schedule for a fleet that no longer exists.

Current state includes more than the queue. Running work consumes capacity, may hold a repository lease or a review slot, and may have produced state that another worker cannot cheaply reconstruct. A re-solve should represent that in-flight work as fixed constraints unless preemption has been separately justified. It should also charge for plan churn, meaning avoidable reassignment or resequencing that makes workers discard useful preparation. The companion-catalog pattern `design-the-online-rescheduling-loop` treats cadence, invalidation triggers, and this churn penalty as parts of the scheduling algorithm. They are not operational details to add after selecting an objective.

At the decision deadline, execute the mixed-integer solver’s incumbent and record its optimality gap. This prescription follows from the mismatch between proof time and operational time. Solvers often find a feasible plan before they finish establishing how close it is to the best plan, while new arrivals and changing capacity continue to age the state on which that plan was built. The cap prevents schedule computation from becoming another queue. The stored gap makes later analysis possible. Operators can then ask whether large gaps coincide with worse flow, whether more solve time would have changed executed choices, and whether a simpler rule performs just as well.

Parazin et al. (2022) measured a mixed-integer scheduler for gravitational-wave follow-up against a tuned greedy heuristic, and neither method won outright. At a 500-second cap, their scheduler and the gwemopt heuristic each did better on different skymaps, and only 37 of 97 well-localized skymaps improved under the optimization comparison the paper reported. Across 951 simulated events, the headline result favored a hybrid of the two by roughly 3 to 11 percent in detection efficiency. A 100-second cap, they reported, would have truncated only 64 more schedules without substantial efficiency loss.

These figures are directional evidence from a gravitational-wave follow-up workload rather than fleet parameters. They support measuring the cap, the gap, and a hybrid, each against a tuned

simple rule. They also argue against assuming in advance that either the optimizer or the simple rule will win.

Naghib et al. (2019) described a second observatory design that makes the same point about state: a feature-based, memoryless policy that decides again at every step from current state. ‘Memoryless’ here does not mean that the system forgets durable facts. It means that the next scheduling choice does not depend on preserving a brittle sequence of earlier planned choices. Interruptions are absorbed when the scheduler observes the new state and makes another decision. Their evidence comes from a framework and a simulation. It therefore establishes a plausible architecture rather than a measured benefit for agent execution.

The global problem and the local problem should remain distinct. A fleet-wide allocator decides how scarce model tiers, reviewers, or execution pools are divided across work. A per-worker dispatcher decides which eligible item a particular worker takes next. The companion catalog records this as **split-fleet-scheduling-into-global-and-local-levels**. Combining both decisions in one opaque score makes it difficult to determine whether a bad outcome came from resource allocation or queue order. It can also cause local dispatch to undo a capacity decision that the global layer just made.

There is a more ambitious companion pattern, **formalize-work-as-constraints-and-solve-globally**, whose cataloged lineage reaches Hubble scheduling in 1990. It proposes expressing work requests in one constraint language so the allocator can solve across them. This architecture is useful only if the request representation captures the constraints that operations actually enforce. A nominally global solution built from incomplete deadlines, missing affinity constraints, or false independence assumptions can be less coherent than separate local rules. **audit-the-allocation-layer** is therefore marked as an aside in the catalog: name the execution, planning, and optimization levels, then inspect which policy actually dispatches work. Its observatory analogy has no software-side measurement.

Probe costs belong in the same accounting. The thin-support aside **probe-only-above-an-uncertainty-threshold** asks whether a dry run, canary, or classifier call can reduce enough uncertainty to repay its cost. Its theory comes from adversarial single-machine scheduling. Its constant therefore does not transfer. The usable question is local: for which uncertain requests does a probe change the chosen worker or the schedule often enough to justify the extra latency and inference? If that answer cannot be recovered from logs, probing is another unmeasured policy.

This decision has an explicit boundary. The survey behind the cited corpus does not see the major USENIX and ACM cluster-scheduling literature. Agent runtime variance is also partly endogenous. Repeated tool failure, unstable environments, and unnecessary retries should be repaired at their source before the scheduler is asked to absorb them. Nor does any cited source establish a general rule against preempting long agent sessions. Fixing running work during a re-solve is a conservative representation of current commitments rather than evidence that preemption is always wrong.

The cadence and cap should be set through a short pilot, with the incumbent and its gap retained at every decision and the resulting trace compared against a tuned greedy policy. The companion entry **pilot-to-pick-the-algorithm-then-commit-the-budget** states the same budget logic. Spend a small amount discriminating among methods, then commit the operating budget to the one that performed better. The design decision is defensible when the trigger, cap, churn charge, and treatment of in-flight work are explicit. Its value remains an empirical question until the fleet’s own traces answer it.

18.3 Route each request to the cheapest sufficient model

Support for cheapest-sufficient routing is three directional literature items and zero strong results. Cayci, Eryilmaz and Srikant (2020) developed budget-constrained online learning under broad cost and reward distributions. Somerstep et al. (2025) analyzed a calibrated static router. Li (2025) reported preference-conditioned dynamic routing in a single-author preprint. All three evaluated formulations or benchmarks, and none evaluated a production software-agent fleet. This entry therefore defines a routing decision and the measurements needed to test it, and it does not establish that a learned router will reduce the cost of a particular fleet.

My agent-fleet orchestrator illustrates the starting condition. Its dispatch policy is a static string in each agent configuration. Every execution pool is assigned a model in advance, and there is no per-request performance estimate, cost model, lookahead, or deadline field. The static table is legible and predictable, and it provides the fallback when a more selective router has too little evidence. It does, however, make request difficulty invisible to dispatch.

A cheapest-sufficient router replaces the static per-model assignment with two estimates for every available model on the current request: expected performance and expected cost. It then selects the least expensive candidate predicted to satisfy the declared requirement. Somerstep et al. (2025) analyzed this plug-in structure in CARROT and argued that its routing overhead is negligible, because a routing decision requires only evaluating those two predictors for each candidate model. That structure depends on calibration, meaning that predicted performance must correspond to observed performance on the deployment distribution. A mathematically clean selection rule cannot recover from a predictor that assigns unwarranted confidence to unfamiliar work.

The requirement must also be operational rather than rhetorical. ‘Good enough’ might mean passing an executable check, staying below a defect probability, meeting a review rubric, or satisfying a cost-quality tradeoff selected by the caller. Each choice defines a different routing target. The roughly 15-fold token premium for some fan-out topologies discussed in Chapter 17 gives that choice real economic weight, but token count alone is not the objective. A cheap model that triggers repeated repair and review may produce a higher accepted-result cost than the expensive model it displaced.

When outcome feedback accumulates, the router can be updated as a budget-constrained bandit, for example by Thompson sampling, with the algorithmic treatment left to the companion catalog. Cayci, Eryilmaz and Srikant (2020) established an asymptotic regret guarantee under stated moment conditions that permit heavy-tailed, correlated, and even negative cost-reward pairs. These properties resemble agent dispatch more closely than a world of bounded, independent rewards. The guarantee still does not tell an operator whether a code review score represents useful work, and it says little about behavior during the finite, early period in which production exploration is most costly.

Online updating addresses a real problem in static routing, because both models and workloads change. A model revision can alter which tier is sufficient, and a new repository or task mix can move the request distribution outside the router’s calibration data. Li (2025) conditioned routing on a user-selected performance and cost preference, allowing one learned policy to express a family of tradeoffs at inference time. The reported support is benchmark evidence from a single-author preprint. It supports testing preference conditioning, but calibration under delayed code outcomes remains untested.

The reward definition is the controlling measurement choice. For code tasks, the observable signals arrive at different times and answer different questions. A test result may be immediate but incomplete. Review can catch a defect later. Rework, rollback, or user rejection can occur after the router has already treated the request as a success. Combining these into one reward is

a construct-validity decision outside the routing mathematics, and it should be versioned so that a policy trained under one definition is not silently compared with a policy trained under another.

A learned policy should stay advisory until its recommendations correlate with an outcome measured outside the router and relevant to accepted work. In advisory mode, the system records the requested route, the route actually taken, estimated cost and performance, uncertainty, and the eventual outcome, without granting the policy control. The thin-support companion aside **log-scheduling-decisions-for-selection-effect-modeling** adds a necessary field: record why a request was routed. Without that reason, later analysis cannot distinguish a model’s performance from the selection process that sent it easier or harder work.

When observations are sparse, the system should fall back to the static cost-performance table. That floor is exactly today’s configuration, and its behavior can be measured directly. The router should take control only when the evidence is dense enough to estimate its errors. A rare task family, a new model, or a reward version with few completed outcomes should stay on the floor until the router exposes its uncertainty.

Calibration data can fail before deployment begins. Benchmark-derived routing sets may encode artifacts of the benchmark into the predictor, including prompt regularities, scoring conventions, and an unrealistically fixed menu of models. CARROT’s formulation assumes a static model pool. Production pools are not static: prices change, versions are retired, rate limits vary, and tool compatibility can remove a model from consideration. Each change either requires recalibration or creates a region in which the policy is extrapolating.

Online exploration imposes a further cost. The policy must sometimes choose an option of uncertain value to learn anything, and the request routed under that choice is real production work. Budget constraints make the cost visible but do not decide who may bear it. Operators need an exploration budget, exclusion rules for high-consequence work, and a stop condition tied to observed error. Guarantees that become useful only after many decisions do not excuse poor behavior during the learning period.

The companion pattern **cost-cascade-routing** covers a different response to uncertainty: begin with a cheaper route and escalate when calibrated confidence is insufficient. In that pattern’s supporting evidence, Chang (2026) reported that confidence-gated cascade routing often beat always-on strong-model fan-out on both cost and quality. This result supports only the catalog pointer. A cascade also changes latency and couples the stages through the escalation signal. It must therefore be compared as a complete route, with cost measured across all calls.

The decision record for a router should include the sufficiency requirement, reward version, calibration population, model-pool version, uncertainty, exploration budget, and static fallback. The evaluation should report accepted-result cost and failures by request class, not only average token spend. Cheapest-sufficient routing is useful as a testable economic policy because it states what is being predicted and what tradeoff is being chosen. It cannot repair an unrepresentative calibration set or a reward that measures the wrong outcome.

18.4 Replay fixed arrival traces before changing policy

In my own agent fleet, the interesting scheduling idea lost to a one-word configuration change. I replayed eleven weeks of traffic and found that a four-feature weighted index performed within 0.1 percent of plain priority banding. This result has narrative weight only, and it is not load-bearing evidence for the recommendation. The strong support in this entry comes from SWAY, the controlled software-engineering result of Chen et al. (2016), which shows why a proposed search method must beat a cheap baseline. Decima, from Mao et al. (2018), and the telescope-network

work of Lampoudi, Saunders and Eastman (2015) provide directional support for learned scheduling and known-optimum validation. Fixed-arrival replay itself remains a reasoned transfer rather than a directly controlled fleet result.

An arrival trace is a time-ordered record of work entering the system, including the information available when each item arrived. A dispatch policy is the rule that decides which eligible item receives a resource next. First-come scheduling orders eligible work by arrival time, subject only to constraints that make an item impossible to run. A replay harness is a read-only re-execution of recorded arrivals under a candidate dispatch policy. It differs from the single-run trace replay used for debugging in Chapter 9, because this harness holds a workload sequence fixed while replacing the policy that acts on it.

The ledger needs, at minimum, arrival times, priorities, claims, durations, outcomes, and review verdicts. It also needs the resource state that constrained each decision, or a defensible reconstruction of that state. If the historical record omits capacity, cancellations, model eligibility, or work already running, the replay may create choices that were never available. Missing decision context is not neutral noise. It changes the feasible schedule.

Holding arrivals fixed turns the comparison into a paired design. Every candidate encounters the same demand in the same order. A difference in simulated flow is therefore attributable to the policy and its interaction with recorded state, rather than to a busier Tuesday in one run. This does not make the simulation causal in every respect. It removes one large source of variation that routinely overwhelms scheduler comparisons.

The first run should be a validation run, not a policy contest. Construct small cases whose best schedule is known, including simultaneous arrivals, a resource that becomes unavailable, a priority inversion, and work that cannot run in the same execution pool. Confirm that the replay clock, eligibility checks, claim duration, and completion events reproduce the known answer. Lampoudi, Saunders and Eastman (2015) derived an integer-program formulation for the Las Cumbres telescope network and reported computational results verifying it at realistic problem sizes. The transferable practice is to test a scheduling kernel on instances with known optima before trusting its output on a historical trace.

The second run establishes cheap baselines. Compare first-come scheduling, a simple priority sort, and random oversampling with the proposed policy. Random oversampling generates several cheap randomized schedules and retains the best according to the declared objective. Chen et al. (2016) built SWAY by sampling a very large candidate population down to better solutions rather than evolving repeated generations. Across several software-engineering models it was competitive with state-of-the-art evolutionary algorithms at far lower compute cost, and they proposed it explicitly as a baseline for search-based software engineering. The controlled result supports the discipline. An elaborate optimizer that cannot beat a cheap alternative has not earned adoption.

The baseline objective must be written before inspecting the candidate results. Mean completion time, priority-weighted flow time, deadline misses, accepted-result cost, and reviewer delay describe different failures. A lower overall mean can coexist with severe delay for one priority or work class. Starvation is persistent denial or extreme delay to a class because other eligible work repeatedly moves ahead of it. Report latency and failure by class, and define a guard that would reveal starvation even when the fleet-wide average improves.

My fleet’s work ledger contained 1,286 work items across 22 execution pools in the eleven-week replay. Age-only first-come scheduling produced 6.84 hours of priority-weighted flow time. A hybrid rule, a plain priority rule, and my four-feature weighted index each produced 6.70 hours, within 0.1 percent of one another. P1 tail latency moved from 20.4 hours to 18.8 hours without a starvation-guard trip.

I had recorded a 15 percent acceptance threshold before the replay ran. The weighted index

therefore failed its gate. The four-feature index was the interesting idea, and the replay is the reason it did not ship. These numbers explain what the protocol prevented me from building. They do not establish an expected effect for another fleet.

The distribution of capacity explained more than the aggregate did. The visible gain concentrated in one contended pool, meaning an execution pool in which eligible work regularly exceeded available capacity. An uncontended execution pool, in which capacity usually met demand, showed nearly no change across policies. This is the expected shape of a real scheduling effect. A proposed policy that claims large gains when work rarely waits for a resource should be treated with suspicion, because queue order then has little opportunity to change anything.

Decima provides a useful but bounded comparison. It learned cluster scheduling under continuous stochastic arrivals and was evaluated on a 25-node Spark cluster. Mao et al. (2018) reported at least a 21 percent average job-completion-time improvement over hand-tuned heuristics, and improvements up to twofold at high load. These measurements support learned scheduling in that cluster workload. They do not test fixed-arrival replay, and they do not transfer a performance expectation to agent work. The relevant transfer is experimental. Preserve the arrival process when comparing policies, then look for effects in the places where resources are actually contested.

Historical replay also preserves historical selection. Work absent from the ledger remains absent, including requests users never submitted because the old system was slow, and work that operators diverted manually. A router may have sent difficult requests elsewhere, leaving a deceptively easy trace for one execution pool. The companion aside `log-scheduling-decisions-for-selection-effect-modeling` specifies a record of why an item entered a route, which lets later analysis model the selection process. It cannot recover demand that was never observed.

Live policies can change the arrivals they later receive. Faster completion may induce more demand, priority treatment may change how users label requests, and model routing may alter reviewer behavior. Historical simulation cannot expose all of these feedback effects. Use a temporal holdout, meaning a later time window excluded while policy choices are developed, to test whether the replay result survives workload drift. Then stage the rollout through shadow mode, a one-project canary, and only then the fleet, with an external outcome and a starvation guard at every gate.

A runnable protocol can be compact:

1. Export an immutable arrival trace with decisions, resources, claims, durations, outcomes, and review verdicts.
2. Build a discrete replay clock and validate the scheduling kernel on constructed instances with known answers.
3. Record the objective, per-class starvation guard, acceptance threshold, and cost accounting before comparing policies.
4. Replay first-come scheduling, simple priority sorting, random oversampling, and each candidate over the identical trace.
5. Report aggregate and per-class results, optimality information where available, routing uncertainty, and the location of resource contention.
6. Repeat the comparison on a temporal holdout, then require shadow and canary evidence before live allocation authority expands.

This protocol is deliberately stricter than asking whether the queue ‘feels better’. It asks whether a candidate changes a declared outcome on identical work, whether a trivial rule captures the same gain, whether one class pays for the improvement, and whether the effect survives later traffic. The harness can be built this month if the fleet ledger already records the necessary state. If it does not, the immediate scheduling task is instrumentation.

The first two decisions in this chapter now become hypotheses rather than received numbers.

Replay several re-decision cadences and solve caps while preserving in-flight work, then measure flow, churn, decision latency, and the gap retained at each cap. Replay cheapest-sufficient routes from logged estimates, or run them in shadow when counterfactual outcomes are unavailable, then measure accepted-result cost and calibration error by class. Build the trace, hold the arrivals fixed, make the cheap policy compete, and let the fleet produce the evidence its scheduler requires.

18.5 Instrument the ledger before choosing a policy

If the ledger does not yet preserve decision state, begin with events the system can record without prediction: arrival time, priority, claim, duration, outcome, and review verdict. These fields reconstruct demand, occupancy, and accepted work, and they expose missing or contradictory event histories before policy-specific data complicates the schema.

Next record the resource state visible at each dispatch decision, including capacity, eligibility, work already running, and any constraint that made an otherwise eligible item unavailable. Add the route taken and the reason for that route in the same phase. State and reason need a shared decision identifier and timestamp. Without them, later analysis cannot distinguish model performance from selection, or determine which alternatives were feasible.

Only after those records are complete should the ledger add estimated cost, estimated performance, and, when a solver returns one, its optimality gap. Estimates belong last because they are versioned outputs of a policy rather than observations of what happened. Store their policy and model versions so later recalibration does not rewrite history.

The first month can settle one descriptive comparison. The question is whether higher-throughput intervals under the incumbent policy also show a higher accepted-result cost than lower-throughput intervals, with both measures reported by request class and constrained resource. That comparison cannot establish the counterfactual effect of a new router, choose a re-solve cadence, validate a solver cap, prove an exploration guarantee, or reveal demand that never entered the ledger. None of the cited studies reports results from software agent fleets. Those questions therefore still require replay, shadow operation, or a controlled rollout on this workload.

My replay supplies no default. This chapter therefore does not supply a cadence, a threshold, or a cost ratio. Do not adopt an observatory cadence, a bandit guarantee, or my priority threshold.

18.6 Sources and evidence

18.6.1 Re-decide cheaply and ship the incumbent

- lit/directional: Bellm, E. C., et al. (2019), “The Zwicky Transient Facility: Surveys and Scheduler,” PASP 131, 068003, arXiv:1905.02209.
- lit/directional: Naghib, E., et al. (2019), “A Framework for Telescope Schedulers: With Applications to the Large Synoptic Survey Telescope,” AJ 157, 151, arXiv:1810.04815. Framework and simulation evidence.
- lit/directional: Parazin, B., et al. (2022), “Foraging with MUSHROOMS: A Mixed-integer Linear Programming Scheduler for Multimessenger Target of Opportunity Searches with the Zwicky Transient Facility,” ApJ 935, 87, arXiv:2203.00013.
- No strong result and no software-fleet measurement support this entry; all three items are observatory scheduling, and the cadence, cap, and churn charge remain deployment decisions.
- Corroboration (narrative only): the author’s transfer notes on observatory scheduling restate the same ZTF and MUSHROOMS results already carried above as literature evidence.

18.6.2 Route each request to the cheapest sufficient model

- lit/directional: Cayci, S., Eryilmaz, A., & Srikant, R. (2020), “Budget-Constrained Bandits over General Cost and Reward Distributions,” arXiv:2003.00365. Asymptotic guarantee under stated moment conditions.
- lit/directional: Somerstep, S., et al. (2025), “CARROT: A Cost Aware Rate Optimal Router,” arXiv:2502.03261. Static model pool assumed.
- lit/directional: Li, Y. (2025), “LLM Bandit: Cost-Efficient LLM Generation via Preference-Conditioned Dynamic Routing,” arXiv:2502.02743. Single-author preprint, benchmark evidence.
- Three directional items and zero strong results; none evaluates a production software-agent fleet, so the entry defines a decision and its measurements rather than establishing a cost reduction.
- explorer/strong: CascadeDebate (Chang 2026), arXiv:2604.12262. Supports the catalog pointer only, not the routing entry itself.
- Corroboration (narrative only): the author’s transfer notes restate the budgeted-bandit formulation already carried above.

18.6.3 Replay fixed arrival traces before changing policy

- explorer/strong: SWAY, Chen, J., et al. (2016), “Sampling as a Baseline Optimizer for Search-Based Software Engineering,” arXiv:1608.07617. The one in-domain software-engineering result: a candidate optimizer that cannot beat a cheap baseline has not earned adoption.
- explorer/directional: Decima, Mao, H., et al. (2018), “Learning Scheduling Algorithms for Data Processing Clusters,” arXiv:1810.01963. Measures learned scheduling under stochastic arrivals, not fixed-arrival replay; the replay transfer is the explorer’s.
- explorer/directional: Lampoudi, S., Saunders, E., & Eastman, J. (2015), “An Integer Linear Programming Solution to the Telescope Network Scheduling Problem,” arXiv:1503.07170. Supports validating a scheduling kernel on instances with known optima.
- Fixed-arrival replay itself is a reasoned transfer, not a directly controlled fleet result, and per-class starvation must be checked separately because a policy can improve the mean by starving one class.
- Corroboration (narrative only): the author’s eleven-week replay of 1,286 work items across 22 execution pools, and the author’s shadow, canary, then fleet rollout design. Corroboration, never an admitting basis.

Author-system cases in this chapter are narrative illustration, not evidence.

Chapter 19

Closing: each part decides what the next one can claim

The most useful result in my own retrieval work was a disagreement between two instruments. Three retrieval measurements agreed that the tool had become much better at putting relevant repository evidence in front of the agent. The paired end-to-end reward across 370 tasks moved by +0.0349, and the first interval I put around that number likely understates the uncertainty and should not be read as a bound on it, because it resampled tasks that shared 73 repositories and 20 suites. Reading that one experiment took two parts of this book. The stage decomposition from Part IV located where the change had landed, and the resampling rule from Part I decided whether the end-to-end difference was a measurement at all.

The same dependency runs through the whole sequence. Measurement comes first, then grading systems, then isolation and recovery, then retrieval and context, then human review and accountability, then work allocation and cost. That order is not a difficulty ramp. Each part decides what evidence the next one is allowed to rely on, and a defect in an earlier part does not announce itself downstream. It arrives as a clean number.

19.1 The order is a dependency chain

Part I sits under everything else because every later practice is adopted or rejected through a comparison. A difference has to clear the local run-to-run spread, and the design has to have been capable of resolving a difference of that size, before any downstream verdict describes the system rather than the draw. Nineteen taught practices in the later parts execute a method taught in Part I. Dropping that dependency does not remove the requirement; it leaves the requirement unstated.

Part II turns those measurements into daily verdicts. A model grader, a consensus vote, and a proxy score are instruments, and Part I is how their errors are estimated. Skalse et al. (2022) established the structural reason no single one of them can be the last word. Over the set of all stochastic policies, two rewards can be mutually unhackable only when at least one of them is constant. A grading system therefore returns a verdict at an operating point under a stated distribution, and the layering exists because that verdict can be optimized against.

Part III decides whether the record those verdicts are computed over is evidence at all. Four ordinary conditions corrupt that record in ways no later statistic repairs. An agent can hold one identity that reaches both the primary data and its backups. A run can die without a durable account of which steps completed. A trace can fail to separate a tool dispatch from its external commitment, and a quarantine policy can remove the failed runs before anyone reads them.

Preservation is necessary and it is not sufficient. Zhang et al. (2025) handed already-annotated failure logs from 127 multi-agent systems to the best automated attribution methods available, and the best of those identified the decisive step 14.2 percent of the time. A preserved record supports an explanation. It does not supply one.

Part IV decides what the model saw. A failure cannot be assigned to the model until the evaluation records whether the needed evidence existed in the index, was returned, survived the context cutoff, and described the current repository state. Stale context is the sharp case, because it replaces an ordinary miss with a confident implementation against an interface that no longer exists.

Part V treats review capacity as a finite input to the system. Its allocation depends on the monitors calibrated in Part II, and its interfaces decide whether challenging a claim costs less than accepting it. A gate that cannot stop the action it names records assent and nothing else.

The decisions in Part VI can only be settled from the artifacts the earlier parts produced. A routing or scheduling policy is tested by replaying recorded arrivals with the arrival sequence held fixed, and by making a cheap rule compete for the same work. That discipline appears at both ends of the book. Kapoor et al. (2024) found that retrying the model matched more elaborate architectures on a function-level coding benchmark at a fraction of their inference cost. Chen et al. (2016) proposed cheap random sampling as the baseline a search-based method has to beat before it earns adoption.

The chain also constrains what a repair can accomplish. Compensating for a weak link with machinery from a later part is the most expensive mistake available here, and it is an easy one to make, because the later machinery is usually the cheaper thing to deploy. More samples do not repair a task distribution that omits the work the deployed system will meet. More judges do not repair a rubric whose categories two experts apply differently. More agents do not repair a retrieval boundary that treats an empty result as authoritative, and more context does not repair a run that has already lost its specification. In each case the added component is then measured by an instrument the earlier part was supposed to have fixed.

19.2 The support is thinnest where the urgency is highest

The evidence behind these six parts is uneven, and the unevenness runs against operational urgency. Strong-graded items account for 59 percent of the evidence in Part I and 53 percent in Part IV. In Part III, the thinnest part in the book, they account for 14 percent, and in Part VI for 22 percent. Chapter 7, on containment, injection defenses, and independent verification, carries no strong-graded evidence and no research-literature item of any class; its support is incident reports and single-organization accounts.

Those are also the chapters a reader with production write access needs first. Two of Chapter 7's three practices were chosen independently by all three selection lenses while their evidence stayed at the floor. In this corpus, urgency and evidence strength were close to uncorrelated, and reporting that is better than letting chapter length imply a support the record does not have.

I would have preferred to write a Part III backed by controlled comparisons. The field has produced design arguments and incident reports instead, and wrapping them in more hedging would have hidden the same gap under more words. The thin chapters are therefore shorter, state their limit before recommending anything, and prescribe an observation rather than a number.

Two observations would change those chapters. The first is a controlled comparison of isolation designs scored against a measured incident rate rather than against a set of self-reports. The second is a recovery benchmark for agent runtimes with a published fault menu, run at several kill

placements and across more than one software version. Neither is exotic. Both are within reach of a team that already operates a fleet and keeps its traces, which is the same instrumentation the procedure below asks for.

Read Part III and Part VI as design arguments carrying named failure checks. A recovery path is often credited to an architecture diagram rather than to an injected fault, and ‘fault tolerant’ then describes the drawing. Every prescription in those parts resolves to something a reader can run against a live system. Kill a worker between an external effect and its completion record. Remove a gate’s dependency inside a contained environment and observe whether the action still reaches durable state. Replay recorded arrivals against a trivial rule and see which one wins.

A design argument that cannot be reduced to a check of that kind has not been stated precisely enough to test.

19.3 What this book does not settle

Almost none of the numbers here are settings to adopt. No refresh cadence for a repository index appears in the literature reviewed for Chapter 12, and that is a gap in the record rather than a value withheld. There is no universal kappa threshold that converts labels into truth, no k for a release gate, no context cap, no routing cost ratio, and no re-solve cadence for a fleet. Each is a local quantity fixed by a workload, a failure cost, and a review capacity.

A second group of open questions concerns transfer. Matching topology to task shape remains unvalidated for the repository-scale coding work this book is about, and the strongest result behind it was measured on short-form question answering, mathematics, and function-level code. The compaction results come from app, office, and question-answering agents. Most of the oversight evidence predates long-horizon agents and was collected on people accepting single suggestions. No controlled result in the reviewed set shows that a dynamic dependency graph beats a well-designed fixed schedule.

A third group is unmeasured. None of the evidence behind the release-test chapter estimates the gap between a public benchmark result and production reliability, so no conversion factor is available. The stale-context result rests on 17 curated samples and two models, which establishes a direction and no effect size for another codebase. Deletion propagation through a derived memory layer is close to unmeasured across the reviewed record.

A fourth question is how long any of this stays true. Several results here are capability snapshots: the context length at which a model still performs reliably on a task family, the share of decisive steps an automated attribution method identifies, the localization accuracy of a trace reader. Those will move with model releases, and a book that reported them as constants would age badly. The structural results are the ones I expect to survive. A single run is one draw, an optimizable score can be optimized against, an identity that reaches both the primary data and its recovery material defines one failure domain, and a component that never executed cannot have caused the outcome.

What replaces the missing constants is a local measurement, and each chapter names the specific one. The recurring set is short. Measure the run-to-run spread on the workload before crediting a delta. Measure the effective context length of the weakest task that has to work reliably, and the contribution of each retrieval lane on the operated corpus. Measure class-specific grader rates at the deployed threshold, and the queue volume a monitor’s false-positive rate produces at the actual base rate. Report the cost of an accepted result rather than the token bill.

The companion catalog indexes all 192 practices, arranged under the chapter whose mechanism each one extends. Read the chapter first, then look beneath it for the variant that fits your constraint. A compact entry cannot repeat the chapter’s full treatment of the mechanism, the

evidence class, and the failure boundary, and that reasoning is what decides whether a variant transfers. Entries marked as thin-support asides are leads for investigation, kept out of the taught set because their support does not justify a recommendation.

19.4 What to run first

The sequence below composes the closing procedures of several chapters into one pass through a system you already operate. It fits inside a week, and it produces the records the rest of the book depends on. Run the steps in order, because the later ones consume what the earlier ones preserve.

1. Take the most recent comparison you made on the strength of one number. Rerun both arms at least three times on the same items, keep the per-item record, and read the spread before reading the difference. A delta that stays smaller than the measured spread stays uncredited.
2. Add the inexpensive arm you skipped. Run the base model directly, then with one retry under a failure signal the deployed system can observe. Report accuracy and cost as two coordinates, and store the pricing snapshot beside the token counts.
3. Inventory one live agent identity from the running process rather than from the architecture diagram. Enumerate every destructive action it can reach without a fresh human decision, follow the delegation edges, and check whether one credential reaches both the primary data and its recovery path. Then attempt the prohibited write under the ordinary identity and require the denial from the enforcing system.
4. Verify one recent completion claim against the workspace or the system of record. Compare the revisions, rerun the relevant check, and keep the attempt identity with the result. Any discrepancy becomes the first test case for the resume and review path.
5. Read the last twenty failed runs end to end and annotate the first upstream failure in each. The first question the trace cannot answer is an instrumentation defect. Add the missing state reference, ordering relation, or identity, then version the schema and keep the old runs decodable.
6. Write the promotion rule before the next release comparison. Record the success floor, the cost ceiling, the repeat count, and the condition under which the mechanism counts as having actually run. Then run the comparison against a stored baseline on the same task versions.

Each step leaves an artifact the next decision can be challenged against. A distribution replaces a score. Two coordinates replace one. A denial issued by an enforcing layer replaces an assurance about permissions, and a diff with a rerun replaces a completion claim. A labeled failure corpus and a threshold fixed in advance replace a recollection of how the last release went.

None of those artifacts certifies that a system is reliable. They make the next reliability claim checkable by someone who did not make it. Begin with step one this week, on the comparison you are currently most confident about, and keep the per-item record even when the rerun agrees with you.

19.5 Sources and evidence

No evidence is introduced here. Each identifier below is carried by the chapter named, and the class and strength come from that chapter's record.

- lit/strong: Skalse, Howe, Krashennikov & Krueger (2022). Defining and Characterizing Reward Hacking. NeurIPS 2022. arXiv:2209.13085. Chapter 6, **layer-signals-beyond-single-proxy**.
- lit/strong: Zhang, S., et al. (2025). Which Agent Causes Task Failures and When? On

Automated Failure Attribution of LLM Multi-Agent Systems. ICML 2025. arXiv:2505.00212. Chapter 10, **keep-humans-in-failure-attribution**.

- lit/directional: Kapoor, Stroebl, Siegel, Nadgir & Narayanan (2024). AI Agents That Matter. arXiv:2407.01502. Chapter 2, **report-cost-accuracy-pareto**.
- explorer/strong: Chen, J., et al. (2016). Sampling as a Baseline Optimizer for Search-Based Software Engineering. arXiv:1608.07617. Chapter 18, **replay-traces-before-policy-changes**.

The part-level and chapter-level evidence shares restated above come from the structure of record, which recomputed them from the catalog: Part I 19 of 32 strong, Part III 4 of 29, Part IV 20 of 38, Part VI 6 of 27, and Chapter 7 at zero strong items with no literature item of any class.