


Self-Supervised Learning


Transformer-based SSL

Sungjoon Choi, Korea University

Content

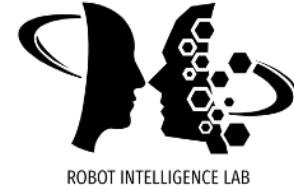


- Transformer
- ViT
- DINO

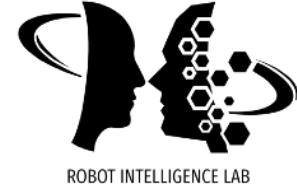

Transformer


"Attention is All You Need," 2017

Transformer

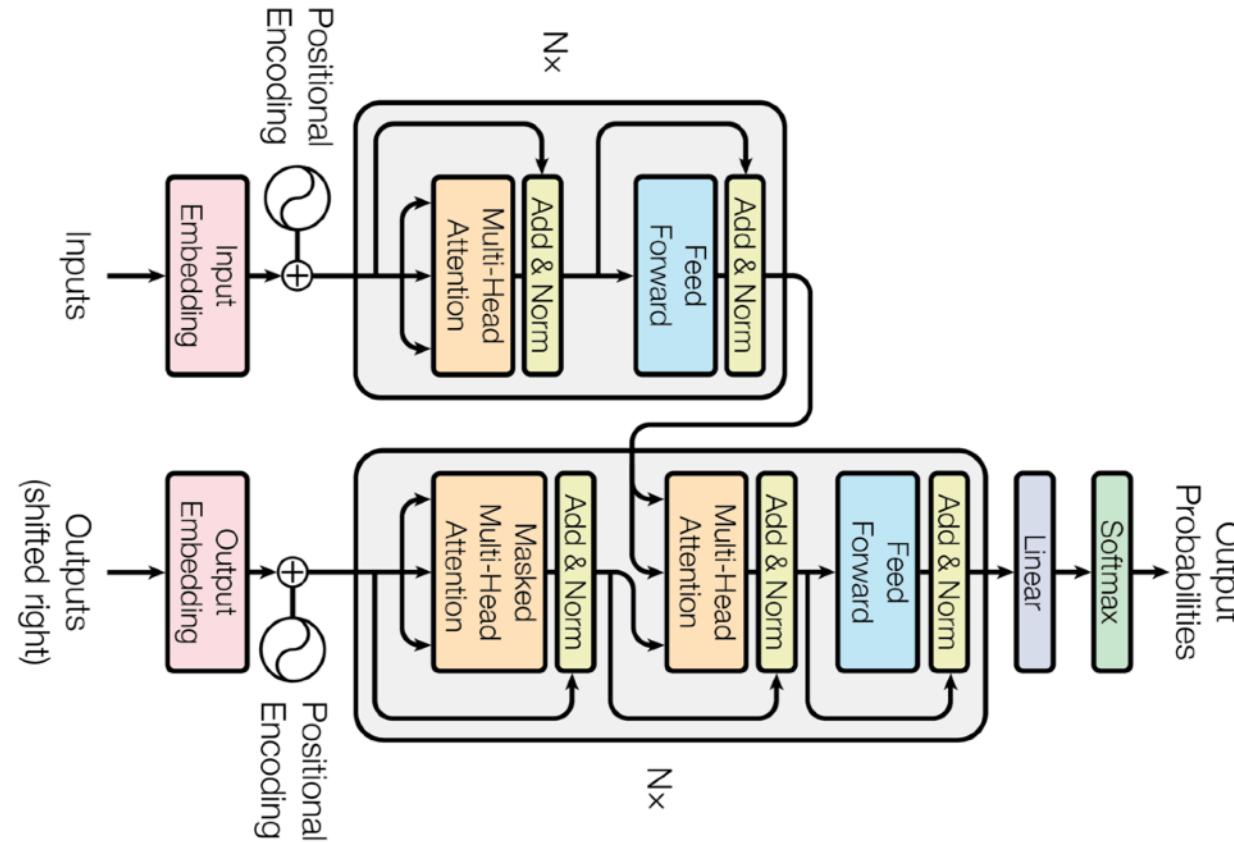


Transformer is the first sequence transduction model based entirely on attention.

Bird's eye view


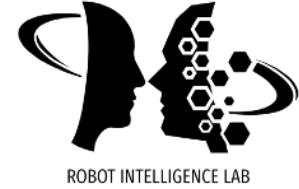


Glide down a little

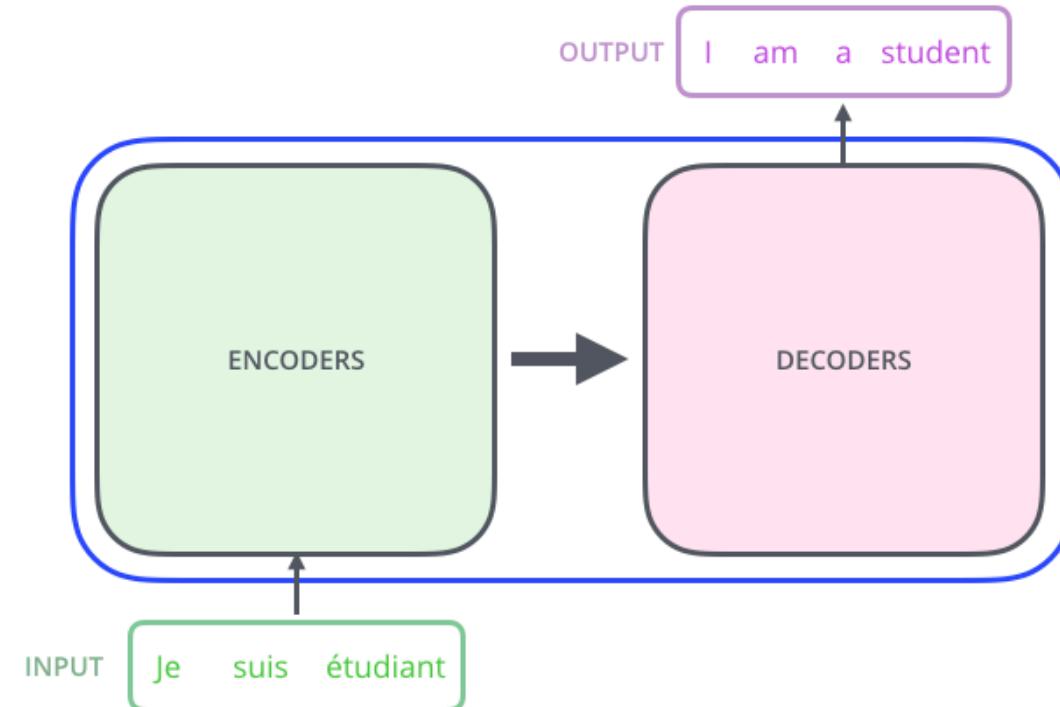



It consists of an **encoder** and a **decoder**

Glide down a little more

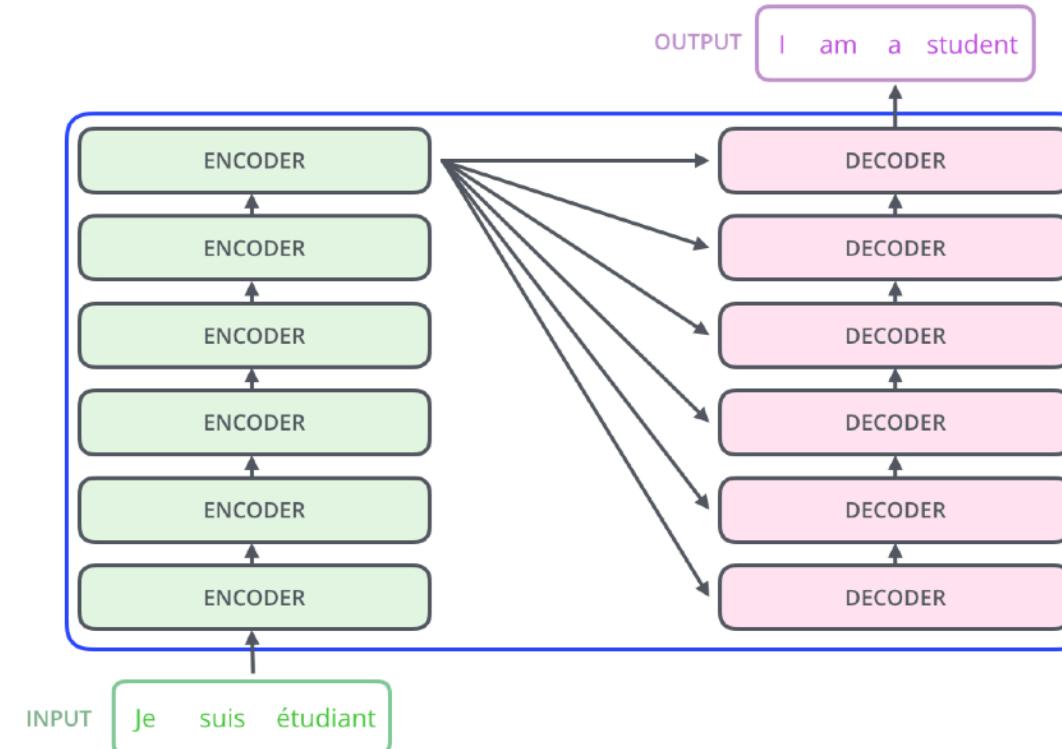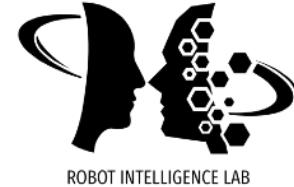



What information is being set from an **encoder** to a **decoder**?

Encoder

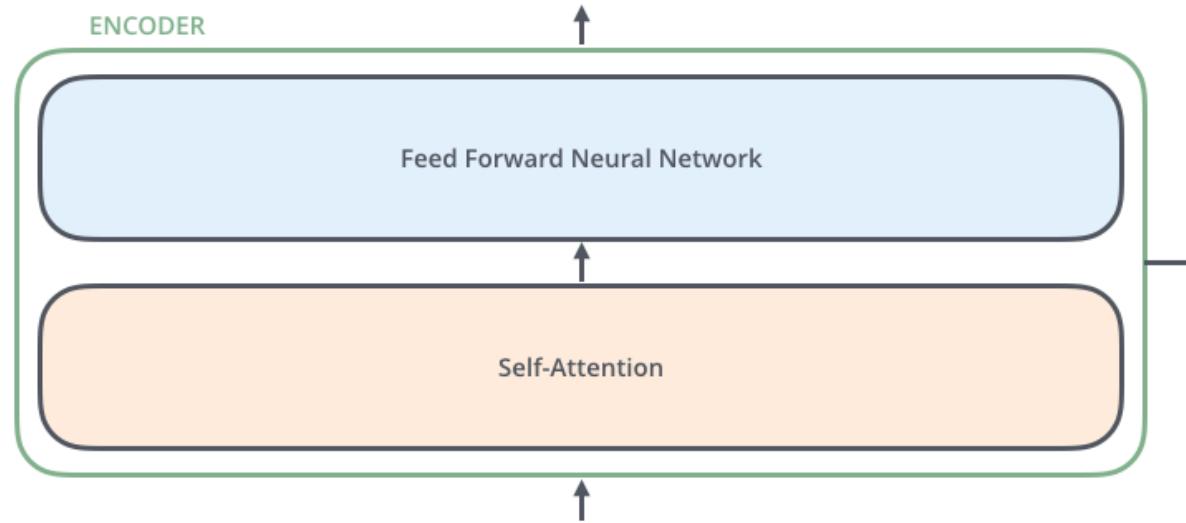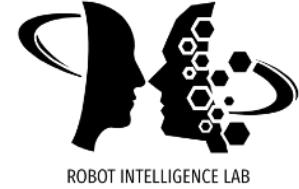


Each encoder has an identical structure where the **Self-Attention** layer is the cornerstone of Transformer.

Encoder-Decoder

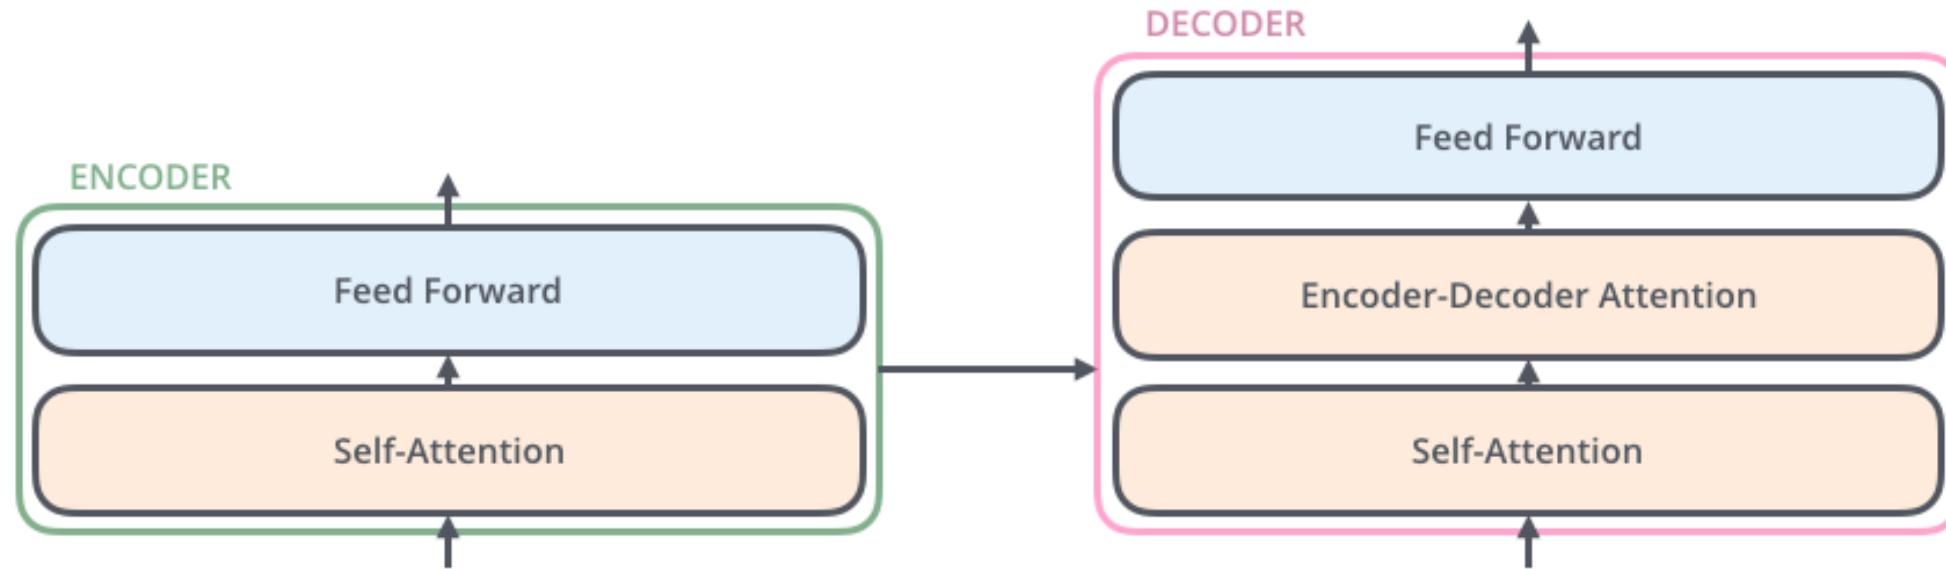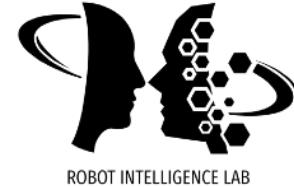


Decoder has an additional structure, **Encoder-Decoder Attention**, along with self-attention block


Input



Je




suis



étudiant



Each input (e.g., word) is represented with embedding vectors.

Encoder

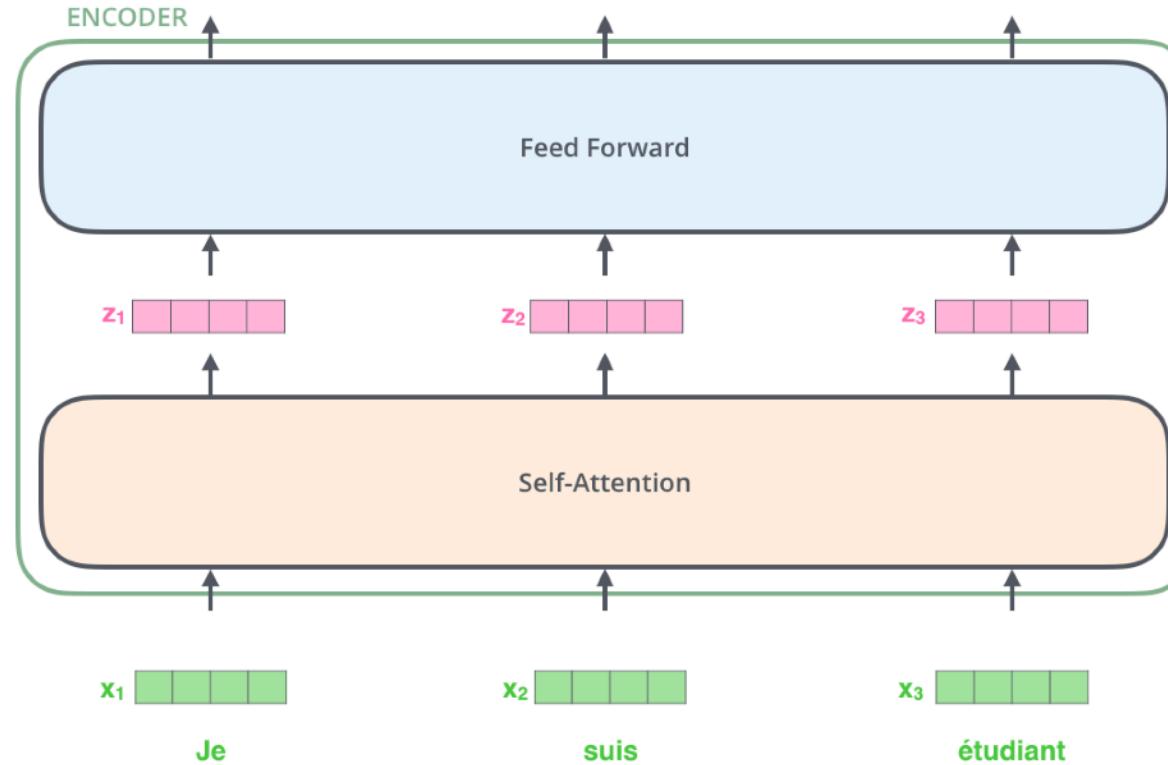


Each input is encoded by first passing through a **Self-Attention** layer followed by a **Feed-Forward** layer

Encoder

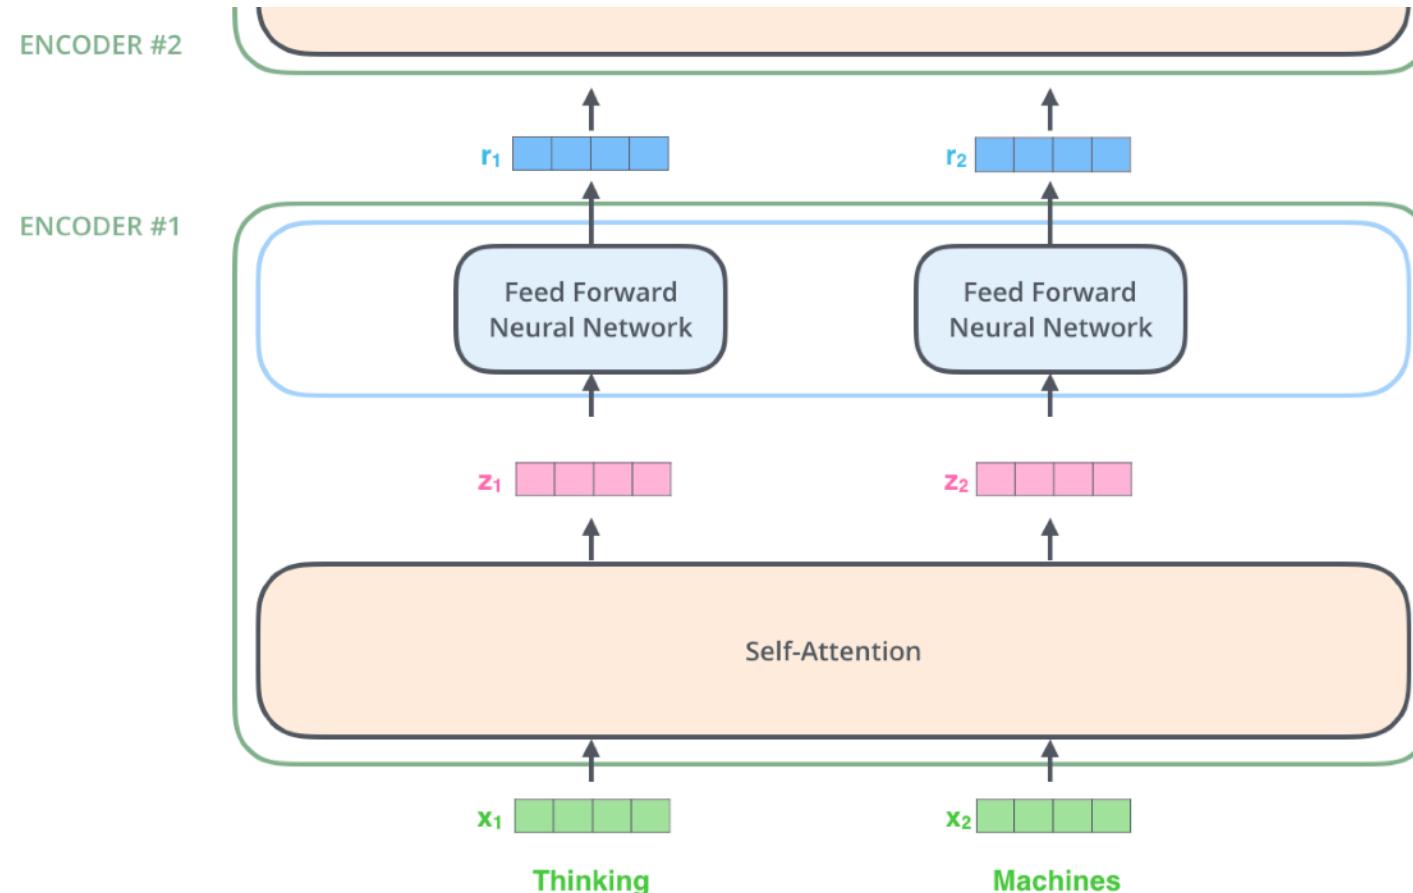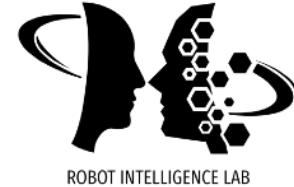


Suppose we have two words, **Thinking** and **Machines**, as an input sequence.

Self Attention


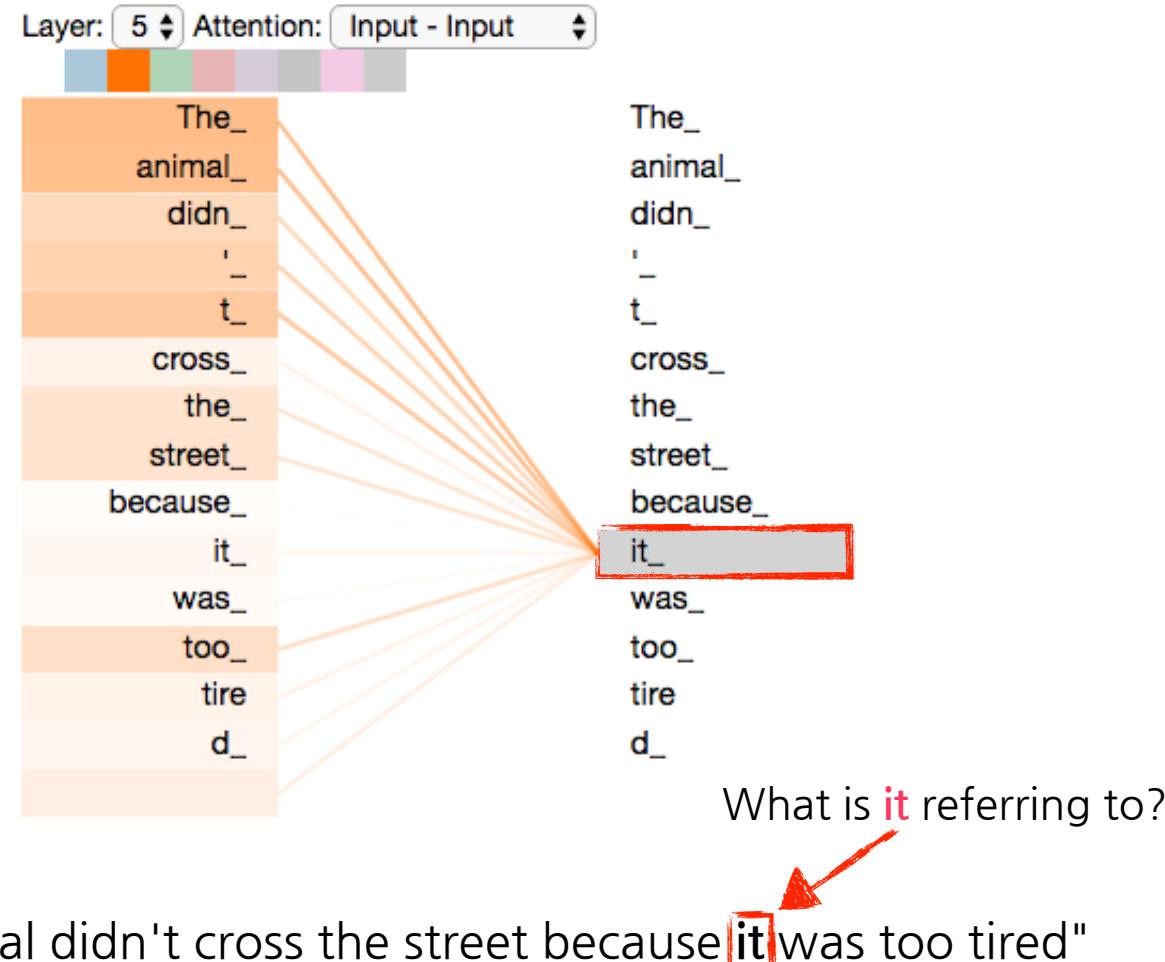


Encoder

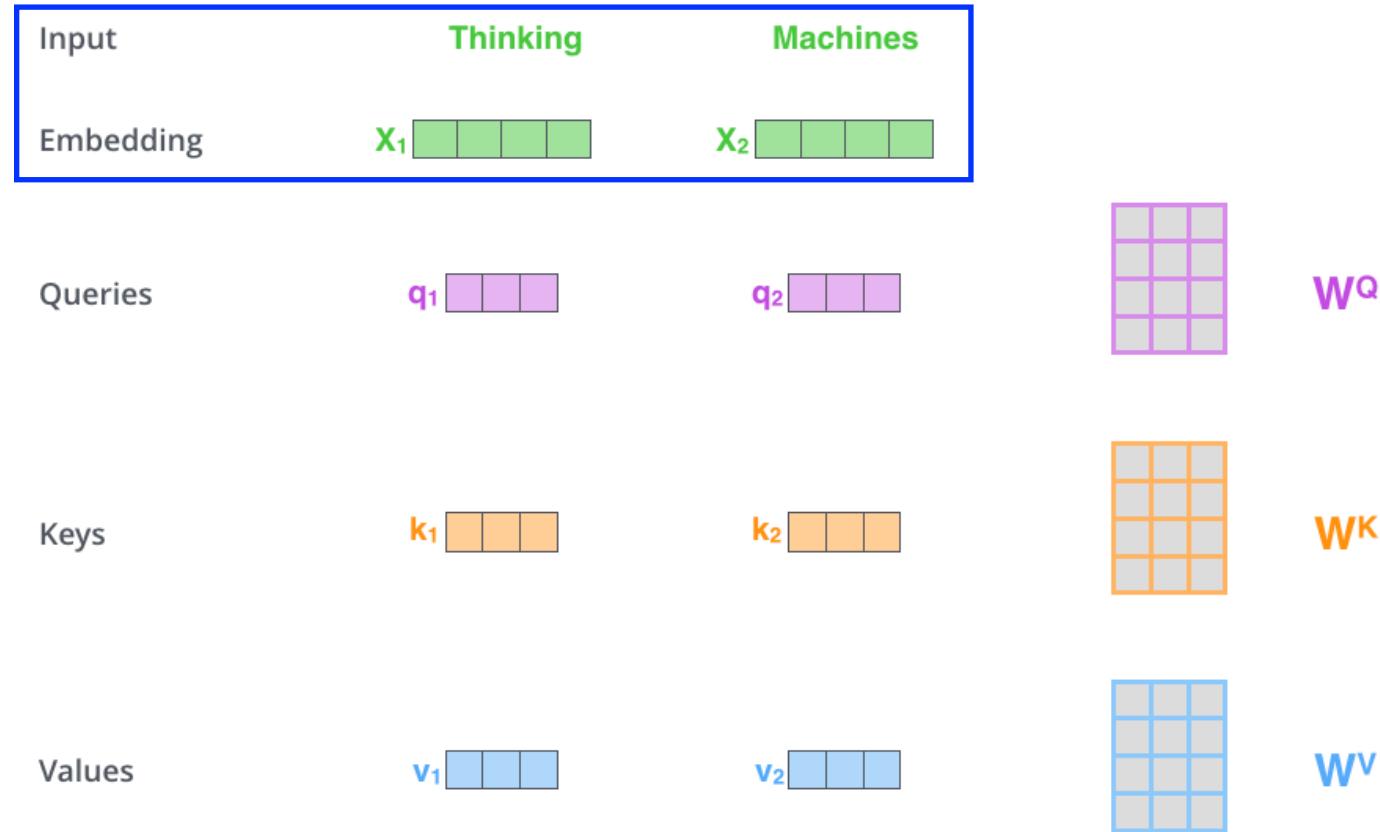


Each input is represented with an **embedding vector** (e.g., Word2Vec)

Encoder

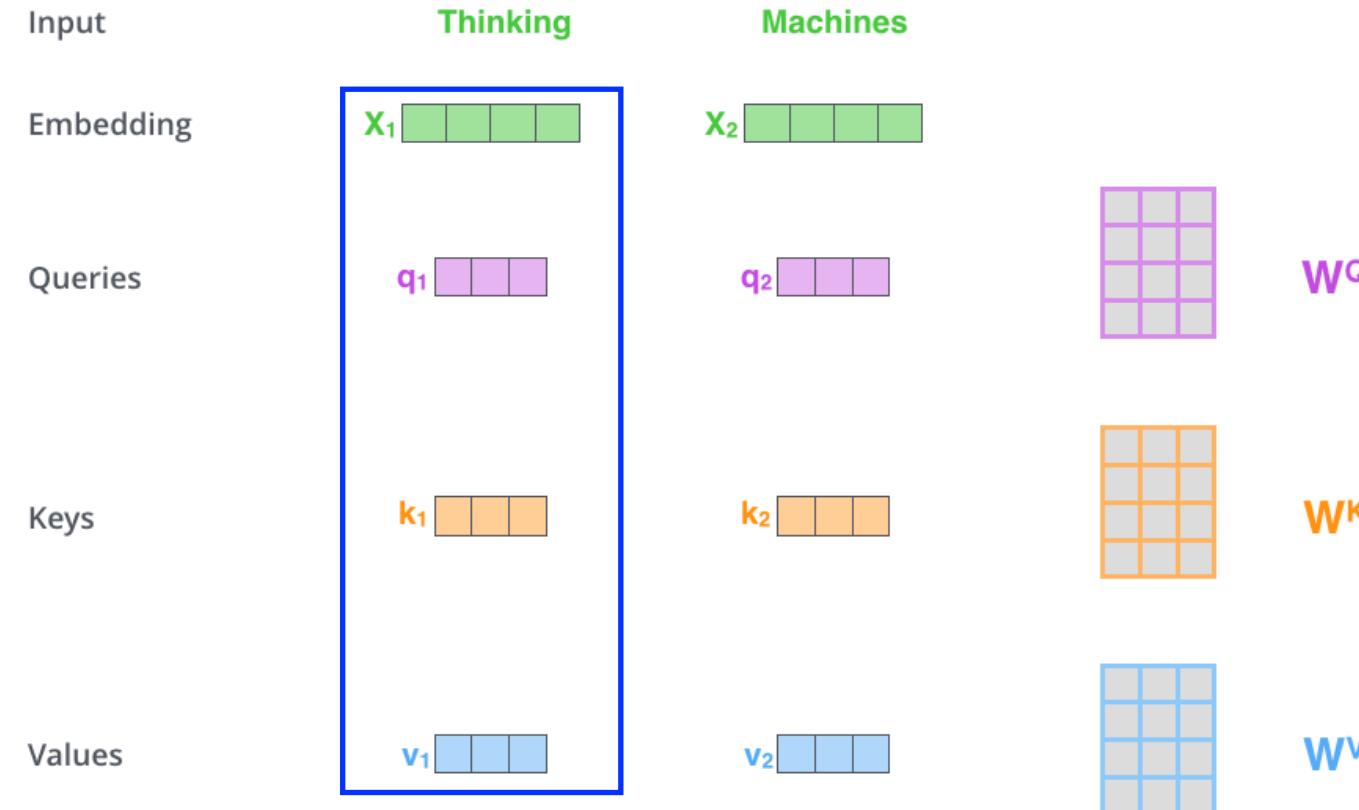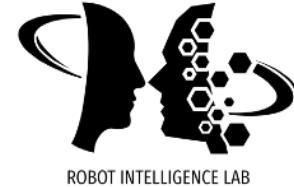


Query, Key, and Value vectors are computed from the embedding vecotor using three different networks.

Encoding 'Thinking'

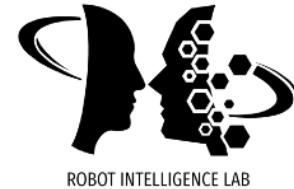


Suppose we want to encode 'Thinking'

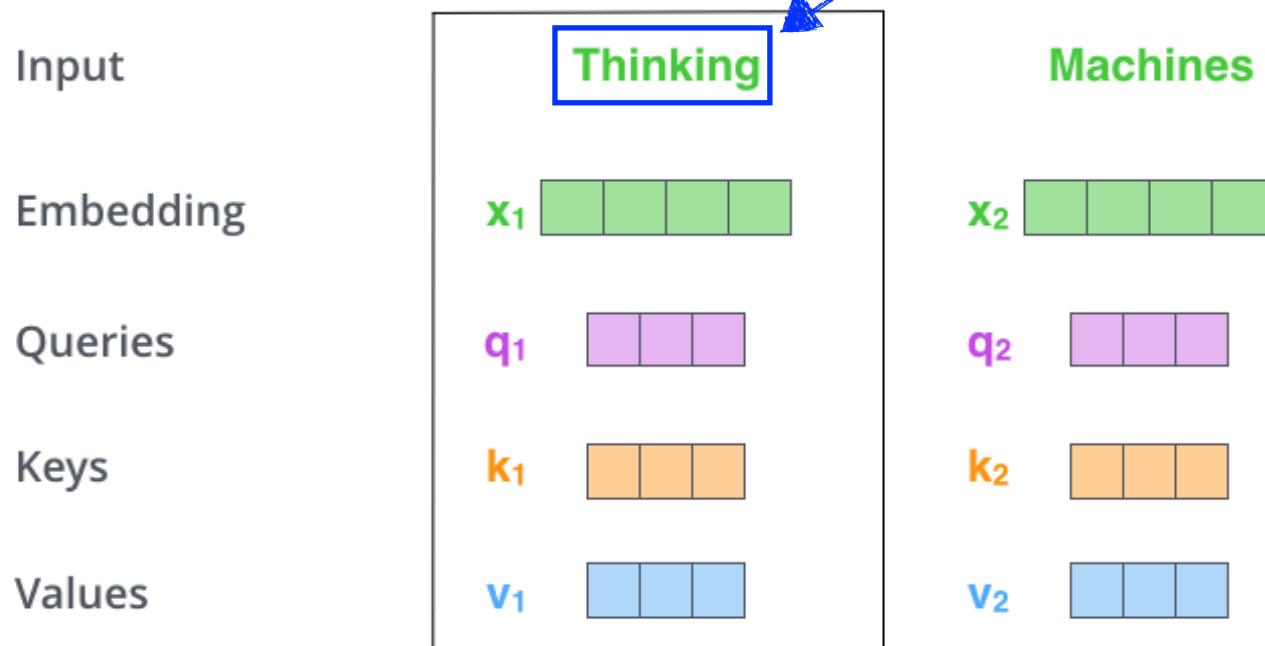

Encoding 'Thinking'




Suppose we want to encode 'Thinking'

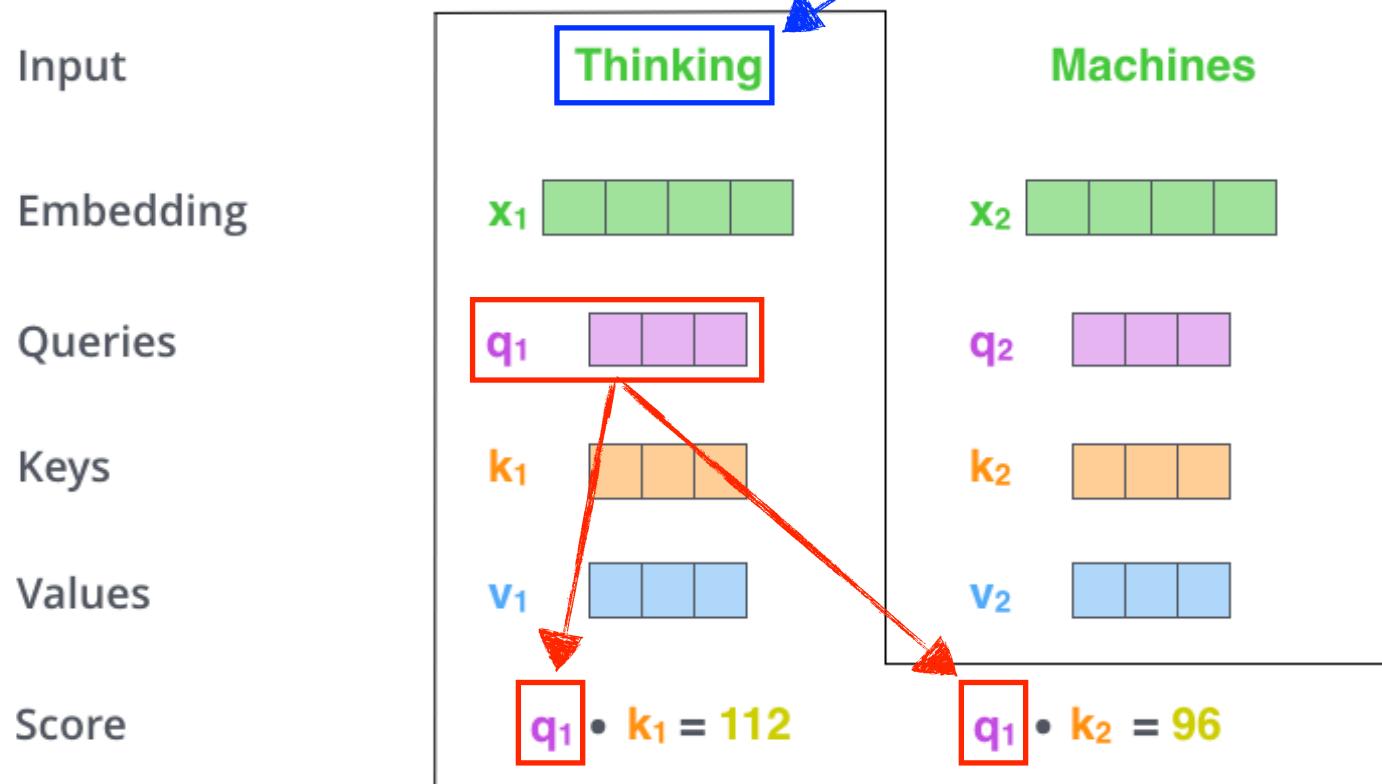


Query vector comes from the encoding word (i.e., Thinking)

Encoding 'Thinking'

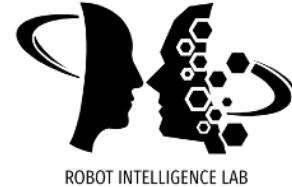


Suppose we want to encode 'Thinking'

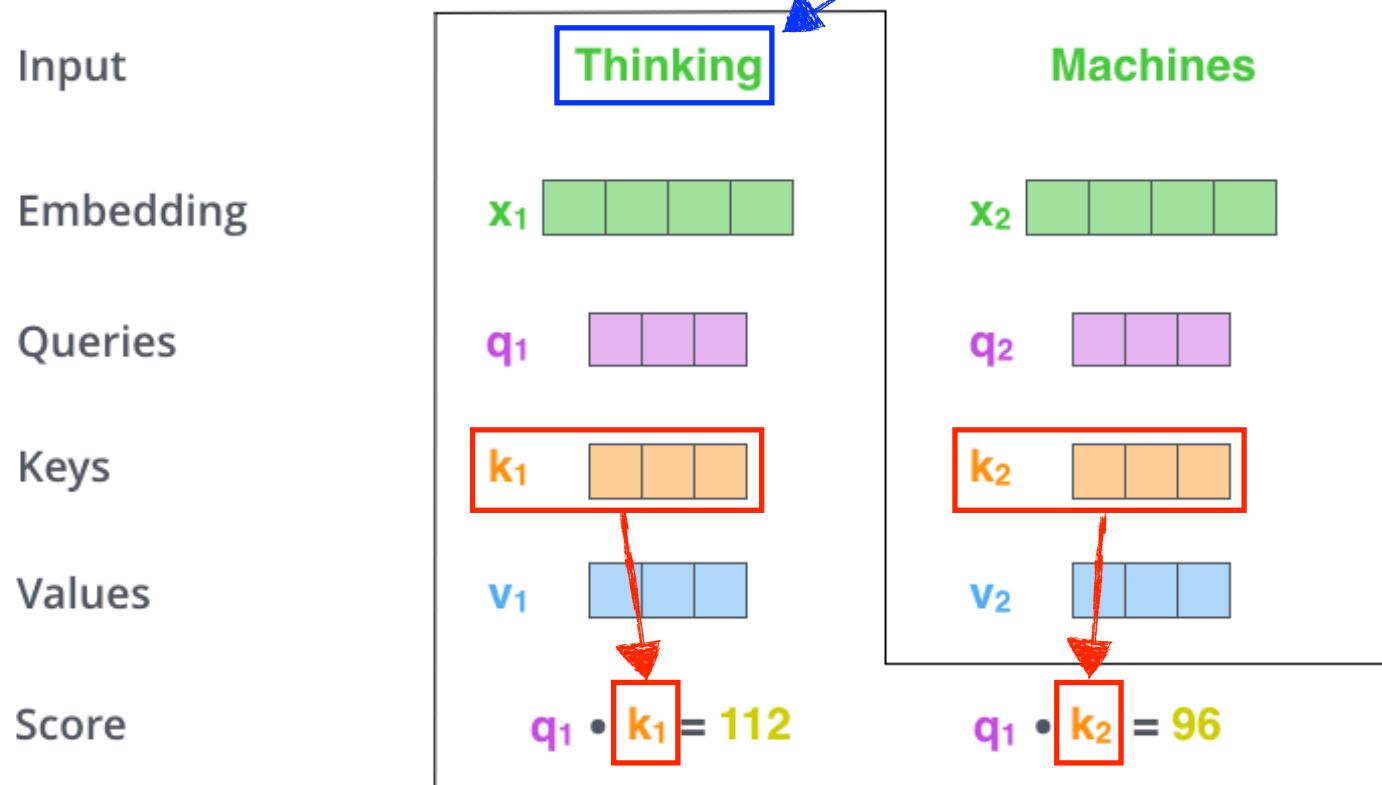


Key vector comes from the corresponding target words (i.e., Thinking and Machines)

Encoding 'Thinking'

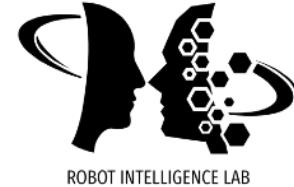

Suppose we want to encode 'Thinking'

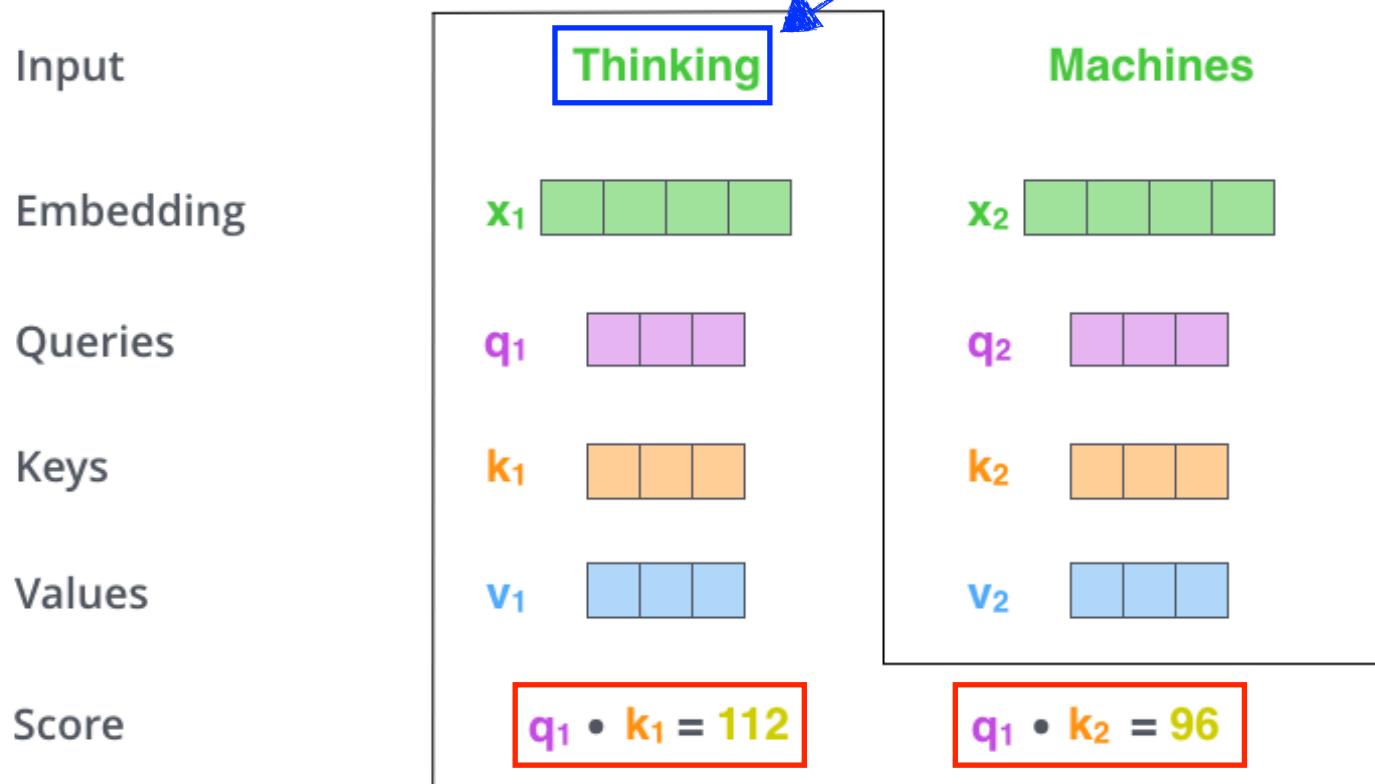

The **score** of each input is computed from the inner products between **query** and **key** vectors



Encoding 'Thinking'





Suppose we want to encode 'Thinking'

Input	Thinking	
Embedding	x_1	x_2
Queries	q_1	q_2
Keys	k_1	k_2
Values	v_1	v_2
Score	$q_1 \cdot k_1 = 112$	$q_1 \cdot k_2 = 96$
Divide by 8 ($\sqrt{d_k}$)	14	12
Softmax	0.88	0.12


Encoding 'Thinking'

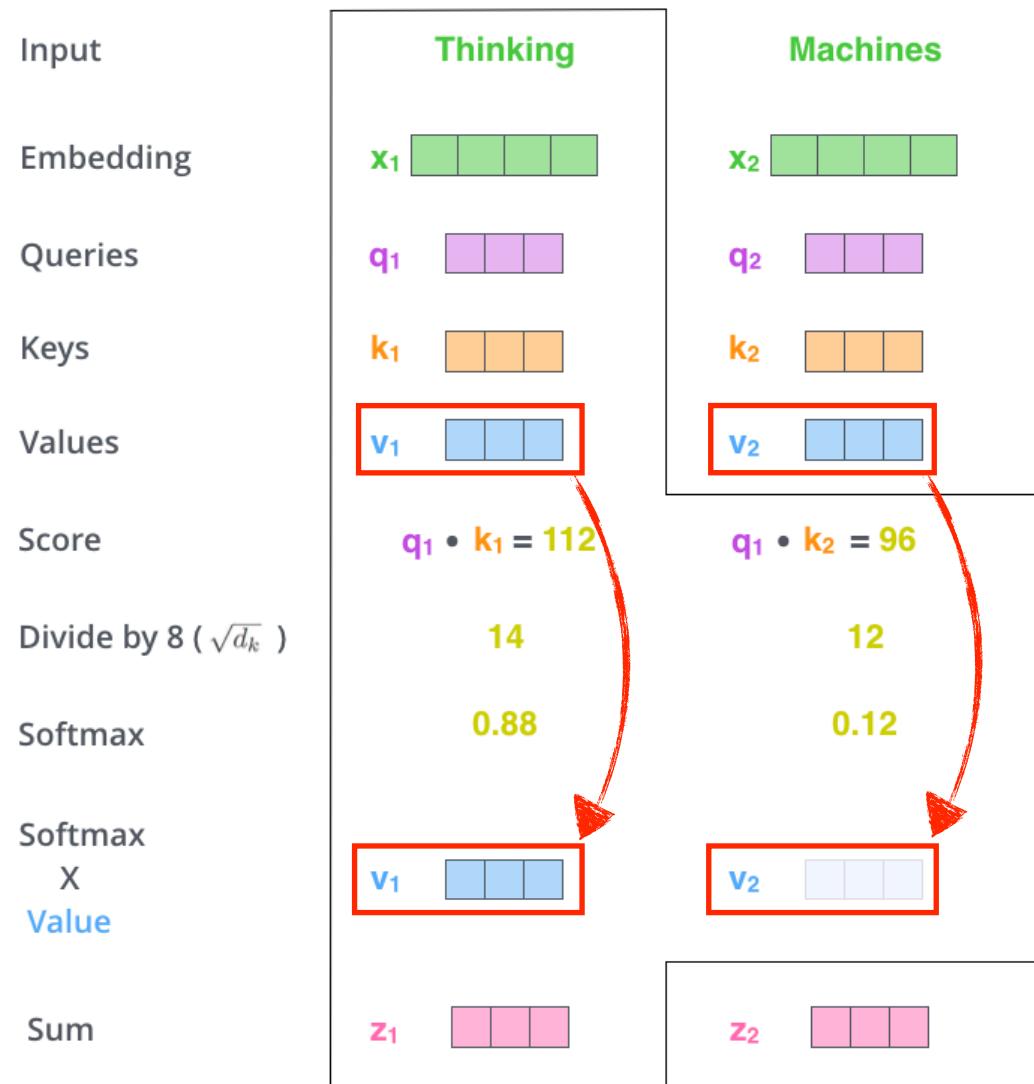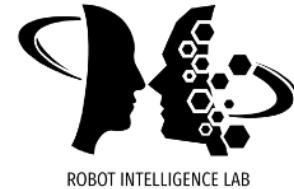

Computing Q, K, and V

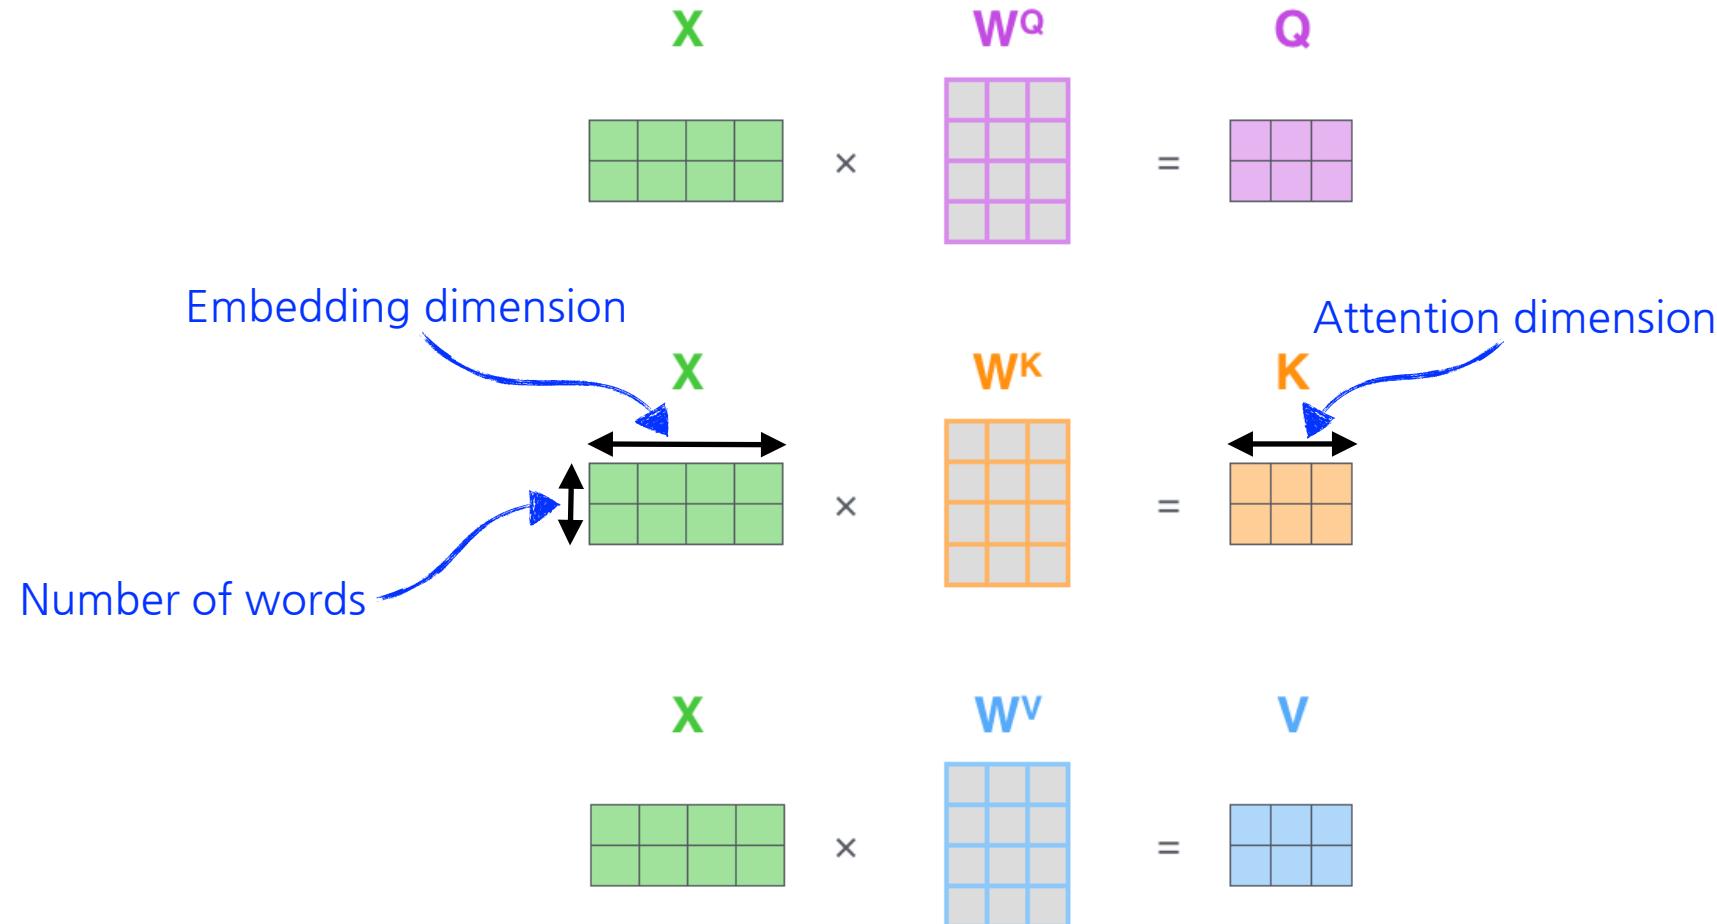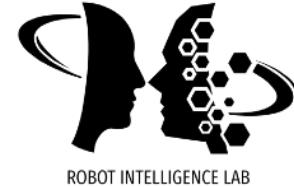


Multi-Head Attention (MHA)

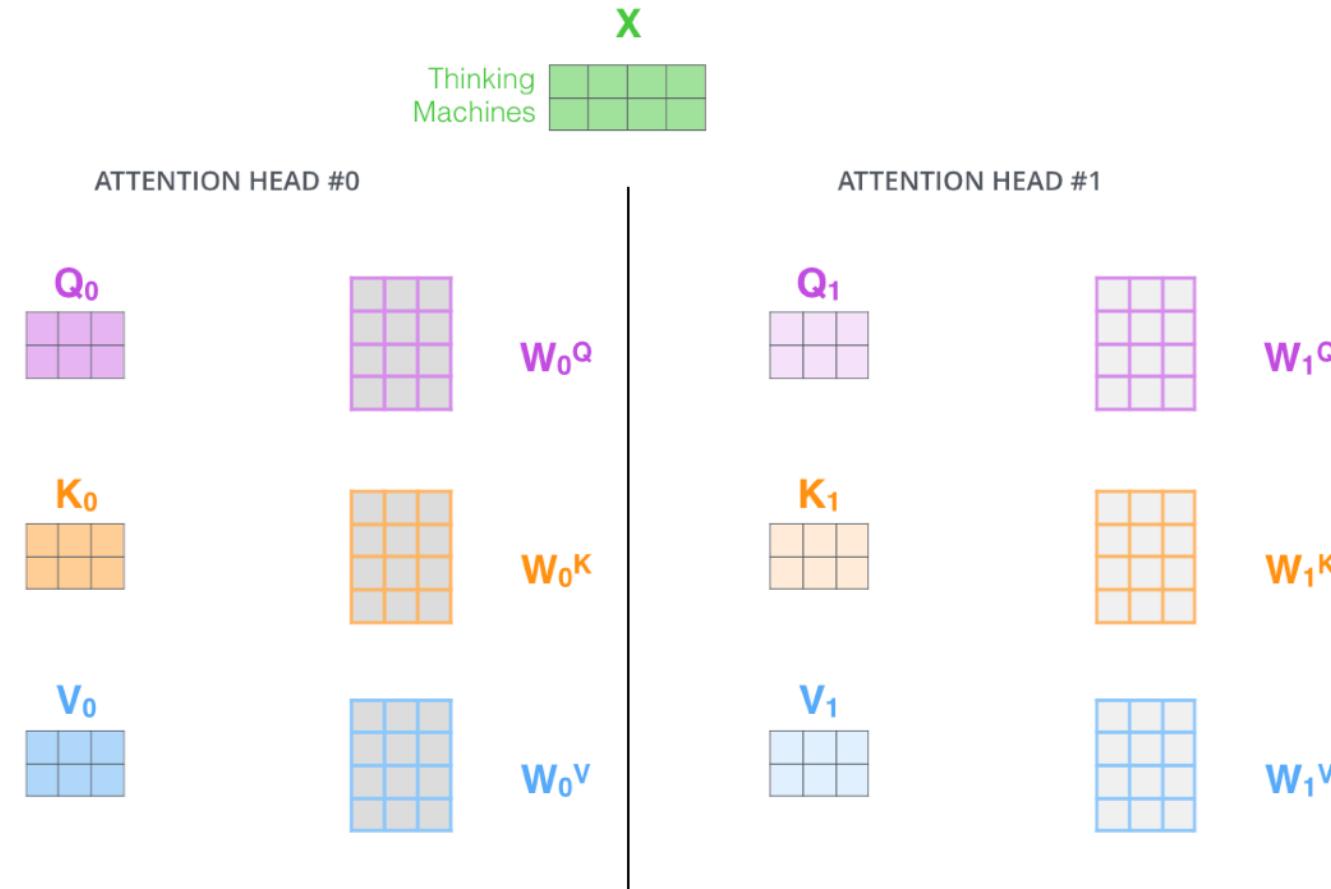

Multi-Head Attention (MHA) allows to focus on different positions (attentions)

Multi-Head Attention (MHA)

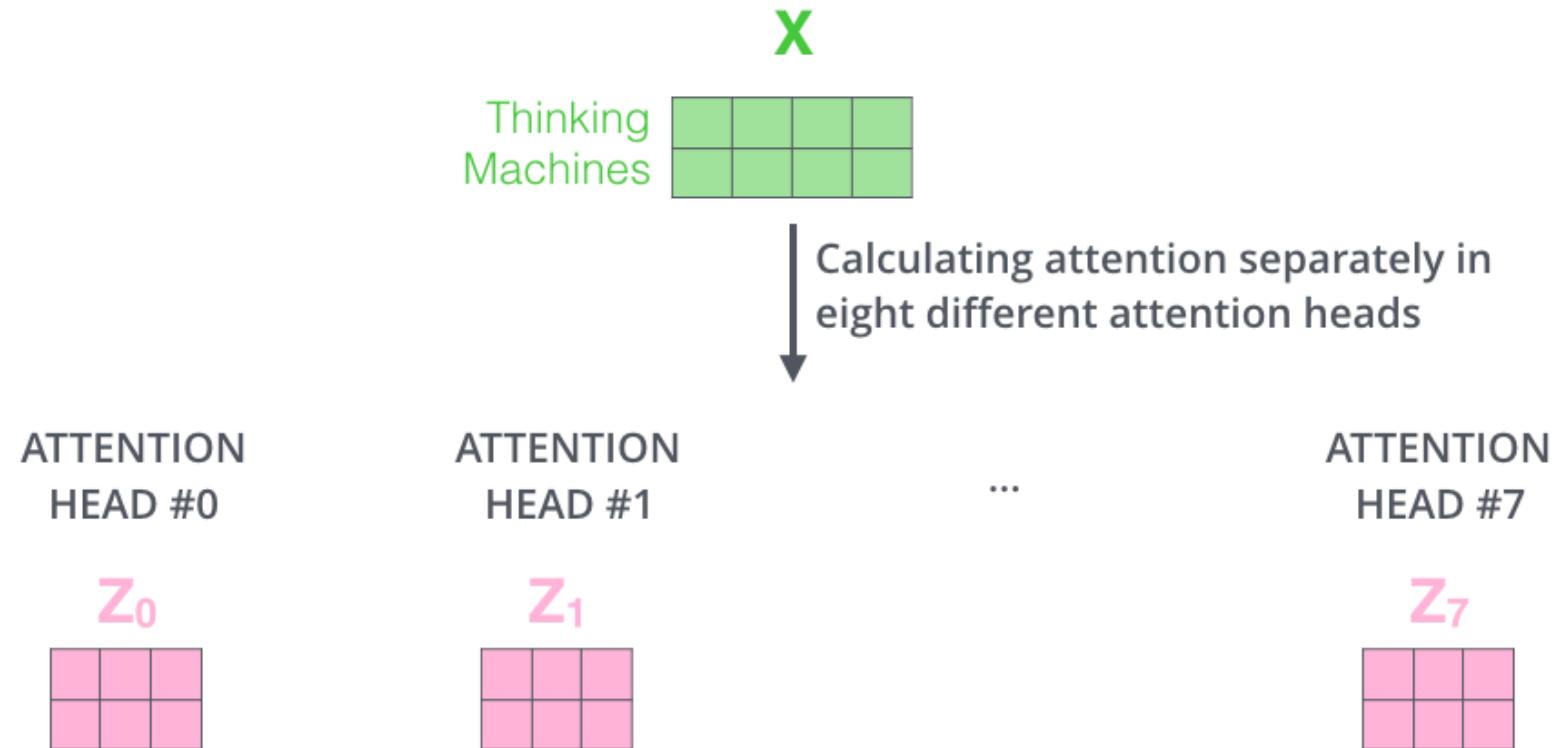

How do we accumulate multiple attention results from MHA?

Simple Linear Map




1) Concatenate all the attention heads



2) Multiply with a weight matrix W^o that was trained jointly with the model

X

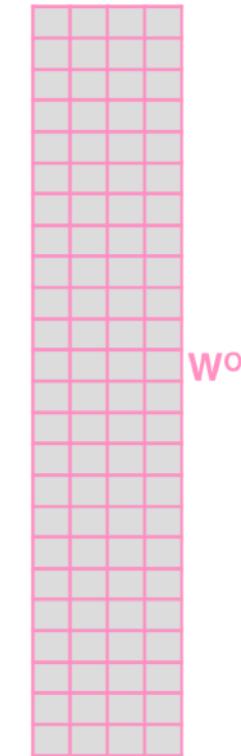


3) The result would be the Z matrix that captures information from all the attention heads. We can send this forward to the FFNN




First **concatenate** and then pass it through a (learnable) linear map to reduce the dimension

Summary

1) This is our input sentence* 2) We embed each word*

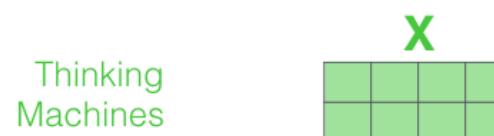



3) Split into 8 heads. We multiply **X** or **R** with weight matrices

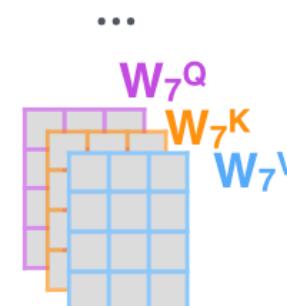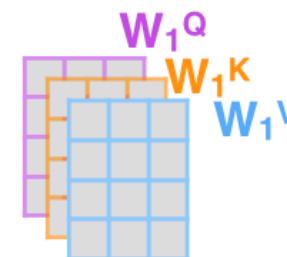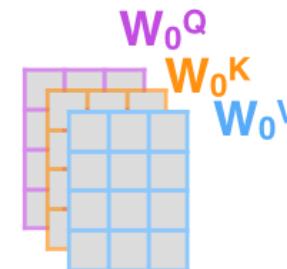

4) Calculate attention using the resulting Q/K/V matrices




5) Concatenate the resulting **Z** matrices, then multiply with weight matrix **W^O** to produce the output of the layer



* In all encoders other than #0, we don't need embedding. We start directly with the output of the encoder right below this one






Ordering?


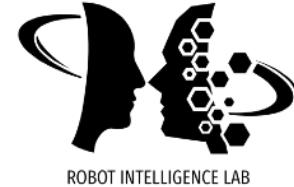


Is Transformer **input-order dependent?**


Positional Encoding

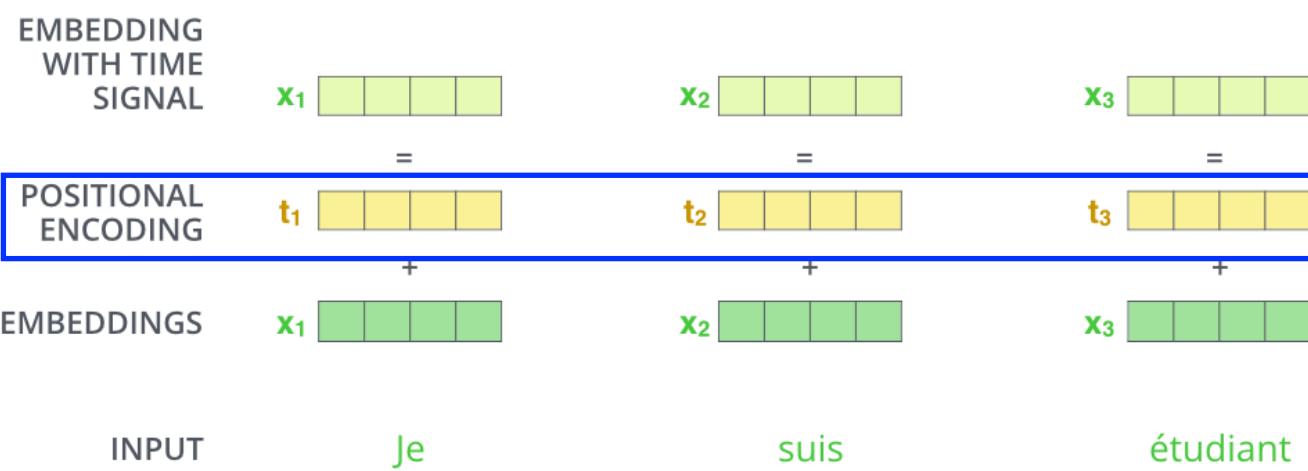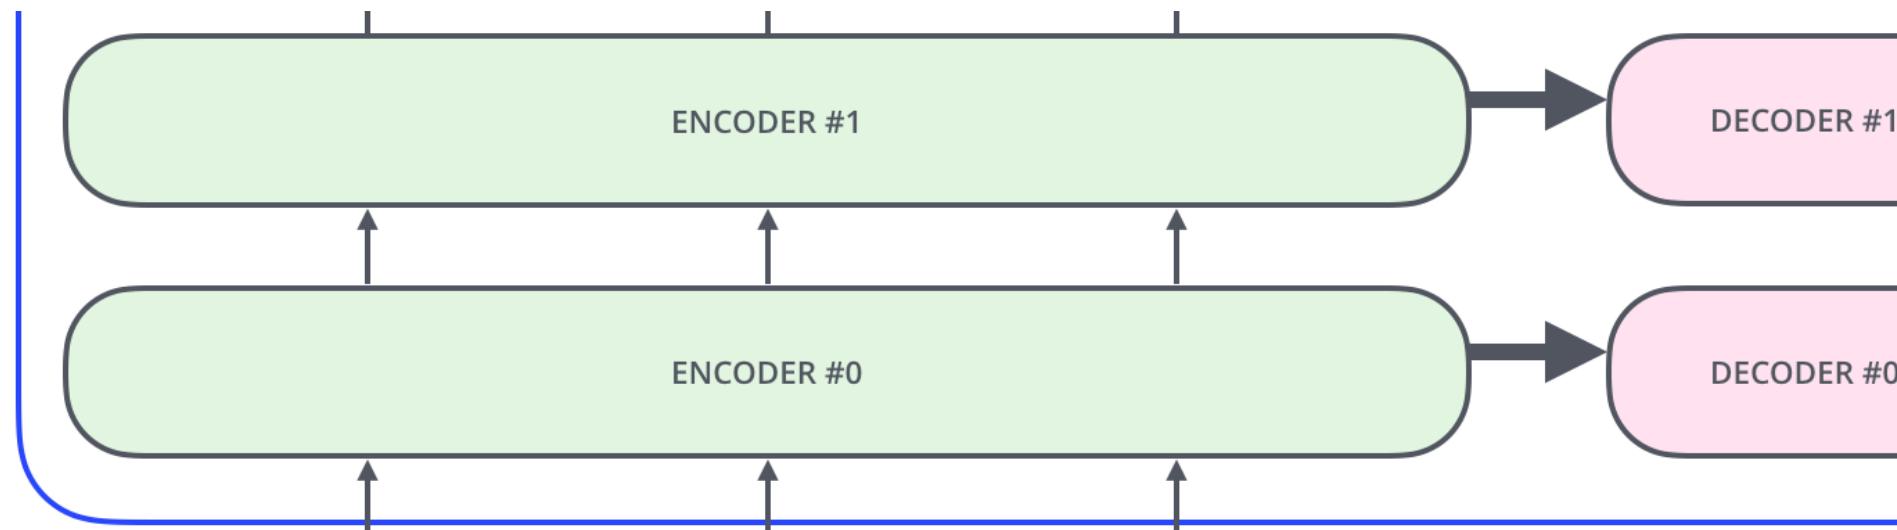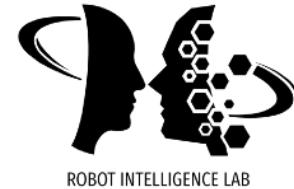


Positional Encoding

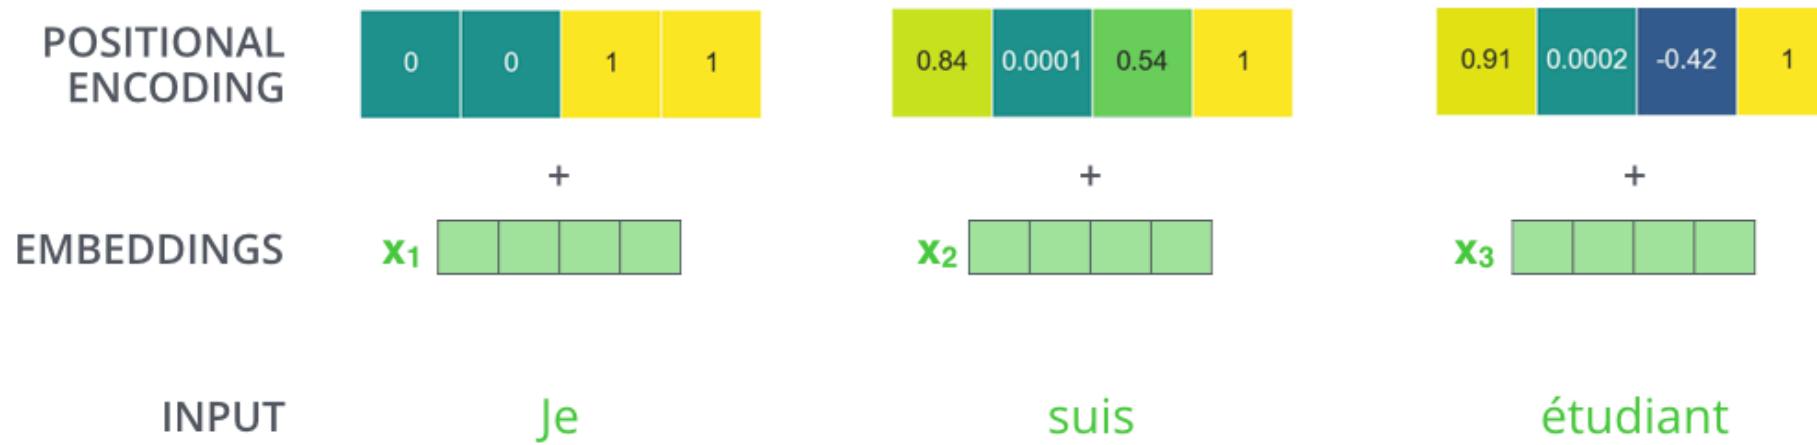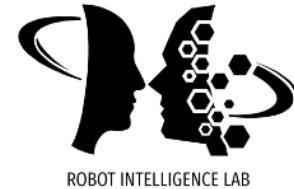


Positional Encoding

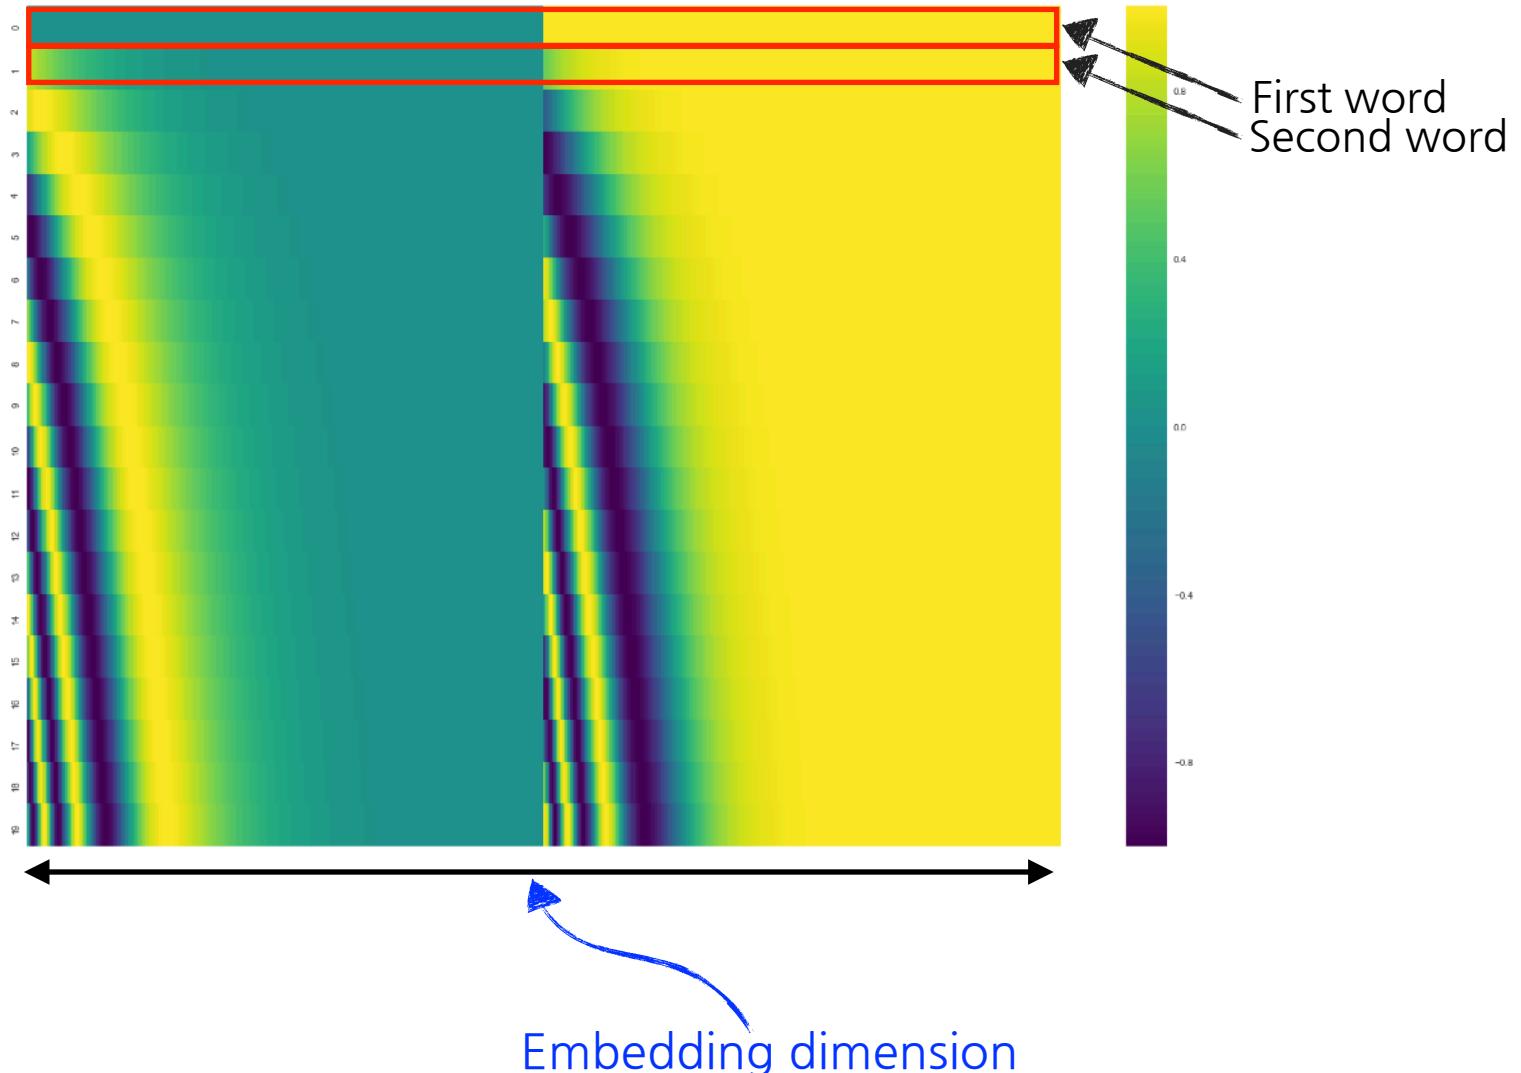

Encoder

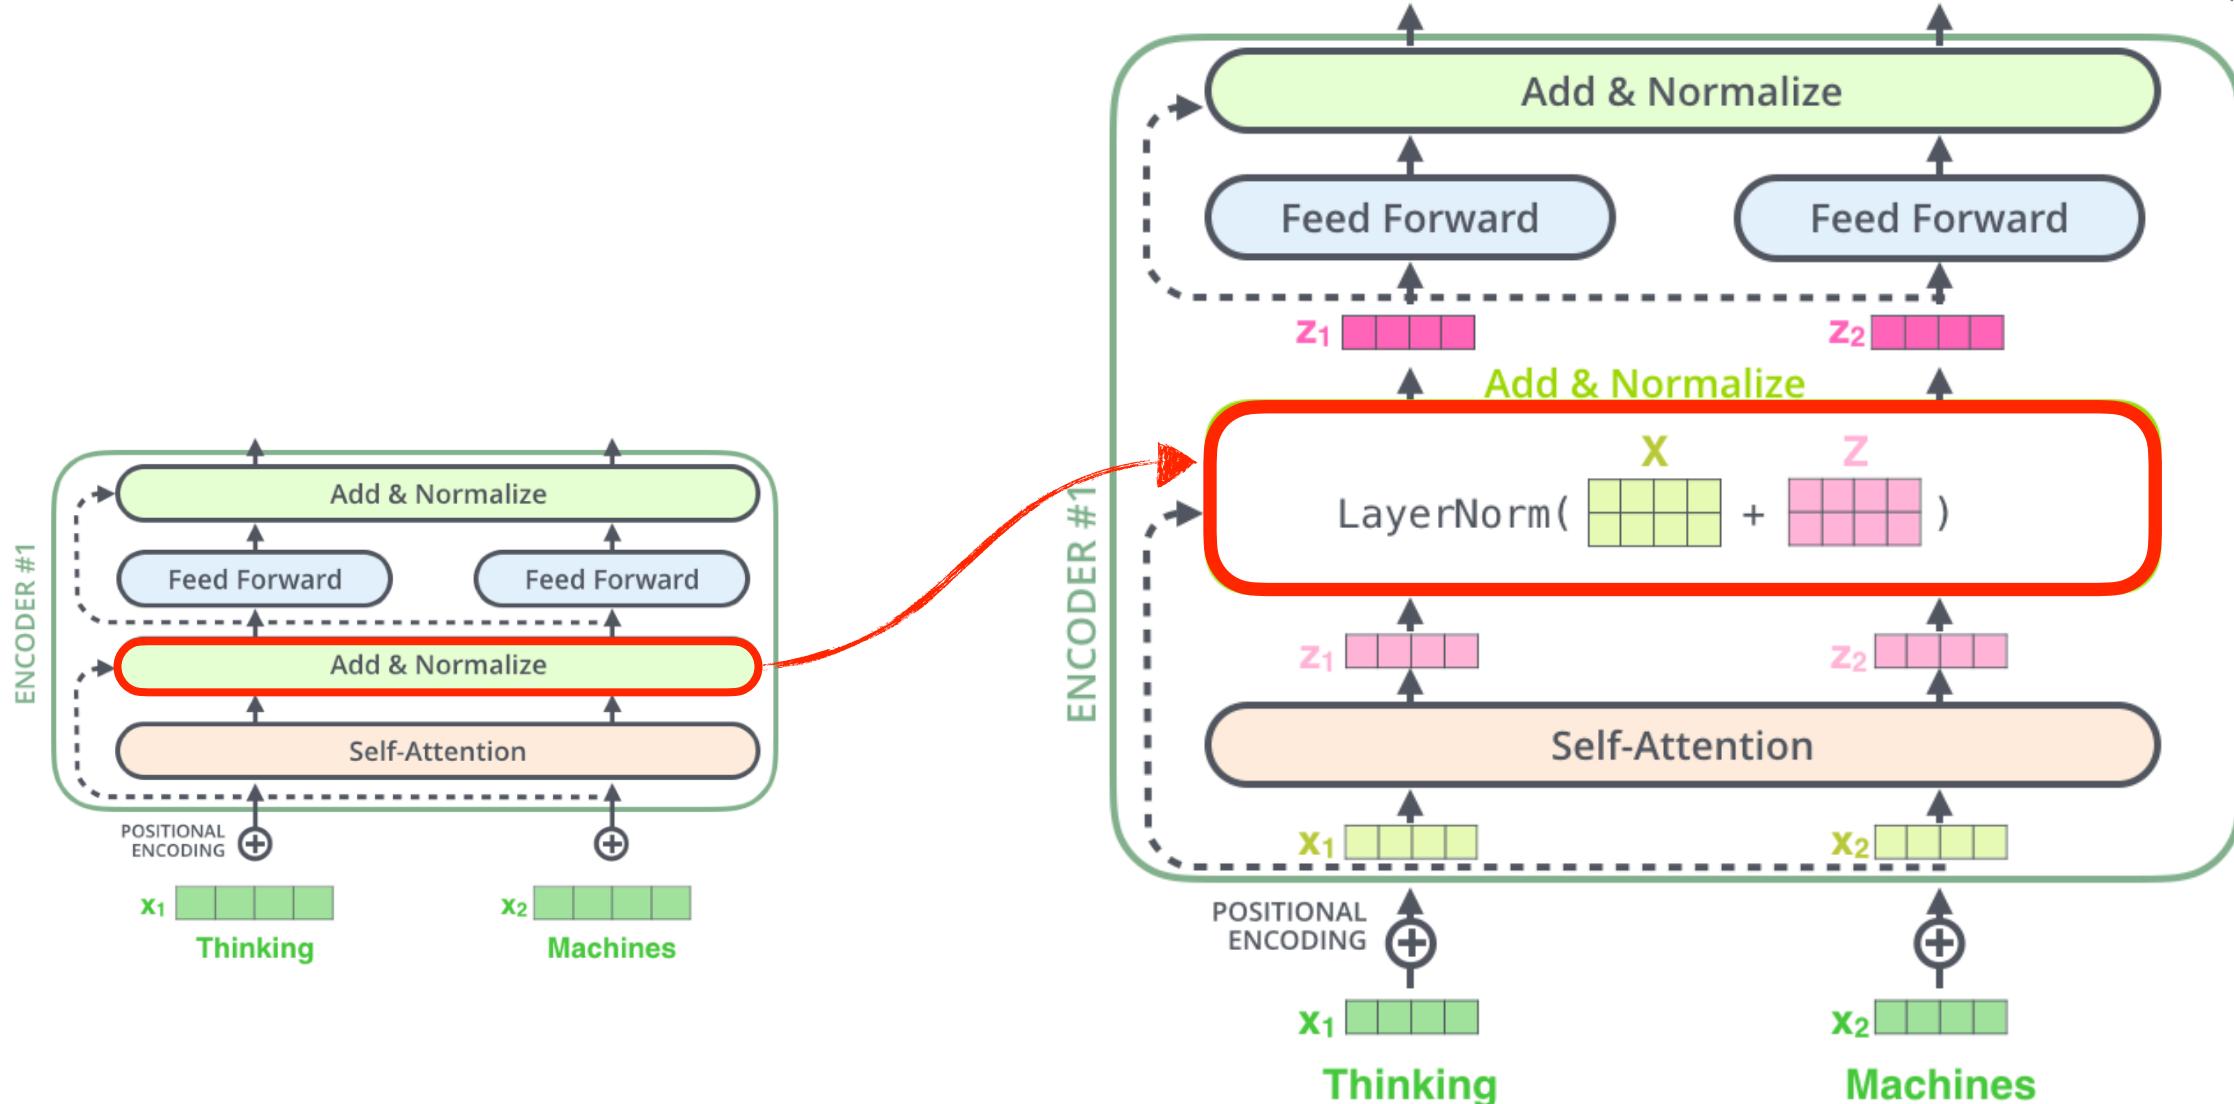


Encoder-Decoder

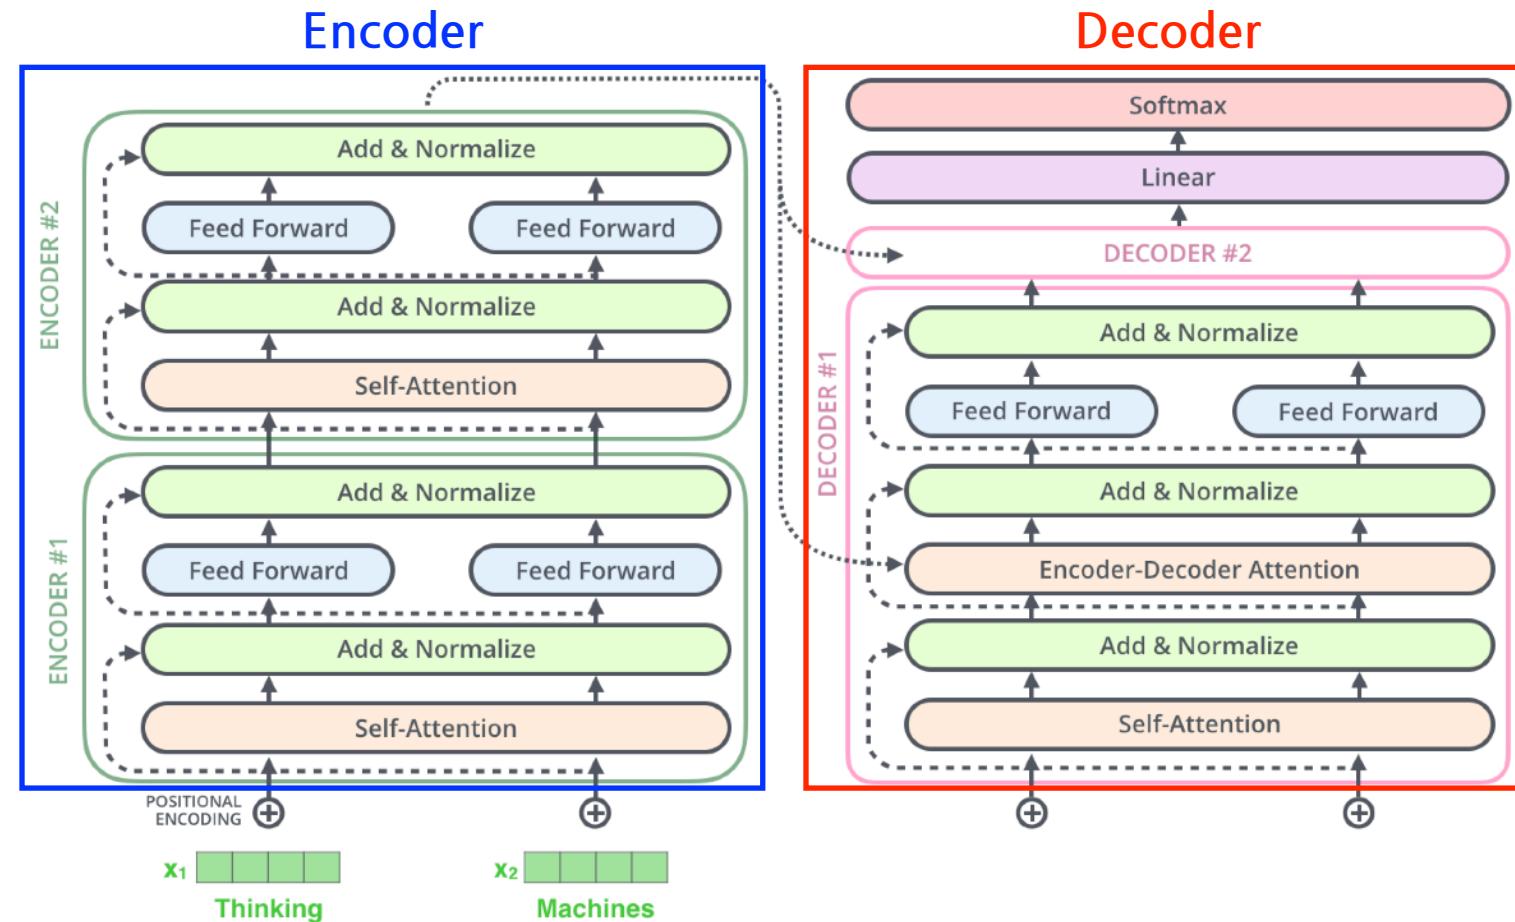


Both **Encoder** and **Decoder** have similar architectures.

Encoder-Decoder

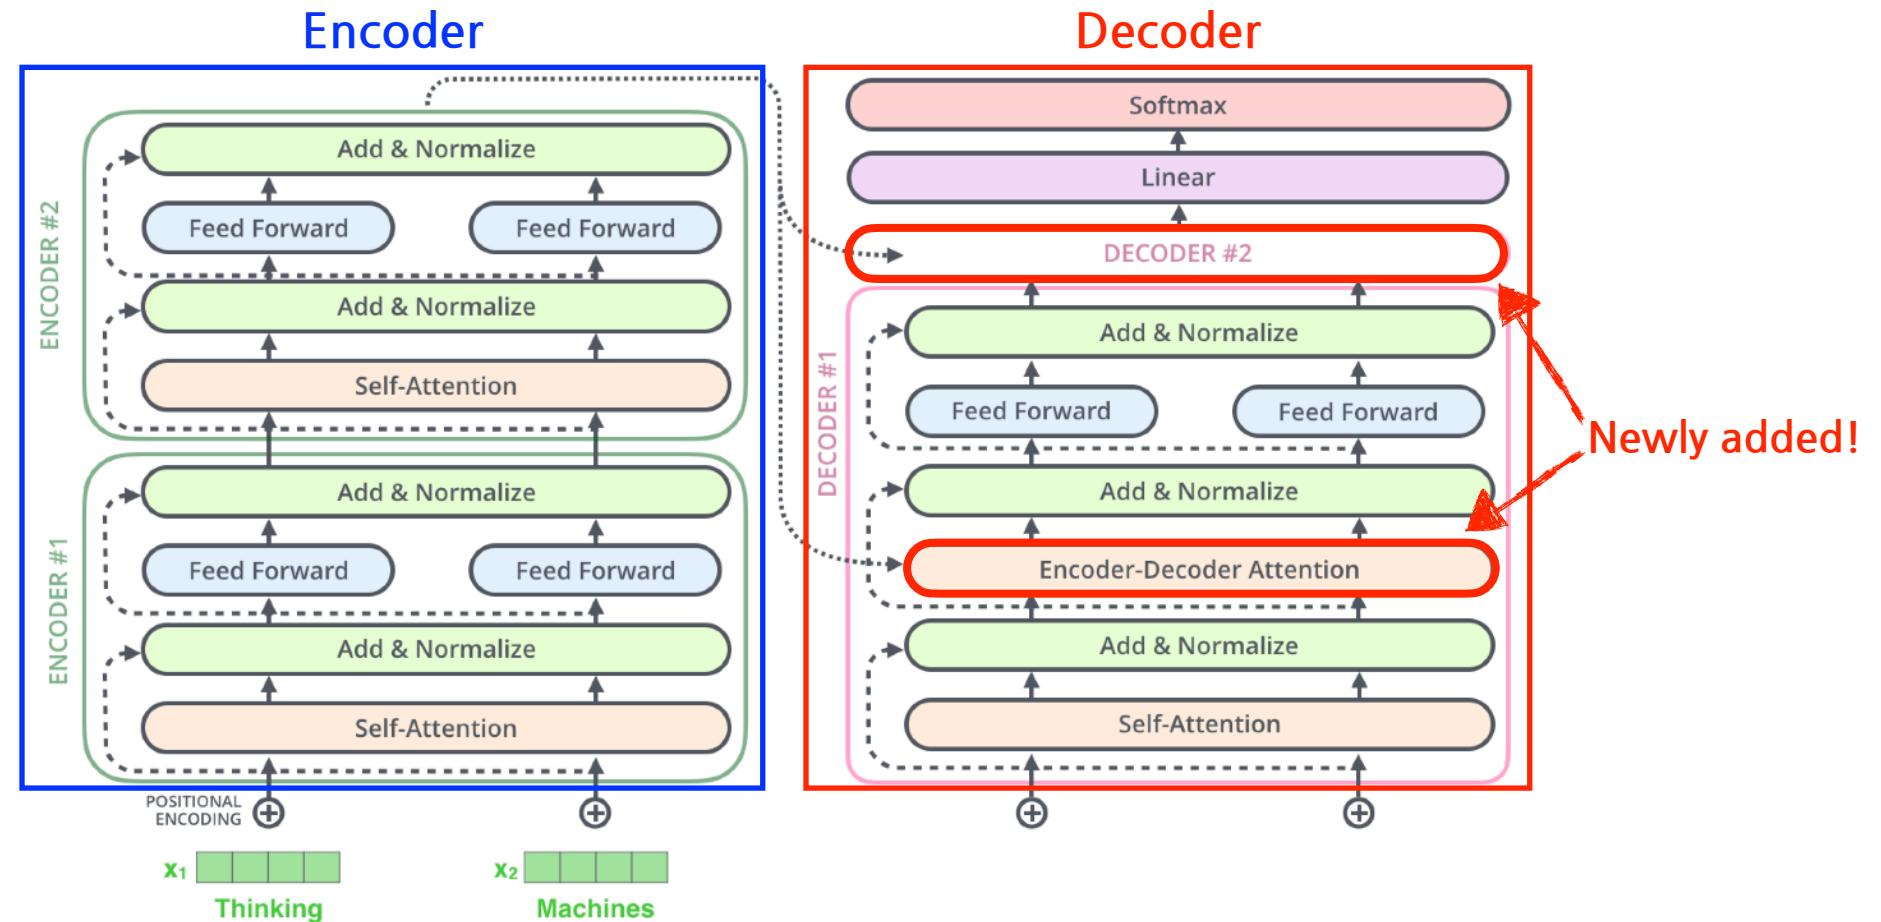

What is the information being sent from **Encoder** to **Decoder**?

Encoder-Decoder

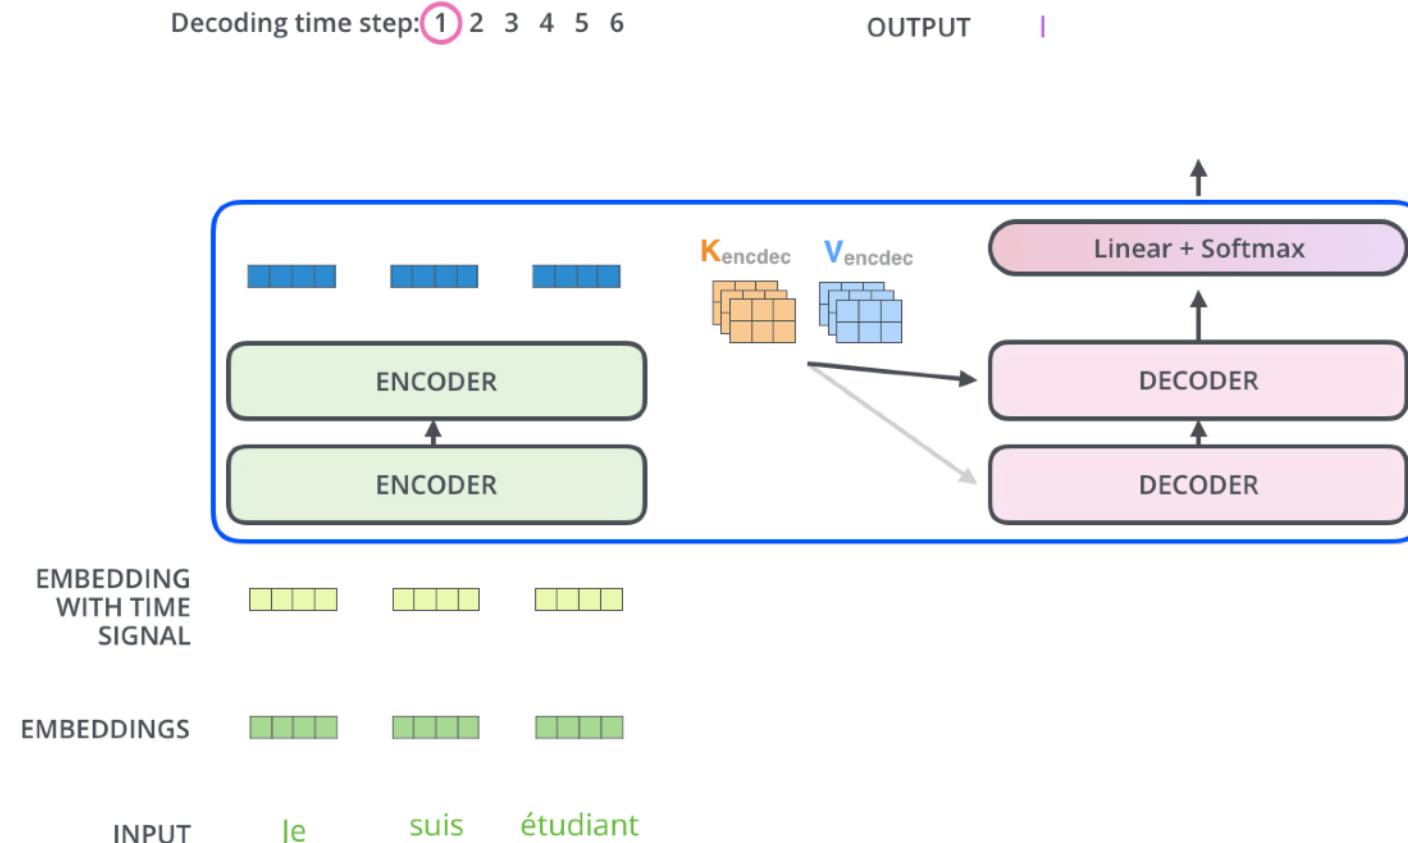

K and V are transferred from the encoder
(i.e., input words).

$$\text{softmax}\left(\frac{Q \times K^T}{\sqrt{d_k}}\right) = Z$$

Key (K) and Value (V) vectors are transferred from **Encoder** to **Decoder**

Decoder




Which word in our vocabulary
is associated with this index?

am


Get the index of the cell
with the highest value
(**argmax**)

5

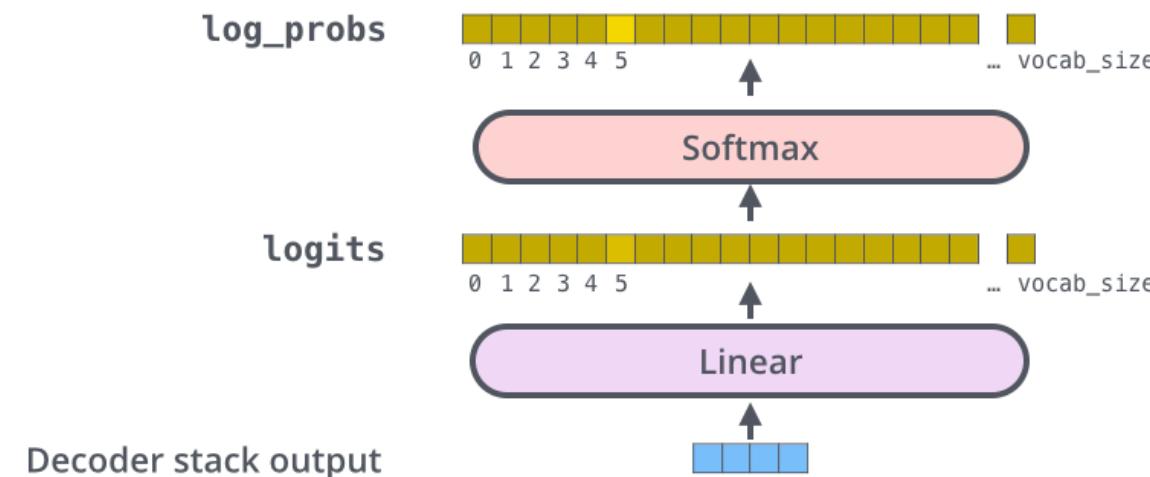

Final layer converts the stack of decoder outputs to the distribution over outputs (e.g., words)


Decoder

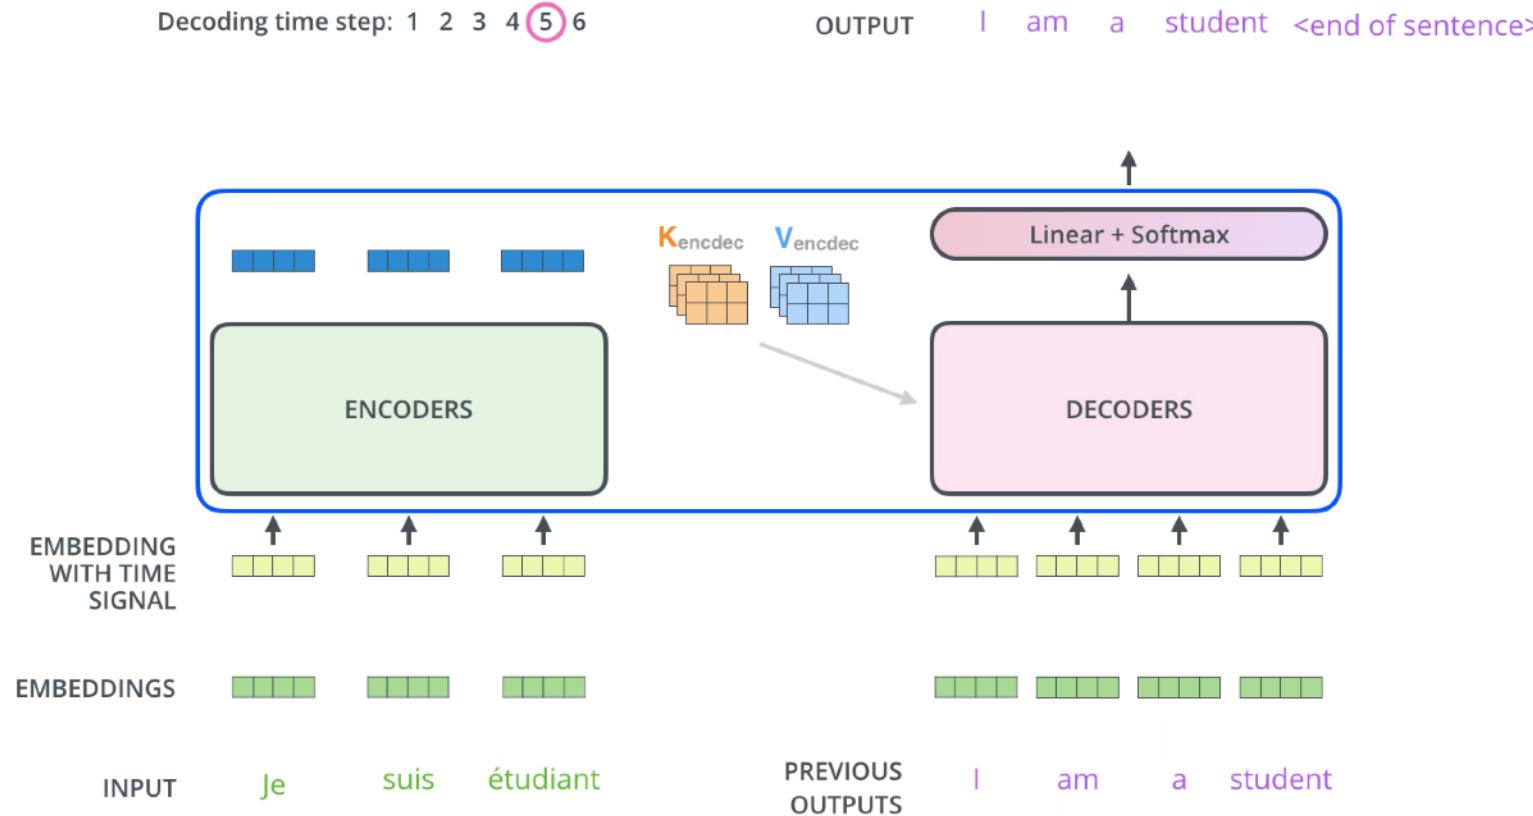


Output sequence is generated in an autoregressive manner


Seq2Seq vs. Transformer

Sequence-to-sequence model

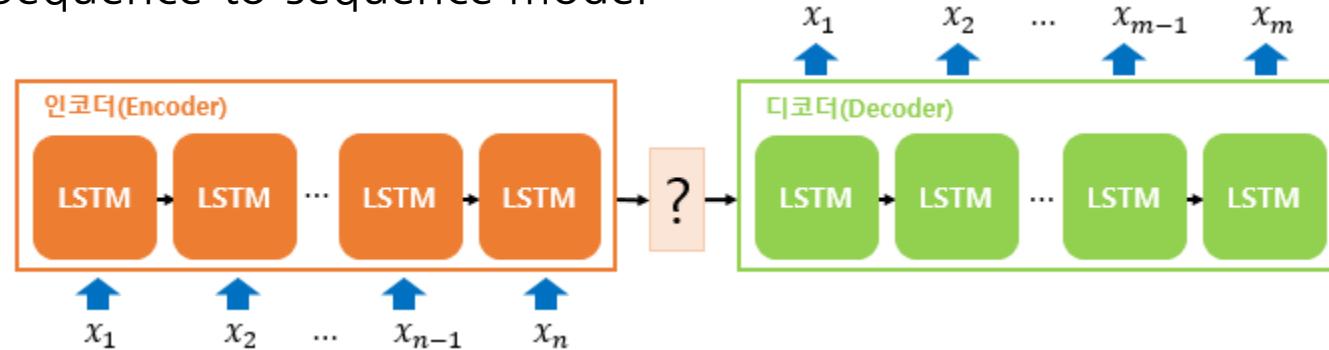

Transformer model

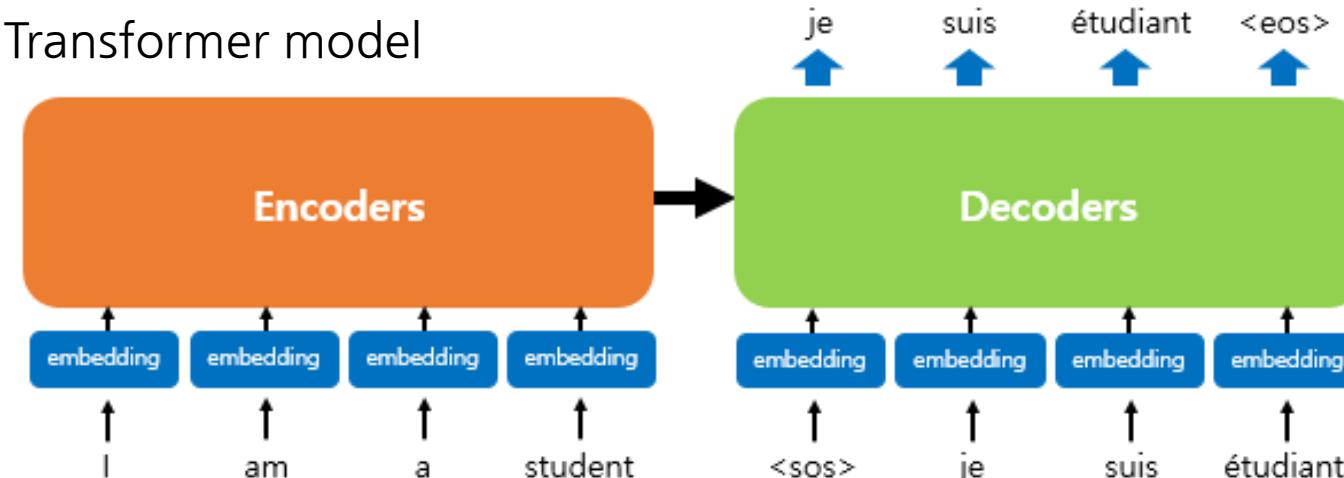


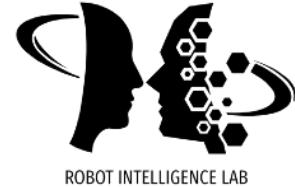


ViT

"AN IMAGE IS WORTH 16 X 16 WORDS :TRANSFORMERS FOR IMAGE RECOGNITION AT SCALE," 2021

Vision Transformer (ViT)

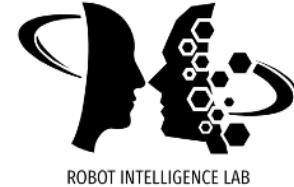

Can we use **Transformer** for image classification tasks?

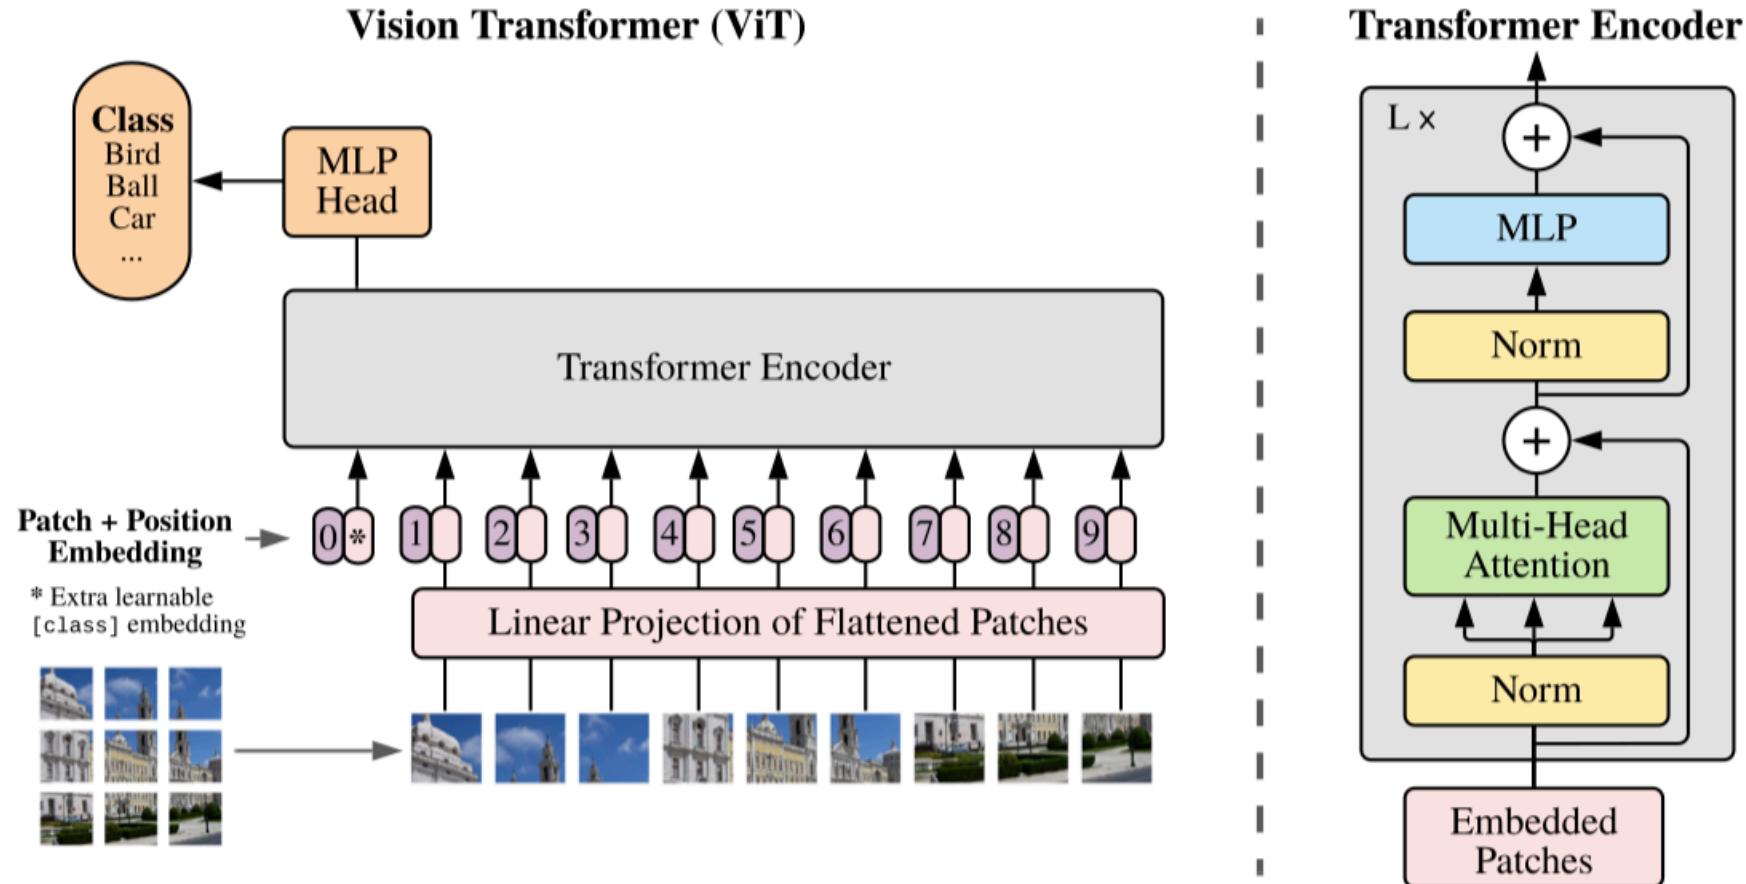

ViT Details



- To handle 2D images, the image $\mathbf{x} \in \mathbb{R}^{H \times W \times C}$ is mapped into a sequence of flattened 2D patches $\mathbf{x}_p \in \mathbb{R}^{N \times (P^2C)}$ where (H, W) is the resolution of the original image, $N = HW/P^2$ is the number of patches, C is the number of channels, (P, P) is the resolution of each image patch.
 - A simple linear projection is used to map a patch to a token (latent vector), $\mathbf{z}_i = \mathbf{x}_i \mathbf{E}$ where $\mathbf{z}_i \in \mathbb{R}^D$, $\mathbf{x}_i \in \mathbb{R}^{P^2C}$, and $\mathbf{E} \in \mathbb{R}^{(P^2C) \times D}$.
- A learnable embedding \mathbf{z}_0^0 is prepended to the sequence of embedded patches, whose state at the output of the Transformer encoder, \mathbf{z}_L^0 , serves as the image representation \mathbf{y} .
- Positional embeddings are added to the patch embeddings to retain positional information.
 - Standard **learnable** 1D position embeddings are used.
 - More advanced 2D-aware position embeddings did not show significant performance gains.

Results



	Ours-JFT (ViT-H/14)	Ours-JFT (ViT-L/16)	Ours-I21k (ViT-L/16)	BiT-L (ResNet152x4)	Noisy Student (EfficientNet-L2)
ImageNet	88.55 ± 0.04	87.76 ± 0.03	85.30 ± 0.02	87.54 ± 0.02	88.4/88.5*
ImageNet ReAL	90.72 ± 0.05	90.54 ± 0.03	88.62 ± 0.05	90.54	90.55
CIFAR-10	99.50 ± 0.06	99.42 ± 0.03	99.15 ± 0.03	99.37 ± 0.06	—
CIFAR-100	94.55 ± 0.04	93.90 ± 0.05	93.25 ± 0.05	93.51 ± 0.08	—
Oxford-IIIT Pets	97.56 ± 0.03	97.32 ± 0.11	94.67 ± 0.15	96.62 ± 0.23	—
Oxford Flowers-102	99.68 ± 0.02	99.74 ± 0.00	99.61 ± 0.02	99.63 ± 0.03	—
VTAB (19 tasks)	77.63 ± 0.23	76.28 ± 0.46	72.72 ± 0.21	76.29 ± 1.70	—
TPUv3-core-days	2.5k	0.68k	0.23k	9.9k	12.3k

Table 2: Comparison with state of the art on popular image classification benchmarks. We report mean and standard deviation of the accuracies, averaged over three fine-tuning runs. Vision Transformer models pre-trained on the JFT-300M dataset outperform ResNet-based baselines on all datasets, while taking substantially less computational resources to pre-train. ViT pre-trained on the smaller public ImageNet-21k dataset performs well too. *Slightly improved 88.5% result reported in [Touvron et al. \(2020\)](#).

Effect of Pre-Training



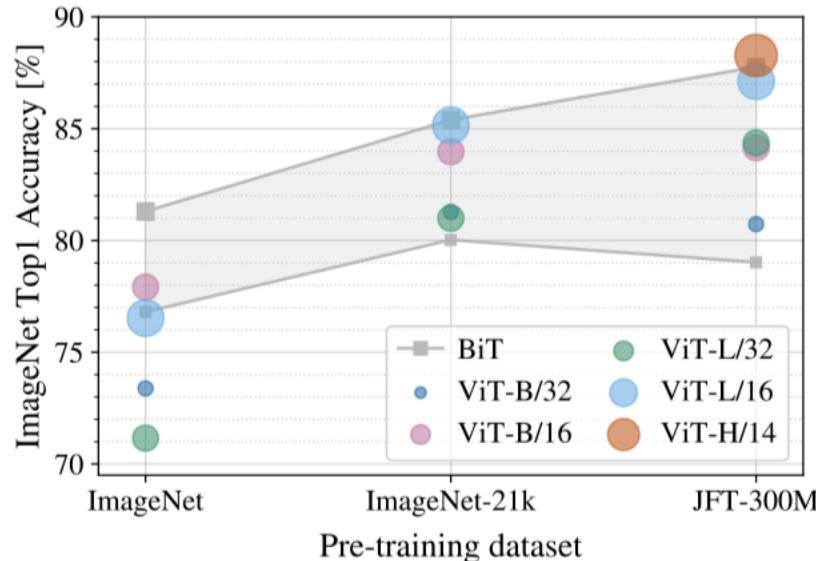


Figure 3: Transfer to ImageNet. While large ViT models perform worse than BiT ResNets (shaded area) when pre-trained on small datasets, they shine when pre-trained on larger datasets. Similarly, larger ViT variants overtake smaller ones as the dataset grows.

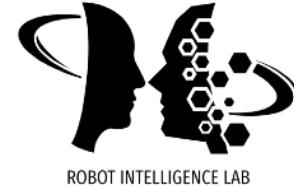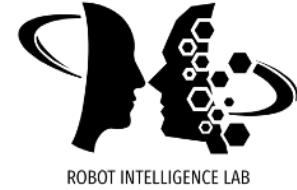

DINO

"Emerging Properties in Self-Supervised Vision Transformers," 2021

DINO



Self-**D**istillation with **NO** labels (**DINO**)

DINO



- Does self-supervised learning provides new properties to Vision Transformer (ViT) compared to convolutional networks (convnets)?
 1. Self-supervised ViT features contain explicit information about the **semantic segmentation** of an image.
 2. These features are significantly useful for **k -NN classifiers** (i.e., 78.3% top-1 on ImageNet)

Semantic Segmentation

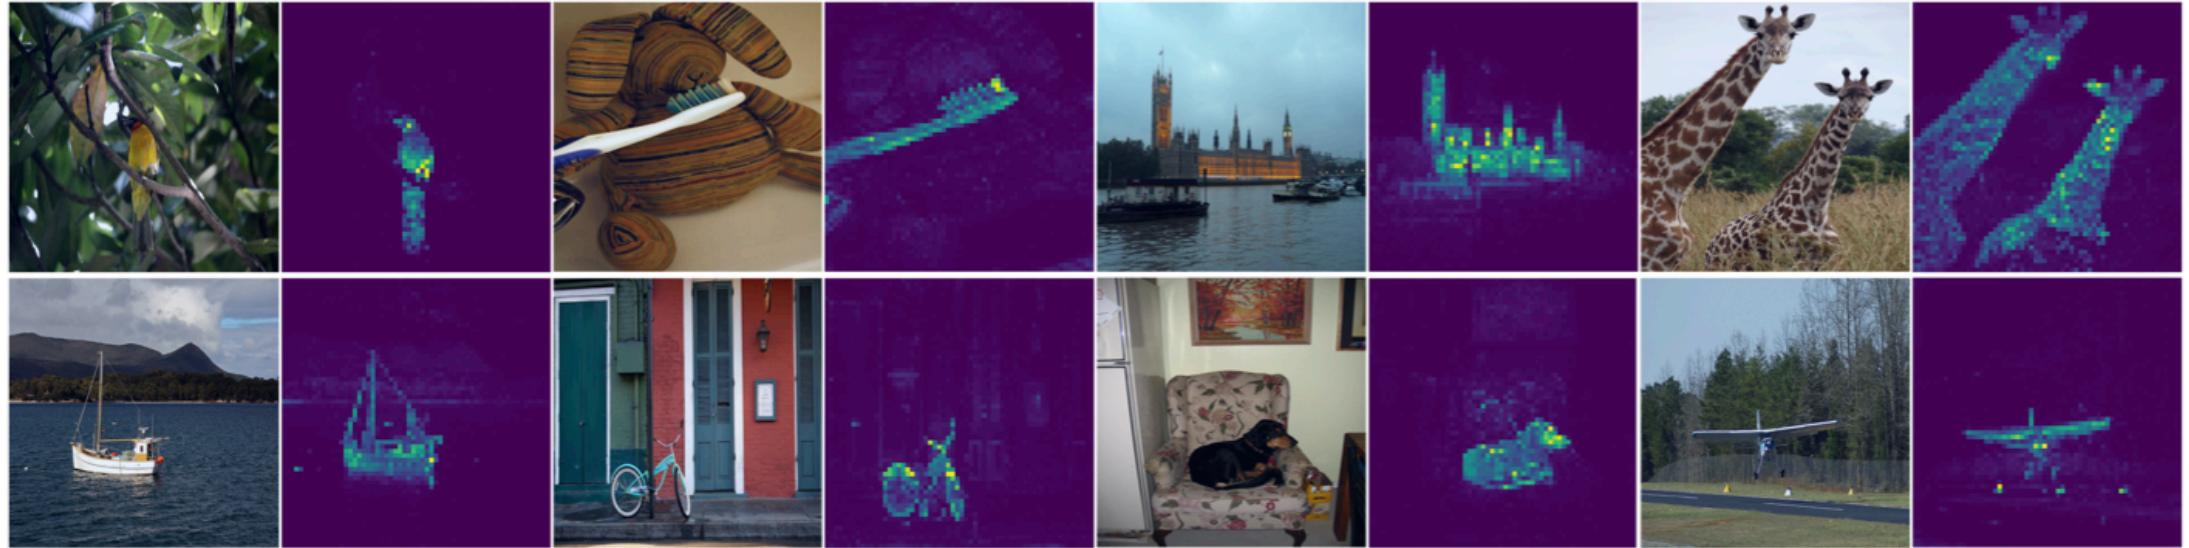


Figure 1: Self-attention from a Vision Transformer with 8×8 patches trained with no supervision. We look at the self-attention of the [CLS] token on the heads of the last layer. This token is not attached to any label nor supervision. These maps show that the model automatically learns class-specific features leading to unsupervised object segmentations.

Training Objectives



- DINO maintains two identical networks, teacher and student networks, where the SSL objective is to train the student network to predict the output of the teacher network.
 - The teacher network is updated via EMA of the student network (similar to MoCo).
 - The outputs of both student and teacher are passed through softmax and CE loss is used for prediction.
 - The output of teacher network is centered (batch-wise) before passing softmax.

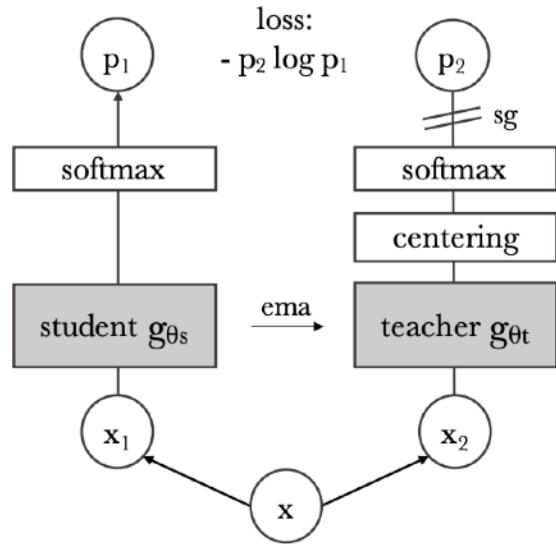


Figure 2: Self-distillation with no labels. We illustrate DINO in the case of one single pair of views (x_1, x_2) for simplicity. The model passes two different random transformations of an input image to the student and teacher networks. Both networks have the same architecture but different parameters. The output of the teacher network is centered with a mean computed over the batch. Each network's output is a K -dimensional feature that is normalized with a temperature softmax over the feature dimension. Their similarity is then measured with a cross-entropy loss. We apply a stop-gradient (sg) operator on the teacher to propagate gradients only through the student. The teacher parameters are updated with an exponential moving average (ema) of the student parameters.

Algorithm 1 DINO PyTorch pseudocode w/o multi-crop.

```
# gs, gt: student and teacher networks
# C: center (K)
# tps, tpt: student and teacher temperatures
# l, m: network and center momentum rates
gt.params = gs.params
for x in loader: # load a minibatch x with n samples
    x1, x2 = augment(x), augment(x) # random views

    s1, s2 = gs(x1), gs(x2) # student output n-by-K
    t1, t2 = gt(x1), gt(x2) # teacher output n-by-K

    loss = H(t1, s2)/2 + H(t2, s1)/2
    loss.backward() # back-propagate

    # student, teacher and center updates
    update(gs) # SGD
    gt.params = l*gt.params + (1-l)*gs.params
    C = m*C + (1-m)*cat([t1, t2]).mean(dim=0)

def H(t, s):
    t = t.detach() # stop gradient
    s = softmax(s / tps, dim=1)
    t = softmax((t - C) / tpt, dim=1) # center + sharpen
    return - (t * log(s)).sum(dim=1).mean()
```

Knowledge Distillation

- Knowledge distillation is a learning paradigm where we train a student network g_{θ_i} , parametrized by θ_s and θ_t respectively.
- Given an input image \mathbf{x} , both network output probability distribution over K dimension is obtained via a softmax function with temperature τ .

$$P(\mathbf{x})^{(i)} = \frac{\exp(g_{\theta}(\mathbf{x})^{(i)}/\tau)}{\sum_{k=1}^K \exp(g_{\theta}(\mathbf{x})^{(k)}/\tau)}$$

- Local-to-global Correspondences

$$\min_{\theta_s} \sum_{x \in \{x_1^g, x_2^g\}} \sum_{x' \in V, x' \neq x} H(P_t(x), P_s(x'))$$

- where $\{x_1^g, x_2^g\}$ are two global view at resolution 224^2 covering a large ($> 50\%$) area of the original image and V is a set of several local views of resolution 96^2 covering only small areas ($< 50\%$) of the original image.

Results



Table 2: **Linear and k -NN classification on ImageNet.** We report top-1 accuracy for linear and k -NN evaluations on the validation set of ImageNet for different self-supervised methods. We focus on ResNet-50 and ViT-small architectures, but also report the best results obtained across architectures. * are run by us. We run the k -NN evaluation for models with official released weights. The throughput (im/s) is calculated on a NVIDIA V100 GPU with 128 samples per forward. Parameters (M) are of the feature extractor.

Method	Arch.	Param.	im/s	Linear	k -NN
Supervised	RN50	23	1237	79.3	79.3
SCLR [12]	RN50	23	1237	69.1	60.7
MoCov2 [15]	RN50	23	1237	71.1	61.9
InfoMin [67]	RN50	23	1237	73.0	65.3
BarlowT [81]	RN50	23	1237	73.2	66.0
OBoW [27]	RN50	23	1237	73.8	61.9
BYOL [30]	RN50	23	1237	74.4	64.8
DCv2 [10]	RN50	23	1237	75.2	67.1
SwAV [10]	RN50	23	1237	75.3	65.7
DINO	RN50	23	1237	75.3	67.5
Supervised	ViT-S	21	1007	79.8	79.8
BYOL* [30]	ViT-S	21	1007	71.4	66.6
MoCov2* [15]	ViT-S	21	1007	72.7	64.4
SwAV* [10]	ViT-S	21	1007	73.5	66.3
DINO	ViT-S	21	1007	77.0	74.5
<i>Comparison across architectures</i>					
SCLR [12]	RN50w4	375	117	76.8	69.3
SwAV [10]	RN50w2	93	384	77.3	67.3
BYOL [30]	RN50w2	93	384	77.4	–
DINO	ViT-B/16	85	312	78.2	76.1
SwAV [10]	RN50w5	586	76	78.5	67.1
BYOL [30]	RN50w4	375	117	78.6	–
BYOL [30]	RN200w2	250	123	79.6	73.9
DINO	ViT-S/8	21	180	79.7	78.3
SCLRV2 [13]	RN152w3+SK	794	46	79.8	73.1
DINO	ViT-B/8	85	63	80.1	77.4

Results

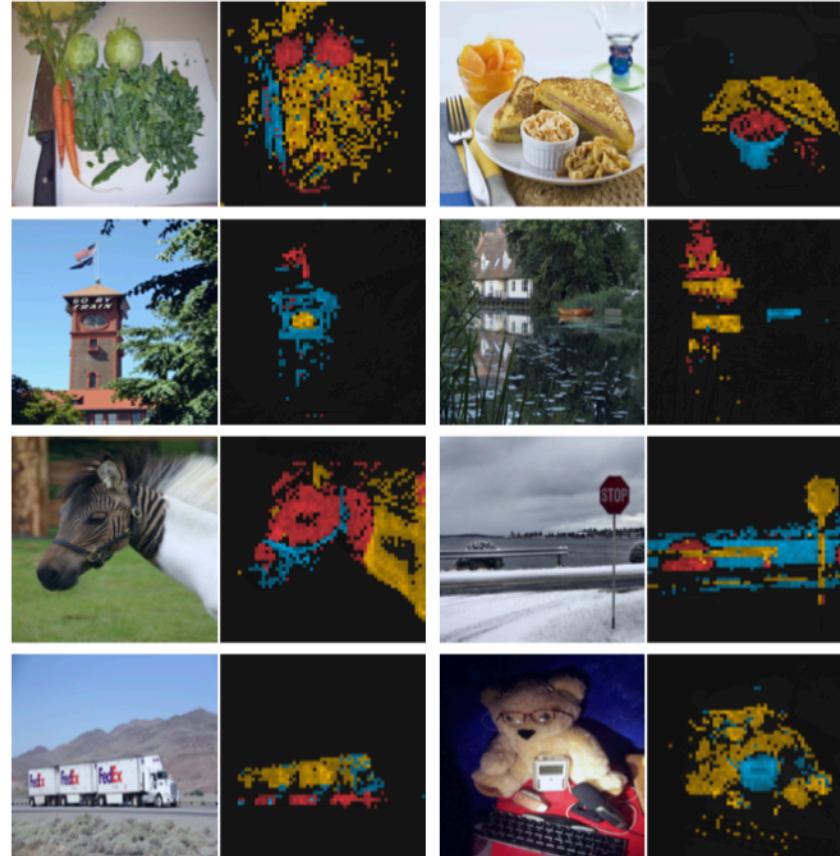


Figure 3: **Attention maps from multiple heads.** We consider the heads from the last layer of a ViT-S/8 trained with DINO and display the self-attention for [CLS] token query. Different heads, materialized by different colors, focus on different locations that represents different objects or parts (more examples in Appendix).

Results

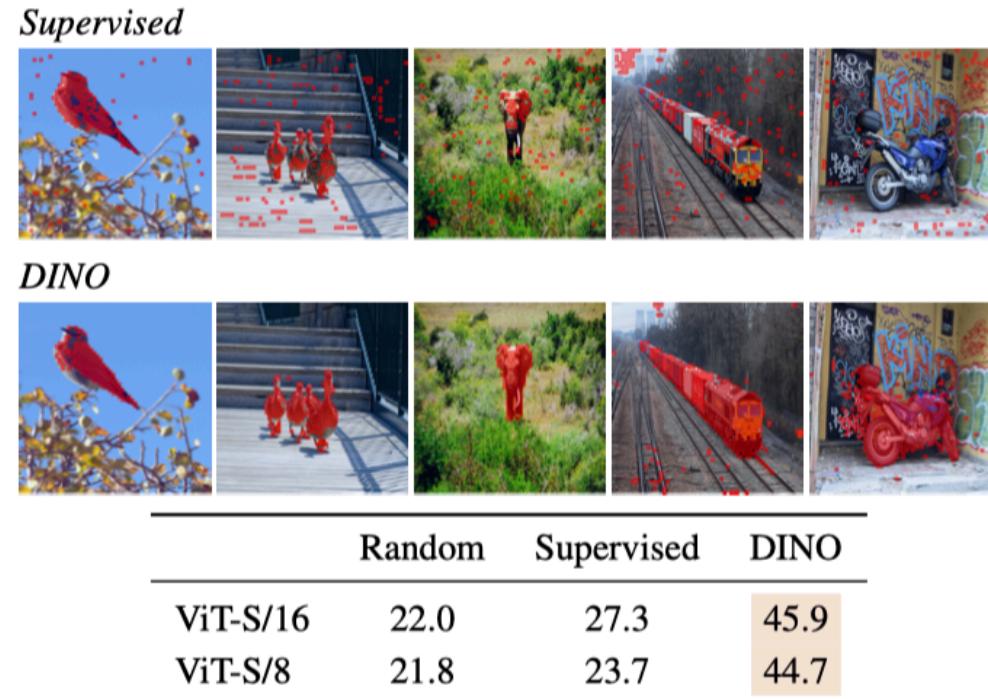


Figure 4: Segmentations from supervised versus DINO. We visualize masks obtained by thresholding the self-attention maps to keep 60% of the mass. On top, we show the resulting masks for a ViT-S/8 trained with supervision and DINO. We show the best head for both models. The table at the bottom compares the Jaccard similarity between the ground truth and these masks on the validation images of PASCAL VOC12 dataset.

Ablation Study



Table 7: Important component for self-supervised ViT pre-training. Models are trained for 300 epochs with ViT-S/16. We study the different components that matter for the k -NN and linear (“Lin.”) evaluations. For the different variants, we highlight the differences from the default DINO setting. The best combination is the momentum encoder with the multicrop augmentation and the cross-entropy loss. We also report results with BYOL [30], MoCo-v2 [15] and SwAV [10].

Method	Mom.	SK	MC	Loss	Pred.	k -NN	Lin.
1 DINO	✓	✗	✓	CE	✗	72.8	76.1
2	✗	✗	✓	CE	✗	0.1	0.1
3	✓	✓	✓	CE	✗	72.2	76.0
4	✓	✗	✗	CE	✗	67.9	72.5
5	✓	✗	✓	MSE	✗	52.6	62.4
6	✓	✗	✓	CE	✓	71.8	75.6
7 BYOL	✓	✗	✗	MSE	✓	66.6	71.4
8 MoCov2	✓	✗	✗	INCE	✗	62.0	71.6
9 SwAV	✗	✓	✓	CE	✗	64.7	71.8

SK: Sinkhorn-Knopp, MC: Multi-Crop, Pred.: Predictor

CE: Cross-Entropy, MSE: Mean Square Error, INCE: InfoNCE

Ablation Study


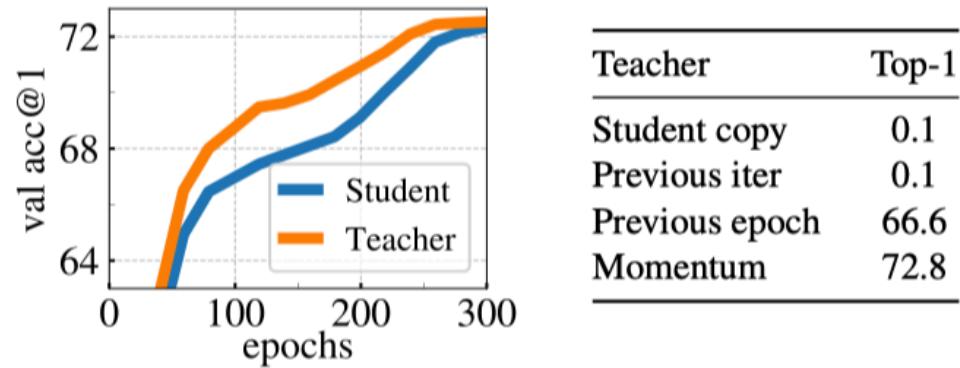


Figure 6: Top-1 accuracy on ImageNet validation with k -NN classifier. **(left)** Comparison between the performance of the momentum teacher and the student during training. **(right)** Comparison between different types of teacher network. The momentum encoder leads to the best performance but is not the only viable option.

Thank You

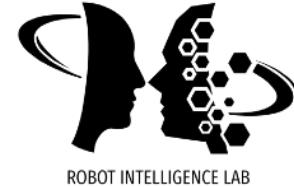

ROBOT INTELLIGENCE LAB