

# Amortized Analysis

Xiaofeng Gao

Department of Computer Science and Engineering  
Shanghai Jiao Tong University, P.R.China

For Algorithm Course

# Outline

## 1 Amortized Analysis

- Definition
- Types

## 2 Three Methods

- Aggregate Analysis
- Accounting Method
- Potential Function Method

## 3 Dynamic Tables

- Description
- Supporting TABLEINSERT Only
- Supporting TABLEINSERT and TABLEDELETE

# Outline

## 1 Amortized Analysis

- Definition
- Types

## 2 Three Methods

- Aggregate Analysis
- Accounting Method
- Potential Function Method

## 3 Dynamic Tables

- Description
- Supporting TABLEINSERT Only
- Supporting TABLEINSERT and TABLEDELETE

# Basic Concepts

**Motivation:** given a **sequence** of operations, majority are cheap, but some rare might be expensive; thus a standard worst-case analysis might be overly pessimistic.

# Basic Concepts

**Motivation:** given a **sequence** of operations, majority are cheap, but some rare might be expensive; thus a standard worst-case analysis might be overly pessimistic.

**Basic idea:** the cost of expensive operations can be “spread out” (amortized) to all operations. If the artificial amortized costs are still cheap, we get a tighter bound overall.

# Basic Concepts

**Motivation:** given a **sequence** of operations, majority are cheap, but some rare might be expensive; thus a standard worst-case analysis might be overly pessimistic.

**Basic idea:** the cost of expensive operations can be “spread out” (amortized) to all operations. If the artificial amortized costs are still cheap, we get a tighter bound overall.

**Amortized Analysis:** A strategy to give a **tighter bound evenly** for a sequence of operations under **worst case** scenario.

# Basic Concepts

**Motivation:** given a **sequence** of operations, majority are cheap, but some rare might be expensive; thus a standard worst-case analysis might be overly pessimistic.

**Basic idea:** the cost of expensive operations can be “spread out” (amortized) to all operations. If the artificial amortized costs are still cheap, we get a tighter bound overall.

**Amortized Analysis:** A strategy to give a **tighter bound evenly** for a sequence of operations under **worst case** scenario.

**Example:** serving coffee in a bar

# Amortized Analysis versus Average-Case Analysis

Amortized analysis differs from average-case analysis in:



# Amortized Analysis versus Average-Case Analysis

Amortized analysis differs from average-case analysis in:

**Average-case analysis:** **average over all input**, e.g., INSERTIONSORT algorithm performs well on “average” over all possible input even if it performs very badly on certain input.

# Amortized Analysis versus Average-Case Analysis

Amortized analysis differs from average-case analysis in:

**Average-case analysis:** **average over all input**, e.g., INSERTIONSORT algorithm performs well on “average” over all possible input even if it performs very badly on certain input.

**Amortized analysis:** **average over operations**, e.g., TABLEINSERTION algorithm performs well on “average” over all operations even if some operations use a lot of time.

- Probability is not involved;
- Guarantees the average performance of each operation in the worst case.

# Outline

## 1 Amortized Analysis

- Definition
- Types

## 2 Three Methods

- Aggregate Analysis
- Accounting Method
- Potential Function Method

## 3 Dynamic Tables

- Description
- Supporting TABLEINSERT Only
- Supporting TABLEINSERT and TABLEDELETE

# Types of Amortized Analyses

There are three common amortization arguments:

# Types of Amortized Analyses

There are three common amortization arguments:

**Aggregate Analysis:** determine an upper bound  $T(n)$  on the total cost of a sequence of  $n$  operations, and the average cost per operation is then  $T(n)/n$  (referred as *amortized cost*).

# Types of Amortized Analyses

There are three common amortization arguments:

**Aggregate Analysis:** determine an upper bound  $T(n)$  on the total cost of a sequence of  $n$  operations, and the average cost per operation is then  $T(n)/n$  (referred as *amortized cost*).

**Accounting Method:** determine an amortized cost of each operation, different cost for different operations. Store “prepaid credit” for overcharge at early stage and pay for operations later in the sequence.

# Types of Amortized Analyses

There are three common amortization arguments:

**Aggregate Analysis:** determine an upper bound  $T(n)$  on the total cost of a sequence of  $n$  operations, and the average cost per operation is then  $T(n)/n$  (referred as *amortized cost*).

**Accounting Method:** determine an amortized cost of each operation, different cost for different operations. Store “prepaid credit” for overcharge at early stage and pay for operations later in the sequence.

**Potential Method:** determine costs for operations, and maintain credit as the “potential energy” as a whole instead of associating the credit within individual objects.

# Examples

Through out this lecture, we will continuously use three examples to illustrate the amortized methods:



# Examples

Through out this lecture, we will continuously use three examples to illustrate the amortized methods:

**Stack Operations:** Push and pop elements from an empty stack;

# Examples

Through out this lecture, we will continuously use three examples to illustrate the amortized methods:

**Stack Operations:** Push and pop elements from an empty stack;

**Binary Counter:** Count a series of numbers by binary flip flops;

# Examples

Through out this lecture, we will continuously use three examples to illustrate the amortized methods:

**Stack Operations:** Push and pop elements from an empty stack;

**Binary Counter:** Count a series of numbers by binary flip flops;

**Dynamic Table:** A continuous storage array that could change size dynamically.

# Outline

- 1 Amortized Analysis
  - Definition
  - Types
- 2 Three Methods
  - Aggregate Analysis
  - Accounting Method
  - Potential Function Method
- 3 Dynamic Tables
  - Description
  - Supporting TABLEINSERT Only
  - Supporting TABLEINSERT and TABLEDELETE

# First Method: Aggregate Analysis

Compute the worst time  $T(n)$  in total for a sequence of  $n$  operations.  
The *amortized cost* (average cost) per operation is  $T(n)/n$  in the worst case.

# First Method: Aggregate Analysis

Compute the worst time  $T(n)$  in total for a sequence of  $n$  operations.  
The *amortized cost* (average cost) per operation is  $T(n)/n$  in the worst case.

- Cost  $T(n)/n$  applies to each operation (There may be several types of operations)

# First Method: Aggregate Analysis

Compute the worst time  $T(n)$  in total for a sequence of  $n$  operations.  
The *amortized cost* (average cost) per operation is  $T(n)/n$  in the worst case.

- Cost  $T(n)/n$  applies to each operation (There may be several types of operations)
- The other two methods may assign different amortized costs to different types of operation.

## Example: Stack with Multipop Operations

There are two fundamental stack operations, each takes  $O(1)$  time:

**PUSH**( $S, x$ ): push object  $x$  onto stack  $S$ .

**POP**( $S$ ): pop the top of stack  $S$  and returns the popped object.



## Example: Stack with Multipop Operations

There are two fundamental stack operations, each takes  $O(1)$  time:

**PUSH**( $S, x$ ): push object  $x$  onto stack  $S$ .

**POP**( $S$ ): pop the top of stack  $S$  and returns the popped object.

Assign cost for each operation as **1**.

## Example: Stack with Multipop Operations

There are two fundamental stack operations, each takes  $O(1)$  time:

**PUSH**( $S, x$ ): push object  $x$  onto stack  $S$ .

**POP**( $S$ ): pop the top of stack  $S$  and returns the popped object.

Assign cost for each operation as **1**.

**Time Complexity:** The total cost of a sequence of  $n$  PUSH and POP operations is  $n$ , and the actual running time for  $n$  operations is  $\Theta(n)$ .

# Multipop Operation

Now we add an additional stack operation MULTIPOP.

# Multipop Operation

Now we add an additional stack operation **MULTIPOP**.

**MULTIPOP( $S, k$ )**: pop  $k$  top objects of stack  $S$  (or pop entire stack if it contains fewer than  $k$  objects).

# Multipop Operation

Now we add an additional stack operation MULTIPOP.

**MULTIPOP( $S, k$ )**: pop  $k$  top objects of stack  $S$  (or pop entire stack if it contains fewer than  $k$  objects).

---

**ALGORITHM 1: MULTIPOP( $S, k$ )**

---

```
1 while  $S$  is not empty and  $k > 0$  do
2   POP ( $S$ );
3    $k \leftarrow k - 1$ ;
```

---

# Multipop Operation

Now we add an additional stack operation MULTIPOP.

**MULTIPOP( $S, k$ )**: pop  $k$  top objects of stack  $S$  (or pop entire stack if it contains fewer than  $k$  objects).

---

**ALGORITHM 1:** MULTIPOP( $S, k$ )

---

```
1 while  $S$  is not empty and  $k > 0$  do
2   POP ( $S$ );
3    $k \leftarrow k - 1$ ;
```

---

The total cost of MULTIPOP is  $\min\{|S|, k\}$ .

# A Sequence of Operations

Consider a sequence of  $n$  POP, PUSH, and MULTIPOP operations on an initially empty stack.

# A Sequence of Operations

Consider a sequence of  $n$  POP, PUSH, and MULTIPOP operations on an initially empty stack.

---

**ALGORITHM 2:** Stack with MULTIPOP

---

**Input** : An array  $A[1..n]$  of  $n$  elements and an integer  $k$ .

**Output:** Stack  $S$ .

```
1 for  $i = 1$  to  $n$  do
2   if  $A[i] \geq A[i - 1]$  then
3      $\text{PUSH}(S, A[i]);$ 
4   else if  $A[i] \leq A[i - 1] - k$  then
5      $\text{MULTIPOP}(S, k);$ 
6   else
7      $\text{POP}(S);$ 
```

---



# An Example Scenario

Read:	5	6	4	7	9	1	2	4	8
Array:	<div><div></div><div></div><div>5</div></div>	<div><div></div><div>6</div><div>5</div></div>	<div><div></div><div></div><div>5</div></div>	<div><div></div><div>7</div><div>5</div></div>	<div><div>9</div><div>7</div><div>5</div></div>	<div><div></div><div></div><div></div></div>	<div><div></div><div></div><div>2</div></div>	<div><div></div><div>4</div><div>2</div></div>	<div><div>8</div><div>4</div><div>2</div></div>
OP:	Push	Push	Pop	Push	Push	MultiPop	Push	Push	Push
$C_i$ :	1	1	1	1	1	3	1	1	1

# An Example Scenario

Read:	5	6	4	7	9	1	2	4	8
Array:	<div><div>5</div></div>	<div><div>6</div><div>5</div></div>	<div><div></div><div>5</div></div>	<div><div>7</div><div>5</div></div>	<div><div>9</div><div>7</div><div>5</div></div>	<div><div></div></div>	<div><div>2</div></div>	<div><div>4</div><div>2</div></div>	<div><div>8</div><div>4</div><div>2</div></div>
OP:	Push	Push	Pop	Push	Push	MultiPop	Push	Push	Push
$C_i$ :	1	1	1	1	1	3	1	1	1

**Cursory analysis:** MULTIPOP( $S, k$ ) may take  $O(n)$  time; thus,

$$T(n) = \sum_{i=1}^n C_i \leq n^2.$$

# Cursory Analysis versus Tighter Analysis

In a sequence of operations, some operations may be cheap, but some operations may be expensive, say  $\text{MULTIPOP}(S, k)$ .

# Cursory Analysis versus Tighter Analysis

In a sequence of operations, some operations may be cheap, but some operations may be expensive, say  $\text{MULTIPOP}(S, k)$ .

However, the worst operation does not occur often. Therefore, the traditional worst-case *individual operation* analysis can give overly pessimistic bound.

# Cursory Analysis versus Tighter Analysis

In a sequence of operations, some operations may be cheap, but some operations may be expensive, say  $\text{MULTIPOP}(S, k)$ .

However, the worst operation does not occur often. Therefore, the traditional worst-case *individual operation* analysis can give overly pessimistic bound.

**Objective:** For each operation we hope to assign an **amortized cost**  $\hat{C}_i$  to bound the actual total cost.

# Cursory Analysis versus Tighter Analysis

In a sequence of operations, some operations may be cheap, but some operations may be expensive, say  $\text{MULTIPOP}(S, k)$ .

However, the worst operation does not occur often. Therefore, the traditional worst-case *individual operation* analysis can give overly pessimistic bound.

**Objective:** For each operation we hope to assign an **amortized cost**  $\hat{C}_i$  to bound the actual total cost.

For **any sequence of  $n$  operations**, we have

$$T(n) = \sum_{i=1}^n C_i \leq \sum_{i=1}^n \hat{C}_i.$$

Here,  $C_i$  denotes the **actual cost** of step  $i$ .

# Tighter Analysis: Aggregate Technique

# Tighter Analysis: Aggregate Technique

**Basic idea:** all operations have the same **amortized cost**  $\frac{1}{n} \sum_{i=1}^n \hat{C}_i$



# Tighter Analysis: Aggregate Technique

**Basic idea:** all operations have the same **amortized cost**  $\frac{1}{n} \sum_{i=1}^n \hat{C}_i$

**Key observation:**  $\#Pop \leq \#Push$ ;

# Tighter Analysis: Aggregate Technique

**Basic idea:** all operations have the same **amortized cost**  $\frac{1}{n} \sum_{i=1}^n \hat{C}_i$

**Key observation:**  $\#Pop \leq \#Push$ ;      Thus, we have:

$$\begin{aligned} T(n) &= \sum_{i=1}^n C_i \\ &= \#Push + \#Pop \\ &\leq 2 \times \#Push \\ &\leq 2n \end{aligned}$$

# Tighter Analysis: Aggregate Technique

**Basic idea:** all operations have the same **amortized cost**  $\frac{1}{n} \sum_{i=1}^n \hat{C}_i$

**Key observation:**  $\#Pop \leq \#Push$ ;      Thus, we have:

$$\begin{aligned} T(n) &= \sum_{i=1}^n C_i \\ &= \#Push + \#Pop \\ &\leq 2 \times \#Push \\ &\leq 2n \end{aligned}$$

**Conclusion:** on average, the  $MULTIPOP(S, k)$  step takes only  $O(1)$  time rather than  $O(k)$  time.

## Another Example: Incrementing a Binary Counter

Consider a  $k$ -bit binary counter that counts upward from 0.

## Another Example: Incrementing a Binary Counter

Consider a  $k$ -bit binary counter that counts upward from 0.

Use array  $A[0, \dots, k - 1]$  of bits to record the count number.

## Another Example: Incrementing a Binary Counter

Consider a  $k$ -bit binary counter that counts upward from 0.

Use array  $A[0, \dots, k-1]$  of bits to record the count number.

A binary number  $x$  stored in the counter has its lowest-order bit in  $A[0]$  and highest-order bit in  $A[k-1]$ , and

$$x = \sum_{i=0}^{k-1} A[i] \cdot 2^i.$$

## Another Example: Incrementing a Binary Counter

Consider a  $k$ -bit binary counter that counts upward from 0.

Use array  $A[0, \dots, k-1]$  of bits to record the count number.

A binary number  $x$  stored in the counter has its lowest-order bit in  $A[0]$  and highest-order bit in  $A[k-1]$ , and

$$x = \sum_{i=0}^{k-1} A[i] \cdot 2^i.$$

Initially,  $x = 0$ ,  $A[i] = 0$  for  $i = 0, \dots, k-1$ .

# An Example Scenario

Counter Value	$A[7]$	$A[6]$	$A[5]$	$A[4]$	$A[3]$	$A[2]$	$A[1]$	$A[0]$	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0



# An Example Scenario

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1	1	1

# An Example Scenario

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
<b>0</b>	0	0	0	0	0	0	0	0	<b>0</b>	<b>0</b>
<b>1</b>	0	0	0	0	0	0	0	<b>1</b>	<b>1</b>	<b>1</b>
<b>2</b>	0	0	0	0	0	0	<b>1</b>	<b>0</b>	<b>2</b>	<b>3</b>

# An Example Scenario

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
<b>0</b>	0	0	0	0	0	0	0	0	<b>0</b>	<b>0</b>
<b>1</b>	0	0	0	0	0	0	0	<b>1</b>	<b>1</b>	<b>1</b>
<b>2</b>	0	0	0	0	0	0	<b>1</b>	<b>0</b>	<b>2</b>	<b>3</b>
<b>3</b>	0	0	0	0	0	0	1	<b>1</b>	<b>1</b>	<b>4</b>

# An Example Scenario

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1	1	1
2	0	0	0	0	0	0	1	0	2	3
3	0	0	0	0	0	0	1	1	1	4
4	0	0	0	0	0	1	0	0	3	7

# An Example Scenario

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1	1	1
2	0	0	0	0	0	0	1	0	2	3
3	0	0	0	0	0	0	1	1	1	4
4	0	0	0	0	0	1	0	0	3	7
5	0	0	0	0	0	1	0	1	1	8

# An Example Scenario

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1	1	1
2	0	0	0	0	0	0	1	0	2	3
3	0	0	0	0	0	0	1	1	1	4
4	0	0	0	0	0	1	0	0	3	7
5	0	0	0	0	0	1	0	1	1	8
6	0	0	0	0	0	1	1	0	2	10

# An Example Scenario

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1	1	1
2	0	0	0	0	0	0	1	0	2	3
3	0	0	0	0	0	0	1	1	1	4
4	0	0	0	0	0	1	0	0	3	7
5	0	0	0	0	0	1	0	1	1	8
6	0	0	0	0	0	1	1	0	2	10
7	0	0	0	0	0	1	1	1	1	11

# An Example Scenario

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1	1	1
2	0	0	0	0	0	0	1	0	2	3
3	0	0	0	0	0	0	1	1	1	4
4	0	0	0	0	0	1	0	0	3	7
5	0	0	0	0	0	1	0	1	1	8
6	0	0	0	0	0	1	1	0	2	10
7	0	0	0	0	0	1	1	1	1	11
8	0	0	0	0	1	0	0	0	4	15



# An Example Scenario

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1	1	1
2	0	0	0	0	0	0	1	0	2	3
3	0	0	0	0	0	0	1	1	1	4
4	0	0	0	0	0	1	0	0	3	7
5	0	0	0	0	0	1	0	1	1	8
6	0	0	0	0	0	1	1	0	2	10
7	0	0	0	0	0	1	1	1	1	11
8	0	0	0	0	1	0	0	0	4	15
9	0	0	0	0	1	0	0	1	1	16

# An Example Scenario

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1	1	1
2	0	0	0	0	0	0	1	0	2	3
3	0	0	0	0	0	0	1	1	1	4
4	0	0	0	0	0	1	0	0	3	7
5	0	0	0	0	0	1	0	1	1	8
6	0	0	0	0	0	1	1	0	2	10
7	0	0	0	0	0	1	1	1	1	11
8	0	0	0	0	1	0	0	0	4	15
9	0	0	0	0	1	0	0	1	1	16
10	0	0	0	0	1	0	1	0	2	18

# An Example Scenario

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1	1	1
2	0	0	0	0	0	0	1	0	2	3
3	0	0	0	0	0	0	1	1	1	4
4	0	0	0	0	0	1	0	0	3	7
5	0	0	0	0	0	1	0	1	1	8
6	0	0	0	0	0	1	1	0	2	10
7	0	0	0	0	0	1	1	1	1	11
8	0	0	0	0	1	0	0	0	4	15
9	0	0	0	0	1	0	0	1	1	16
10	0	0	0	0	1	0	1	0	2	18
11	0	0	0	0	1	0	1	1	1	19

# An Example Scenario

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1	1	1
2	0	0	0	0	0	0	1	0	2	3
3	0	0	0	0	0	0	1	1	1	4
4	0	0	0	0	0	1	0	0	3	7
5	0	0	0	0	0	1	0	1	1	8
6	0	0	0	0	0	1	1	0	2	10
7	0	0	0	0	0	1	1	1	1	11
8	0	0	0	0	1	0	0	0	4	15
9	0	0	0	0	1	0	0	1	1	16
10	0	0	0	0	1	0	1	0	2	18
11	0	0	0	0	1	0	1	1	1	19
12	0	0	0	0	1	1	0	0	3	22

# Pseudo Code for Binary Counter

INCREMENT is used to add 1 (modulo  $2^k$ ) to the value in the counter.

---

**ALGORITHM 3:** INCREMENT( $A$ )

---

```
1  $i \leftarrow 0$ ;  
2 while  $i \leq k - 1$  and  $A[i] = 1$  do  
3    $A[i] \leftarrow 0$ ;  
4    $i \leftarrow i + 1$ ;  
5 if  $i \leq k - 1$  then  
6    $A[i] \leftarrow 1$ ;
```

---

Consider a sequence of  $n$  operations that counts upward from 0:

---

**ALGORITHM 4:** BINARYCOUNTER

---

```
1 for  $i = 1$  to  $n$  do  
2   INCREMENT( $A$ );
```

---

# Tighter Analysis: Aggregate Technique

Question:  $T(n) \leq ?$

# Tighter Analysis: Aggregate Technique

Question:  $T(n) \leq ?$

**Cursory analysis:**  $T(n) \leq kn$  since an increment step might change all  $k$  bits.

# Tighter Analysis: Aggregate Technique

Question:  $T(n) \leq ?$

**Cursory analysis:**  $T(n) \leq kn$  since an increment step might change all  $k$  bits.

**Aggregate analysis:** Basic operations:  $\text{flip}(1 \rightarrow 0), \text{flip}(0 \rightarrow 1)$



# Tighter Analysis: Aggregate Technique

Question:  $T(n) \leq ?$

**Cursory analysis:**  $T(n) \leq kn$  since an increment step might change all  $k$  bits.

**Aggregate analysis:** Basic operations:  $\text{flip}(1 \rightarrow 0), \text{flip}(0 \rightarrow 1)$

During a sequence of  $n$  INCREMENT operations:

$A[0]$  flips each time INCREMENT is called  $\leftarrow n$  times;

$A[1]$  flips every other time  $\leftarrow \lfloor n/2 \rfloor$  times;

...

$A[i]$  flips  $\lfloor n/2^i \rfloor$  times.

# Tighter Analysis: Aggregate Technique (Cont.)

Thus,

$$T(n) = \sum_{i=1}^n C_i$$

# Tighter Analysis: Aggregate Technique (Cont.)

Thus,

$$\begin{aligned} T(n) &= \sum_{i=1}^n C_i \\ &= 1 + 2 + 1 + 3 + 1 + 2 + 1 + 4 + \cdots \end{aligned} \quad \text{(add by row)}$$

# Tighter Analysis: Aggregate Technique (Cont.)

Thus,

$$\begin{aligned} T(n) &= \sum_{i=1}^n C_i \\ &= 1 + 2 + 1 + 3 + 1 + 2 + 1 + 4 + \cdots && \text{(add by row)} \\ &= \#flip(A[0]) + \#flip(A[1]) + \cdots + \#flip(A[k]) && \text{(add by column)} \end{aligned}$$

# Tighter Analysis: Aggregate Technique (Cont.)

Thus,

$$\begin{aligned}T(n) &= \sum_{i=1}^n C_i \\&= 1 + 2 + 1 + 3 + 1 + 2 + 1 + 4 + \cdots && \text{(add by row)} \\&= \#flip(A[0]) + \#flip(A[1]) + \cdots + \#flip(A[k]) && \text{(add by column)} \\&= n + \frac{n}{2} + \frac{n}{4} + \cdots \\&\leq 2n\end{aligned}$$

# Tighter Analysis: Aggregate Technique (Cont.)

Thus,

$$\begin{aligned}T(n) &= \sum_{i=1}^n C_i \\&= 1 + 2 + 1 + 3 + 1 + 2 + 1 + 4 + \cdots && \text{(add by row)} \\&= \#flip(A[0]) + \#flip(A[1]) + \cdots + \#flip(A[k]) && \text{(add by column)} \\&= n + \frac{n}{2} + \frac{n}{4} + \cdots \\&\leq 2n\end{aligned}$$

Amortized cost of each operation:  $O(n)/n = O(1)$ .

# Outline

## 1 Amortized Analysis

- Definition
- Types

## 2 Three Methods

- Aggregate Analysis
- **Accounting Method**
- Potential Function Method

## 3 Dynamic Tables

- Description
- Supporting TABLEINSERT Only
- Supporting TABLEINSERT and TABLEDELETE

# Accounting Method

**Basic idea:** for each operation  $OP$  with actual cost  $C_{OP}$ , an amortized cost  $\widehat{C}_{OP}$  is assigned such that for **any sequence of  $n$  operations**,

$$T(n) = \sum_{i=1}^n C_i \leq \sum_{i=1}^n \widehat{C}_i.$$



# Accounting Method

**Basic idea:** for each operation  $OP$  with actual cost  $C_{OP}$ , an amortized cost  $\widehat{C}_{OP}$  is assigned such that for **any sequence of  $n$  operations**,

$$T(n) = \sum_{i=1}^n C_i \leq \sum_{i=1}^n \widehat{C}_i.$$

**Intuition:** If  $\widehat{C}_{op} > C_{op}$ , the overcharge will be stored as **prepaid credit**; the credit will be used later for the operations with  $\widehat{C}_{op} < C_{op}$ .

# Accounting Method

**Basic idea:** for each operation  $OP$  with actual cost  $C_{OP}$ , an amortized cost  $\widehat{C}_{OP}$  is assigned such that for **any sequence of  $n$  operations**,

$$T(n) = \sum_{i=1}^n C_i \leq \sum_{i=1}^n \widehat{C}_i.$$

**Intuition:** If  $\widehat{C}_{op} > C_{op}$ , the overcharge will be stored as **prepaid credit**; the credit will be used later for the operations with  $\widehat{C}_{op} < C_{op}$ .

The requirement that  $\sum_{i=1}^n C_i \leq \sum_{i=1}^n \widehat{C}_i$  is essentially **credit never goes negative**.

## Example 1: Stack with MULTIPOP Operation

**Example:** For stack with MULTIPOP, assign amortized cost as:

Operation	Real Cost $C_{op}$	Amortized Cost $\widehat{C}_{op}$
PUSH	1	2
POP	1	0
MULTIPOP	$\min\{ S , k\}$	0

## Example 1: Stack with MULTIPOP Operation

**Example:** For stack with MULTIPOP, assign amortized cost as:

Operation	Real Cost $C_{op}$	Amortized Cost $\widehat{C}_{op}$
PUSH	1	2
POP	1	0
MULTIPOP	$\min\{ S , k\}$	0

**Credit:** the number of items in the stack.

## Example 1: Stack with MULTIPOP Operation

**Example:** For stack with MULTIPOP, assign amortized cost as:

Operation	Real Cost $C_{op}$	Amortized Cost $\widehat{C}_{op}$
PUSH	1	2
POP	1	0
MULTIPOP	$\min\{ S , k\}$	0

**Credit:** the number of items in the stack.

Starting from an empty stack, **any** sequence of  $n_1$  PUSH,  $n_2$  POP, and  $n_3$  MULTIPOP operations takes at most  $T(n) = \sum_{i=1}^n C_i \leq \sum_{i=1}^n \widehat{C}_i = 2n_1$ .

Here  $n = n_1 + n_2 + n_3$ .

**Note:** when there are more than one type of operations, each type of operation might be assigned with different amortized cost.

## Accounting Method: “Banker’s View”

Suppose you are renting a "**coin-operation**" machine, and are charged according to the number of operations.

# Accounting Method: “Banker’s View”

Suppose you are renting a "**coin-operation**" machine, and are charged according to the number of operations.

Two payment strategies:

- Pay actual cost for each operation:  
say pay \$1 for PUSH, \$1 for POP, and \$ $k$  for MULTIPOP.
- Open an account, and pay “average” cost for each operation:  
say pay \$2 for PUSH, \$0 for POP, and \$0 for MULTIPOP.

## Accounting Method: “Banker’s View”

Suppose you are renting a "**coin-operation**" machine, and are charged according to the number of operations.

Two payment strategies:

- Pay actual cost for each operation:  
say pay \$1 for PUSH, \$1 for POP, and \$ $k$  for MULTIPOP.
- Open an account, and pay “average” cost for each operation:  
say pay \$2 for PUSH, \$0 for POP, and \$0 for MULTIPOP.

If “average” cost  $>$  actual cost: the extra will be deposited as *credit*.

If “average” cost  $<$  actual cost: credit will be used to pay actual cost.



# Accounting Method: “Banker’s View”

Suppose you are renting a **"coin-operation"** machine, and are charged according to the number of operations.

Two payment strategies:

- Pay actual cost for each operation:  
say pay \$1 for PUSH, \$1 for POP, and \$ $k$  for MULTIPOP.
- Open an account, and pay “average” cost for each operation:  
say pay \$2 for PUSH, \$0 for POP, and \$0 for MULTIPOP.

If “average” cost  $>$  actual cost: the extra will be deposited as *credit*.

If “average” cost  $<$  actual cost: credit will be used to pay actual cost.

**Constraint:**  $\sum_{i=1}^n C_i \leq \sum_{i=1}^n \hat{C}_i$  for arbitrary  $n$  operations, i.e. you have enough **credit** in your account.

# An Example Scenario

Read: 5  
Array: 

5

  
OP: Push  
 $C_i$ : 1  
 $\hat{C}_i$ : 2  
Credit: 1

# An Example Scenario

Read:	5	6
Array:	<div><div></div><div>5</div></div>	<div><div></div><div>6</div><div>5</div></div>
OP:	Push	Push
$C_i$ :	1	1
$\hat{C}_i$ :	2	2
Credit:	1	2

# An Example Scenario

Read:	5	6	4
Array:	<div><div></div><div>5</div></div>	<div><div>6</div><div>5</div></div>	<div><div></div><div>5</div></div>
OP:	Push	Push	Pop
$C_i$ :	1	1	1
$\hat{C}_i$ :	2	2	0
Credit:	1	2	1

# An Example Scenario

Read:	5	6	4	7
Array:	<div><div></div><div>5</div></div>	<div><div>6</div><div>5</div></div>	<div><div></div><div>5</div></div>	<div><div>7</div><div>5</div></div>
OP:	Push	Push	Pop	Push
$C_i$ :	1	1	1	1
$\hat{C}_i$ :	2	2	0	2
Credit:	1	2	1	2

# An Example Scenario

Read:	5	6	4	7	9
Array:	<div><div></div><div></div><div>5</div></div>	<div><div></div><div>6</div><div>5</div></div>	<div><div></div><div></div><div>5</div></div>	<div><div></div><div>7</div><div>5</div></div>	<div><div>9</div><div>7</div><div>5</div></div>
OP:	Push	Push	Pop	Push	Push
$C_i$ :	1	1	1	1	1
$\hat{C}_i$ :	2	2	0	2	2
Credit:	1	2	1	2	3

# An Example Scenario

Read:	5	6	4	7	9	1
Array:	<div><div></div><div></div><div>5</div></div>	<div><div></div><div>6</div><div>5</div></div>	<div><div></div><div></div><div>5</div></div>	<div><div></div><div>7</div><div>5</div></div>	<div><div>9</div><div>7</div><div>5</div></div>	<div><div></div><div></div><div></div></div>
OP:	Push	Push	Pop	Push	Push	MultiPop
$C_i$ :	1	1	1	1	1	3
$\hat{C}_i$ :	2	2	0	2	2	0
Credit:	1	2	1	2	3	0

# An Example Scenario

Read:	5	6	4	7	9	1	2
Array:	<div>5</div>	<div>5 6</div>	<div>5</div>	<div>5 7</div>	<div>5 7 9</div>	<div></div>	<div>2</div>
OP:	Push	Push	Pop	Push	Push	MultiPop	Push
$C_i$ :	1	1	1	1	1	3	1
$\hat{C}_i$ :	2	2	0	2	2	0	2
Credit:	1	2	1	2	3	0	1



# An Example Scenario

Read:	5	6	4	7	9	1	2	4
Array:	<div>5</div>	<div>5</div> <div>6</div>	<div>5</div>	<div>5</div> <div>7</div>	<div>5</div> <div>7</div> <div>9</div>		<div>2</div>	<div>2</div> <div>4</div>
OP:	Push	Push	Pop	Push	Push	MultiPop	Push	Push
$C_i$ :	1	1	1	1	1	3	1	1
$\hat{C}_i$ :	2	2	0	2	2	0	2	2
Credit:	1	2	1	2	3	0	1	2

# An Example Scenario

Read:	5	6	4	7	9	1	2	4	8
Array:	<div><div></div><div></div><div>5</div></div>	<div><div></div><div>6</div><div>5</div></div>	<div><div></div><div></div><div>5</div></div>	<div><div></div><div>7</div><div>5</div></div>	<div><div>9</div><div>7</div><div>5</div></div>	<div><div></div><div></div><div></div></div>	<div><div></div><div></div><div>2</div></div>	<div><div></div><div>4</div><div>2</div></div>	<div><div>8</div><div>4</div><div>2</div></div>
OP:	Push	Push	Pop	Push	Push	MultiPop	Push	Push	Push
$C_i$ :	1	1	1	1	1	3	1	1	1
$\hat{C}_i$ :	2	2	0	2	2	0	2	2	2
Credit:	1	2	1	2	3	0	1	2	3

## Example 2: Incrementing Binary Counter

Set amortized cost as follows:

$OP$	Real Cost $C_{OP}$	Amortized Cost $\widehat{C}_{OP}$
flip(0→1)	1	2
flip(1→0)	1	0

## Example 2: Incrementing Binary Counter

Set amortized cost as follows:

$OP$	Real Cost $C_{OP}$	Amortized Cost $\widehat{C_{OP}}$
<code>flip(0→1)</code>	1	2
<code>flip(1→0)</code>	1	0

**Key observation:**  $\#flip(0 \rightarrow 1) \geq \#flip(1 \rightarrow 0)$

## Example 2: Incrementing Binary Counter

Set amortized cost as follows:

$OP$	Real Cost $C_{OP}$	Amortized Cost $\widehat{C}_{OP}$
<code>flip(0→1)</code>	1	2
<code>flip(1→0)</code>	1	0

**Key observation:**  $\#flip(0 \rightarrow 1) \geq \#flip(1 \rightarrow 0)$

$$\begin{aligned}T(n) &= \sum_{i=1}^n C_i \\&= \#flip(0 \rightarrow 1) + \#flip(1 \rightarrow 0) \\&\leq 2\#flip(0 \rightarrow 1) \\&\leq 2n\end{aligned}$$

# Outline

## 1 Amortized Analysis

- Definition
- Types

## 2 Three Methods

- Aggregate Analysis
- Accounting Method
- **Potential Function Method**

## 3 Dynamic Tables

- Description
- Supporting TABLEINSERT Only
- Supporting TABLEINSERT and TABLEDELETE

# Potential Technique: “Physicist’s View”

**Basic idea:** sometimes it is not easy to set  $\widehat{C}_{op}$  for each operation  $OP$  directly.

# Potential Technique: “Physicist’s View”

**Basic idea:** sometimes it is not easy to set  $\widehat{C}_{op}$  for each operation  $OP$  directly.

Define a **potential function as a bridge**, i.e. we can assign a value to **state** rather than **operation**, and amortized costs are then calculated based on potential function.



# Potential Technique: “Physicist’s View”

**Basic idea:** sometimes it is not easy to set  $\widehat{C}_{op}$  for each operation  $OP$  directly.

Define a potential function as a bridge, i.e. we can assign a value to state rather than operation, and amortized costs are then calculated based on potential function.

**Potential Function:**  $\Phi(S) : S \rightarrow R$ , where  $S$  is state collection.

# Potential Technique: “Physicist’s View”

**Basic idea:** sometimes it is not easy to set  $\widehat{C}_{op}$  for each operation  $OP$  directly.

Define a potential function as a bridge, i.e. we can assign a value to state rather than operation, and amortized costs are then calculated based on potential function.

**Potential Function:**  $\Phi(S) : S \rightarrow R$ , where  $S$  is state collection.

**Amortized Cost Setting:**  $\widehat{C}_i = C_i + \Phi(S_i) - \Phi(S_{i-1})$ .

# Potential Technique: “Physicist’s View” (Cont.)

Then we have

$$\begin{aligned}\sum_{i=1}^n \hat{C}_i &= \sum_{i=1}^n (C_i + \Phi(S_i) - \Phi(S_{i-1})) \\ &= \sum_{i=1}^n C_i + \Phi(S_n) - \Phi(S_0)\end{aligned}$$

# Potential Technique: “Physicist’s View” (Cont.)

Then we have

$$\begin{aligned}\sum_{i=1}^n \hat{C}_i &= \sum_{i=1}^n (C_i + \Phi(S_i) - \Phi(S_{i-1})) \\ &= \sum_{i=1}^n C_i + \Phi(S_n) - \Phi(S_0)\end{aligned}$$

**Requirement:** To guarantee  $\sum_{i=1}^n C_i \leq \sum_{i=1}^n \hat{C}_i$ , it suffices to assure

$$\Phi(S_n) \geq \Phi(S_0).$$

## Stack Example: Potential Changes

**Potential Function:** Let  $\Phi(S)$  denote the number of items in stack.

# Stack Example: Potential Changes

**Potential Function:** Let  $\Phi(S)$  denote the number of items in stack.

In fact, we simply use “credit” as potential.

# Stack Example: Potential Changes

**Potential Function:** Let  $\Phi(S)$  denote the number of items in stack.

In fact, we simply use “credit” as potential.

**State:** Here state  $S_i$  refers to the STATE of the stack after the  $i$ -th operation.

# Stack Example: Potential Changes

**Potential Function:** Let  $\Phi(S)$  denote the number of items in stack.

In fact, we simply use “credit” as potential.


**State:** Here state  $S_i$  refers to the STATE of the stack after the  $i$ -th operation.

**Correctness:**  $\Phi(S_i) \geq 0 = \Phi(S_0)$  for any  $i$ ;




# An Example Scenario

States of Stack  $S$ :

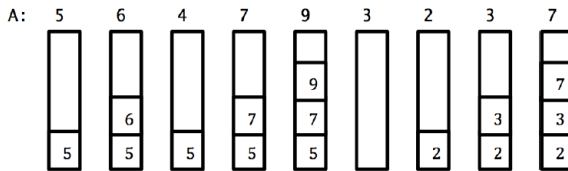

Polyline of Potential Function  $\Phi(S_i)$ :

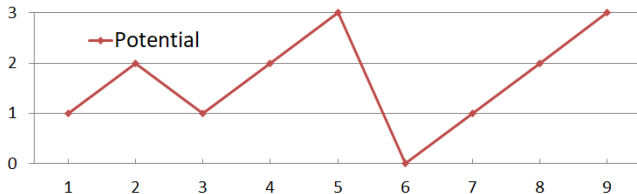

# Potential Function Technique: Amortized Cost Setting

**Definition:**  $\Phi(S)$  denotes the number of items in stack;

# Potential Function Technique: Amortized Cost Setting

**Definition:**  $\Phi(S)$  denotes the number of items in stack;

$$\begin{aligned}\text{PUSH: } \Phi(S_i) - \Phi(S_{i-1}) &= 1 \\ \hat{C}_i &= C_i + \Phi(S_i) - \Phi(S_{i-1}) = 2\end{aligned}$$

# Potential Function Technique: Amortized Cost Setting

**Definition:**  $\Phi(S)$  denotes the number of items in stack;

$$\begin{aligned}\text{PUSH: } \quad & \Phi(S_i) - \Phi(S_{i-1}) = 1 \\ & \widehat{C}_i = C_i + \Phi(S_i) - \Phi(S_{i-1}) = 2\end{aligned}$$

$$\begin{aligned}\text{POP: } \quad & \Phi(S_i) - \Phi(S_{i-1}) = -1 \\ & \widehat{C}_i = C_i + \Phi(S_i) - \Phi(S_{i-1}) = 0\end{aligned}$$

# Potential Function Technique: Amortized Cost Setting

**Definition:**  $\Phi(S)$  denotes the number of items in stack;

$$\begin{aligned}\text{PUSH: } \quad & \Phi(S_i) - \Phi(S_{i-1}) = 1 \\ & \widehat{C}_i = C_i + \Phi(S_i) - \Phi(S_{i-1}) = 2\end{aligned}$$

$$\begin{aligned}\text{POP: } \quad & \Phi(S_i) - \Phi(S_{i-1}) = -1 \\ & \widehat{C}_i = C_i + \Phi(S_i) - \Phi(S_{i-1}) = 0\end{aligned}$$

$$\begin{aligned}\text{MULTIPOP: } \quad & \Phi(S_i) - \Phi(S_{i-1}) = -\#Pop \\ & \widehat{C}_i = C_i + \Phi(S_i) - \Phi(S_{i-1}) = 0\end{aligned}$$

# Potential Function Technique: Amortized Cost Setting

**Definition:**  $\Phi(S)$  denotes the number of items in stack;

$$\begin{aligned}\text{PUSH: } \Phi(S_i) - \Phi(S_{i-1}) &= 1 \\ \widehat{C}_i &= C_i + \Phi(S_i) - \Phi(S_{i-1}) = 2\end{aligned}$$

$$\begin{aligned}\text{POP: } \Phi(S_i) - \Phi(S_{i-1}) &= -1 \\ \widehat{C}_i &= C_i + \Phi(S_i) - \Phi(S_{i-1}) = 0\end{aligned}$$

$$\begin{aligned}\text{MULTIPOP: } \Phi(S_i) - \Phi(S_{i-1}) &= -\#Pop \\ \widehat{C}_i &= C_i + \Phi(S_i) - \Phi(S_{i-1}) = 0\end{aligned}$$

Thus, starting from an empty stack, **any sequence** of  $n_1$  PUSH,  $n_2$  POP, and  $n_3$  MULTIPOP operations takes at most

$$T(n) = \sum_{i=1}^n C_i \leq \sum_{i=1}^n \widehat{C}_i = 2n_1. \text{ Here } n = n_1 + n_2 + n_3.$$

# Binary Counter

**Definition:** Set potential function as  $\Phi(S) = \#1$  in counter


Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1	1	1
2	0	0	0	0	0	0	1	0	2	3
3	0	0	0	0	0	0	1	1	1	4
4	0	0	0	0	0	1	0	0	3	7
5	0	0	0	0	0	1	0	1	1	8
6	0	0	0	0	0	1	1	0	2	10
7	0	0	0	0	0	1	1	1	1	11
8	0	0	0	0	1	0	0	0	4	15

# Binary Counter

**Definition:** Set potential function as  $\Phi(S) = \#1$  in counter

Counter Value	A[7]	A[6]	A[5]	A[4]	A[3]	A[2]	A[1]	A[0]	Cost	Total Cost
0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1	1	1
2	0	0	0	0	0	0	1	0	2	3
3	0	0	0	0	0	0	1	1	1	4
4	0	0	0	0	0	1	0	0	3	7
5	0	0	0	0	0	1	0	1	1	8
6	0	0	0	0	0	1	1	0	2	10
7	0	0	0	0	0	1	1	1	1	11
8	0	0	0	0	1	0	0	0	4	15

Polyline of Potential Function  $\Phi(S)$ :

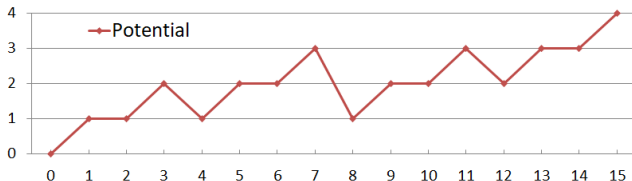



## Binary Counter (Cont.)

**Definition:** Set potential function as  $\Phi(S) = \#1$  in counter;

## Binary Counter (Cont.)

**Definition:** Set potential function as  $\Phi(S) = \#1$  in counter;

At step  $i$ , the number of flips  $C_i$  is:

$$C_i = \#flip_{0 \rightarrow 1}^{(i)} + \#flip_{1 \rightarrow 0}^{(i)} = 1 + \#flip_{1 \rightarrow 0}^{(i)} \quad (\text{why?})$$

## Binary Counter (Cont.)

**Definition:** Set potential function as  $\Phi(S) = \#1$  in counter;

At step  $i$ , the number of flips  $C_i$  is:

$$\begin{aligned}C_i &= \#flip_{0 \rightarrow 1}^{(i)} + \#flip_{1 \rightarrow 0}^{(i)} = 1 + \#flip_{1 \rightarrow 0}^{(i)} \quad (\text{why?}) \\ \Phi(S_i) &= \Phi(S_{i-1}) + 1 - \#flip_{1 \rightarrow 0}^{(i)}\end{aligned}$$

## Binary Counter (Cont.)

**Definition:** Set potential function as  $\Phi(S) = \#1$  in counter;

At step  $i$ , the number of flips  $C_i$  is:

$$\begin{aligned}C_i &= \#flip_{0 \rightarrow 1}^{(i)} + \#flip_{1 \rightarrow 0}^{(i)} = 1 + \#flip_{1 \rightarrow 0}^{(i)} \quad (\text{why?}) \\ \Phi(S_i) &= \Phi(S_{i-1}) + 1 - \#flip_{1 \rightarrow 0}^{(i)} \\ \widehat{C}_i &= C_i + \Phi(S_i) - \Phi(S_{i-1}) \\ &= 1 + \#flip_{1 \rightarrow 0}^{(i)} + 1 - \#flip_{1 \rightarrow 0}^{(i)} = 2\end{aligned}$$

## Binary Counter (Cont.)

**Definition:** Set potential function as  $\Phi(S) = \#1$  in counter;

At step  $i$ , the number of flips  $C_i$  is:

$$\begin{aligned}C_i &= \#flip_{0 \rightarrow 1}^{(i)} + \#flip_{1 \rightarrow 0}^{(i)} = 1 + \#flip_{1 \rightarrow 0}^{(i)} \quad (\text{why?}) \\ \Phi(S_i) &= \Phi(S_{i-1}) + 1 - \#flip_{1 \rightarrow 0}^{(i)} \\ \hat{C}_i &= C_i + \Phi(S_i) - \Phi(S_{i-1}) \\ &= 1 + \#flip_{1 \rightarrow 0}^{(i)} + 1 - \#flip_{1 \rightarrow 0}^{(i)} = 2\end{aligned}$$

Thus we have

$$T(n) = \sum_{i=1}^n C_i \leq \sum_{i=1}^n \hat{C}_i = 2n$$

## Binary Counter (Cont.)

**Definition:** Set potential function as  $\Phi(S) = \#1$  in counter;

At step  $i$ , the number of flips  $C_i$  is:

$$\begin{aligned}C_i &= \#flip_{0 \rightarrow 1}^{(i)} + \#flip_{1 \rightarrow 0}^{(i)} = 1 + \#flip_{1 \rightarrow 0}^{(i)} \quad (\text{why?}) \\ \Phi(S_i) &= \Phi(S_{i-1}) + 1 - \#flip_{1 \rightarrow 0}^{(i)} \\ \hat{C}_i &= C_i + \Phi(S_i) - \Phi(S_{i-1}) \\ &= 1 + \#flip_{1 \rightarrow 0}^{(i)} + 1 - \#flip_{1 \rightarrow 0}^{(i)} = 2\end{aligned}$$

Thus we have

$$T(n) = \sum_{i=1}^n C_i \leq \sum_{i=1}^n \hat{C}_i = 2n$$

In other words, starting from  $00\dots 0$ , a sequence of  $n$  INCREMENT operations takes at most  $2n$  time.

# Outline

## 1 Amortized Analysis

- Definition
- Types

## 2 Three Methods

- Aggregate Analysis
- Accounting Method
- Potential Function Method

## 3 Dynamic Tables

- Description
- Supporting TABLEINSERT Only
- Supporting TABLEINSERT and TABLEDELETE

# A Practical Problem

Suppose you are asked to develop a C++ compiler.



# A Practical Problem

Suppose you are asked to develop a C++ compiler.

`vector` is one of a C++ class templates to hold a set of objects. It supports the following operations:

- `push_back`: to add a new object onto the tail;
- `pop_back`: to pop out the last object;

Recall that `vector` uses a **contiguous memory area** to store objects.

# A Practical Problem

Suppose you are asked to develop a C++ compiler.

`vector` is one of a C++ class templates to hold a set of objects. It supports the following operations:

- `push_back`: to add a new object onto the tail;
- `pop_back`: to pop out the last object;

Recall that `vector` uses a **contiguous memory area** to store objects.

Question: How to design an efficient **memory-allocation strategy** for `vector`?

# DYNAMICTABLE Problem

# DYNAMICTABLE Problem

In many applications, we do not know in advance how many objects will be stored in a table.

Thus we have to allocate space for a table, only to find out later that it is not enough.

# DYNAMICTABLE Problem

In many applications, we do not know in advance how many objects will be stored in a table.

Thus we have to allocate space for a table, only to find out later that it is not enough.

**DYNAMIC EXPANSION:** When inserting a new item into a full table, the table must be reallocated with a larger size, and the objects in the original table must be copied into the new table.

# DYNAMIC TABLE Problem

In many applications, we do not know in advance how many objects will be stored in a table.

Thus we have to allocate space for a table, only to find out later that it is not enough.

**DYNAMIC EXPANSION:** When inserting a new item into a full table, the table must be reallocated with a larger size, and the objects in the original table must be copied into the new table.

**DYNAMIC CONTRACTION:** Similarly, if many objects have been removed from a table, it is worthwhile to reallocate the table with a smaller size.

# DYNAMIC TABLE Problem

In many applications, we do not know in advance how many objects will be stored in a table.

Thus we have to allocate space for a table, only to find out later that it is not enough.

**DYNAMIC EXPANSION:** When inserting a new item into a full table, the table must be reallocated with a larger size, and the objects in the original table must be copied into the new table.

**DYNAMIC CONTRACTION:** Similarly, if many objects have been removed from a table, it is worthwhile to reallocate the table with a smaller size.

We will show a **memory allocation strategy** such that the amortized cost of insertion and deletion is  $O(1)$ , even if the actual cost of an operation is large when it triggers an expansion or contraction.

# Outline

## 1 Amortized Analysis

- Definition
- Types

## 2 Three Methods

- Aggregate Analysis
- Accounting Method
- Potential Function Method

## 3 Dynamic Tables

- Description
- **Supporting TABLEINSERT Only**
- Supporting TABLEINSERT and TABLEDELETE



# Table Expansion Operation

---

**ALGORITHM 5:** TABLE\_INSERT( $T, i$ )

---

```
1 if  $size[T] = 0$  then
2   |   allocate a table with 1 slot;
3   |    $size[T] = 1$ ;
4 if  $num[T] = size[T]$  then
5   |   allocate a new table with  $2 \times size[T]$  slots; //double size
6   |    $size[T] = 2 \times size[T]$ ;
7   |   copy all items into the new table;
8   |   free the original table;
9 insert the new item  $i$  into  $T$ ;
10  $num[T] \leftarrow num[T] + 1$ ;
```



---

# Example: TABLEINSERT

An Example Dynamic Table  $T$ :

1	2	3	4				
---	---	---	---	--	--	--	--

`num[T]`: #used slots


`size[T]`: total number of slots  

# Example: TABLEINSERT

An Example Dynamic Table  $T$ :

1	2	3	4				
---	---	---	---	--	--	--	--

$\text{num}[T]$ : #used slots

$\text{size}[T]$ : total number of slots 

Consider a sequence of operations starting with an empty table:

---

## ALGORITHM 6: TABLE\_INSERT

---

- 1 Table  $T$ ;
  - 2 **for**  $i = 1$  **to**  $n$  **do**
  - 3     TABLE\_INSERT( $T, i$ );
-

# TABLEINSERT(1)

INSERT(1)

1

$C_1=1$

## TABLEINSERT(2)

INSERT(1)

1

$C_1=1$

INSERT(2)

*overflow*

# TABLEINSERT(2)

INSERT(1)

1


INSERT(2)

$C_1=1$

# TABLEINSERT(2)

INSERT(1)

INSERT(2)



$C_1=1$

# TABLEINSERT(2)

INSERT(1)



1

$C_1=1$

INSERT(2)

2

$C_2=2$



# TABLEINSERT(3)

INSERT(1)

1

$C_1=1$

INSERT(2)

2

$C_1=2$

INSERT(3)

*overflow*

# TABLEINSERT(3)

INSERT(1)

1

$C_1=1$

INSERT(2)

2

$C_1=2$


INSERT(3)

# TABLEINSERT(3)

INSERT(1)

INSERT(2)

INSERT(3)



$C_1=1$

$C_2=2$

# TABLEINSERT(3)

INSERT(1)

INSERT(2)

INSERT(3)



$C_1=1$

$C_2=2$

$C_3=3$

# TABLEINSERT(4)

INSERT(1)

INSERT(2)

INSERT(3)

INSERT(4)

1
2
3
4

$C_1=1$

$C_2=2$

$C_3=3$

$C_4=1$

# TABLEINSERT(5)

INSERT(1)

INSERT(2)

INSERT(3)

INSERT(4)

INSERT(5)

1
2
3
4

*overflow*

$C_1=1$

$C_2=2$

$C_3=3$

$C_4=1$

# TABLEINSERT(5)

INSERT(1)

INSERT(2)

INSERT(3)

INSERT(4)

INSERT(5)

1	
2	
3	
4	

$C_1=1$

$C_2=2$

$C_3=3$

$C_4=1$

# TABLEINSERT(5)


INSERT(1)

INSERT(2)

INSERT(3)

INSERT(4)

INSERT(5)

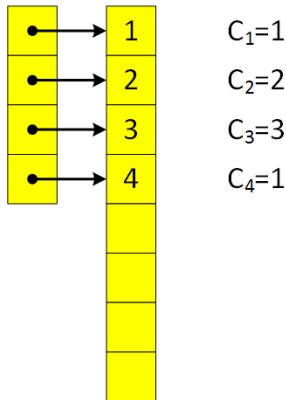



# TABLEINSERT(5)


INSERT(1)

INSERT(2)

INSERT(3)

INSERT(4)

INSERT(5)



$C_1=1$

$C_2=2$

$C_3=3$

$C_4=1$

$C_5=5$

# TABLEINSERT(6)

INSERT(1)

INSERT(2)

INSERT(3)

INSERT(4)

INSERT(5)

INSERT(6)

1
2
3
4
5
6

 $C_1=1$  $C_2=2$  $C_3=3$  $C_4=1$  $C_5=5$  $C_6=1$

# TABLEINSERT(7)

INSERT(1)

INSERT(2)

INSERT(3)

INSERT(4)

INSERT(5)

INSERT(6)

INSERT(7)

1
2
3
4
5
6
7

 $C_1=1$  $C_2=2$  $C_3=3$  $C_4=1$  $C_5=5$  $C_6=1$  $C_7=1$

# TABLEINSERT(8)

INSERT(1)

INSERT(2)

INSERT(3)

INSERT(4)

INSERT(5)

INSERT(6)

INSERT(7)

INSERT(8)

1	$C_1=1$
2	$C_2=2$
3	$C_3=3$
4	$C_4=1$
5	$C_5=5$
6	$C_6=1$
7	$C_7=1$
8	$C_8=1$

# Cursory analysis: $O(n^2)$

Consider a sequence of operations starting with an empty table.  
Define  $C_i$  as the cost of the  $i$ th operation (elementary insertions or deletions),

# Cursory analysis: $O(n^2)$

Consider a sequence of operations starting with an empty table. Define  $C_i$  as the cost of the  $i$ th operation (elementary insertions or deletions),

$$C_i = \begin{cases} i & \text{if } i - 1 \text{ is an exact power of 2} \\ 1 & \text{otherwise} \end{cases}$$

Here  $C_i = i$  when the table is full, since we need to perform 1 insertion, and copy  $i - 1$  items into the new table.

# Cursory analysis: $O(n^2)$

Consider a sequence of operations starting with an empty table. Define  $C_i$  as the cost of the  $i$ th operation (elementary insertions or deletions),

$$C_i = \begin{cases} i & \text{if } i - 1 \text{ is an exact power of 2} \\ 1 & \text{otherwise} \end{cases}$$

Here  $C_i = i$  when the table is full, since we need to perform 1 insertion, and copy  $i - 1$  items into the new table.

If  $n$  operations are performed, the worst-case cost of an operation will be  $O(n)$ . Thus, the total running time is  $O(n^2)$ . **Not tight!**

# Tighter Analysis 1: Aggregate Method

**Key Observation:** **Table expansions are rare.**

The  $O(n^2)$  bound is not tight since **table expansion** doesn't occur often in the course of  $n$  operations.



# Tighter Analysis 1: Aggregate Method

**Key Observation:** **Table expansions are rare.**

The  $O(n^2)$  bound is not tight since **table expansion** doesn't occur often in the course of  $n$  operations.

Specifically, **table expansion** occurs at the  $i$ th operation, where  $i - 1$  is an exact power of 2.

$i$	1	2	3	4	5	6	7	8	9	10	11	12
$Size_i$	1	2	4	4	8	8	8	8	16	16	16	16
$C_i$	1	2	3	1	5	1	1	1	9	1	1	1

# Tighter Analysis 1: Aggregate Method

**Key Observation:** Table expansions are rare.

The  $O(n^2)$  bound is not tight since **table expansion** doesn't occur often in the course of  $n$  operations.

Specifically, **table expansion** occurs at the  $i$ th operation, where  $i - 1$  is an exact power of 2.

$i$	1	2	3	4	5	6	7	8	9	10	11	12
$Size_i$	1	2	4	4	8	8	8	8	16	16	16	16
$C_i$	1	2	3	1	5	1	1	1	9	1	1	1

We can decompose  $C_i$  as follows:

$i$	1	2	3	4	5	6	7	8	9	10	11	12
$Size_i$	1	2	4	4	8	8	8	8	16	16	16	16
$C_i$ (insert)	1	1	1	1	1	1	1	1	1	1	1	1
$C_i$ (copy)		1	2		4				8			

# Total cost of $n$ operations

The total cost of  $n$  operations is:

$$\sum_{i=1}^n C_i = 1 + 2 + 3 + 1 + 5 + 1 + 1 + 1 + 9 + 1 + \dots$$

# Total cost of $n$ operations

The total cost of  $n$  operations is:

$$\begin{aligned}\sum_{i=1}^n C_i &= 1 + 2 + 3 + 1 + 5 + 1 + 1 + 1 + 9 + 1 + \dots \\ &= n + \sum_{j=0}^{\lfloor \lg n \rfloor} 2^j\end{aligned}$$

# Total cost of $n$ operations

The total cost of  $n$  operations is:

$$\begin{aligned}\sum_{i=1}^n C_i &= 1 + 2 + 3 + 1 + 5 + 1 + 1 + 1 + 9 + 1 + \dots \\ &= n + \sum_{j=0}^{\lfloor \lg n \rfloor} 2^j \\ &< n + 2n \\ &= 3n\end{aligned}$$

# Total cost of $n$ operations

The total cost of  $n$  operations is:

$$\begin{aligned}\sum_{i=1}^n C_i &= 1 + 2 + 3 + 1 + 5 + 1 + 1 + 1 + 9 + 1 + \dots \\ &= n + \sum_{j=0}^{\lfloor \lg n \rfloor} 2^j \\ &< n + 2n \\ &= 3n\end{aligned}$$

Thus the amortized cost of an operation is 3.

In other words, the average cost of each TABLEINSERT operation is  $O(n)/n = O(1)$ .

## Tighter Analysis 2: Accounting Technique

For the  $i$ -th operation, an **amortized cost**  $\hat{C}_i = \$3$  is charged.

- \$1 pays for the insertion **itself**;
- \$2 is stored for **later table doubling**, \$1 for copying one of the recent  $\frac{i}{2}$  items, \$1 for copying one of the old  $\frac{i}{2}$  items.

## Tighter Analysis 2: Accounting Technique

For the  $i$ -th operation, an **amortized cost**  $\hat{C}_i = \$3$  is charged.

- \$1 pays for the insertion **itself**;
- \$2 is stored for **later table doubling**, \$1 for copying one of the recent  $\frac{i}{2}$  items, \$1 for copying one of the old  $\frac{i}{2}$  items.

Original:

\$0	\$0	\$0	\$0	\$2	\$2	\$2	\$2
1	2	3	4	5	6	7	8




## Tighter Analysis 2: Accounting Technique


For the  $i$ -th operation, an **amortized cost**  $\hat{C}_i = \$3$  is charged.

- \$1 pays for the insertion **itself**;
- \$2 is stored for **later table doubling**, \$1 for copying one of the recent  $\frac{i}{2}$  items, \$1 for copying one of the old  $\frac{i}{2}$  items.

Original:



Expansion:



## Tighter Analysis 2: Accounting Technique

**Key observation:** the credit never goes negative. In other words, the sum of amortized cost provides an upper bound of the sum of actual costs.

## Tighter Analysis 2: Accounting Technique

**Key observation:** the credit never goes negative. In other words, the sum of amortized cost provides an upper bound of the sum of actual costs.

$$T(n) = \sum_{i=1}^n C_i \leq \sum_{i=1}^n \hat{C}_i = 3n.$$

## Tighter Analysis 2: Accounting Technique

**Key observation:** the credit never goes negative. In other words, the sum of amortized cost provides an upper bound of the sum of actual costs.

$$T(n) = \sum_{i=1}^n C_i \leq \sum_{i=1}^n \hat{C}_i = 3n.$$

$i$	1	2	3	4	5	6	7	8	9	10	11	12
$Size_i$	1	2	4	4	8	8	8	8	16	16	16	16
$C_i$ (insert)	1	1	1	1	1	1	1	1	1	1	1	1
$C_i$ (copy)		1	2		4				8			
$\hat{C}_i$	3	3	3	3	3	3	3	3	3	3	3	3
<i>Credit</i>	2	3	3	5	3	5	7	9	3	5	7	9

## Tighter Analysis 3: Potential Function Technique

**Basic idea:** the **bank account** can be viewed as potential function of the dynamic set. More specifically, we prefer a potential function  $\Phi : \{T\} \rightarrow R$  with the following properties:

- $\Phi(T) = 0$  immediately **after** an expansion;
- $\Phi(T) = \text{size}[T]$  immediately **before** an expansion; thus, the next expansion can be paid for by the potential.

## Tighter Analysis 3: Potential Function Technique


**Basic idea:** the **bank account** can be viewed as potential function of the dynamic set. More specifically, we prefer a potential function  $\Phi : \{T\} \rightarrow R$  with the following properties:

- $\Phi(T) = 0$  immediately **after** an expansion;
- $\Phi(T) = \text{size}[T]$  immediately **before** an expansion; thus, the next expansion can be paid for by the potential.

A possibility:  $\Phi(T) = 2 \times \text{num}[T] - \text{size}[T]$

\$0	\$0	\$0	\$0	\$2	\$2		
1	2	3	4	5	6		

$$\Phi = 2\text{num}[T] - \text{size}[T] = 4$$

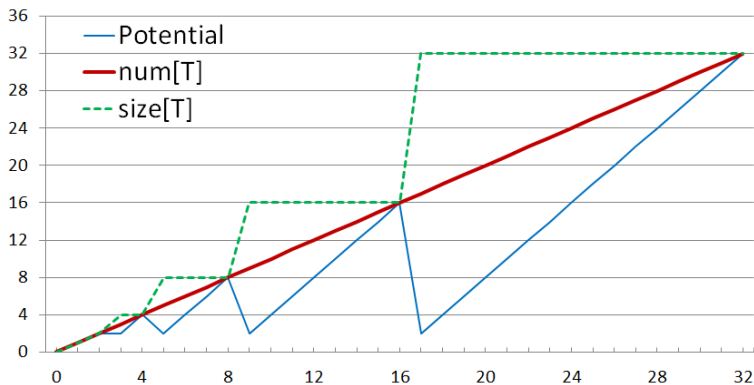$\Phi(T) = 2 \times \text{num}[T] - \text{size}[T]$ : An Example

**Figure:** The effect of a sequence of  $n$  TABLEINSERT on  $\text{size}_i$  (green),  $\text{num}_i$  (red), and  $\Phi_i$  (blue).

# Correctness of $\Phi(T) = 2 \times \text{num}[T] - \text{size}[T]$

**Correctness:** Initially  $\Phi_0 = 0$ , and it is easy to verify that  $\Phi_i \geq \Phi_0$  since the table is always at least half full.



# Correctness of $\Phi(T) = 2 \times \text{num}[T] - \text{size}[T]$

**Correctness:** Initially  $\Phi_0 = 0$ , and it is easy to verify that  $\Phi_i \geq \Phi_0$  since the table is always at least half full.

The **amortized cost**  $\hat{C}_i$  with respect to  $\Phi$  is defined as:

$$\hat{C}_i = C_i + \Phi(T_i) - \Phi(T_{i-1}).$$

# Correctness of $\Phi(T) = 2 \times \text{num}[T] - \text{size}[T]$

**Correctness:** Initially  $\Phi_0 = 0$ , and it is easy to verify that  $\Phi_i \geq \Phi_0$  since the table is always at least half full.

The **amortized cost**  $\hat{C}_i$  with respect to  $\Phi$  is defined as:

$$\hat{C}_i = C_i + \Phi(T_i) - \Phi(T_{i-1}).$$

Thus  $\sum_{i=1}^n \hat{C}_i = \sum_{i=1}^n C_i + \Phi_n - \Phi_0$  is really an upper bound of the actual cost  $\sum_{i=1}^n C_i$ .

# Calculate $\hat{C}_i$ with respect to $\Phi$

**Case 1:** the  $i$ -th insertion does not trigger an expansion

$size_i = size_{i-1}$  ( $size_i$ : the table size after the  $i$ -th operation.)

$num_i = num_{i-1} + 1$  ( $num_i$ : no. of items after the  $i$ -th operations)

# Calculate $\hat{C}_i$ with respect to $\Phi$

**Case 1:** the  $i$ -th insertion does not trigger an expansion

$size_i = size_{i-1}$  ( $size_i$ : the table size after the  $i$ -th operation.)

$num_i = num_{i-1} + 1$  ( $num_i$ : no. of items after the  $i$ -th operations)

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + (2num_i - size_i) - (2num_{i-1} - size_{i-1}) \\ &= 1 + 2 \\ &= 3\end{aligned}$$

# Calculate $\hat{C}_i$ with respect to $\Phi$

**Case 1:** the  $i$ -th insertion does not trigger an expansion

$size_i = size_{i-1}$  ( $size_i$ : the table size after the  $i$ -th operation.)

$num_i = num_{i-1} + 1$  ( $num_i$ : no. of items after the  $i$ -th operations)

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + (2num_i - size_i) - (2num_{i-1} - size_{i-1}) \\ &= 1 + 2 \\ &= 3\end{aligned}$$

1. Insert(1)

2. Insert(2)

3. Insert(3)

4. Insert(4)

1
2
3
4

C1: 1

C2: 2

C3: 3

C4: 1

# Calculate $\hat{C}_i$ with respect to $\Phi$

**Case 2:** the  $i$ -th insertion triggers an expansion

$$size_i = 2 \times size_{i-1}.$$

$$size_{i-1} = num_{i-1} = num_i - 1.$$

# Calculate $\hat{C}_i$ with respect to $\Phi$

**Case 2:** the  $i$ -th insertion triggers an expansion

$$size_i = 2 \times size_{i-1}.$$

$$size_{i-1} = num_{i-1} = num_i - 1.$$

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= num_i + (2num_i - size_i) - (2num_{i-1} - size_{i-1}) \\ &= num_i + 2 - (num_i - 1) \\ &= 3\end{aligned}$$

# Calculate $\hat{C}_i$ with respect to $\Phi$

**Case 2:** the  $i$ -th insertion triggers an expansion

$$size_i = 2 \times size_{i-1}.$$

$$size_{i-1} = num_{i-1} = num_i - 1.$$

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= num_i + (2num_i - size_i) - (2num_{i-1} - size_{i-1}) \\ &= num_i + 2 - (num_i - 1) \\ &= 3\end{aligned}$$

1. Insert(1)
2. Insert(2)
3. Insert(3)



C1: 1  
C2: 2  
C3: 3



# Outline

## 1 Amortized Analysis

- Definition
- Types

## 2 Three Methods

- Aggregate Analysis
- Accounting Method
- Potential Function Method

## 3 Dynamic Tables

- Description
- Supporting TABLEINSERT Only
- Supporting TABLEINSERT and TABLEDELETE

# TABLEDELETE Operation

To implement TABLEDELETE operation, it is simple to remove the specified item from the table, followed by a CONTRACTION operation when the **load factor** (denoted as  $\alpha(T) = \frac{\text{num}[T]}{\text{size}[T]}$ ) is small, so that the wasted space is not exorbitant.

# TABLEDELETE Operation

To implement TABLEDELETE operation, it is simple to remove the specified item from the table, followed by a CONTRACTION operation when the **load factor** (denoted as  $\alpha(T) = \frac{\text{num}[T]}{\text{size}[T]}$ ) is small, so that the wasted space is not exorbitant.

Specifically, when the number of the items in the table drops too low, we allocate a new, smaller space, copy the items from the old table to the new one, and finally free the original table.

# TABLEDELETE Operation

To implement TABLEDELETE operation, it is simple to remove the specified item from the table, followed by a CONTRACTION operation when the **load factor** (denoted as  $\alpha(T) = \frac{\text{num}[T]}{\text{size}[T]}$ ) is small, so that the wasted space is not exorbitant.

Specifically, when the number of the items in the table drops too low, we allocate a new, smaller space, copy the items from the old table to the new one, and finally free the original table.

We would like the following two properties:

- The load factor is bounded below by a constant;
- The amortized cost of a table operation is bounded above by a constant.

# Trial 1

Trial 1: load factor  $\alpha(T)$  never drops below  $1/2$

# Trial 1

Trial 1: load factor  $\alpha(T)$  never drops below  $1/2$

A natural strategy is:

- To double the table size when inserting an item into a full table;
- To halve the table size when deletion causes  $\alpha(T) < \frac{1}{2}$ .

# Trial 1

Trial 1: load factor  $\alpha(T)$  never drops below  $1/2$

A natural strategy is:

- To double the table size when inserting an item into a full table;
- To halve the table size when deletion causes  $\alpha(T) < \frac{1}{2}$ .

The strategy guarantees that load factor  $\alpha(T)$  never drops below  $1/2$ .

However, the amortized cost of an operation might be quite large.

# An Example of Large Amortized Cost

Consider a sequence of  $n = 16$  operations:

- The first 8 operations: I, I, I, . . . .
- The second 8 operations: I, D, D, I, I, D, D, I
- Repeat the I, D, D, I operations . . . . .



# An Example of Large Amortized Cost

Consider a sequence of  $n = 16$  operations:

- The first 8 operations:  $I, I, I, \dots$
- The second 8 operations:  $I, D, D, I, I, D, D, I$
- Repeat the  $I, D, D, I$  operations  $\dots\dots$

Note:

- After the 8-th  $I$ , we have  $num_8 = size_8 = 8$ .
- The 9-th  $I$  leads to a table expansion;
- The following two  $D$  lead to a table contraction;
- The following two  $I$  lead to a table expansion, and so on.

# An Example of Large Amortized Cost

After 8 Insertions

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

Insert(9) causes an expansion

1	2	3	4	5	6	7	8	9						
---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Delete(9) and Delete(8) causes a contraction

1	2	3	4	5	6	7								
---	---	---	---	---	---	---	--	--	--	--	--	--	--	--

1	2	3	4	5	6	7	
---	---	---	---	---	---	---	--



# An Example of Large Amortized Cost

After 8 Insertions

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

Insert(9) causes an expansion

1	2	3	4	5	6	7	8	9						
---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Delete(9) and Delete(8) causes a contraction

1	2	3	4	5	6	7								
---	---	---	---	---	---	---	--	--	--	--	--	--	--	--

1	2	3	4	5	6	7	
---	---	---	---	---	---	---	--



The expansion/contraction takes  $O(n)$  time, and there are  $n$  of them.

Thus the total cost of  $n$  operations are  $O(n^2)$ , and the amortized cost of an operation is  $O(n)$ .

## Trial 2

Trial 2: load factor  $\alpha(T)$  never drops below  $1/4$

# Trial 2

Trial 2: load factor  $\alpha(T)$  never drops below  $1/4$

Another strategy is:

- To double the table size when inserting an item into a full table;
- To halve the table size when deletion causes  $\alpha(T) < \frac{1}{4}$ .

# Trial 2

Trial 2: load factor  $\alpha(T)$  never drops below  $1/4$

Another strategy is:

- To double the table size when inserting an item into a full table;
- To halve the table size when deletion causes  $\alpha(T) < \frac{1}{4}$ .

The strategy guarantees that load factor  $\alpha(T)$  never drops below  $1/4$ .

# Amortized Analysis

We start by defining a potential function  $\Phi(T)$  that is 0 immediately after an expansion or contraction, and builds as  $\alpha(T)$  increases to 1 or decreases to  $\frac{1}{4}$ .

# Amortized Analysis

We start by defining a potential function  $\Phi(T)$  that is 0 immediately after an expansion or contraction, and builds as  $\alpha(T)$  increases to 1 or decreases to  $\frac{1}{4}$ .

$$\Phi(T) = \begin{cases} 2 \times \text{num}[T] - \text{size}[T] & \text{if } \alpha(T) \geq \frac{1}{2} \\ \frac{1}{2} \text{size}[T] - \text{num}[T] & \text{if } \alpha(T) < \frac{1}{2} \end{cases}$$



# Amortized Analysis

We start by defining a potential function  $\Phi(T)$  that is 0 immediately after an expansion or contraction, and builds as  $\alpha(T)$  increases to 1 or decreases to  $\frac{1}{4}$ .

$$\Phi(T) = \begin{cases} 2 \times \text{num}[T] - \text{size}[T] & \text{if } \alpha(T) \geq \frac{1}{2} \\ \frac{1}{2} \text{size}[T] - \text{num}[T] & \text{if } \alpha(T) < \frac{1}{2} \end{cases}$$

**Correctness:** the potential is 0 for an empty table, and  $\Phi(T)$  never goes negative. Thus, the total amortized cost of a sequence of  $n$  operations with respect to  $\Phi$  is an upper bound of the actual cost.

# Amortized Cost of TABLEINSERT

**Case 1:**  $\alpha_{i-1} \geq \frac{1}{2}$  and no expansion

# Amortized Cost of TABLEINSERT

**Case 1:**  $\alpha_{i-1} \geq \frac{1}{2}$  and no expansion

The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + (2num_i - size_i) - (2num_{i-1} - size_{i-1}) \\ &= 1 + (2(num_{i-1} + 1) - size_{i-1}) - (2num_{i-1} - size_{i-1}) \\ &= 3\end{aligned}$$

# Amortized Cost of TABLEINSERT

**Case 1:**  $\alpha_{i-1} \geq \frac{1}{2}$  and no expansion

The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + (2num_i - size_i) - (2num_{i-1} - size_{i-1}) \\ &= 1 + (2(num_{i-1} + 1) - size_{i-1}) - (2num_{i-1} - size_{i-1}) \\ &= 3\end{aligned}$$

1. Insert(1)
2. Insert(2)
3. Insert(3)
4. Insert(4)

1
2
3
4

C1: 1  
C2: 2  
C3: 3  
C4: 1

# Amortized Cost of TABLEINSERT

**Case 2:**  $\alpha_{i-1} \geq \frac{1}{2}$  and an expansion was triggered

# Amortized Cost of TABLEINSERT

**Case 2:**  $\alpha_{i-1} \geq \frac{1}{2}$  and an expansion was triggered

The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= num_i + (2num_i - size_i) - (2num_{i-1} - size_{i-1}) \\ &= num_{i-1} + 1 + (2(num_{i-1} + 1) - 2size_{i-1}) - (2num_{i-1} - size_{i-1}) \\ &= 3 + num_{i-1} - size_{i-1} \quad \leftarrow num_{i-1} = size_{i-1} \\ &= 3\end{aligned}$$

# Amortized Cost of TABLEINSERT

**Case 2:**  $\alpha_{i-1} \geq \frac{1}{2}$  and an expansion was triggered

The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= num_i + (2num_i - size_i) - (2num_{i-1} - size_{i-1}) \\ &= num_{i-1} + 1 + (2(num_{i-1} + 1) - 2size_{i-1}) - (2num_{i-1} - size_{i-1}) \\ &= 3 + num_{i-1} - size_{i-1} \quad \leftarrow num_{i-1} = size_{i-1} \\ &= 3\end{aligned}$$

1. Insert(1)
2. Insert(2)
3. Insert(3)
4. Insert(4)
5. Insert(5)



- C1: 1  
C2: 2  
C3: 3  
C4: 1  
C5: 5

# Amortized Cost of TABLEINSERT

**Case 3:**  $\alpha_{i-1} < \frac{1}{2}$  and  $\alpha_i < \frac{1}{2}$



# Amortized Cost of TABLEINSERT

**Case 3:**  $\alpha_{i-1} < \frac{1}{2}$  and  $\alpha_i < \frac{1}{2}$

The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + \left(\frac{1}{2}size_i - num_i\right) - \left(\frac{1}{2}size_{i-1} - num_{i-1}\right) \\ &= 1 + \left(\frac{1}{2}size_i - num_i\right) - \left(\frac{1}{2}size_i - (num_i - 1)\right) \\ &= 0\end{aligned}$$

# Amortized Cost of TABLEINSERT

**Case 3:**  $\alpha_{i-1} < \frac{1}{2}$  and  $\alpha_i < \frac{1}{2}$


The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + \left(\frac{1}{2}size_i - num_i\right) - \left(\frac{1}{2}size_{i-1} - num_{i-1}\right) \\ &= 1 + \left(\frac{1}{2}size_i - num_i\right) - \left(\frac{1}{2}size_i - (num_i - 1)\right) \\ &= 0\end{aligned}$$

num = 6, size = 16, phi = 2



num = 7, size=16, phi = 1



# Amortized Cost of TABLEINSERT

**Case 4:**  $\alpha_{i-1} < \frac{1}{2}$  but  $\alpha_i \geq \frac{1}{2}$

# Amortized Cost of TABLEINSERT

**Case 4:**  $\alpha_{i-1} < \frac{1}{2}$  but  $\alpha_i \geq \frac{1}{2}$

The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + (2num_i - size_i) - \left(\frac{1}{2}size_{i-1} - num_{i-1}\right) \\ &= 1 + (2num_i - size_i) - \left(\frac{1}{2}size_i - (num_i - 1)\right) \\ &= 1 + 0 - 1 = 0 \quad \leftarrow size_i = 2num_i\end{aligned}$$

# Amortized Cost of TABLEINSERT

**Case 4:**  $\alpha_{i-1} < \frac{1}{2}$  but  $\alpha_i \geq \frac{1}{2}$

The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + (2num_i - size_i) - \left(\frac{1}{2}size_{i-1} - num_{i-1}\right) \\ &= 1 + (2num_i - size_i) - \left(\frac{1}{2}size_i - (num_i - 1)\right) \\ &= 1 + 0 - 1 = 0 \quad \leftarrow size_i = 2num_i\end{aligned}$$

num = 7, size = 16, phi = 1



num = 8, size = 16, phi = 0



# Amortized Cost of TABLEDELETE

**Case 1:**  $\alpha_{i-1} < \frac{1}{2}$  and no contraction

# Amortized Cost of TABLEDELETE

**Case 1:**  $\alpha_{i-1} < \frac{1}{2}$  and no contraction

The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + \left(\frac{1}{2}size_i - num_i\right) - \left(\frac{1}{2}size_{i-1} - num_{i-1}\right) \\ &= 1 + \left(\frac{1}{2}size_{i-1} - (num_{i-1} - 1)\right) - \left(\frac{1}{2}size_{i-1} - num_{i-1}\right) \\ &= 2\end{aligned}$$

# Amortized Cost of TABLEDELETE

**Case 1:**  $\alpha_{i-1} < \frac{1}{2}$  and no contraction


The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + \left(\frac{1}{2}size_i - num_i\right) - \left(\frac{1}{2}size_{i-1} - num_{i-1}\right) \\ &= 1 + \left(\frac{1}{2}size_{i-1} - (num_{i-1} - 1)\right) - \left(\frac{1}{2}size_{i-1} - num_{i-1}\right) \\ &= 2\end{aligned}$$

num = 7, size = 16, phi = 1



num = 6, size = 16, phi = 2





# Amortized Cost of TABLEDELETE

**Case 2:**  $\alpha_{i-1} < \frac{1}{2}$  and a contraction was triggered

# Amortized Cost of TABLEDELETE

**Case 2:**  $\alpha_{i-1} < \frac{1}{2}$  and a contraction was triggered

The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= num_i + 1 + \left(\frac{1}{2}size_i - num_i\right) - \left(\frac{1}{2}size_{i-1} - num_{i-1}\right) \\ &= num_{i-1} + \left(\frac{1}{4}size_{i-1} - (num_{i-1} - 1)\right) - \left(\frac{1}{2}size_{i-1} - num_{i-1}\right) \\ &= 1 + num_{i-1} - \frac{1}{4}size_{i-1} \quad \leftarrow num_{i-1} = \frac{1}{4}size_{i-1} \\ &= 1\end{aligned}$$

# Amortized Cost of TABLEDELETE

**Case 2:**  $\alpha_{i-1} < \frac{1}{2}$  and a contraction was triggered

The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= num_i + 1 + \left(\frac{1}{2}size_i - num_i\right) - \left(\frac{1}{2}size_{i-1} - num_{i-1}\right) \\ &= num_{i-1} + \left(\frac{1}{4}size_{i-1} - (num_{i-1} - 1)\right) - \left(\frac{1}{2}size_{i-1} - num_{i-1}\right) \\ &= 1 + num_{i-1} - \frac{1}{4}size_{i-1} \quad \leftarrow num_{i-1} = \frac{1}{4}size_{i-1} \\ &= 1\end{aligned}$$

num=4, size=16, phi=4

1	2	3	4												
---	---	---	---	--	--	--	--	--	--	--	--	--	--	--	--

num=3, size=8, phi=1

1	2	3					
---	---	---	--	--	--	--	--

# Amortized Cost of TABLEDELETE

**Case 3:**  $\alpha_{i-1} \geq \frac{1}{2}$  and  $\alpha_i \geq \frac{1}{2}$

# Amortized Cost of TABLEDELETE

**Case 3:**  $\alpha_{i-1} \geq \frac{1}{2}$  and  $\alpha_i \geq \frac{1}{2}$

The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + (2num_i - size_i) - (2num_{i-1} - size_{i-1}) \\ &= 1 + (2(num_{i-1} - 1) - size_{i-1}) - (2num_{i-1} - size_{i-1}) \\ &= -1\end{aligned}$$

# Amortized Cost of TABLEDELETE

**Case 3:**  $\alpha_{i-1} \geq \frac{1}{2}$  and  $\alpha_i \geq \frac{1}{2}$


The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + (2\text{num}_i - \text{size}_i) - (2\text{num}_{i-1} - \text{size}_{i-1}) \\ &= 1 + (2(\text{num}_{i-1} - 1) - \text{size}_{i-1}) - (2\text{num}_{i-1} - \text{size}_{i-1}) \\ &= -1\end{aligned}$$

num = 10, size = 16, phi = 4



num = 9, size = 16, phi = 2



# Amortized Cost of TABLEDELETE

**Case 4:**  $\alpha_{i-1} \geq \frac{1}{2}$  and  $\alpha_i < \frac{1}{2}$

# Amortized Cost of TABLEDELETE

**Case 4:**  $\alpha_{i-1} \geq \frac{1}{2}$  and  $\alpha_i < \frac{1}{2}$

The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + \left(\frac{1}{2}size_i - num_i\right) - (2num_{i-1} - size_{i-1}) \\ &= 1 + \left(\frac{1}{2}size_{i-1} - (num_{i-1} - 1)\right) - (2num_{i-1} - size_{i-1}) \\ &= 2 + \frac{3}{2}size_{i-1} - 3num_{i-1} \\ &= 2 \quad \leftarrow size_{i-1} = 2num_{i-1}\end{aligned}$$



# Amortized Cost of TABLEDELETE

**Case 4:**  $\alpha_{i-1} \geq \frac{1}{2}$  and  $\alpha_i < \frac{1}{2}$


The amortized cost is:

$$\begin{aligned}\hat{C}_i &= C_i + \Phi_i - \Phi_{i-1} \\ &= 1 + \left(\frac{1}{2}size_i - num_i\right) - (2num_{i-1} - size_{i-1}) \\ &= 1 + \left(\frac{1}{2}size_{i-1} - (num_{i-1} - 1)\right) - (2num_{i-1} - size_{i-1}) \\ &= 2 + \frac{3}{2}size_{i-1} - 3num_{i-1} \\ &= 2 \quad \leftarrow size_{i-1} = 2num_{i-1}\end{aligned}$$


num = 8, size = 16, phi = 0



num = 7, size = 16, phi = 1



# An Example Polyline of $\Phi_i$

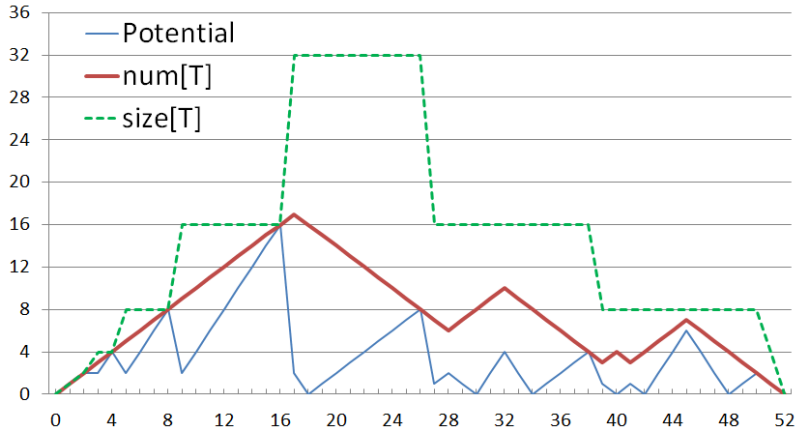

# Conclusion

Since the amortized cost of each operation is bounded above by a constant, Starting with an empty table:

- a sequence of  $n$  TABLEINSERT operations cost  $O(n)$  time in the worst case.
- the actual cost of **any sequence of  $n$**  TABLEINSERT and TABLEDELETE operations is still  $O(n)$  in the worst case.

# Summary

Amortized costs can provide a clean abstraction of data-structure performance.

# Summary

Amortized costs can provide a clean abstraction of data-structure performance.

Any of the analysis methods can be used when an amortized analysis is called for, but each method has some situations where it is arguably the simplest.

# Summary

Amortized costs can provide a clean abstraction of data-structure performance.

Any of the analysis methods can be used when an amortized analysis is called for, but each method has some situations where it is arguably the simplest.

Different schemes may work for assigning amortized costs in the accounting method, or potentials in the potential method, sometimes yielding radically different bounds.