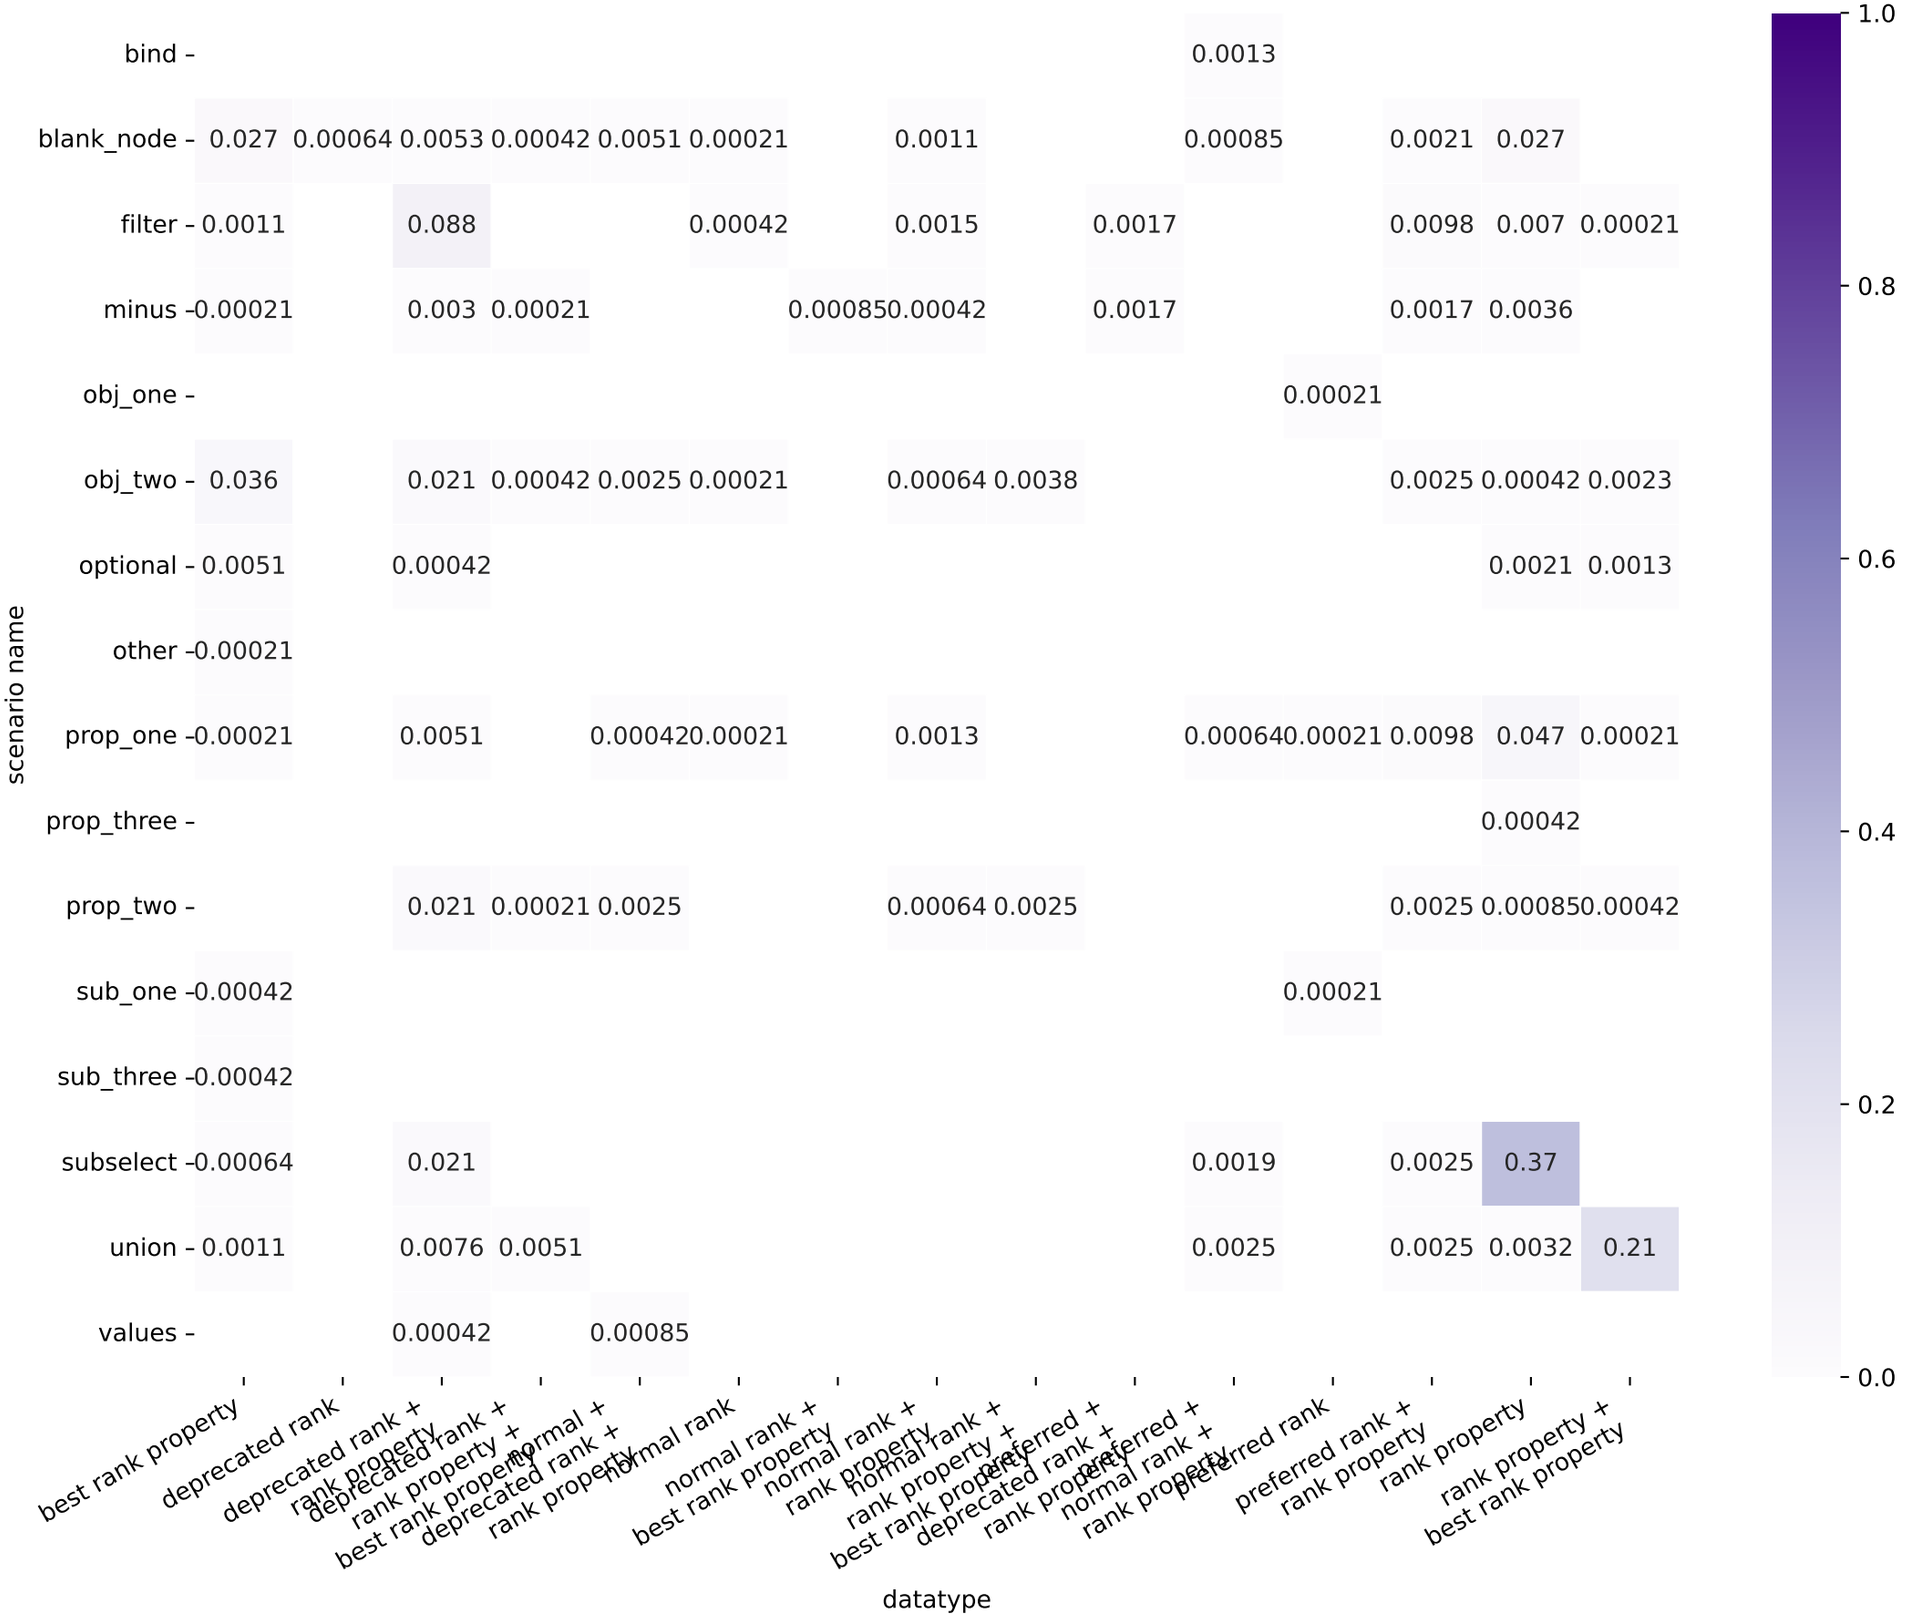
scenario name
datatype
bind
blank_node
filter
minus
obj_one
obj_two
optional
other
prop_one
prop_three
prop_two
sub_one
sub_three
subselect
union
values
best rank property
deprecated rank
deprecated rank + rank property
deprecated rank + best rank property
normal + deprecated rank + rank property
normal rank
normal rank + best rank property
normal rank + rank property
normal rank + best rank property
preferred + deprecated rank + rank property
preferred + normal rank + rank property
preferred rank
preferred rank + rank property
rank property
rank property + best rank property
1.0
0.8
0.6
0.4
0.2
0.0