


cliscrape: A High-Performance CLI Parsing Engine with Interactive TUI Debugger

TextFSM-Compatible State Machine Parser in Rust

Simon Knight

March 2026 • Version 0.1.1

Last updated: March 18, 2026

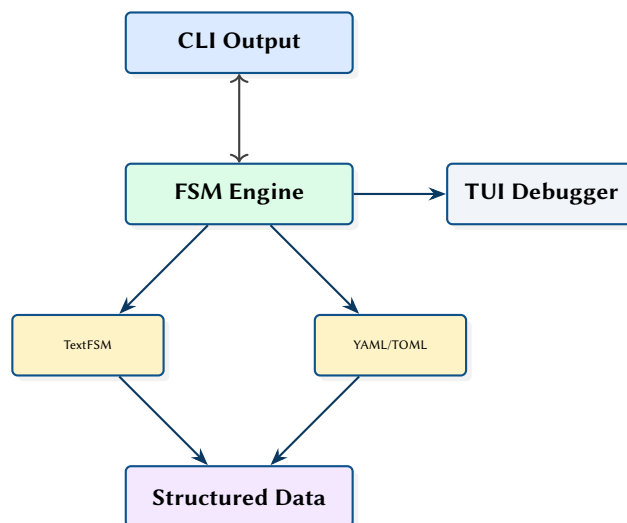

Abstract. Network automation pipelines rely heavily on parsing unstructured CLI output from network devices. This report presents cliscrape, a Rust implementation of a TextFSM-compatible state machine parser that provides over 4 million lines/sec throughput, offering a 10–50× performance improvement over the Python reference implementation. It maintains full compatibility with the existing NTC-Templates library, incorporates an embedded XDG-compliant template library, and features robust edge-case hardening. The system also introduces a modern YAML/TOML template format, a TUI debugger, and a radically innovative isomorphic generation mode that allows for bidirectional synthetic generation of CLI text from structured JSON state.

Contents

1	Introduction and Ecosystem Context	2
1.1	Ecosystem Role	2
2	Operational Model and Case Studies	2
3	FSM Engine Architecture	3
3.1	Stateful Modifiers	3
4	Template Formats	3
4.1	Native Type Coercion	4
5	Production Hardening	4
5.1	Zero-Dependency Static Deployment	4
5.2	Embedded Template Library & Hot-Reloading	4
5.3	Validation and Edge Case Management	4
5.4	Structured Observability	5
6	Isomorphic Simulation and Synthetic Generation	5
6.1	The Inverse Parser (FSM^{-1})	5
6.2	Mathematical Verification	5
7	Interactive TUI Debugger	5
8	Future Trajectories: The Network Compiler	6
8.1	Semantic Drift Analysis	6
8.2	Vendor-Neutral State Manifolds	6
8.3	Grammar Induction and Structural Inference	6
8.4	The FSM-Oracle: Self-Verification	6
9	Performance Evaluation	6
10	Design Summary	7
	Revision History	8
FSM	Finite State Machine	2
TUI	Terminal User Interface	5
JSON	JavaScript Object Notation	2

1 Introduction and Ecosystem Context

The networking industry relies on CLI-based management for device configuration and monitoring. Parsing this unstructured text output is often the bottleneck in automation pipelines. TextFSM [1] provides a template-based approach using state machines, and the NTC-Templates [2] library offers hundreds of community-maintained templates.

However, the Python TextFSM implementation has three core limitations: performance limitations due to interpreted execution (often struggling with large `show tech-support` outputs), readability issues caused by dense inline regex syntax, and a lack of observability when templates fail to match expected output.

1.1 Ecosystem Role

`cliscrape` operates within the Operations Path of the broader network automation ecosystem. It sits directly behind the connectivity layer, transforming raw device output into structured operational state.




Figure 1. The Operations Path pipeline. `deviceinteraction` handles connectivity, while `cliscrape` handles pure parsing, feeding operational state to analysis tools.

2 Operational Model and Case Studies

The foundational goal of `cliscrape` is taking semi-structured CLI text and enforcing a typed schema contract. Consider a standard `show version` command from a Cisco IOS device:

Raw CLI Output (Cisco IOS)

```
Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 15.0(2)SE11, RELEASE SOFTWARE (fc3
↪ )
ROM: Bootstrap program is C2960 boot loader
SW-CORE-01 uptime is 5 weeks, 2 days, 3 hours, 45 minutes
System image file is "flash:/c2960-lanbasek9-mz.150-2.SE11.bin"
```

Instead of brittle custom scripts or string-splitting, the Finite State Machine (FSM) engine applies an embedded YAML or TextFSM template. The variables defined in the template dictate the keys of the resulting JSON object.

Parsed Structured Output

```
[
  {
    "hostname": "SW-CORE-01",
    "model": "WS-C2960-48TT-L",
    "serial": ":",
    "uptime": "5 weeks, 2 days, 3 hours, 45 minutes",
    "version": "15.0(2)SE11,"
  }
]
```

This operational model allows downstream tools like `netassure` to perform strict type-checking and logical assertions against properties like `uptime` and `version`, entirely decoupled from the vendor-specific formatting quirks of the original CLI.

3 FSM Engine Architecture

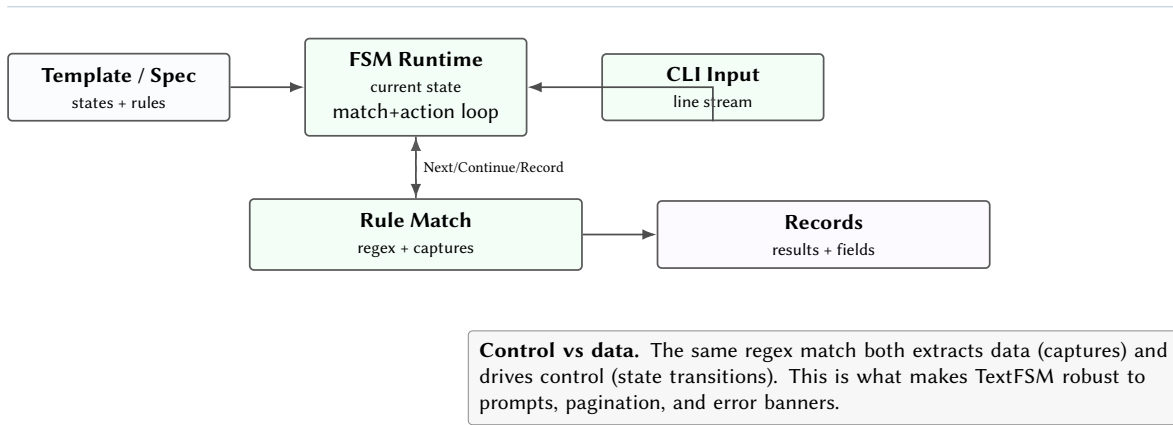


Figure 2. FSM engine model: rule matching is both evidence extraction and control-flow.

The core engine implements the exact TextFSM state machine semantics using Rust.

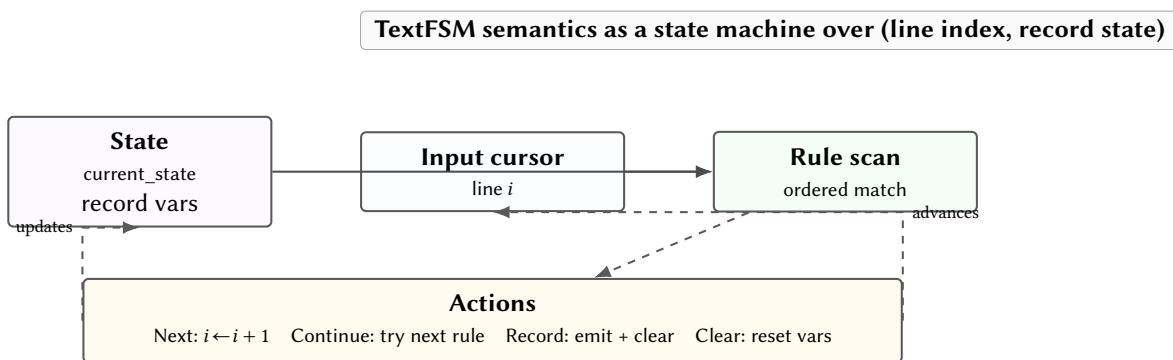


Figure 3. TextFSM parsing as an interpreter over a line cursor and an accumulating record.

For each input line, the engine evaluates rules in the current state sequentially. On match, captured groups are assigned to named variables, and the defined action (Next, Continue, Record, Clear) is executed.

3.1 Stateful Modifiers

Simple regular expressions are insufficient for network CLI outputs that exhibit hierarchical or stateful formatting (e.g., a routing table where a single routing protocol applies to multiple subsequent subnet lines). To support this, the engine implements TextFSM’s stateful variable modifiers:

- **Filldown:** Retains a captured variable’s value across multiple record emissions until explicitly cleared or overwritten.
- **List:** Rather than overwriting a variable on subsequent matches, accumulates the matched values into a native [JSON](#) array.

These modifiers allow the parser to build deep, relational data structures from flat text without requiring complex post-processing.

4 Template Formats

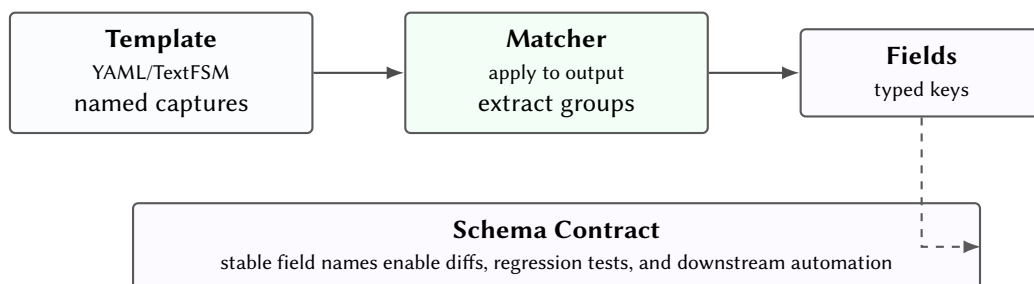


Figure 4. Templates define the parsing contract: semistructured CLI output becomes stable, typed records.

Insight:
The Rust `regex` crate’s DFA-based engine provides predictable $O(n)$ matching per line, avoiding the catastrophic backtracking possible with Python’s `re` module on pathological patterns.

Supporting both TextFSM and YAML formats allows teams to migrate incrementally. Existing templates work immediately via a compatibility translation layer. New templates can use the more readable YAML format. Both compile to the same internal [FSM](#) representation (IR).

Beyond mere readability, the shift to YAML/TOML introduces a strict schema definition capability. Because values can be natively typed (e.g., explicitly defining an interface MTU as an integer rather than an arbitrary regex string), `cliscrape` can automatically generate downstream tooling assets like typed struct definitions, upstream documentation, and the embedded Template Catalog.

4.1 Native Type Coercion

Legacy Python TextFSM implementations fundamentally treat all captured data as strings. If a device outputs an MTU of 1500, the resulting JSON output will be `"mtu": "1500"`. This pushes the burden of data normalisation onto downstream analysis tools.

Because `cliscrape`'s modern templates allow explicit type definitions, the engine performs native type coercion during the match phase. An extracted string representing a number is safely converted and emitted as a native [JSON](#) Integer. This seemingly small feature represents a major architectural win for the Operations Path: when data reaches `netassure`, it is instantly queryable without secondary casting operations.

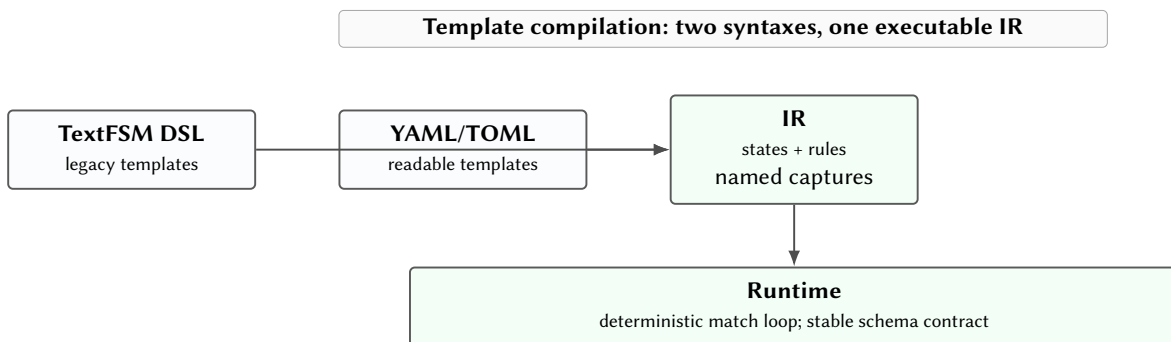


Figure 5. Compilation boundary: both template syntaxes compile into one IR consumed by the same runtime.

5 Production Hardening

Moving from a parsing prototype to a robust operational tool required several critical system enhancements to handle edge cases, simplify deployments, and ensure continuous availability.

5.1 Zero-Dependency Static Deployment

In enterprise networking environments, deploying tools to jump-hosts or restricted bastion servers is often hindered by Python runtime dependencies, virtual environments, and missing pip packages. Because `cliscrape` is written in Rust and bundles its templates internally, it compiles down to a single, zero-dependency static binary. Operators can simply `scp` the executable to any restricted node and parse CLI outputs out-of-the-box without altering the host system state.

5.2 Embedded Template Library & Hot-Reloading

To eliminate the friction of distributing raw template files, `cliscrape` ships with an embedded library of validated templates. Using an XDG-compliant resolver, users can parse outputs simply by declaring the target device and command, e.g., `-t cisco_ios_show_version`. User-defined overrides placed in `~/.local/share/cliscrape/templates/` automatically take precedence over embedded defaults.

Furthermore, the embedded library utilizes `rust-embed` to provide dual-mode execution. In release builds, templates are compiled directly into the binary for zero-dependency deployment. In debug builds, the engine dynamically reads from the local filesystem, enabling instant hot-reloading of templates during development without requiring recompilation.

5.3 Validation and Edge Case Management

Network CLI data is notoriously inconsistent due to firmware patches, unexpected banners, and hardware variants. The engine implements strict thresholds and boundaries:

- **Coverage Validation:** A configurable warning system triggers if a parsed output matches fewer fields than a minimum acceptable threshold (e.g., 80%), acting as a canary for firmware formatting changes.
- **Regex Boundary Enforcement:** To defend against catastrophic backtracking in custom user templates, timeout mechanisms and contextual line-number errors preemptively kill hung matching processes.
- **Snapshot Testing:** A comprehensive internal suite relies on `insta` snapshots, ensuring every embedded template guarantees identical parsed [JSON](#) parity against real-world fixture data across updates.

- **Execution Modes:** To balance resilience with strictness, the parser supports a Partial-Match mode (gracefully returning successfully parsed data alongside warnings for missing fields) and a `-strict` Fail-Fast mode that aborts execution upon the first error.

5.4 Structured Observability

For production deployments, raw text logs are insufficient. The engine utilises Rust's tracing framework to emit highly structured [JSON](#) events, capturing module-level lifecycle events, resolution paths, and parsing failures seamlessly for integration into enterprise observability pipelines.

6 Isomorphic Simulation and Synthetic Generation

The most significant architectural advancement in `cliscape` is the introduction of isomorphic state machine execution. While traditional parsers represent a unidirectional projection from unstructured text to structured data, `cliscape` treats the FSM as a bijective mapping ($FSM \leftrightarrow FSM^{-1}$).

6.1 The Inverse Parser (FSM^{-1})

Because the modern YAML/TOML templates enforce strict schema contracts and type coercion, the parsing engine can be executed in reverse. In this mode, `cliscape` consumes a structured [JSON](#) object and uses the template's rules to synthesize perfectly formatted, pixel-accurate raw CLI text.

This capability transforms the parser into a deterministic network device simulator. By providing a hypothetical device state (e.g., a BGP neighbor down or an interface flapping), operators can instantly generate the corresponding CLI output required to test downstream automation pipelines, monitoring logic, and alert systems without requiring access to physical hardware.

6.2 Mathematical Verification

Isomorphic generation also provides a mechanism for mathematical verification of templates. A template is considered "bijectively stable" if a raw CLI string parsed into [JSON](#) can be re-generated into a string that is semantically identical to the original input. This "round-trip" validation ensures that the template captures 100% of the relevant operational state without loss of fidelity.

7 Interactive TUI Debugger

The built-in Terminal User Interface (TUI) provides an integrated "Live Lab", offering visual, interactive observability into the parser execution, eliminating trial-and-error template development.

Beyond simply debugging a single file, the TUI includes a full **Template Browser**. Users can browse the embedded XDG library, select a template (e.g., `cisco_ios_show_version`), and instantly load it into the Live Lab alongside their current raw CLI text. The parsing engine automatically recompiles the selected template and re-evaluates the input text in real-time.

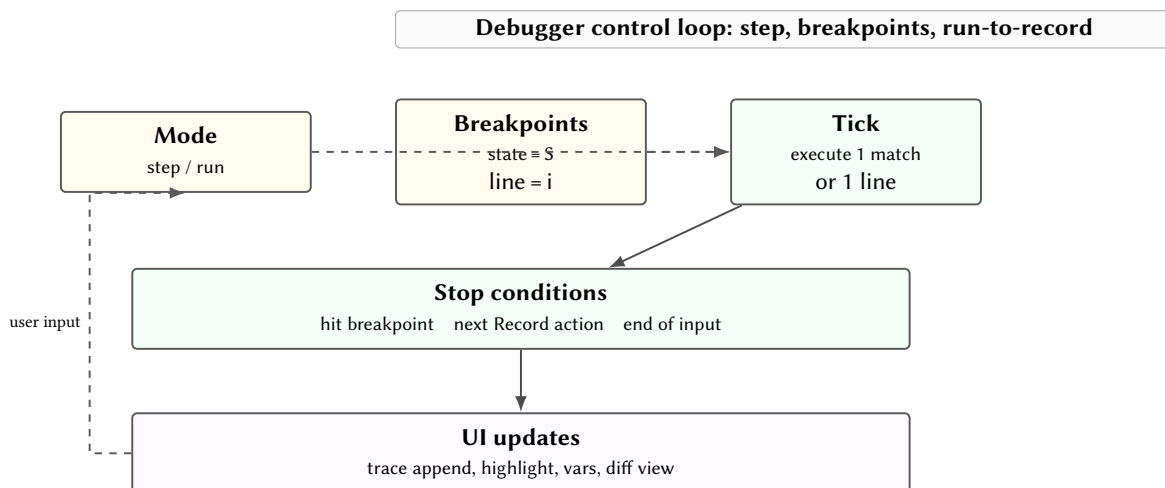


Figure 6. Debugger as a control loop over the parsing interpreter.

The interface offers four panes: an **Input Pane** for raw text with line highlighting, a **State Pane** detailing the [FSM](#) transition history, a **Variables Pane** showing live value states, and a **Diff View** explicitly highlighting matching capture groups.

8 Future Trajectories: The Network Compiler

By establishing a bijective mathematical engine ($FSM \leftrightarrow FSM^{-1}$) and enforcing rigorous type contracts, `cliscrape` provides the foundational primitive for several advanced theoretical applications within the broader automation ecosystem.

8.1 Semantic Drift Analysis

Traditional diff utilities are line-oriented and text-blind, heavily penalizing syntactic noise such as timestamp updates or pagination artifacts. Because `cliscrape` projects raw text into a typed `JSON` manifold, it enables Operational Diffs. By isolating the delta between two parsed states ($S_1 \rightarrow S_2$), the system identifies genuine semantic transitions (e.g., a BGP peer state changing from ESTABLISHED to IDLE) while ignoring trivial formatting shifts.

8.2 Vendor-Neutral State Manifolds

Network data is traditionally trapped within vendor-specific syntax constraints. `cliscrape`'s modern `YAML` definitions permit mapping disparate outputs (e.g., `cisco_ios_show_ip_route` and `juniper_junos_show_route`) onto a singular, universal semantic schema. This creates a unified data ledger, allowing downstream systems to query the network's operational state without vendor-specific logic.

8.3 Grammar Induction and Structural Inference

Presently, template creation relies on human authoring. Future iterations of the parsing engine aim to employ grammar induction techniques over large corpuses of raw CLI outputs. By statistically identifying static structural anchors versus variable data payloads, the engine can autonomously synthesize candidate FSM templates for new operating systems, effectively "learning" the language of unknown devices.

8.4 The FSM-Oracle: Self-Verification

The inverse parser facilitates the creation of a closed-loop FSM-Oracle. When a network device receives a firmware update that alters its CLI output formatting, the oracle can detect the anomaly automatically. By continuously verifying templates for round-trip bijective stability, the ecosystem can flag broken templates the moment they fail to losslessly re-generate their input state, laying the groundwork for self-healing automation.

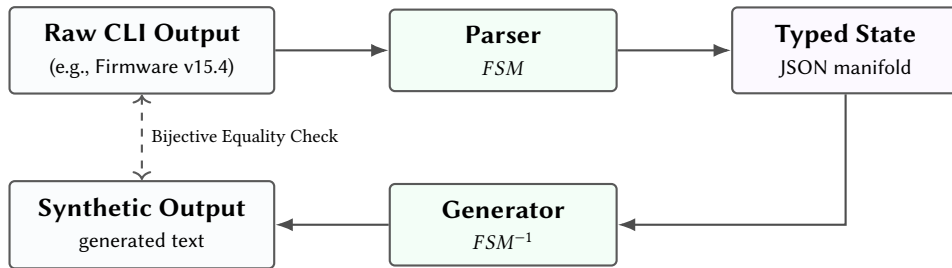


Figure 7. The FSM-Oracle closed loop. A template is proven robust if the generated synthetic output perfectly matches the original raw CLI output.

9 Performance Evaluation

The transition from interpreted Python execution to a zero-cost abstraction model in Rust yields significant performance gains. Benchmark testing using the Criterion framework indicates that `cliscrape` operates at a sustained throughput of approximately **4.1 million lines per second**.

This magnitude of throughput enables the processing of massive `show tech-support` archives in milliseconds rather than seconds. When compared directly to the legacy Python implementation, the compiled Rust architecture and DFA-based regex matching deliver a stable **10–50× improvement** in parsing speed, free from GIL bottlenecks and catastrophic backtracking delays. Furthermore, the verified overhead of the production structured logging framework remains strictly below the targeted 5% margin.

10 Design Summary

Table 1. Key design decisions.

Decision	Rationale
Rust regex crate	DFA-based $O(n)$ matching; no backtracking vulnerabilities
Full TextFSM compat	Zero-cost migration from existing NTC-Templates
Stateful modifiers	Filtdown/List support native relational data extraction
Dual template formats	Incremental adoption; YAML for new templates
Native type coercion	YAML template hints yield directly queryable JSON types
Isomorphic Simulation	Bidirectional FSM^{-1} execution enables synthetic CLI generation
Embedded library	XDG-compliant, zero-configuration parsing out-of-the-box
TUI debugger	Real-time FSM visualisation eliminates trial-and-error template development

References

- [1] Google, *TextFSM: Template-based state machine for parsing*, 2024. [Online]. Available: <https://github.com/google/textfsm>
- [2] Network to Code, *NTC Templates: Textfsm templates for network devices*, 2024. [Online]. Available: <https://github.com/networktocode/ntc-templates>

Revision History

Version	Date	Changes
0.1.0	March 2026	Initial architecture report
0.1.1	March 2026	Added ecosystem context, case studies, production hardening, and performance data