
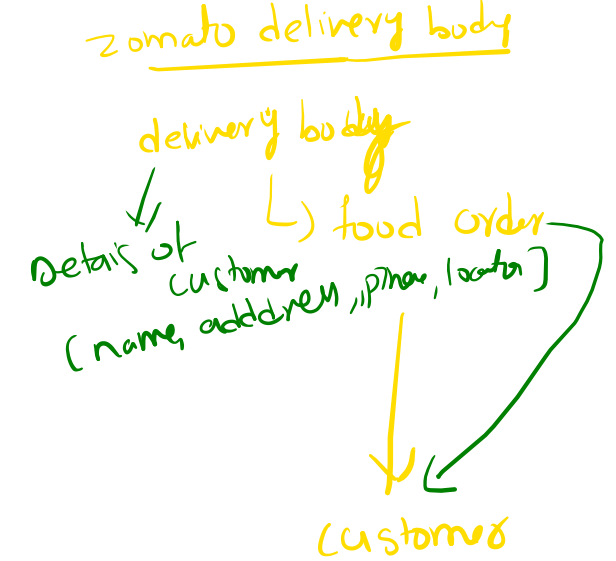


```
#include <stdio.h>

int main()
{
    int a;
    a = 45;
    printf("This is a value = %c",a);

    return 0;
}
```

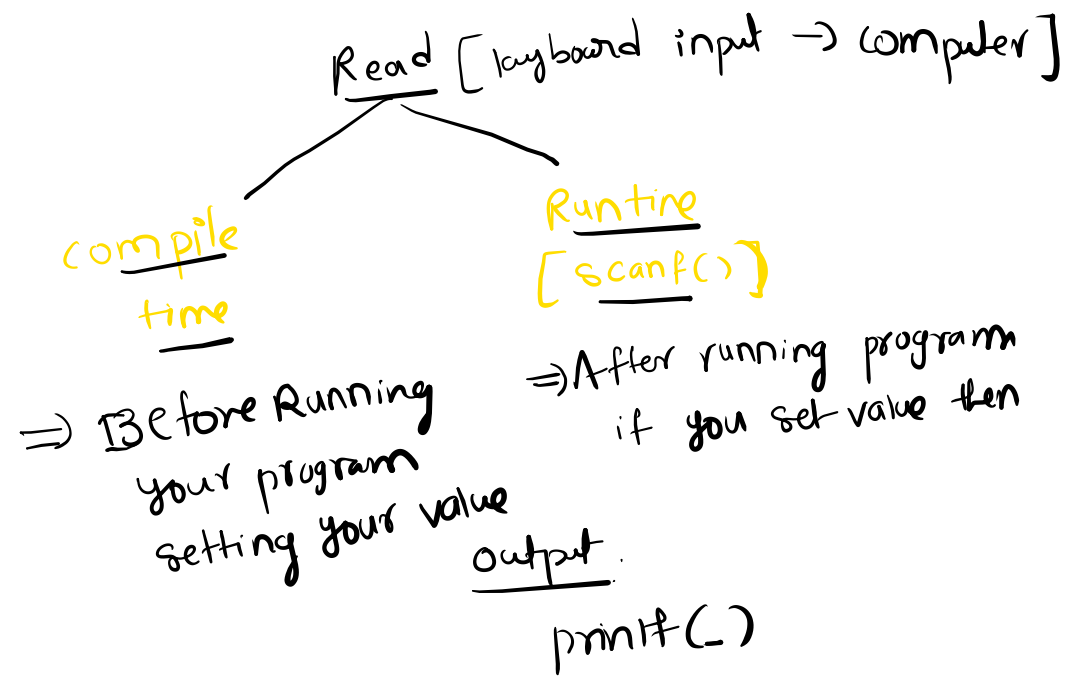

```
#include <stdio.h>

int main()
{
    int a,b;
    printf("Enter your a b values :");
    scanf("%d%d",&a,&b);
    printf("a = %d , b = %d",a,b);
    return 0;
}
```

DOSBox 0.74-3, Cpu speed: max 100% cycles, Frameskip 0, Program: TC

File Edit Search Run Compile Debug Project Options Window Help

READVALU.C

```
#include<stdio.h>
#include<conio.h>
int main()
{
    int a,b;
    clrscr();
    printf("Enter a b values : ");
    scanf("%d%d",&a,&b);
    printf("This is a = %d ",a);
    printf("This is b = %d",b);_

    getch();

    return 0;
}
```

10:28