Docker Hub에 이미지 배포하기

단계1: Docker Server 실행 및 로그인

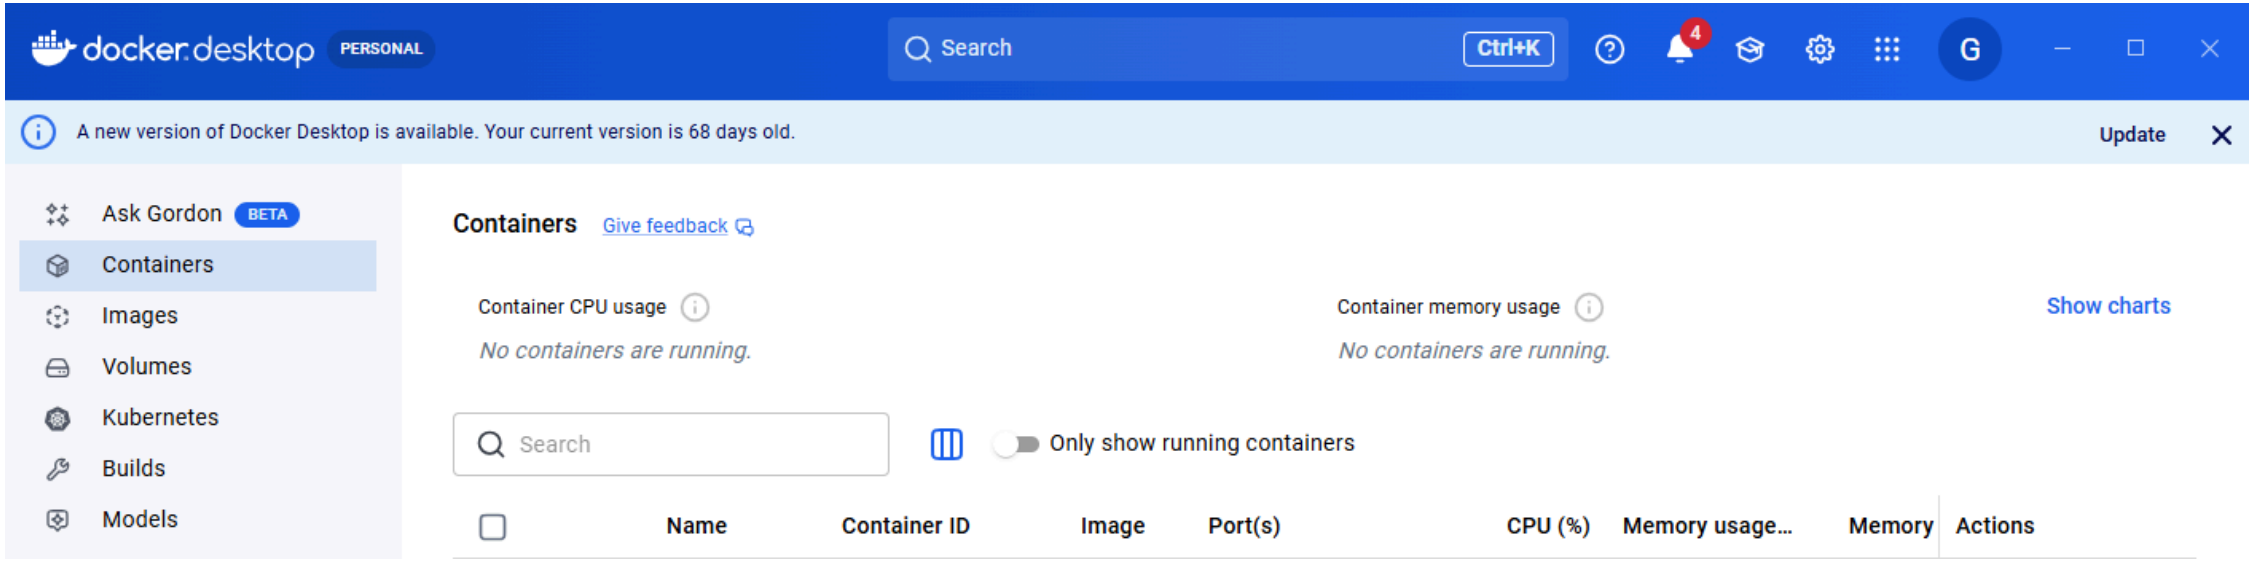

단계2: Docker Image 생성

```
# 도커파일이 있는 폴더에서 실행
docker build --platform linux/amd64 -t [YOUR_USERNAME]/runpod-ollama:latest .
```

```
Problems   Output   Debug Console   Terminal   Ports                                   powershell

PS C:\dev\course\course_LLM\2. LLM Fine Tuning\2. Fine Tuning with Runpod\5. 배포\2-1. runpod with ollama> docker build --platform linux/amd64 -t goo
dwon593/runpod-ollama:latest .
[+] Building 1.7s (15/15) FINISHED                                                                                  docker:desktop-linux
 => [internal] load build definition from Dockerfile                                                                                0.0s
 => => transferring dockerfile: 1.28kB                                                                                              0.0s
 => [internal] load metadata for docker.io/ollama/ollama:0.11.6                                                                     1.4s
 => [auth] ollama/ollama:pull token for registry-1.docker.io                                                                        0.0s
 => [internal] load .dockerignore                                                                                                   0.0s
 => => transferring context: 2B                                                                                                     0.0s
 => [ 1/10] FROM docker.io/ollama/ollama:0.11.6@sha256:1868fd51253099b8f48b89b981e5d8ba23e4db161a501b86e29593071c1c069b              0.0s
```

결과 확인

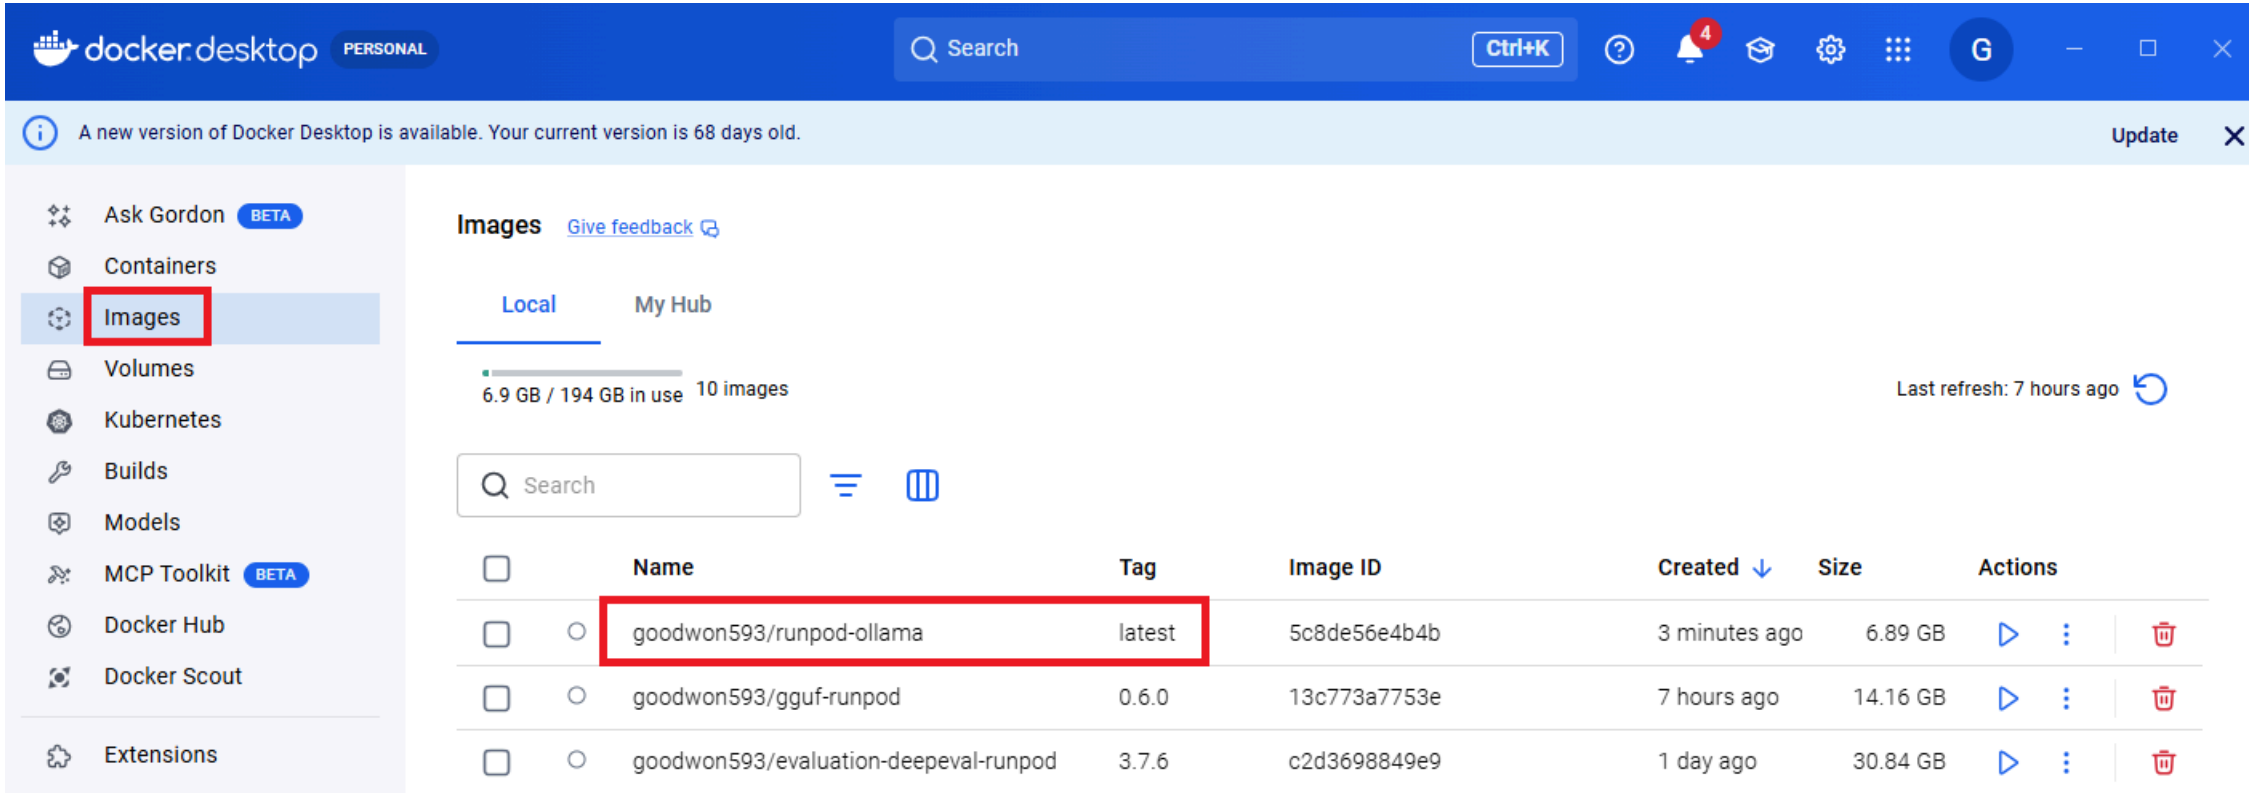
docker desktop PERSONAL
Search
Ctrl+K
A new version of Docker Desktop is available. Your current version is 68 days old.
Update
Ask Gordon BETA
Containers
Images
Volumes
Kubernetes
Builds
Models
MCP Toolkit BETA
Docker Hub
Docker Scout
Extensions
Images
Give feedback
Local
My Hub
6.9 GB / 194 GB in use
10 images
Last refresh: 7 hours ago
Search
Name
Tag
Image ID
Created
Size
Actions
goodwon593/runpod-ollama
latest
5c8de56e4b4b
3 minutes ago
6.89 GB
goodwon593/gguf-runpod
0.6.0
13c773a7753e
7 hours ago
14.16 GB
goodwon593/evaluation-deepeval-runpod
3.7.6
c2d3698849e9
1 day ago
30.84 GB

단계3: Docker Hub 배포

```
docker push [YOUR_USERNAME]/runpod-ollama:latest
```

```
Problems   Output   Debug Console   Terminal   Ports                                   powershell

PS C:\dev\course\course_LLM\2. LLM Fine Tuning\2. Fine Tuning with Runpod\5. 배포\2-1. runpod with ollama> docker push goodwon593/runpod-ollama:lates
t
The push refers to repository [docker.io/goodwon593/runpod-ollama]
663b45743a4a: Pushed
8d638ec70240: Pushing [==================================================>]  19.73MB/19.73MB
4f311fdcebaa: Pushed
3cc2b9b46d27: Pushed
6b120a18722f: Pushed
fba622da64be: Pushing [================>                                  ]  17.83MB/53.97MB
079e49e6f560: Pushing [>                                                  ]  19.92MB/1.572GB
```

결과 확인

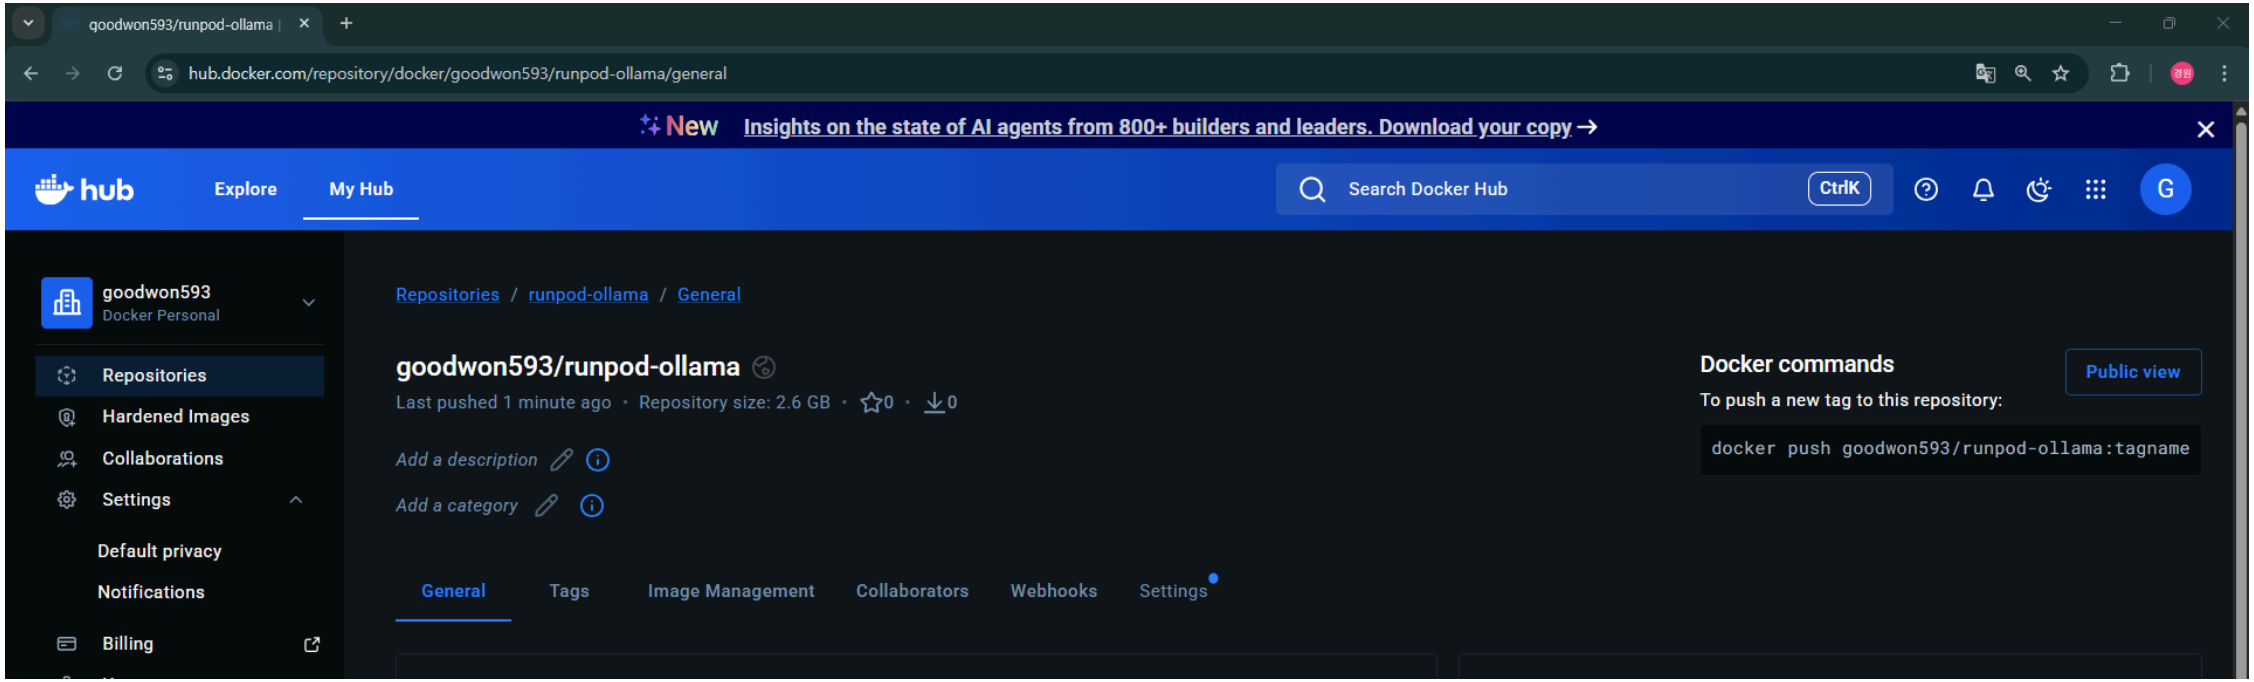
goodwon593/runpod-ollama
hub.docker.com/repository/docker/goodwon593/runpod-ollama/general
New
Insights on the state of AI agents from 800+ builders and leaders. Download your copy →
hub
Explore
My Hub
Search Docker Hub
CtrlK
G
goodwon593
Docker Personal
Repositories
Hardened Images
Collaborations
Settings
Default privacy
Notifications
Billing
Repositories / runpod-ollama / General
goodwon593/runpod-ollama
Last pushed 1 minute ago · Repository size: 2.6 GB · 0 · 0
Add a description
Add a category
General
Tags
Image Management
Collaborators
Webhooks
Settings
Docker commands
Public view
To push a new tag to this repository:
docker push goodwon593/runpod-ollama:tagname

Runpod 배포

단계1: Runpod > Serverless

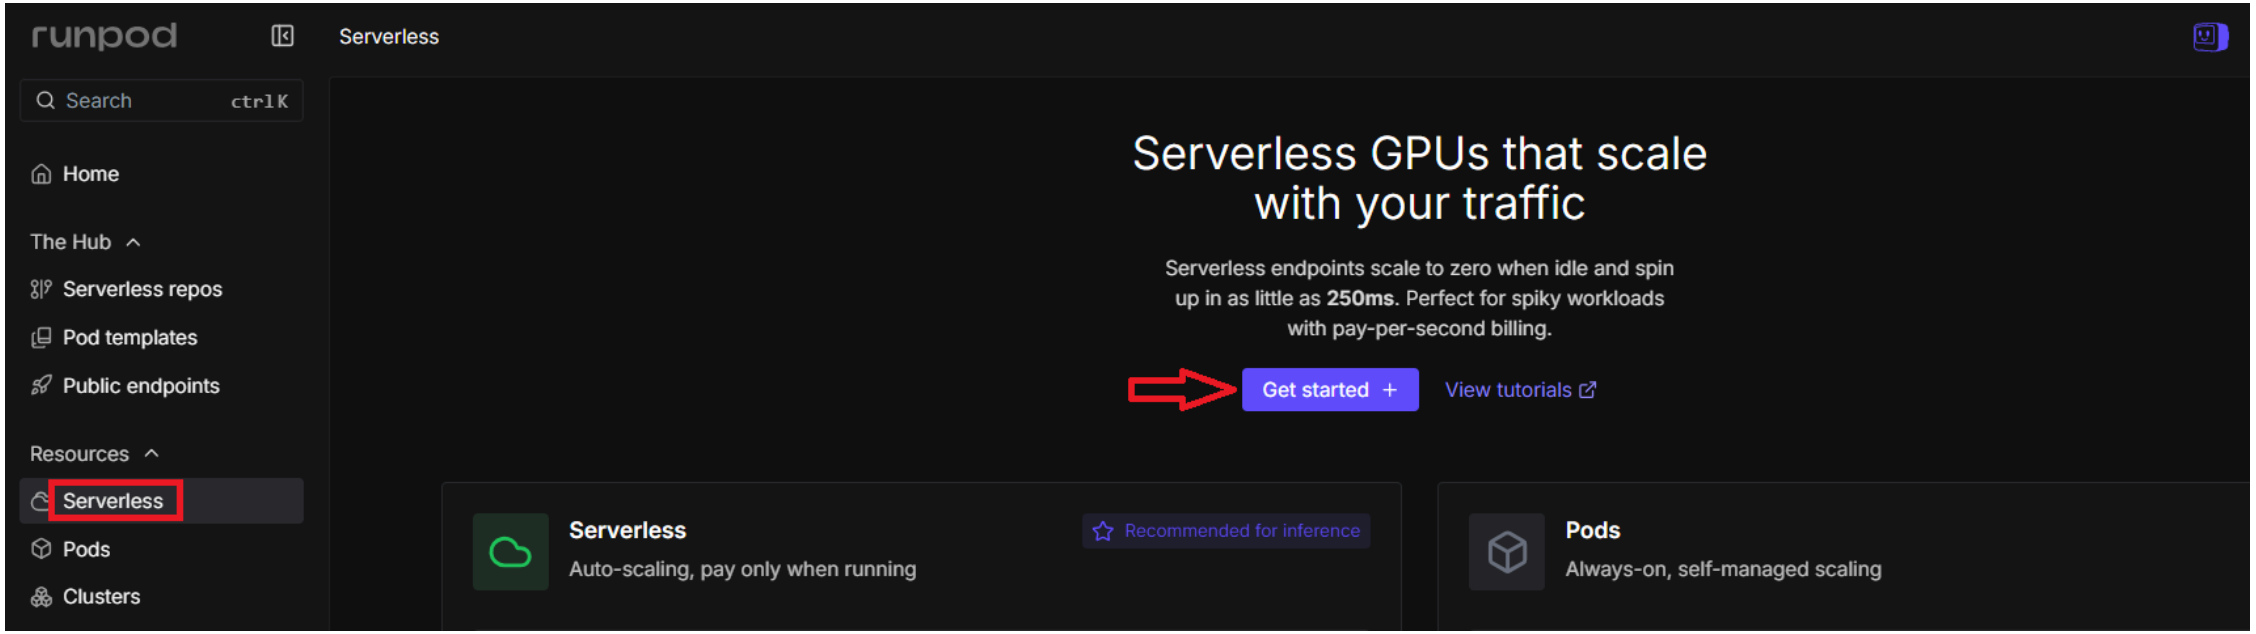

단계2: Create a new deployment

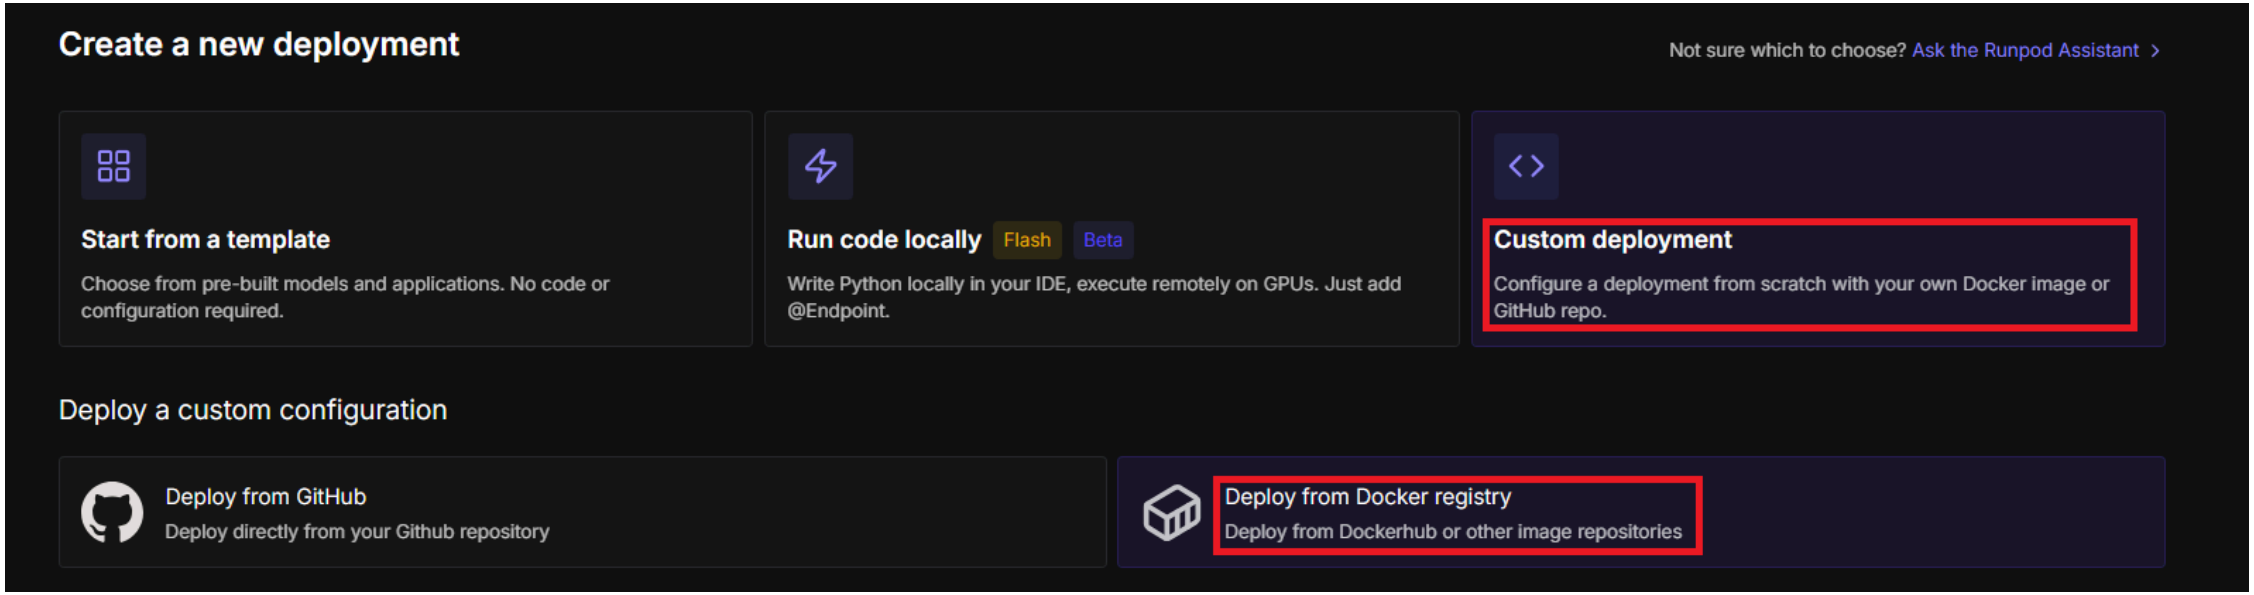

Container image

Choose a template

Select a template to use for this endpoint

No template

Container image

This can be a public image from Docker Hub or a private image from your own registry.

Warning: It's not recommended to use the :latest tag for production deployments. Learn more

goodwon593/runpod-ollama:latest

+ Select Registry Auth

+ Start Command

Configure endpoint

Endpoint name

runpod-ollama

Endpoint type

Queue | Load balancer

Queue-based endpoints place requests in a queue and process them sequentially with guaranteed delivery. Each endpoint requires a handler function to process jobs. Ideal for asynchronous tasks and batch workloads. Learn more

Worker type

Worker type

GPU CPU

Enhanced cloud performance with cutting-edge GPUs, equipped with the fastest memory and throughput capabilities for demanding computational workloads. Learn more

GPU configuration

☑	24 GB PRO	1st	High Supply	$0.00031/s
☐	16 GB		Low Supply	$0.00016/s
☐	24 GB		Low Supply	$0.00019/s
☐	32 GB PRO		High Supply	$0.00044/s
☐	48 GB		High Supply	$0.00034/s
☐	48 GB PRO		Low Supply	$0.00053/s

Create endpoint

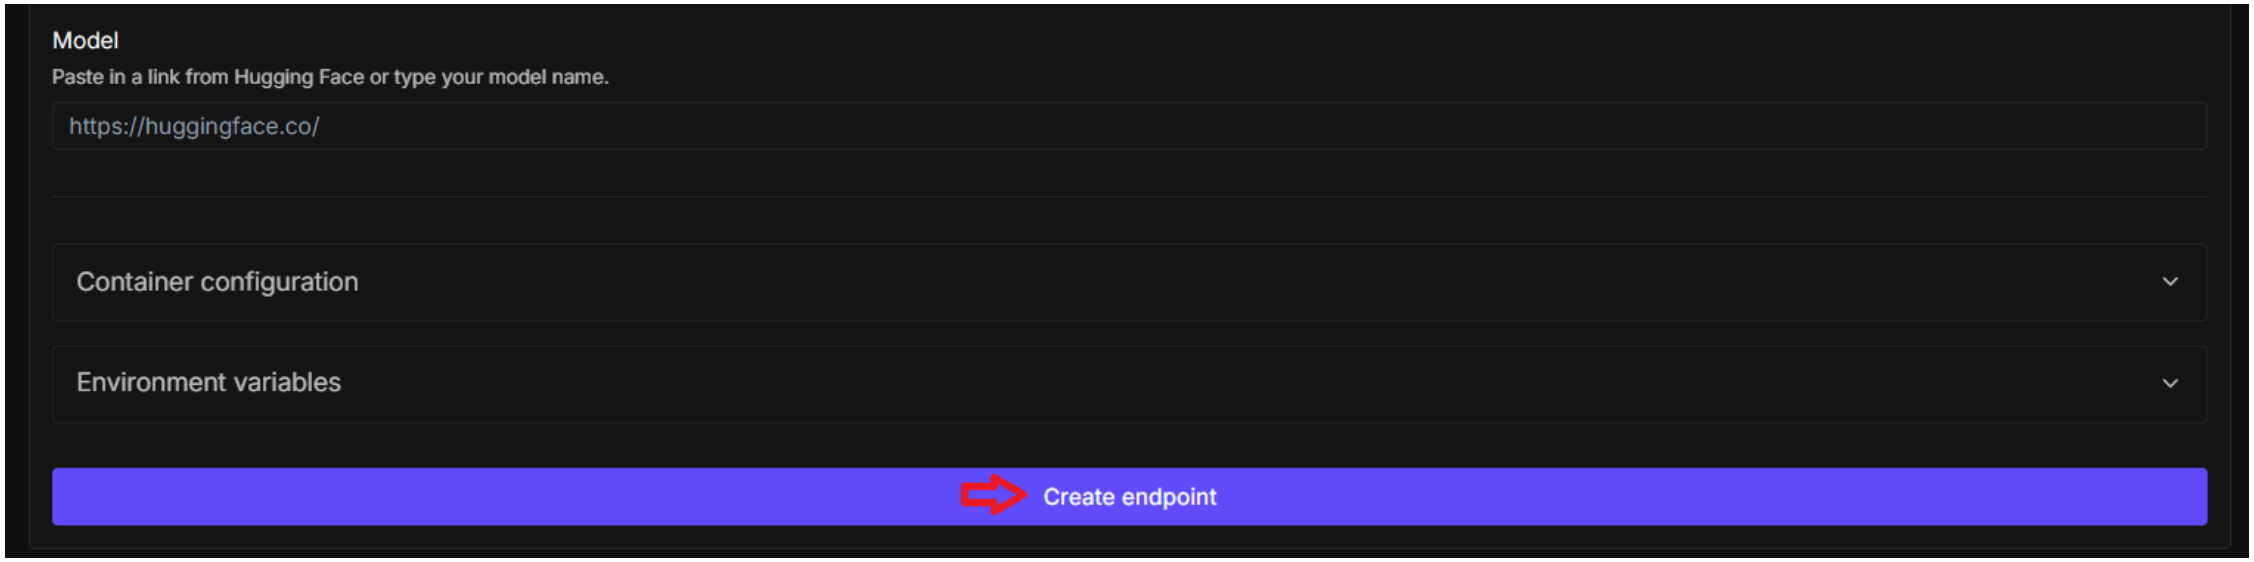

단계3: Serverless 테스트

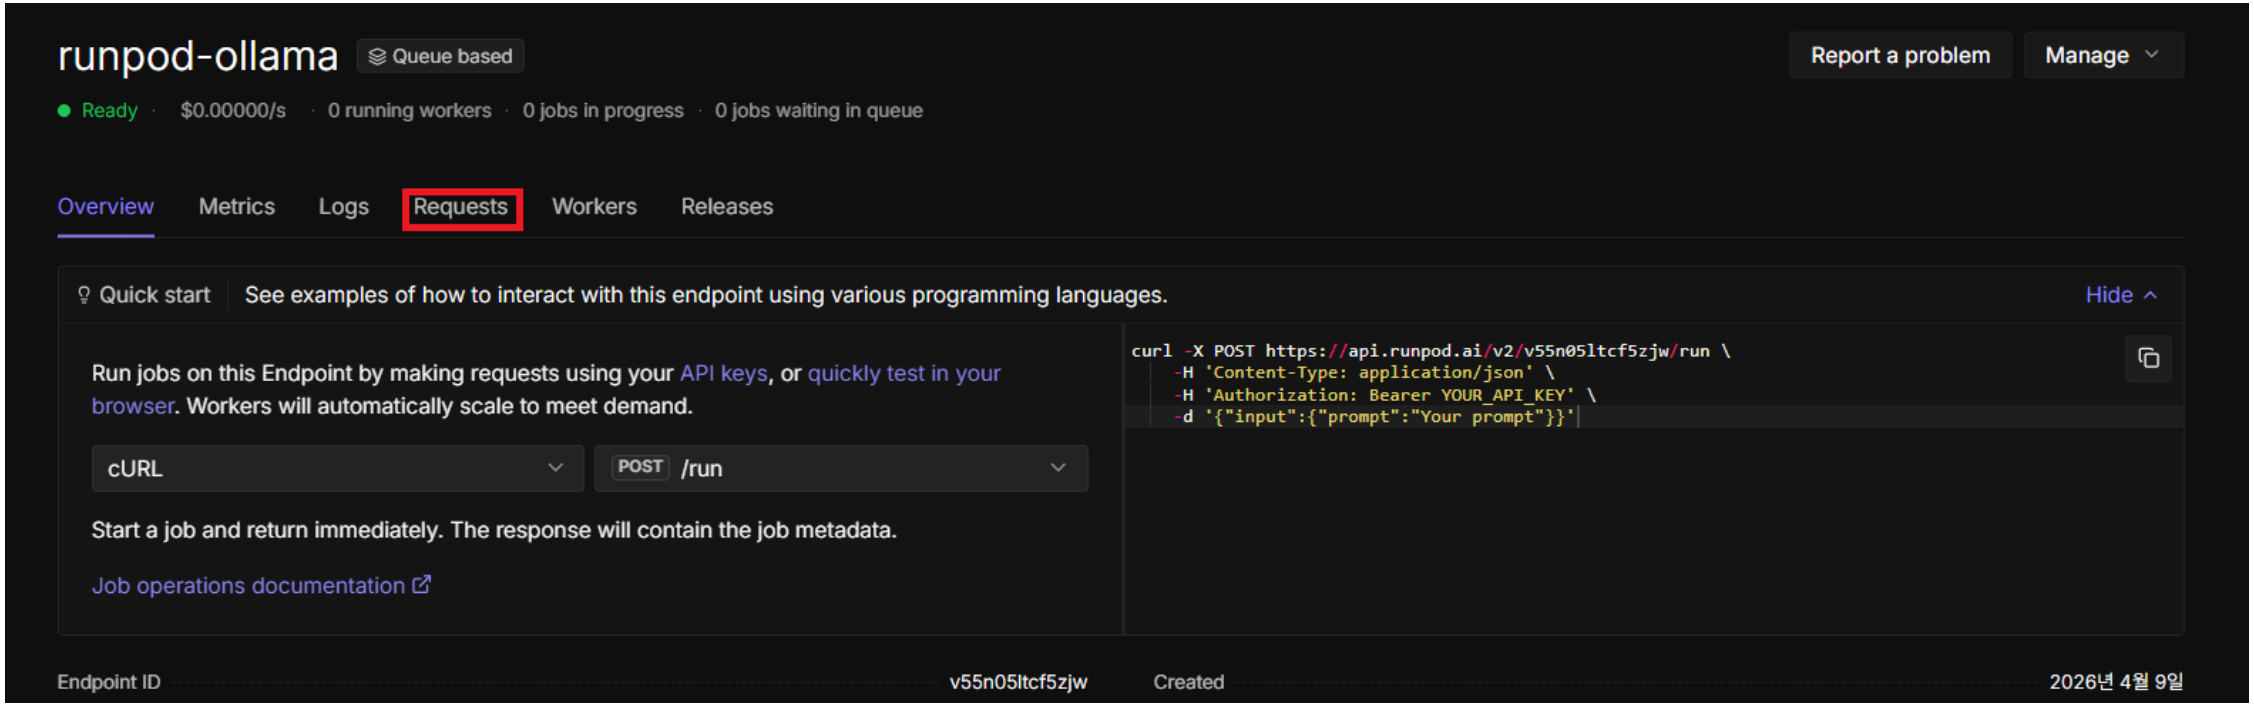

허니 햄버거 병이란 무엇인가요?

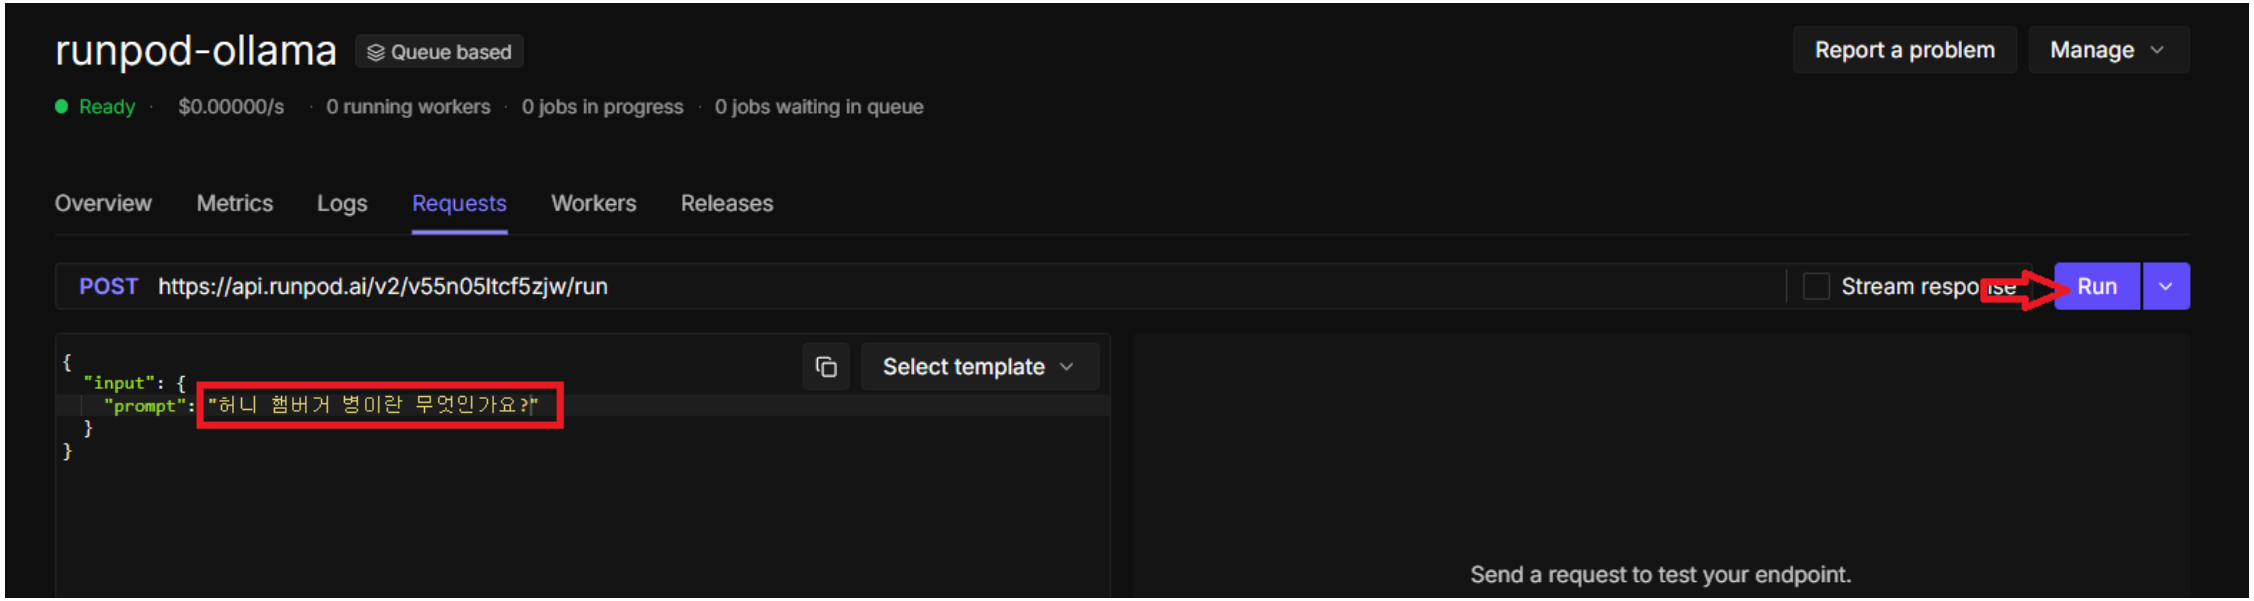

결과 확인

runpod-ollama Queue based

Report a problem Manage

Initializing · $0.00000/s · 1 running worker · 0 jobs in progress · 0 jobs waiting in queue

Overview Metrics Logs Requests Workers Releases

GET https://api.runpod.ai/v2/v55n05ltcf5zjw/status/8ab060eb-b9b0-44a0-8843-056f788b74d9-e2 Status


```
{
  "input": {
    "prompt": "허니 햄버거 병이란 무엇인가요?"
  }
}
```


Select template

You are viewing the status of a response

8ab060eb-b9b0-44a0-8843-056f788b74d9-e2

+ New request


```
{
  "delayTime": 67214,
  "executionTime": 8386,
  "id": "8ab060eb-b9b0-44a0-8843-056f788b74d9-e2",
  "output": "허니 햄버거 병은 햄버거를 만들 때 햄버거를 오랫동안 보관하지 않고 바로 먹는 경우
    발생할 수 있습니다. 이로 인해 햄버거가 상할 수 있습니다. 특히 햄버거를 오랫동안 보관하지 않고
    바로 먹는 경우에 주의해야 합니다. 또한, 햄버거를 오랫동안 보관하지 않고 바로 먹는 경우
    햄버거가 상할 수 있습니다. 햄버거를 오랫동안 보관하지 않고 바로 먹는 경우, 햄버거를 보관할 때
    주의해야 할 점이 있습니다. 가장 중요한 것은 햄버거를 오랫동안 보관하지 않고 바로 먹는 것을
    피하는 것입니다. 또한, 햄버거를 오랫동안 보관하지 않고 바로 먹는 경우 햄버거가 상할 수 있으니
    주의해야 합니다. 햄버거를 오랫동안 보관하지 않고 바로 먹는 경우, 햄버거를 보관할 때 주의해야
    할 점이 있습니다. 가장 중요한 것은 햄버거를 오랫동안 보관하지 않고 바로 먹는 것을 피하는
    것입니다. 또한, 햄버거를 오랫동안 보관하지 않고 바로 먹는 경우 햄버거가 상할 수 있으니
    주의해야 합니다. 햄버거를 오랫동안 보관하지 않고 바로 먹는 경우, 햄버거를 보관할 때 주의해야
    할 점이 있습니다. 가장 중요한 것은 햄버거를 오랫동안 보관하지 않고 바로 먹는 것을 피하는
```