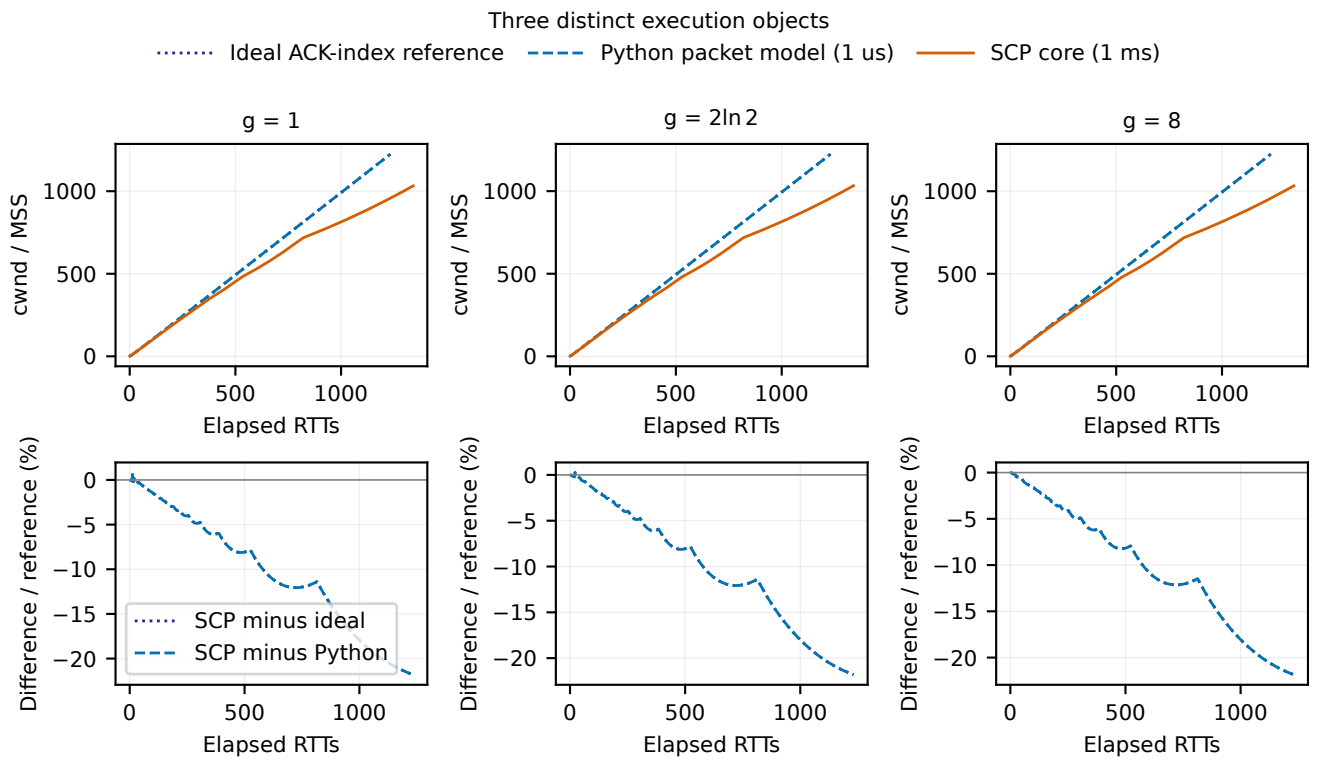
Three distinct execution objects
Ideal ACK-index reference
Python packet model (1 us)
SCP core (1 ms)
g = 1
g = 2ln 2
g = 8
cwnd / MSS
Elapsed RTTs
Difference / reference (%)
SCP minus ideal
SCP minus Python