

```

lexical_array: [{"to-P"}, {"Mary"}],
workspace: [],
state: "designate",
convergent: false
}


```

#### ASSEMBLED TREES

```

{
  tag: "to_inf",
  syn:[
    "cT[to]",
    "=v[intrans]",
    "=D[john]"],
  sem: "",
  phon: "",
  constituents: ["v_intrans", "John"]
}

```

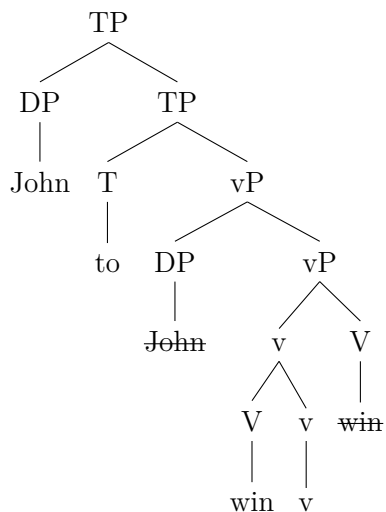

- (19) Again using as a selection heuristic that one element can select the other but not the other way around, the **stage** picks to-P