


```

sem: "",
phon: "",
constituents: ["v_intrans"]
}

```

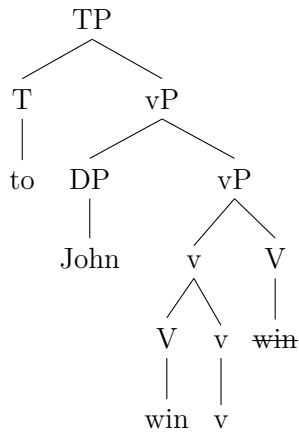

(17) After **merge**, the **stage** is in a “react” **state** and so enters a mutual **probe** cycle.

This happens to involve another **select** feature, and so begins the first instance of “move.” As per standard assumption, this is just **re-merge**. The **probe** starts with **v_intrans**, finds no match, and so (recursively) continues along the **constituents** array of **v_intrans**. **win** is of course featurally empty, and in any case **john** is higher so is probed first. It finds a match on **john**. **John** now appears in the **constituents** arrays of two objects - a multiattachment implementation. **John** again tries its **case** probe but is unable to find a match.

DERIVATION

```

{
  lexical_array: [
    [{"to-P"}, {"Mary"}],
    [{"promise"}, {"v_ditrans"}],
    [{"T-past"}, {"C"}]]

```