

# Classifying car price ranges with neural networks

Sivert M. Skarning

March 2020

# Contents

- 1 Introduction 3**
  - 1.1 Related work . . . . . 3
- 2 Method 3**
  - 2.1 Data quality . . . . . 3
    - 2.1.1 missing values . . . . . 3
    - 2.1.2 duplicate values . . . . . 3
  - 2.2 Encoding . . . . . 4
  - 2.3 Artificial Neural Networks(ANN) . . . . . 4

# 1 Introduction

This project will try to find data pre-processing methods and a neural network that best predicts the buying price of a car, based on the car evaluation dataset. It will also compare performance and anccuracy between decision trees and neural networks on this dataset.

## 1.1 Related work

There are numerous articles that have studied the performance of different modeling techniques with respect to the car evaluation dataset. The article by Sameer Singh[4] discusses the performance of varying training set sizes for different classification methods for the car evaluation sets. Sameer used artificial neural networks, K-nearest neighbour, decision trees and support vector machines in order to classify the acceptability of each car.

An article[3] also explored the performance of data mining classification methods. Here the authors also focus on the pre-processing of the data. They discuss concepts like data-cleaning, data-transformation and splitting of the data-set.

# 2 Method

## 2.1 Data quality

In order to ensure data quality it is necessary to assess the dataset. In this report we will clean the dataset by removing duplicates and fill missing values. We do this to give the neural network algorithms quality data to analyze[1].

### 2.1.1 missing values

After running an r script that counts missing values, we foundt out that there are no missing values. This will save us from doing interpolation or fill with mean method to fill missing values.

### 2.1.2 duplicate values

Duplicate values might give the modeling algorithm an idea that the date counts more than other data. This migh contribute to over-fitting. After running a script that counted duplicates in r, we found out that the dataset did not have any duplicate data.


## 2.2 Encoding

There are three main encodings when working with classification of categorical data[2].

- Integer encoding
- One Hot encoding
- Learned embedding encoding

In this project i will explore the performance of One Hot encoding on the car evaluation data set. This encoding method is used when the machine learning algorithm might not be able to understand the relationship between the data. Integer encoding on this dataset gave poor performance.

In figure 1 you can see how one hot encoding encodes the lug\_boot size category into numerical values by splitting the categories into seperate columns of data.

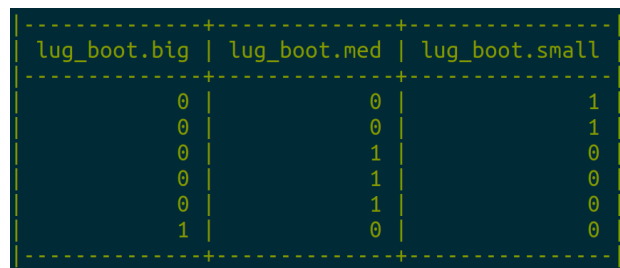

lug_boot.big	lug_boot.med	lug_boot.small
0	0	1
0	0	1
0	1	0
0	1	0
0	1	0
1	0	0

Figure 1: Excerpt of One Hot Encoding on car evaluation dataset

## 2.3 Artificial Neural Networks(ANN)

In this project i decided to use neuralnet in r for the neural network prediction. This is a well know package and it has good resources.

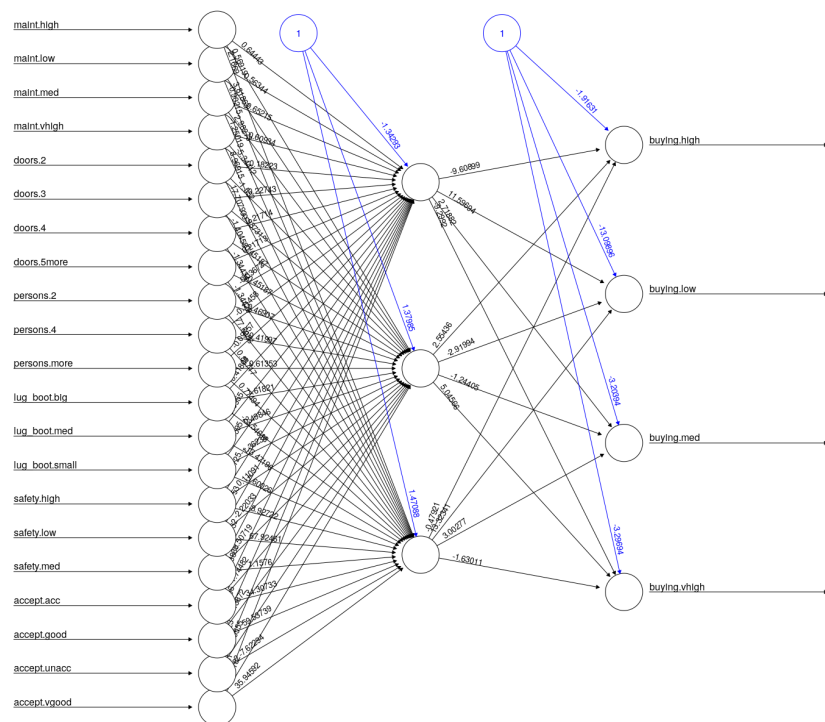


Figure 2: Artificial Neural Network

## References

- [1] Data preprocessing concepts. <https://towardsdatascience.com/data-preprocessing-concepts-fa946d11c825>. Accessed: 2020-03-02.
- [2] Why one-hot encode data in machine learning? <https://machinelearningmastery.com/why-one-hot-encode-data-in-machine-learning/>. Accessed: 2020-03-02.
- [3] Jamilu Awwalu, Anahita Ghazvini, and Azuraliza Abu Bakar. Performance comparison of data mining algorithms: A case study on car evaluation dataset. *Int. Jour. of Computer Trends and Technology (IJCTT)*, 13(2), 2014.
- [4] Sameer Singh. Modeling performance of different classification methods: deviation from the power law. *Project Report, Department of Computer Science, Vanderbilt University, USA*, 2005.