Blindspot

Follow the whales.
Leave no trace.

Copy-trade alerts and balances, without telling any RPC provider who you watch.

Blindspot

Your RPC provider sees more than your balance.

Your wallets

Every balance check names your address, every block, from your IP.

```
eth_getBalance( 0xa11c…e5b0 )
```

Your watchlist

Following a whale means asking about the whale. Ask every 12 seconds and that's a list.

```
eth_getLogs( 0xC2D7…73E9 )
```

Your next trade


A quote names the pair and the size before you sign. That's enough to trade ahead of you.

```
quote( ETH → USDC, 0.5 )
```

Infura, Alchemy, any public node: same requests, same view.

Blindspot

Anon-RPC hides who you are.
It doesn't hide what you ask.

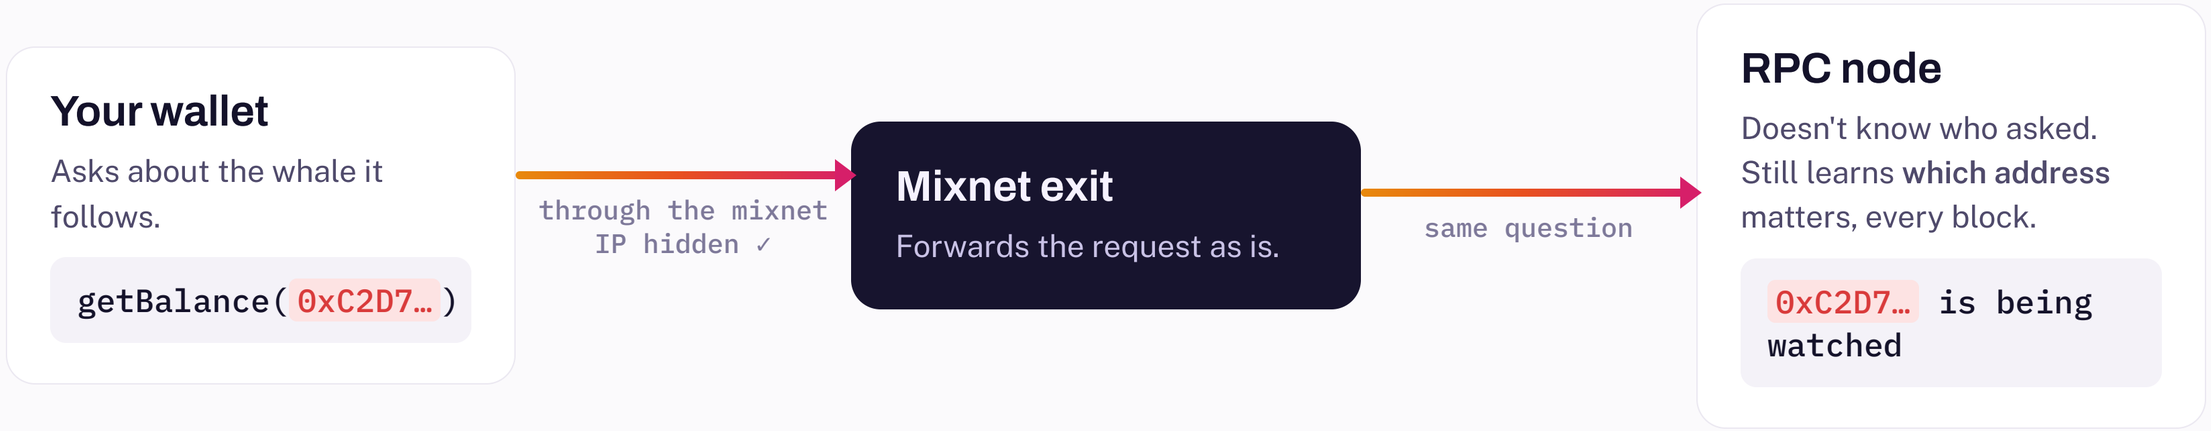

The request itself is the leak.

Never ask about an address.

One relay, same blocks

The relay fetches each Sepolia block once. Everyone downloads the same bytes, by block number.

```
block 12,080,193
```

Checked on your phone

Header hash, access-list hash, receipts root, and a second provider. A lying relay gets caught.

Filtered on your phone


Your wallets and the whales you follow never leave the device.

PIR for lookups

The server computes over every record, encrypted, and can't tell which one you read.

Blindspot

How a block reaches your phone

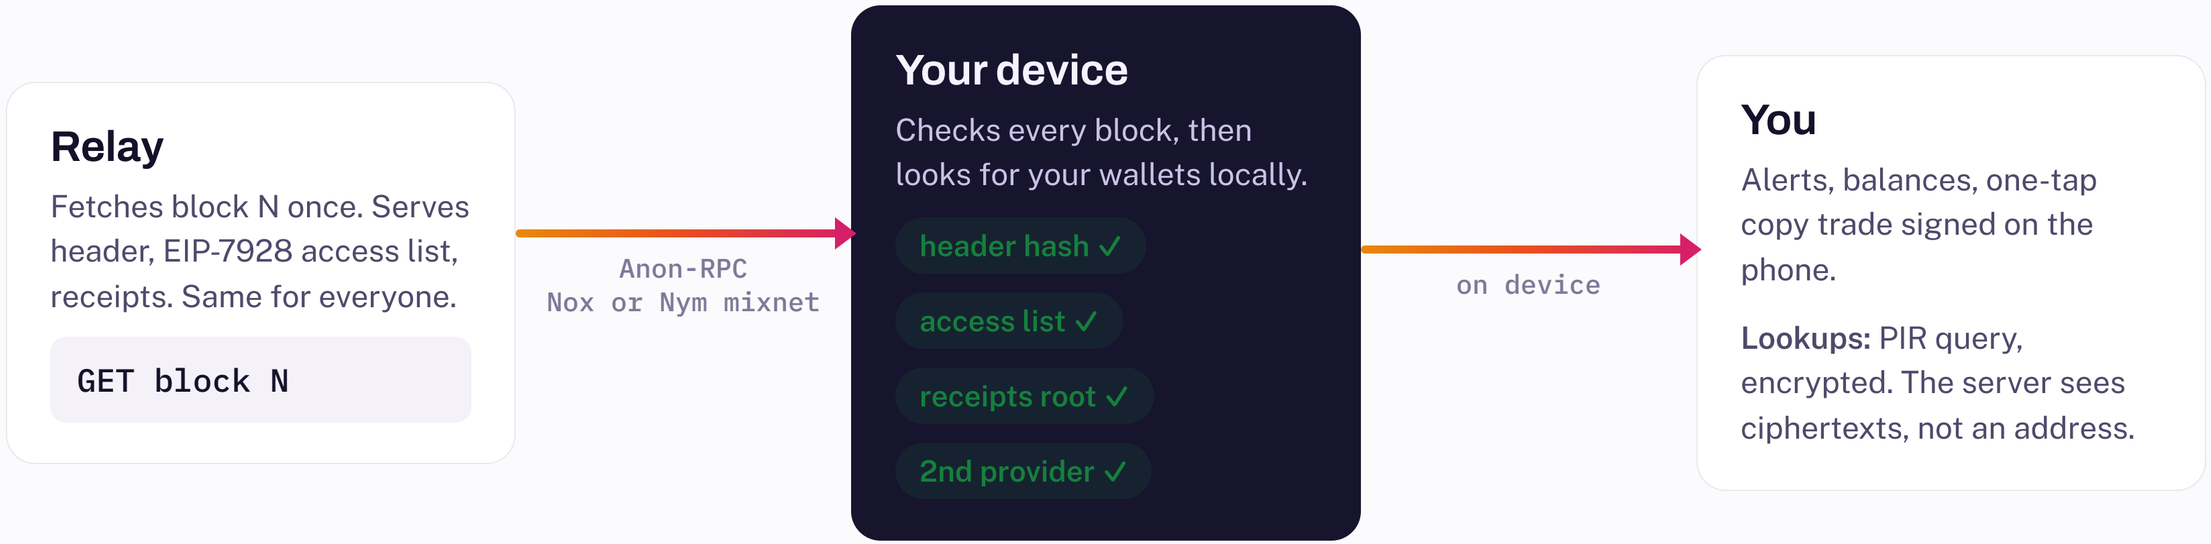

Relay and PIR server are untrusted. The phone does the checking.

Blindspot

What each one learns, from real requests

Normal RPC

2 + IP

Addresses it learns, plus your IP on every request.

Anon-RPC alone

2

Addresses it learns. Your IP is hidden.

Blindspot

0

Addresses. Block numbers only, from mixnet exits.

98.7%

of requests through Anon-RPC (230 of 233, Nov 7)

~6 s

pending alert after a whale's swap

~20 s

verified alert, once the block lands

3–5 s

private balance lookup through the mixnet

Spy panel, live on useblindspot.xyz. The relay received 84 app requests, 0 from our IP.

Demo

Watch a whale · pending alert · verified alert · copy trade · private lookup · Spy panel · Network

Limits, and what's next

Today

- Sepolia only, until block access lists reach mainnet.
- Private lookup covers about 1,000 addresses.
- Alerts need the app open (or Watch mode on a phone).
- Copy trades are public once they land.

Next

- A light client. Lodestar already serves the sync-committee data we need.
- Faster PIR (SimplePIR or YPIR) for every active address.
- A passkey wallet instead of a browser key.

Everything is in the README, with the numbers.

Thank you.

Built **bina pooche**: without asking.

useblindspot.xyz

github.com/skartik-sk/blindspot