TEST CASE – H7 PRE-LODGED

—

Version: 2.4

Author: Katrine Gawronski Frederiksen

netcompany

Document history

Version	Date	Author	Status	Comments
0.1	25-01-21	Katrine Gawronski Frederiksen	Draft	Original Draft
0.2	23-02-21	Katrine Gawronski Frederiksen	Draft	(missing from original document)
0.3	08-03-2021	Bjarke Runz Jensen	Draft	Removed section on Control notification. Updated references to Notification codes. (Review)
0.4	11-05-2021	Jacob Rindom Bertelsen	Completed	Reworked diagrams, formatting, (Final review)
2.1	15-10-2024	Emilie Madsen	Draft	Restructure of document style and information to match other test cases for import.
2.2	22-10-2024	Cina Arjmand	Draft	Minor corrections
2.3	05-12-2024	Emilie Madsen	Completed	Correction to notification flow
2.4	25-06-2025	Johannes Bæk	Completed	Removed references to TFE02

Table of contents

1   Preconditions

To complete the functional test case for "H7 Pre-lodged", the company must have an established connection to the AS4-gateway, and have a functioning system user to DMS Import, see Connectivity Guide & System Guide.

Furthermore, ensure that you for this test case have the correct URLs, Services, and Actions, as seen below. In place of {CVR} and {UUID}, fill out your own CVR and UUID in the URL below. While the URLs and Services are the same for all the test cases, the Actions however, will change depending on the test case you are performing, please keep an eye out that you have the correct Action for the test case in hand.

To submit the XMLs for this test case, use the following endpoint:

URL	TFE Service	Action
https://secureftpgatewaytest.skat.dk:6384/exchange/CVR_{CVR}_UI_{UUID}	DMS.Import2	Notification

For retrieving the notification, use the following endpoint:

URL	TFE Service	Action
https://secureftpgatewaytest.skat.dk:6384/exchange/CVR_{CVR}_UI_{UUID}	DMS.Import2	Notification

2   Process flow

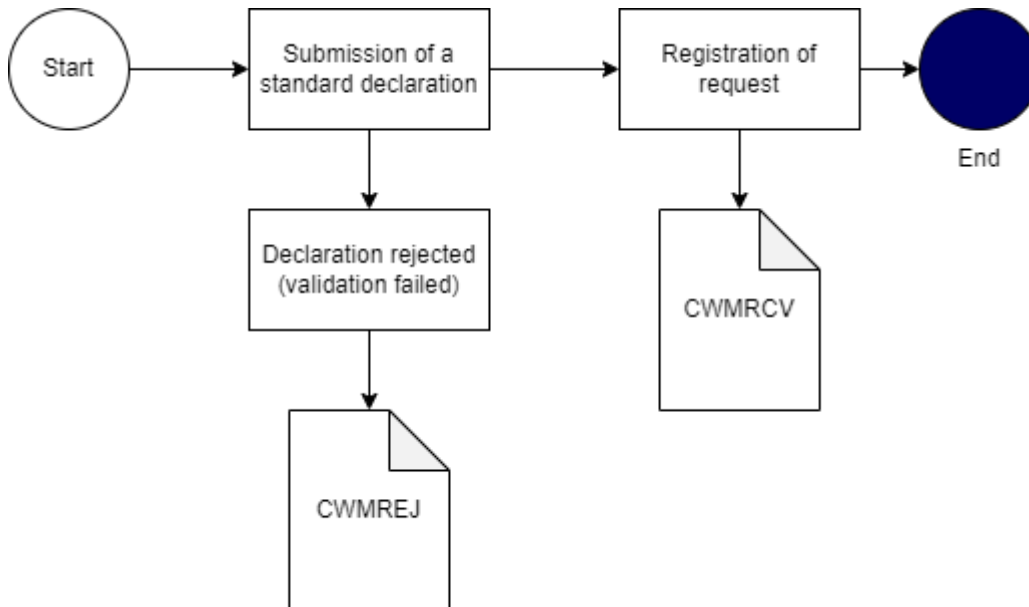The process flow for a H7 pre-lodged declaration can be seen in Figure 1 below:

Figure 1: Process flow for H7 pre-lodged declaration.

3   Test Scenarios

To complete this test case, test scenario 1 and 2 must be passed successfully. Descriptions and specifics for each test can be found in the coming sections. Be sure to go through the scenarios thoroughly. It is recommended that you use the attached files to test the notifications.

Test no.	Test scenario	Passed/Failed
1	Submit H7 – Pre-lodged declaration, which is accepted	☐
2	Submit H7 – Pre-lodged declaration, which is rejected	☐

3.1   Description of test scenarios

The following sections will describe the aim of each specific scenario and provide the desired results of the test scenarios. It is worth noting that there can be changes in the notifications provided by DMS Import as the solution is still in development.

The purpose of the test scenarios is to ensure your connection to the system, and that you as a company can receive the correct notifications when sending in XMLs. Each step describes what you need to do when going through the test case. In the folder where you found this test case document an XML corresponding to the acceptance test case will be available. This can be adapted for the rejection case.

Since this is a functional test case, it does not complete the declaration flow fully. To complete the declaration flow after successfully submitting a pre-lodged declaration, please refer to the test case "Test Case – I2 Presentation Notification".

3.2 Test scenario 1 – Acceptance

The aim of this scenario is to get a notification that the H7 Pre-lodged XML has been accepted.

The following table shows the necessary test steps for completing this scenario as well as expected results. For the first step it is recommended using the provided declaration XML found in the Test Case folder. Secondly, make sure that your **LRN** is unique, and that the Submitter field is correct (this is done by putting your **CVR** in the Submitter/Name and Submitter/ID fields). The fields **DeclarantEORI** and **ImporterEORI** should also be filled out with the corresponding EORI numbers for the Declarant (Declarant/ID) and Importer (Importer/ID) roles. The placeholders are denoted in the XML by double curly brackets {{placeholder}}.

Step no.	Description of steps	Expected result	Passed
1	Use the provided H7 XML found in the test case folder (remember to replace the placeholders)	Should have the test **XML** ready for the next step	☐
3	Submit the declaration using the conditions found under Pre-conditions	The declaration should be sent to the system	☐
4	Pull the notifications	You should be able to pull notification from the system	☐
5	Registration of submitted declaration by receiving a **CWMRCV** notification	You should get a **CWMRCV** notifications from pre-lodging the declaration	☐

3.3 Test scenario 2 – Rejection

The aim of this scenario is for the EO to get a notification that the H7 Pre-lodged XML has been rejected.

The following table shows the necessary test steps for completing this scenario as well as expected results. For the first step it is recommended using the provided declaration XML found in the Test Case folder. Secondly, make sure that your **LRN** is unique, and that the Submitter field is correct (this is done by putting your **CVR** in the Submitter/Name and Submitter/ID fields). The fields **DeclarantEORI** and **ImporterEORI** should also be filled out with the corresponding EORI numbers for the Declarant (Declarant/ID) and Importer (Importer/ID) roles. The placeholders are denoted in the XML by double curly brackets {{placeholder}}.

Step no.	Description of steps	Expected result	Passed
1	Use the provided XML found in the test case folder (remember to replace the placeholders)	Should have the test **XML** ready for the next step	☐
2	Enter information from section 3.3.1 with the invalid data in the element **Exporter** (13 01 000 000) to ensure rejection	**Exporter** (13 01 000 000) element should resemble section 3.3.1	☐
3	Submit the declaration using the conditions found under Pre-conditions	The declaration should be sent to the system	☐
4	Pull the notifications	You should be able to pull notifications from the system	☐
5	Rejection of a submission of declaration by receiving the **CWMREJ** notification	Receive notification **CWMREJ** and pass the test	☐

3.3.1 XML example

```
<ns3:Declarant>
        <ns3:ID>DK12345678</ns3:ID>
</ns3:Declarant>
```