

# TEST CASE – H5 PRE-LODGED



**Version:** 1.2  
**Author:** Cina Arjmand

netcompany

Document history

| Version | Date       | Author        | Status    | Comments                    |
|---------|------------|---------------|-----------|-----------------------------|
| 0.1     | 28-02-2024 | Cina Arjmand  | Draft     | Original Draft              |
| 0.2     | 14-10-2024 | Emilie Madsen | Draft     | Review                      |
| 1.0     | 24-10-2024 | Emilie Madsen | Completed |                             |
| 1.1     | 06-12-2024 | Johannes Bæk  | Completed | Updated notification flow   |
| 1.2     | 24-06-2025 | Johannes Bæk  | Completed | Removed references to TFE02 |

Table of contents

1        **Preconditions** ..... 3

2        **Process flow** ..... 4

3        **Test Scenarios** ..... 5

      3.1        **Description of test scenarios** ..... 5

      3.2        **Test scenario 1 – Acceptance** ..... 6

      3.3        **Test scenario 2 – Rejection** ..... 7

          3.3.1        **XML example** ..... 7

# 1 Preconditions

To complete the functional test case for “H5 Pre-lodged”, the company must have an established connection to the AS4-gateway, and have a functioning system user to DMS Import, see [Connectivity Guide & System Guide](#).

Furthermore, ensure that you for this test case have the correct URLs, Services, and Actions, as seen below. In place of {CVR} and {UUID}, fill out your own CVR and UUID in the URL below. While the URLs and Services are the same for all the test cases, the Actions however, will change depending on the test case you are performing, please keep an eye out that you have the correct Action for the test case in hand.

To submit the XMLs for this test case, use the following endpoint:

| URL   | TFE Service | Action             |
|---|-------------|--------------------|
| <a href="https://secureftpgatewaytest.skat.dk:6384/exchange/CVR_{CVR}_UI_{UUID}">https://secureftpgatewaytest.skat.dk:6384/exchange/CVR_{CVR}_UI_{UUID}</a> | DMS.Import2 | Declaration.Submit |

For retrieving the notification, use the following endpoint:

| URL   | TFE Service | Action       |
|---|-------------|--------------|
| <a href="https://secureftpgatewaytest.skat.dk:6384/exchange/CVR_{CVR}_UI_{UUID}">https://secureftpgatewaytest.skat.dk:6384/exchange/CVR_{CVR}_UI_{UUID}</a> | DMS.Import2 | Notification |

## 2 Process flow

The process flow for a H5 pre-lodged declaration can be seen in Figure 1 below:

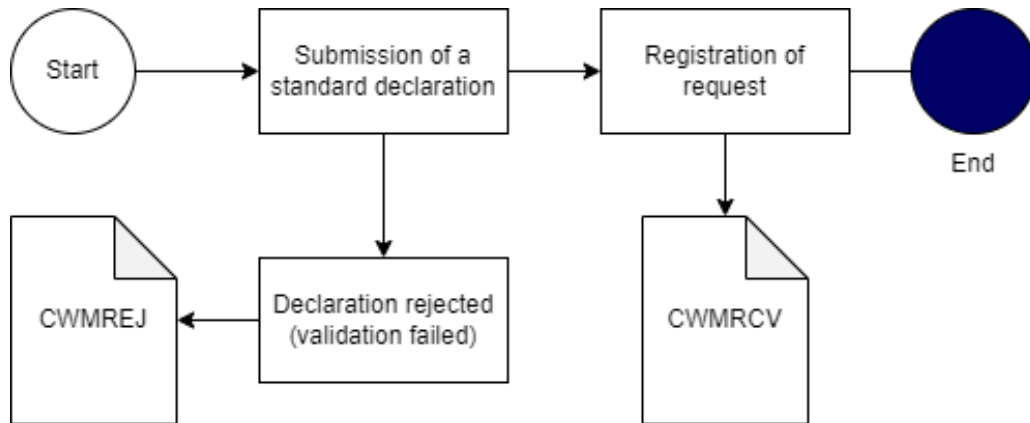


Figure 1: Process flow for H5 pre-lodged declaration.

## 3 Test Scenarios

To complete this test case, test scenario 1 and 2 must be passed successfully. Descriptions and specifics for each test can be found in the coming sections. Be sure to go through the scenarios thoroughly. It is recommended that you use the attached files to test the notifications.

| Test no. | Test scenario   | Passed/Failed            |
|----------|---|--------------------------|
| 1        | Submit H5 – Pre-lodged declaration, which is accepted | <input type="checkbox"/> |
| 2        | Submit H5 – Pre-lodged declaration, which is rejected | <input type="checkbox"/> |

### 3.1 Description of test scenarios

The following sections will describe the aim of each specific scenario and provide the desired results of the test scenarios. It is worth noting that there can be changes in the notifications provided by DMS Import as the solution is still in development.

The purpose of the test scenarios is to ensure your connection to the system, and that you as a company can receive the correct notifications when sending in XMLs. Each step describes what you need to do when going through the test case. In the folder where you found this test case document an XML corresponding to the acceptance test case will be available. This can be adapted for the rejection case.

Since this is a functional test case, it does not complete the declaration flow fully. To complete the declaration flow after successfully submitting a pre-lodged declaration, please refer to the test case “Test Case – I2 Presentation Notification”.

## 3.2 Test scenario 1 – Acceptance

The aim of this scenario is to get a notification that the H5 Pre-lodged XML has been accepted.

The following table shows the necessary test steps for completing this scenario as well as expected results. For the first step it is recommended using the provided declaration XML found in the Test Case folder. Secondly, make sure that your **LRN** is unique, and that the Submitter field is correct (this is done by putting your **CVR** in the Submitter/Name and Submitter/ID fields). The fields **DeclarantEORI** and **ImporterEORI** should also be filled out with the corresponding EORI numbers for the Declarant (Declarant/ID) and Importer (Importer/ID) roles. The placeholders are denoted in the XML by double curly brackets {{placeholder}}.

| Step no. | Description of steps   | Expected result  | Passed                   |
|----------|--|--|--------------------------|
| 1        | Use the provided H5 XML found in the test case folder (remember to replace the placeholders) | Should have the test <b>XML</b> ready for the next step                      | <input type="checkbox"/> |
| 2        | Submit the declaration using the conditions found under Pre-conditions                       | The declaration should be sent to the system                                 | <input type="checkbox"/> |
| 3        | Pull the notifications   | You should be able to pull notification from the system                      | <input type="checkbox"/> |
| 4        | Registration of submitted declaration by receiving <b>CWMRCV</b> notification                | You should get a <b>CWMRCV</b> notification from pre-lodging the declaration | <input type="checkbox"/> |

### 3.3 Test scenario 2 – Rejection

#### Disclaimer:

The following section is currently not working as intended for the declaration in question. Following the steps below will not result in an immediate rejection of the pre-lodged declaration.

The aim of this scenario is for the EO to get a notification that the H5 Pre-lodged XML has been rejected.

The following table shows the test steps necessary to complete this scenario as well as expected results. For the first step it is recommended adapting the provided declaration XML found in the Test Case folder. Secondly, make sure that your **LRN** is unique, and that the Submitter field is correct (this is done by putting your **CVR** in the Submitter/Name and Submitter/ID fields). The fields **DeclarantEORI** and **ImporterEORI** should also be filled out with the corresponding EORI numbers for the Declarant (Declarant/ID) and Importer (Importer/ID) roles. The placeholders are denoted in the XML by double curly brackets {{placeholder}}.

| Step no. | Description of steps  | Expected result   | Passed                   |
|----------|---|---|--------------------------|
| 1        | Use the provided XML found in the test case folder (remember to replace the placeholders)                                     | Should have the test <b>XML</b> ready for the next step               | <input type="checkbox"/> |
| 2        | Enter information from section 3.3.1 with the invalid data in the element <b>Exporter</b> (13 01 000 000) to ensure rejection | <b>Exporter</b> (13 01 000 000) element should resemble section 3.3.1 | <input type="checkbox"/> |
| 3        | Submit the declaration using the conditions found under Pre-conditions  | The declaration should be sent to the system                          | <input type="checkbox"/> |
| 4        | Pull the notifications  | You should be able to pull notifications from the system              | <input type="checkbox"/> |
| 5        | Rejection of a submission of declaration by receiving the <b>CWMREJ</b> notification  | Receive notification <b>CWMREJ</b> and pass the test                  | <input type="checkbox"/> |

#### 3.3.1 XML example

```
<ns3:Declarant>
  <ns3:ID>DK12345678</ns3:ID>
</ns3:Declarant>
```