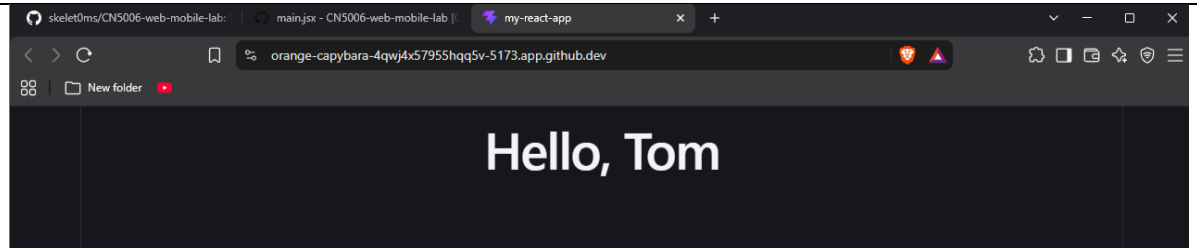
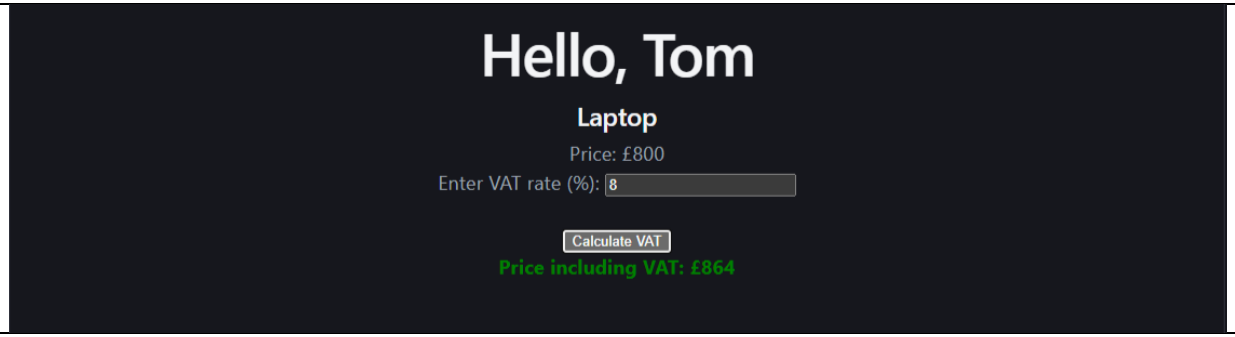
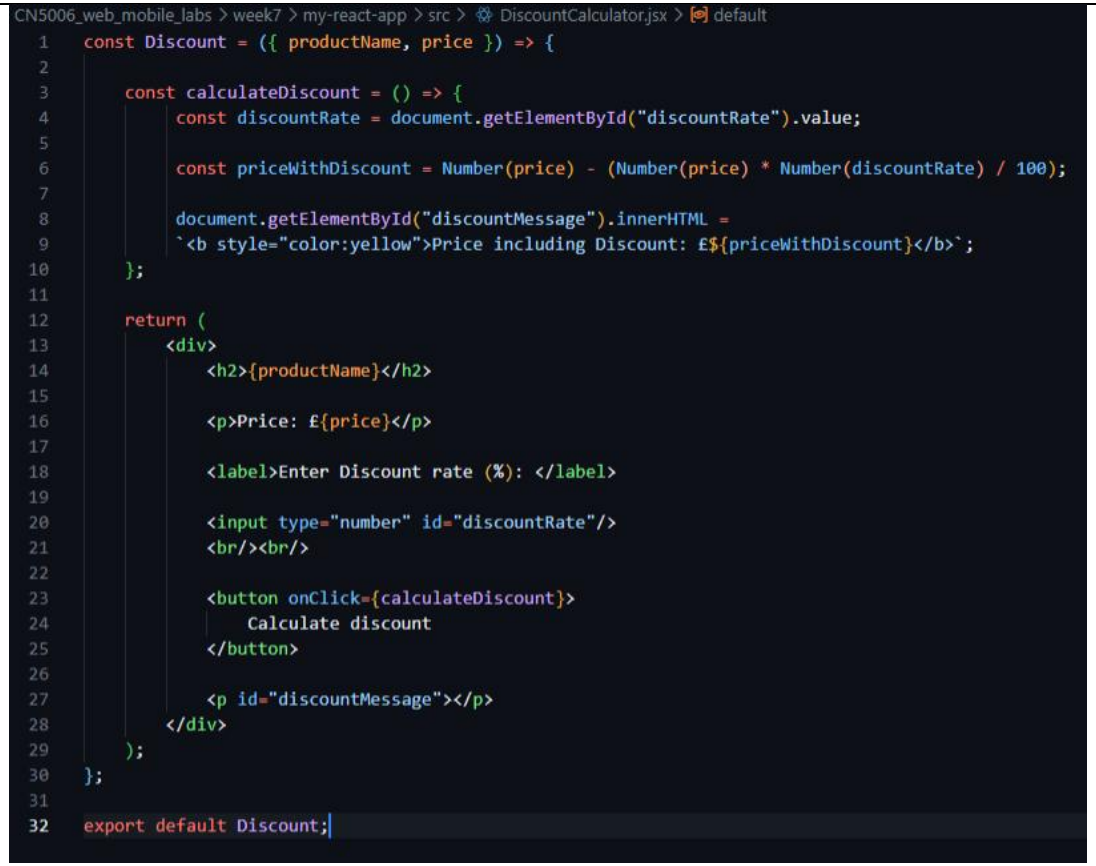
Week 7 lab

Task	Evidence	What I learned	Challenges /Errors	How I solved them	Key skills developed
Task 1		How to install react and run a react app	N/A	N/A	Installing and running a react app
Task 2		How to code with react and use html	N/A	N/A	Coding using react

Portfolio task	CN5006_web_mobile_labs > week7 > my-react-app > src > DiscountCalculator.jsx > default 				

```jsx
const Discount = ({ productName, price }) => {

    const calculateDiscount = () => {
        const discountRate = document.getElementById("discountRate").value;

        const priceWithDiscount = Number(price) - (Number(price) * Number(discountRate) / 100);

        document.getElementById("discountMessage").innerHTML =
        `<b style="color:yellow">Price including Discount: £${priceWithDiscount}</b>`;
    };

    return (
        <div>
            <h2>{productName}</h2>

            <p>Price: £{price}</p>


            <label>Enter Discount rate (%): </label>

            <input type="number" id="discountRate"/>
            <br/><br/>

            <button onClick={calculateDiscount}>
                Calculate discount
            </button>

            <p id="discountMessage"></p>
        </div>
    );
};

export default Discount;
```

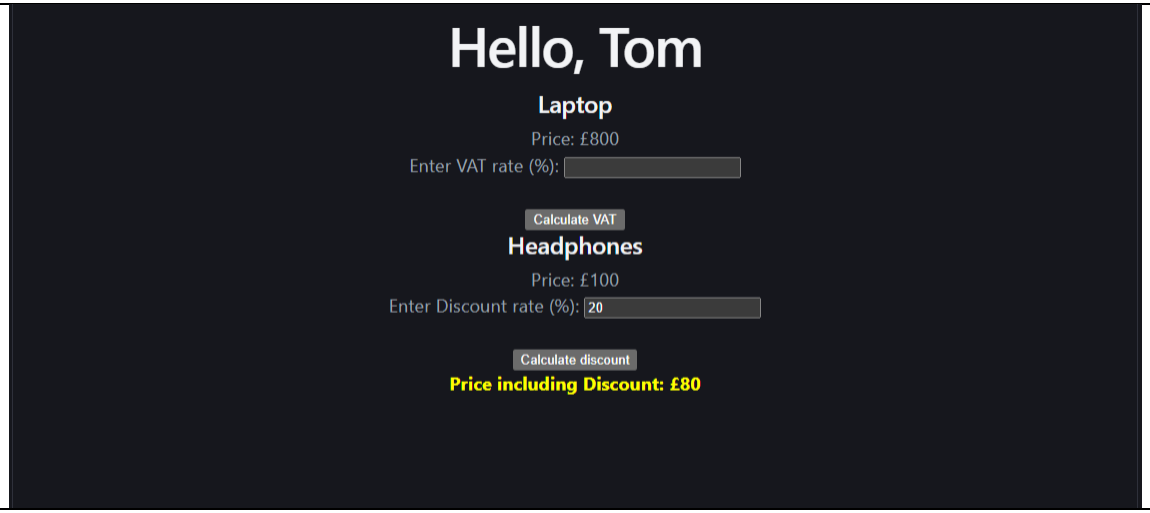

Portfolio explanation:

The purpose of the component is to display the product name and price using html elements and have a field that allows the user to input a discount percentage and using said discount percentage, calculate the final price of the product.

The props of the component are the productName and price.

The button works using an event called “onClick” which uses the calculateDiscount() function when the user clicks the button.

Inside the calculateDiscount() function, there’s the statement “document.getElementById("discountMessage").innerHTML” which updates the paragraph element with the discountMessage (which is “`<b style="color:yellow">Price including Discount: £${priceWithDiscount}</b>`; “)