1 Background: detectors use parallel hardware


Exact ML

search 16^{32} candidates




32 users, 16-QAM

MDI-MIMO: correct a guess, minimizing $\|y - Hx\|^2$

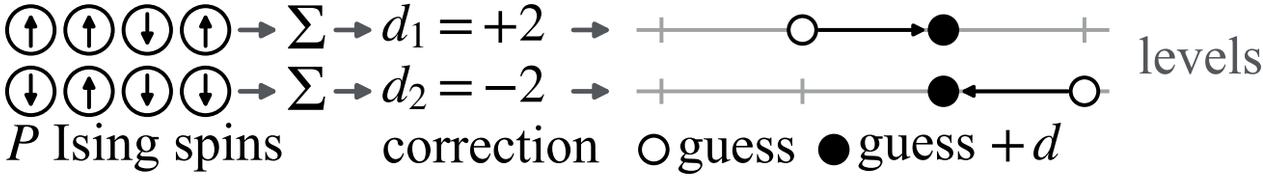


2 Challenge: no remedy separates only the copies

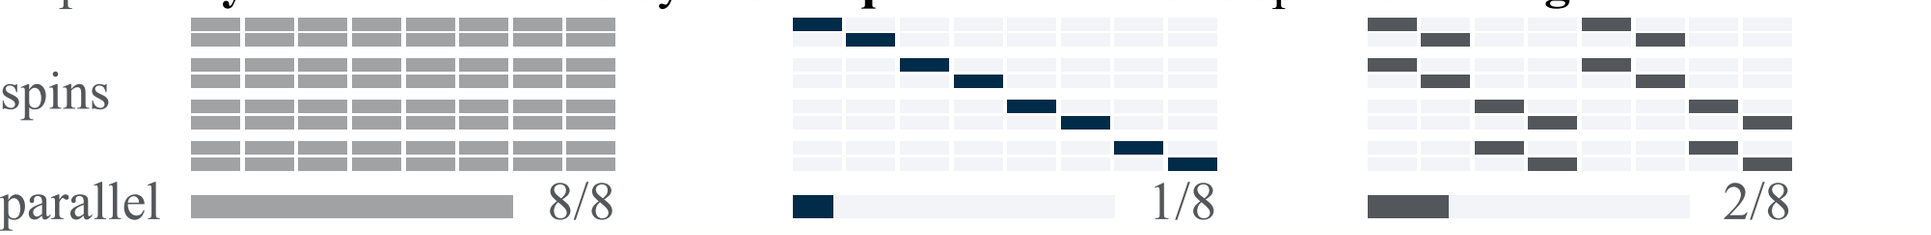

3 Research Question: *Must MIMO detectors flip in parallel?*

4 Approach: on our engine, Chord vs. Arpeggio

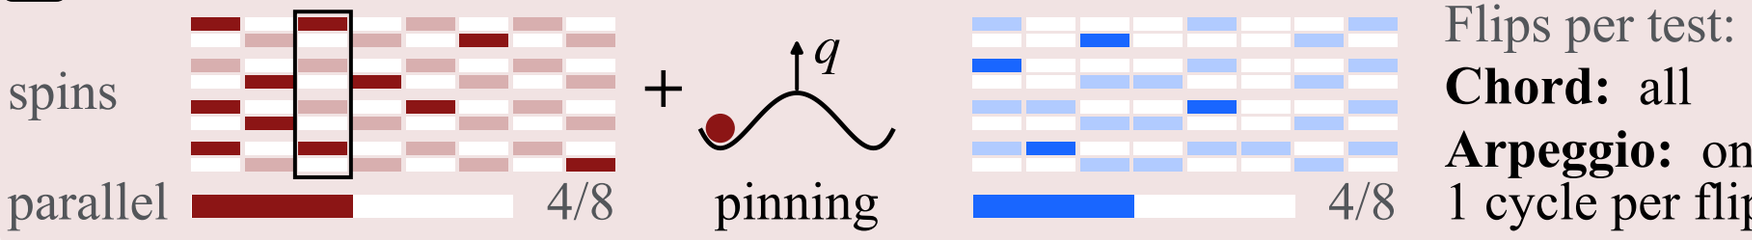


Flips per test:

Chord: all


Arpeggio: one

1 cycle per flip

5 Results: no gain from flipping all

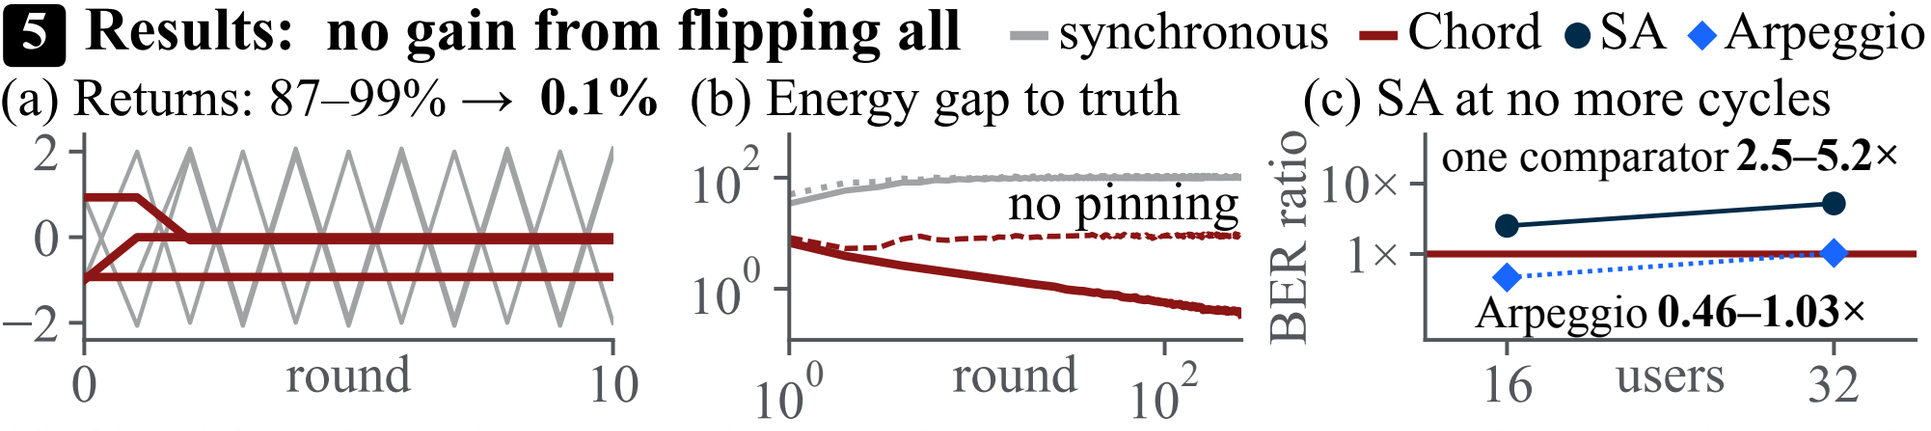

(d) Chord SNR lead, dB; one mark per setting

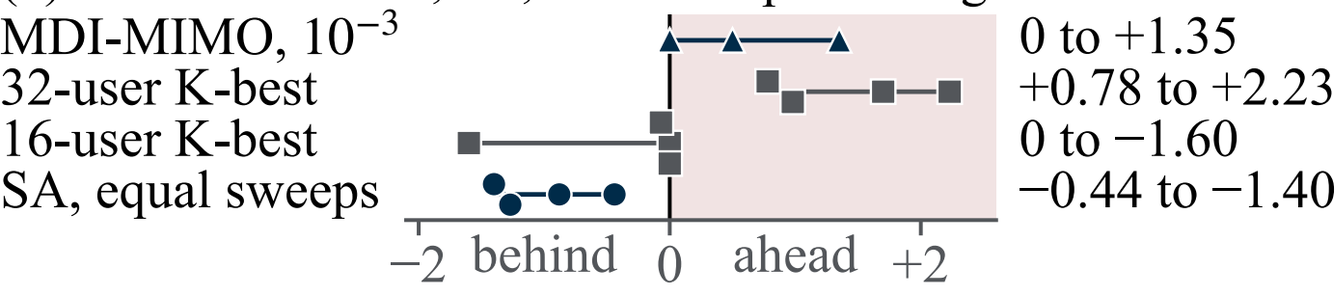

(e) Routed Arpeggio

