ExpressEditors &DBEditors

Copyright © 2000 Developer Express Inc.

Table of Contents

TdxStyleController 18

- **TdxStyleController Properties** 19
- **TdxStyleController Methods** 20
- **TdxStyleController Events** 23

TdxEditStyleController 24

- **TdxEditStyleController Properties** 25
- **TdxEditStyleController Events** 29

TdxEditStyle 30

- **TdxEditStyle Properties** 31
- **TdxEditStyle Methods** 36

TdxEditDataDefinition 42

- **TdxEditDataDefinition Properties** 43
- **TdxEditDataDefinition Methods** 44
- **TdxEditDataDefinition Events** 45

TdxInplaceEdit 46

- **TdxInplaceEdit Properties** 47
- **TdxInplaceEdit Methods** 51
- **TdxInplaceEdit Events** 54

TdxInplacePopupControl 56

- **TdxInplacePopupControl Properties** 57
- **TdxInpacePopupControl Methods** 59

TdxInplaceTextEdit 60

- **TdxInplaceTextEdit Properties** 61
- **TdxInplaceTextEdit Methods** 67
- **TdxInplaceTextEdit Events** 76

Copyright © 2000 Developer Express Inc.

TdxInplaceMaskEdit **77**

TdxInplaceMaskEdit Properties **78**

TdxInplaceMaskEdit Methods **81**

TdxInplaceMaskEdit Events **88**

TdxInplaceMemoEdit **89**

TdxInplaceMemoEdit Properties **90**

TdxInplaceMemoEdit Methods **94**

TdxInplaceMemoEdit Events **95**

TdxInplaceDropDownEdit **96**

TdxInplaceDropDownEdit Properties **97**

TdxInplaceDropDownEdit Methods **101**

TdxInplaceDropDownEdit Events **104**

TdxInplaceDateEdit **105**

TdxInplaceDateEdit Properties **106**

TdxInplaceDateEdit Methods **109**

TdxInplaceDateEdit Events **111**

TdxInplaceButtonEdit **112**

TdxInplaceButtonEdit Properties **113**

TdxInplaceButtonEdit Methods **115**

TdxInplaceButtonEdit Events **117**

TdxCheckEditStyleController **118**

TdxCheckEditStyleController Properties **119**

TdxInplaceCheckEdit **121**

TdxInplaceCheckEdit Properties **122**

TdxInplaceCheckEdit Methods **126**

TdxInplaceCheckEdit Events **127**

TdxInplaceImageEdit **128**

TdxInplaceImageEdit Properties 129

TdxInplaceImageEdit Methods 132

TdxInplaceImageEdit Events 133

TdxInplaceSpinEdit 134

TdxInplaceSpinEdit Properties 135

TdxInplaceSpinEdit Methods 139

TdxInplaceSpinEdit Events 143

TdxInplacePickEdit 144

TdxInplacePickEdit Properties 145

TdxInplacePickEdit Methods 148

TdxInplacePickEdit Events 149

TdxInplaceCalcEdit 150

TdxInplaceCalcEdit Properties 151

TdxInplaceCalcEdit Methods 154

TdxInplaceCalcEdit Events 155

TdxInplaceHyperLinkEdit 156

TdxInplaceHyperLinkEdit Properties 157

TdxInplaceHyperLinkEdit Methods 159

TdxInplaceHyperLinkEdit Events 160

TdxInplaceTimeEdit 161

TdxInplaceTimeEdit Properties 162

TdxInplaceTimeEdit Methods 164

TdxInplaceTimeEdit Events 165

TdxInplaceCurrencyEdit 166

TdxInplaceCurrencyEdit Properties 167

TdxInplaceCurrencyEdit Methods 170

TdxInplaceCurrencyEdit Events 172

Copyright © 2000 Developer Express Inc.

TdxPopupToolBarWindow **173**

TdxPopupToolBarWindow Properties **174**

TdxInplaceGraphicEdit **177**

TdxInplaceGraphicEdit Properties **178**

TdxInplaceGraphicEdit Methods **183**

TdxInplaceGraphicEdit Events **186**

TdxInplaceBlobEdit **188**

TdxInplaceBlobEdit Properties **189**

TdxInplaceBlobEdit Methods **199**

TdxInplaceBlobEdit Events **202**

TdxInplaceMRUEdit **204**

TdxInplaceMRUEdit Properties **205**

TdxInplaceMRUEdit Methods **207**

TdxInplaceMRUEdit Events **209**

TdxInplacePopupEdit **210**

TdxInplacePopupEdit Properties **211**

TdxInplacePopupEdit Methods **217**

TdxInplacePopupEdit Events **219**

TdxPopupEditForm **221**

TdxPopupEditForm Properties **222**

TdxPopupEditForm Methods **225**

TdxInplaceLookupEdit **226**

TdxInplaceLookupEdit Properties **227**

TdxInplaceLookupEdit Methods **230**

TdxInplaceLookupEdit Events **233**

TdxEditButton **234**

TdxEditButton Properties **235**

TdxEditButton Methods 237

TdxEditButtons 238

TdxEditButtons Properties 239

TdxEditButtons Methods 240

TCustomdxEdit 241

TCustomdxEdit Properties 242

TCustomdxEdit Methods 243

TCustomdxEdit Events 244

TdxEdit 245

TdxEdit Properties 246

TdxEdit Methods 247

TdxEdit Events 248

TCustomdxMaskEdit 249

TCustomdxMaskEdit Properties 250

TCustomdxMaskEdit Methods 251

TCustomdxMaskEdit Events 252

TdxMaskEdit 253

TdxMaskEdit Properties 254

TdxMaskEdit Methods 255

TdxMaskEdit Events 256

TCustomdxMemo 257

TCustomdxMemo Properties 258

TCustomdxMemo Methods 259

TCustomdxMemo Events 260

TdxMemo 261

TdxMemo Properties 262

TdxMemo Methods 263

Copyright © 2000 Developer Express Inc.

TdxMemo Events 264
TCustomdxDateEdit 265
TCustomdxDateEdit Properties 266
TCustomdxDateEdit Methods 267
TCustomdxDateEdit Events 269
TdxDateEdit 270
TdxDateEdit Properties 272
TdxDateEdit Methods 273
TdxDateEdit Events 274
TCustomdxButtonEdit 275
TCustomdxButtonEdit Properties 276
TCustomdxButtonEdit Methods 277
TCustomdxButtonEdit Events 279
TdxButtonEdit 280
TdxButtonEdit Properties 281
TdxButtonEdit Methods 282
TdxButtonEdit Events 283
TCustomdxCheckEdit 284
TCustomdxCheckEdit Properties 285
TCustomdxCheckEdit Methods 286
TCustomdxCheckEdit Events 287
TdxCheckEdit 288
TdxCheckEdit Properties 289
TdxCheckEdit Methods 290
TdxCheckEdit Events 291
TCustomdxImageEdit 292
TCustomdxImageEdit Properties 293

TCustomdxImageEdit Methods 294
TCustomdxImageEdit Events 296
TdxImageEdit 297
TdxImageEdit Properties 298
TdxImageEdit Methods 299
TdxImageEdit Events 300
TCustomdxSpinEdit 301
TCustomdxSpinEdit Properties 302
TCustomdxSpinEdit Methods 303
TCustomdxSpinEdit Events 305
TdxSpinEdit 306
TdxSpinEdit Properties 307
TdxSpinEdit Methods 308
TdxSpinEdit Events 309
TCustomdxPickEdit 310
TCustomdxPickEdit Properties 311
TCustomdxPickEdit Methods 312
TCustomdxPickEdit Events 314
TdxPickEdit 315
TdxPickEdit Properties 316
TdxPickEdit Methods 317
TdxPickEdit Events 318
TCustomdxCalcEdit 319
TCustomdxCalcEdit Properties 320
TCustomdxCalcEdit Methods 321
TCustomdxCalcEdit Events 323
TdxCalcEdit 324

Copyright © 2000 Developer Express Inc.

TdxCalcEdit Properties **325**

TdxCalcEdit Methods **326**

TdxCalcEdit Events **327**

TCustomdxHyperLinkEdit **328**

TCustomdxHyperLinkEdit Properties **329**

TCustomdxHyperLinkEdit Methods **330**

TCustomdxHyperLinkEdit Events **331**

TdxHyperLinkEdit **332**

TdxHyperLinkEdit Properties **333**

TdxHyperLinkEdit Methods **334**

TdxHyperLinkEdit Events **335**

TCustomdxTimeEdit **336**

TCustomdxTimeEdit Properties **337**

TCustomdxTimeEdit Methods **338**

TCustomdxTimeEdit Events **340**

TdxTimeEdit **341**

TdxTimeEdit Properties **342**

TdxTimeEdit Methods **343**

TdxTimeEdit Events **344**

TCustomdxCurrencyEdit **345**

TCustomdxCurrencyEdit Properties **346**

TCustomdxCurrencyEdit Methods **347**

TCustomdxCurrencyEdit Events **349**

TdxCurrencyEdit **350**

TdxCurrencyEdit Properties **351**

TdxCurrencyEdit Methods **352**

TdxCurrencyEdit Events **353**

TCustomdxGraphicEdit **354**

TCustomdxGraphicEdit Properties **355**

TCustomdxGraphicEdit Methods **356**

TCustomdxGraphicEdit Events **357**

TdxGraphicEdit **358**

TdxGraphicEdit Properties **359**

TdxGraphicEdit Methods **360**

TdxGraphicEdit Events **361**

TCustomdxBlobEdit **362**

TCustomdxBlobEdit Properties **363**

TCustomdxBlobEdit Methods **364**

TCustomdxBlobEdit Events **366**

TdxBlobEdit **367**

TdxBlobEdit Properties **369**

TdxBlobEdit Methods **370**

TdxBlobEdit Events **371**

TCustomdxMRUEdit **372**

TCustomdxMRUEdit Properties **373**

TCustomdxMRUEdit Methods **374**

TCustomdxMRUEdit Events **376**

TdxMRUEdit **377**

TdxMRUEdit Properties **378**

TdxMRUEdit Methods **379**

TdxMRUEdit Events **380**

TCustomdxPopupEdit **381**

TCustomdxPopupEdit Properties **382**

TCustomdxPopupEdit Methods **383**

Copyright © 2000 Developer Express Inc.

TCustomdxPopupEdit Events 385
TdxPopupEdit 386
TdxPopupEdit Properties 387
TdxPopupEdit Methods 388
TdxPopupEdit Events 389
TCustomdxLookupEdit 390
TCustomdxLookupEdit Properties 391
TCustomdxLookupEdit Methods 392
TCustomdxLookupEdit Events 393
TdxLookupEdit 394
TdxLookupEdit Properties 395
TdxLookupEdit Methods 396
TdxLookupEdit Events 397
TdxEditDataLink 398
TdxEditDataLink Properties 399
TdxEditDataLink Methods 400
TdxEditDBDataDefinition 401
TCustomdxDBEdit 402
TCustomdxDBEdit Properties 403
TCustomdxDBEdit Methods 404
TCustomdxDBEdit Events 405
TdxDBEdit 406
TdxDBEdit Properties 407
TdxDBEdit Methods 408
TdxDBEdit Events 409
TCustomdxDBMaskEdit 410
TCustomdxDBMaskEdit Properties 411

TCustomdxDBMaskEdit Methods 413
TCustomdxDBMaskEdit Events 415
TdxDBMaskEdit 416
TdxDBMaskEdit Properties 417
TdxDBMaskEdit Methods 418
TdxDBMaskEdit Events 419
TCustomdxDBMemo 420
TCustomdxDBMemo Properties 421
TCustomdxDBMemo Methods 423
TCustomdxDBMemo Events 424
TdxDBMemo 425
TdxDBMemo Properties 426
TdxDBMemo Methods 427
TdxDBMemo Events 428
TCustomdxDBDateEdit 429
TCustomdxDBDateEdit Properties 430
TCustomdxDBDateEdit Methods 432
TCustomdxDBDateEdit Events 434
TdxDBDateEdit 435
TdxDBDateEdit Properties 437
TdxDBDateEdit Methods 438
TdxDBDateEdit Events 439
TCustomdxDBButtonEdit 440
TCustomdxDBButtonEdit Properties 441
TCustomdxDBButtonEdit Methods 443
TCustomdxDBButtonEdit Events 445
TdxDBButtonEdit 446

Copyright © 2000 Developer Express Inc.

TdxDBButtonEdit Properties **447**

TdxDBButtonEdit Methods **448**

TdxDBButtonEdit Events **449**

TCustomdxDBCheckEdit **450**

TCustomdxDBCheckEdit Properties **451**

TCustomdxDBCheckEdit Methods **453**

TCustomdxDBCheckEdit Events **454**

TdxDBCheckEdit **455**

TdxDBCheckEdit Properties **456**

TdxDBCheckEdit Methods **457**

TdxDBCheckEdit Events **458**

TCustomdxDBImageEdit **459**

TCustomdxDBImageEdit Properties **460**

TCustomdxDBImageEdit Methods **462**

TCustomdxDBImageEdit Events **464**

TdxDBImageEdit **465**

TdxDBImageEdit Properties **466**

TdxDBImageEdit Methods **467**

TdxDBImageEdit Events **468**

TCustomdxDBSpinEdit **469**

TCustomdxDBSpinEdit Properties **470**

TCustomdxDBSpinEdit Methods **472**

TCustomdxDBSpinEdit Events **474**

TdxDBSpinEdit **475**

TdxDBSpinEdit Properties **476**

TdxDBSpinEdit Methods **477**

TdxDBSpinEdit Events **478**

TCustomdxDBPickEdit **479**

TCustomdxDBPickEdit Properties **480**

TCustomdxDBPickEdit Methods **482**

TCustomdxDBPickEdit Events **484**

TdxDBPickEdit **485**

TdxDBPickEdit Properties **486**

TdxDBPickEdit Methods **487**

TdxDBPickEdit Events **488**

TCustomdxDBCalcEdit **489**

TCustomdxDBCalcEdit Properties **490**

TCustomdxDBCalcEdit Methods **492**

TCustomdxDBCalcEdit Events **494**

TdxDBCalcEdit **495**

TdxDBCalcEdit Properties **496**

TdxDBCalcEdit Methods **497**

TdxDBCalcEdit Events **498**

TCustomdxDBHyperLinkEdit **499**

TCustomdxDBHyperLinkEdit Properties **500**

TCustomdxDBHyperLinkEdit Methods **502**

TCustomdxDBHyperLinkEdit Events **503**

TdxDBHyperLinkEdit **504**

TdxDBHyperLinkEdit Properties **505**

TdxDBHyperLinkEdit Methods **506**

TdxDBHyperLinkEdit Events **507**

TCustomdxDBTimeEdit **508**

TCustomdxDBTimeEdit Properties **509**

TCustomdxDBTimeEdit Methods **511**

Copyright © 2000 Developer Express Inc.

TCustomdxDBTimeEdit Events 513
TdxDBTimeEdit 514
TdxDBTimeEdit Properties 515
TdxDBTimeEdit Methods 516
TdxDBTimeEdit Events 517
TCustomdxDBCurrencyEdit 518
TCustomdxDBCurrencyEdit Properties 519
TCustomdxDBCurrencyEdit Methods 521
TCustomdxDBCurrencyEdit Events 523
TdxDBCurrencyEdit 524
TdxDBCurrencyEdit Properties 525
TdxDBCurrencyEdit Methods 526
TdxDBCurrencyEdit Events 527
TCustomdxDBGraphicEdit 528
TCustomdxDBGraphicEdit Properties 529
TCustomdxDBGraphicEdit Methods 530
TCustomdxDBGraphicEdit Events 531
TdxDBGraphicEdit 532
TdxDBGraphicEdit Properties 533
TdxDBGraphicEdit Methods 534
TdxDBGraphicEdit Events 535
TCustomdxDBLookupEdit 536
TCustomdxDBLookupEdit Properties 537
TCustomdxDBLookupEdit Methods 539
TCustomdxDBLookupEdit Events 541
TdxDBLookupEdit 542
TdxDBLookupEdit Properties 543

TdxDBLookupEdit Methods 544
TdxDBLookupEdit Events 545
TCustomdxDBBlobEdit 546
TCustomdxDBBlobEdit Properties 547
TCustomdxDBBlobEdit Methods 549
TCustomdxDBBlobEdit Events 551
TdxDBBlobEdit 552
TdxDBBlobEdit Properties 553
TdxDBBlobEdit Methods 554
TdxDBBlobEdit Events 555
TCustomdxDBMRUEdit 556
TCustomdxDBMRUEdit Properties 557
TCustomdxDBMRUEdit Methods 559
TCustomdxDBMRUEdit Events 561
TdxDBMRUEdit 562
TdxDBMRUEdit Properties 564
TdxDBMRUEdit Methods 565
TdxDBMRUEdit Events 566
TCustomdxDBPopupEdit 567
TCustomdxDBPopupEdit Properties 568
TCustomdxDBPopupEdit Methods 570
TCustomdxDBPopupEdit Events 572
TdxDBPopupEdit 573
TdxDBPopupEdit Properties 574
TdxDBPopupEdit Methods 575
TdxDBPopupEdit Events 576
TdxInplaceExtLookupEdit 577

Copyright © 2000 Developer Express Inc.

TdxInplaceExtLookupEdit Properties **578**

TdxInplaceExtLookupEdit Methods **581**

TdxInplaceExtLookupEdit Events **582**

TCustomdxDBExtLookupEdit **583**

TCustomdxDBExtLookupEdit Properties **584**

TCustomdxDBExtLookupEdit Methods **586**

TCustomdxDBExtLookupEdit Events **588**

TdxDBExtLookupEdit **589**

TdxDBExtLookupEdit Properties **591**

TdxDBExtLookupEdit Methods **592**

TdxDBExtLookupEdit Events **593**

Index **594**

ExpressEditors&DBEditors

TdxStyleController

This is the core class used to manage the display style of all editors connected to the style controller on the same form.

Unit

dxCntner

```
TdxStyleController = class(TComponent)
```

Description

This class is the ancestor of the TdxEditStyleController class. The TdxEditStyleController class is used to set specific values for the properties that determine the appearance and behavior of associated editors. The TdxStyleController class represents the basic methods and properties (AddLink, Changed, RemoveLink, StyleChanged, Links, OnStyleChanged, BeginUpdate, EndUpdate, Update) used by the TdxEditStyleController class to manage the appearance of its associated editors.

The TdxEditStyleController class works with editors that support the StyleController property.

Hierarchy

TObject

  TPersistent

    TComponent

TdxStyleController Properties

Links	**protected / read only**

Links property read only

Contains a list of objects linked to the current style controller.

```
property Links: TList;
```

Description

The Links property is an array, every item of which represents an editor linked to the current style controller. Each editor connected to the current style controller represents an item in the Links array. When a style controller property changes, the corresponding style property of all editors in the Links array changes as well.

See also

TdxStyleController.AddLink; TdxStyleController.RemoveLink

TdxStyleController Methods

AddLink	**protected**	RemoveLink	**protected**
BeginUpdate	**public**	StyleChanged	**protected**
Changed	**protected**	Update	**public**
EndUpdate	**public**		

AddLink method

Connects the current edit style to a new object.

```
procedure AddLink(ALink: TObject); virtual;
```

Description

The AddLink method is used internally to insert a new object specified by the ALink parameter at the end of the linked object array (represented by the Links property). This method connects the current style controller to the editor specified by the ALink parameter.

Note: *It is best to use the StyleController property of* TdxEditStyleController.

See Also

TdxStyleController.Links; TdxStyleController.RemoveLink

BeginUpdate method

Disables style refresh operations.

```
procedure BeginUpdate;
```

Description

Calling the BeginUpdate method disables style property changes until calling the EndUdpate method. The BeginUpdate and EndUpdate methods work together to prevent multiple updates of editors. Make certain to call the EndUpdate method after calling the BeginUpdate method. Every call of the BeginUpdate method increases the internal counter by one. Every call of the EndUpdate method decreases the internal counter by one. Editor style properties can be set to new values only when the internal counter is 0.

See Also

TdxStyleController.EndUpdate; TdxStyleController.Update

Changed method

Calls the StyleChanged method for all editors connected to a style controller.

```
procedure Changed;
```

Copyright © 2000 Developer Express Inc.

Description

The Changed method calls the StyleChanged method for all items of the linked objects array represented by the Links property. The Changed method is used internally to simultaneously modify similar properties for all editors connected to the style controller.

Note: *It is recommended that you use the Update method instead of the Change method.*

See Also

TdxStyleController.StyleChanged; TdxStyleController.OnStyleChanged

EndUpdate method

Enables styles refresh operations.

```
procedure EndUpdate;
```

Description

The BeginUpdate and EndUpdate methods work together to prevent numerous updates of editor styles. Make certain to call the EndUpdate method after calling the BeginUpdate method. Every call of the BeginUpdate method increases the internal counter by one. Every call of the EndUpdate method decreases the internal counter by one. Editor style properties can be set to new values only when the internal counter is 0.

See Also

TdxStyleController.BeginUpdate; TdxStyleController.Update

RemoveLink method

Removes the connection between an editor and the current style controller.

```
procedure RemoveLink(ALink: TObject); virtual;
```

Description

Call the RemoveLink method to remove a specific item (the ALink parameter) from the linked object array represented by the Links property. Said differently, call this method to remove the connection between the current style controller and the editor specified by the ALink parameter.

See Also

TdxStyleController.Links; TdxStyleController.AddLink

StyleChanged method

Generates the OnStyleChanged event when changing the current edit style.

```
procedure StyleChanged(ALink: TObject); virtual;
```

Description

The StyleChanged method calls the OnStyleChanged event handler to manipulate the object specified by the ALink parameter, when changing the current edit style.

See Also

TdxStyleController.OnStyleChanged

Update method

Updates all linked editors when changing edit style.

```
procedure Update;
```

Description

Use the Update method to call the Changed method for all linked editors when changing current edit style. This method can be used if a user writes an OnStyleChanged event handler.

See Also

TdxStyleController.BeginUpdate; TdxStyleController.EndUpdate

Copyright © 2000 Developer Express Inc.

TdxStyleController Events

OnStyleChanged	**protected**

OnStyleChanged event

Occurs when changing current edit style.

```
type
  TdxStyleChangedEvent = procedure (Sender: TObject; Link: TObject) of
object;
property OnStyleChanged: TdxStyleChangedEvent;
```

Description

Write an OnStyleChanged event handler to perform specific actions when changing current edit style. The Sender parameter specifies the style controller whose event handler is called. The Link parameter determines the editor linked to the style controller.

See Also

TdxStyleController.StyleChanged

TdxEditStyleController

TdxEditStyleController is used to unify the appearance style of all linked editors.

Unit

dxCntner

```
TdxEditStyleController = class(TdxStyleController)
```

Description

TdxEditStyleController is a non-visual component. Use this component to simultaneously change similar properties of all linked editors and to apply identical style changes to all linked ExpressEditors.

TdxEditStyleController functions as a wrapper of the editor's Style object and contains the same properties. If a property is not directly set (the appropriate flag is activated in the AssignedValues property), it is taken from a specific controller.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TdxStyleController

See Also

TdxStyleController; TdxEditStyle

Copyright © 2000 Developer Express Inc.

TdxEditStyleController Properties

BorderColor	**published / read / write**	Edges	**published / read / write**
BorderStyle	**published / read / write**	HotTrack	**published / read / write**
ButtonStyle	**published / read / write**	Shadow	**published / read / write**
ButtonTransparence	**published / read / write**		

BorderColor property — read / write

Specifies border color for all editors connected to the current style controller.

```
property BorderColor: TColor;
```

Description

Use the BorderColor property to read or set the border color property for all linked editors.

The default value is **clWindowFrame**.

See Also

TdxEditStyle.BorderColor; TdxEditStyleController.BorderStyle

BorderStyle property — read / write

Specifies border style for all editors connected to a style controller.

```
type
 TdxEditBorderStyle = (xbsNone, xbsSingle, xbsThick, xbsFlat, xbs3D);
property BorderStyle: TdxEditBorderStyle;
```

Description

Use the BorderStyle property to read or set the border style for all linked editors. Available values include:

Value	Description	Example
xbsNone	No visible border.	
xbsSingle	Single-line border.	
xbsThick	Single-line border with a thick line.	
xbsFlat	Flat border with a light 3D effect.	

xbs3D	Standard border with a 3D effect.	

See Also

TdxEditStyle.BorderStyle; TdxEditStyleController.BorderColor

ButtonStyle property — read / write

Specifies button style for all editors connected to a style controller.

```
type
 TdxEditButtonViewStyle = (btsDefault, bts3D, btsFlat, btsSimple,
btsHotFlat);
property ButtonStyle: TdxEditButtonViewStyle;
```

Description

Use the ButtonStyle property to read or set the button style for all linked editors. Available values include:

Value	Description	Example
btsDefault	Default button style.	
bts3D	Standard button with a 3D effect.	
btsFlat	Flat button with a light 3D effect.	
btsSimple	Simple button without a 3D effect and with a transparent border.	
btsHotFlat	Flat button without a 3D effect and with a single-line border.	

See Also

TdxEditStyle.ButtonStyle; TdxEditStyleController.ButtonTransparence

ButtonTransparence property — read / write

Specifies button transparency for all editors connected to the current style controller.

```
type
 TdxEditButtonTransparence = (ebtNone, ebtInactive, ebtAlways,
ebtHideInactive);
property ButtonTransparence: TdxEditButtonTransparence;
```

Description

Use the ButtonTransparence property to read or set button transparency for all linked editors. Available values include:

Value	Description	Active	Inactive
ebtNone	A button is not transparent.		
ebtInactive	A button is transparent only when inactive.		
ebtAlways	A button is always transparent.		
ebtHideInactive	A button is invisible when inactive.		

See Also

TdxEditStyle.ButtonTransparence; TdxEditStyleController.ButtonStyle

Edges property — read / write

Specifies the border edge for all linked editors.

```
type
 TdxEditEdge = (edgLeft, edgTop, edgRight, edgBottom);
TdxEditEdges = set of TdxEditEdge;
property Edges: TdxEditEdges;
```

Description

Use the Edges property to add or remove a specific border edge for all editors connected to the current style controller. Available values include:

Value		Description	Example
edgLeft	**True**	The leftmost border edge is visible.	
	False	The leftmost border edge is invisible.	
edgTop	**True**	The topmost border edge is visible.	
	False	The top border edge is invisible.	
edgRight	**True**	The rightmost border edge is visible.	
	False	The rightmost border edge is invisible.	
edgBottom	**True**	The bottom border edge is visible.	
	False	The bottom border edge is invisible.	

See Also

TdxEditStyle.Edges

HotTrack property — read / write

Specifies whether an editor is highlighted when the mouse is placed over it.

```
property HotTrack: Boolean;
```

Description

Use the HotTrack property to specify the manner in which an editor responds to mouse movements. Though the control changes its visual state, it does not receive focus.

Value	Example
True	
False	

The default value is **False**.

See Also

TdxEditStyle.HotTrack

Shadow property — read / write

Specifies whether to display a shadow for all linked editors.

```
property Shadow: Boolean;
```

Description

Set the Shadow property to **True** to display a shadow for all editors connected to the current style controller.

Value	Example
True	
False	

The default value is **False**.

See Also

TdxEditStyle.Shadow

Copyright © 2000 Developer Express Inc.

TdxEditStyleController Events

OnStyleChanged	**published**

OnStyleChanged event

Occurs when changing the current edit style.

```
type
  TdxStyleChangedEvent = procedure (Sender: TObject; Link: TObject) of
object;
property OnStyleChanged;
```

Description

Use this property to write an OnStyleChanged event handler to perform specific actions when changing the current edit style. You can use it to implement different colors, fonts, etc. for editors. The Sender parameter specifies the style controller whose event handler is called. The Link parameter determines the editor linked to the style controller.

TdxEditStyle

TdxEditStyle describes the style of an editor.

Unit

dxCntner

```
TdxEditStyle = class(TPersistent)
```

Description

Use TdxEditStyle to specify the look & feel of an editor.

Hierarchy

TObject

TPersistent

See Also

TdxEditStyleController; TdxStyleController

Copyright © 2000 Developer Express Inc.

TdxEditStyle Properties

Edit	**public / read only**	ButtonTransparence	**published / read / write**
AssignedValues	**published / read / write**	Edges	**published / read / write**
BorderColor	**published / read / write**	HotTrack	**published / read / write**
BorderStyle	**published / read / write**	Shadow	**published / read / write**
ButtonStyle	**published / read / write**		

Edit property — read only

Determines the editor associated with an edit style.

```
property Edit: TdxInplaceEdit;
```

Description

The Edit property determines the editor connected to the current edit style.

See Also

TdxInplaceEdit

AssignedValues property — read / write

Specifies which properties are assigned to an editor.

```
type
 TdxEditStyleValue = (svBorderColor, svBorderStyle, svButtonStyle,
svButtonTransparence, svEdges, svHotTrack, svShadow);
 TdxEditStyleValues = set of TdxEditStyleValue;
property AssignedValues: TdxEditStyleValues;
```

Description

The TdxEditStyleValues type defines a set of possible state flags for the AssignedValues property. Assigned values (except for default values) are used when implementing a style in a component. The following table lists the possible values for a TdxEditStyleValues object and explains the meaning of each flag:

Value	Description
svBorderColor	The BorderColor property has been assigned.
svBorderStyle	The BorderStyle property has been assigned.
svButtonStyle	The ButtonStyle property has been assigned.
svButtonTransparence	The ButtonTransparence property has been assigned.
svEdges	The Edges property has been assigned.
svHotTrack	The HotTrack property has been assigned.
svShadow	The Shadow property has been assigned.

See Also

TdxEditStyle.BorderColor; TdxEditStyle_BorderStyle; TdxEditStyle_ButtonStyle; TdxEditStyle.ButtonTransparence; TdxEditStyle.Edges; TdxEditStyle.HotTrack; TdxEditStyle.Shadow

BorderColor property — read / write

Specifies the border color of an editor.

```
property BorderColor: TColor;
```

Description

Use this property to read or set the border color for an editor. It affects a control only if the BorderStyle property is set to **xbsSingle** or **xbsThick**.

See Also

TdxEditStyleController.BorderColor

BorderStyle property — read / write

Specifies the border style of an editor.

```
type
 TdxEditBorderStyle = (xbsNone, xbsSingle, xbsThick, xbsFlat, xbs3D);
property BorderStyle: TdxEditBorderStyle;
```

Description

Use this property to read or set the border style of an editor. Available values include:

Value	Description	Example
xbsNone	No visible border.	
xbsSingle	Single-line border.	
xbsThick	Single-line border with a thick line.	
xbsFlat	Flat border with a light 3D effect.	
xbs3D	Standard border with a 3D effect.	

See Also

TdxEditStyleController.BorderStyle

Copyright © 2000 Developer Express Inc.

ButtonStyle property read / write

Specifies the button style of an editor.

```
type
 TdxEditButtonViewStyle = (btsDefault, bts3D, btsFlat, btsSimple,
btsHotFlat);
property ButtonStyle: TdxEditButtonViewStyle
```

Description

Use this property to read or set the button style of an editor. Available values include:

Value	Description	Example
btsDefault	Default button style.	
bts3D	Standard button with a 3D effect.	
btsFlat	Flat button with a light 3D effect.	
btsSimple	Simple button without a 3D effect and with a transparent border.	
btsHotFlat	Flat button without a 3D effect and with a single-line border.	

See Also

TdxEditStyleController.ButtonStyle

ButtonTransparence property read / write

Specifies the button transparency of an editor.

```
type
 TdxEditButtonTransparence = (ebtNone, ebtInactive, ebtAlways,
ebtHideInactive);
property ButtonTransparence: TdxEditButtonTransparence;
```

Description

Use this property to read or set the button transparency of an editor. Available values include:

Value	Description	Active	Inactive
ebtNone	A button is not transparent.		

ebtInactive	A button is transparent only when inactive.		
ebtAlways	A button is always transparent.		
ebtHideInactive	A button is invisible when inactive.		

See Also

TdxEditStyleController.ButtonTransparence

Edges property — read / write

Specifies the displayed edges of an editor.

```
type
 TdxEditEdge = (edgLeft, edgTop, edgRight, edgBottom);
 TdxEditEdges = set of TdxEditEdge;
property Edges: TdxEditEdges;
```

Description

Use the Edges property to add or remove editor borders. Available values include:

Value		Description	Example
edgLeft	**True**	The leftmost border edge is visible.	
	False	The leftmost border edge is invisible.	
edgTop	**True**	The topmost border edge is visible.	
	False	The topmost border edge is invisible.	
edgRight	**True**	The rightmost border edge is visible.	
	False	The rightmost border edge is invisible.	
edgBottom	**True**	The bottom border edge is visible.	
	False	The bottom border edge is invisible.	

See Also

TdxEditStyleController.Edges

HotTrack property — read / write

Specifies whether an editor item is highlighted when the mouse is placed over it.

```
property HotTrack: Boolean;
```

Copyright © 2000 Developer Express Inc.

Description

Set the HotTrack property to **True** to highlight an editor in response to mouse movements.

Value	Example
True	
False	

See Also

TdxEditStyleController.HotTrack

Shadow property — read / write

Specifies whether to display a shadow for an editor.

```
property Shadow: Boolean;
```

Description

Set the Shadow property to **True** to provide a shadow effect for an editor.

Value	Example
True	
False	

The default value is **False**.

See Also

TdxEditStyleController.Shadow

TdxEditStyle Methods

Changed	**protected**	DefaultButtonStyle	**public**
EditStyleController	**protected**	DefaultButtonTransparence	**public**
Create	**public**	DefaultEdges	**public**
Destroy	**public**	DefaultHotTrack	**public**
Assign	**public**	DefaultShadow	**public**
DefaultBorderColor	**public**	GetDefaultEditStyleController	**public**
DefaultBorderStyle	**public**	RestoreDefaults	**public**

Changed method

Provides specific actions when changing the style property values.

```
procedure Changed; virtual;
```

Description

The Changed method calls the StyleChanged method of a linked editor. The linked editor is specified by the Edit property of the TdxEditStyle class. The Changed method is used internally to calculate the editor's new size and to repaint it.

EditStyleController method

Determines the style controller assigned to a specific editor.

```
function EditStyleController: TdxEditStyleController;
```

Description

The EditStyleController method returns the TdxEditStyleController class assigned to the StyleController property of an editor. If the Edit and StyleController properties are not defined, the EditStyleController method returns nil.

See Also

TdxEditStyleController

Create method

Creates an instance of a TdxEditStyle object and then connects an editor to the default style controller.

```
constructor Create(AEdit: TdxInplaceEdit);
```

Description

The Create method calls the inherited Create method to create an instance of the TdxEditStyle object. Use the Create method to add a new link to an editor at the end of the linked object array represented by the Links property of the default style controller. The AEdit parameter specifies the editor connected to the style controller.

Copyright © 2000 Developer Express Inc.

Destroy method

Destroys an instance of the TdxEditStyle object.

```
destructor Destroy; override;
```

Description

The Destroy method removes the connection between an editor and the default style controller. Use the Destroy method to delete a specific item from the array represented by the Links property of the current style controller, then call the inherited Destroy method to destroy an instance of the TdxEditStyle object.

Assign method

Copies the contents of one TdxEditStyle object to another.

```
procedure Assign(Source: TPersistent); override;
```

Description

Call the Assign method to copy the properties of one edit style to another. The standard form of a call to Assign is:

```
Destination.Assign(Source);
```

This forces Destination to copy the contents of Source to itself.

DefaultBorderColor method

Specifies the default color of an editor border.

```
function DefaultBorderColor: TColor; virtual;
```

Description

If an editor is connected to a style controller, the DefaultBorderColor method returns the border color set in this style controller. Otherwise, the DefaultBorderColor method returns the border color of the default style controller (**clWindowFrame**).

See Also

TdxEditStyle.BorderColor

DefaultBorderStyle method

Specifies the default style of an editor's border.

```
type
 TdxEditBorderStyle = (xbsNone, xbsSingle, xbsThick, xbsFlat, xbs3D);
function DefaultBorderStyle: TdxEditBorderStyle; virtual;
```

Description

If an editor is connected to a style controller, the DefaultBorderStyle method returns the border style set in this style controller. Otherwise, the DefaultBorderStyle method returns the border style defined by the default style controller (**xbs3D**). Available values include:

Value	Description	Example
xbs3D	Standard border with a 3D effect.	
xbsNone	No visible border.	
xbsSingle	Single-line border.	
xbsThick	Single-line border with a thick line.	
xbsFlat	Flat border with a light 3D effect.	

See Also

TdxEditStyle.BorderStyle

DefaultButtonStyle method

Specifies the default style of an editor button.

```
type
  TdxEditButtonViewStyle = (btsDefault, bts3D, btsFlat, btsSimple,
btsHotFlat);
function DefaultButtonStyle: TdxEditButtonViewStyle; virtual;
```

Description

If an editor is connected to a style controller, the DefaultButtonStyle method returns the button style set in this style controller. Otherwise, the DefaultButtonStyle method returns the button style defined by the default style controller (**btsDefault**). Available values include:

Value	Description	Example
btsDefault	Default button style.	
bts3D	Standard button with a 3D effect.	
btsFlat	Flat button with a light 3D effect.	
btsSimple	Simple button without a 3D effect and with a transparent border.	

Copyright © 2000 Developer Express Inc.

btsHotFlat	Flat button without a 3D effect and with a single-line border.	

See Also

TdxEditStyle.ButtonStyle

DefaultButtonTransparence method

Specifies the manner in which a button appears within an editor by default.

```
type
  TdxEditButtonTransparence = (ebtNone, ebtInactive, ebtAlways,
ebtHideInactive);
function DefaultButtonTransparence: TdxEditButtonTransparence; virtual;
```

Description

If an editor is connected to a style controller, the DefaultButtonTransparence method returns the button transparency value set in this style controller. Otherwise, the DefaultButtonTransparence method returns the button transparency value defined by the default style controller (**ebtNone**). Available values include:

Value	Description	Active	Inactive
ebtNone	A button is not transparent.		
ebtInactive	A button is transparent only when inactive.		
ebtAlways	A button is always transparent.		
ebtHideInactive	A button is invisible when inactive.		

See Also

TdxEditStyle.ButtonTransparence

DefaultEdges method

Specifies which edge of an editor is displayed by default.

```
type
 TdxEditEdge = (edgLeft, edgTop, edgRight, edgBottom);
 TdxEditEdges = set of TdxEditEdge;
function DefaultEdges: TdxEditEdges; virtual;
```

Description

If an editor is connected to a style controller, the DefaultEdges method returns the set of displayed edges of this style controller. Otherwise, the DefaultEdges method returns the set of displayed edges defined by the default style controller (**[edgLeft, edgTop, edgRight, edgBottom]**). Available values include:

Value		Description	Example
edgLeft	**True**	The leftmost border edge is visible.	
	False	The leftmost border edge is invisible.	
edgTop	**True**	The topmost border edge is visible.	
	False	The topmost border edge is invisible.	
edgRight	**True**	The rightmost border edge is visible.	
	False	The rightmost border edge is invisible.	
edgBottom	**True**	The bottom border edge is visible.	
	False	The bottom border edge is invisible.	

See Also

TdxEditStyle.Edges

DefaultHotTrack method

Returns the default value of the HotTrack property.

```
function DefaultHotTrack: Boolean; virtual;
```

Description

If an editor is connected to a style controller, the DefaultHotTrack method returns the value set in this style controller. Otherwise, the DefaultEdges method returns the value defined by the default style controller (**False**).

See Also

TdxEditStyle.HotTrack

DefaultShadow method

Returns the default value which specifies whether an editor is displayed with a shadow.

```
function DefaultShadow: Boolean; virtual;
```

Description

If an editor is connected to a style controller, the DefaultShadow method returns the value set in this style controller. Otherwise, the DefaultShadow method returns the value defined by the default style controller (**False**).

Value	Example
False	
True	

See Also

TdxEditStyle.Shadow

GetDefaultEditStyleController method

Returns the default style controller.

```
class function GetDefaultEditStyleController: TdxEditStyleController;
virtual;
```

Description

The GetDefaultEditStyleController method returns the value of the DefaultEditStyleController variable. The value of this variable is the TdxEditStyleController class that is created and initialized with the default values.

See Also

TdxEditStyleController)

RestoreDefaults method

Restores the default values of the style properties of an editor.

```
procedure RestoreDefaults; virtual;
```

Description

The RestoreDefaults method removes the current values of the style properties of an editor and restores their default values.

TdxEditDataDefinition

Used by data-aware editors to provide access to a data source.

Unit

dxCntner

```
TdxEditDataDefinition = class(TPersistent);
```

Description

TdxEditDataDefinition is used internally to work with data associated with a data-aware editor and provides access to a data source. If you wish to write your own class that provides access to any other dataset you have to inherit it from this class. In your own class the virtual protected methods GetEditValue and SetEditValue must be overridden. Remember to implement proper notification with the help of the OnActiveChange and OnDataChange events.

Hierarchy

TObject

TPersistent

Copyright © 2000 Developer Express Inc.

TdxEditDataDefinition Properties

DisplayValue	**public / read only**
EditValue	**public / read only**

DisplayValue property — read only

Contains the value which is displayed within a data-aware editor.

```
property DisplayValue: Variant;
```

Description

The DisplayValue property contains the value to display.

Specifies the manner in which text is aligned within an editor.

```
property Alignment: TAlignment;
```

EditValue property — read only

Contains the value which is being edited within a data-aware editor.

```
property EditValue: Variant;
```

Description

The EditValue property contains the value to edit.

TdxEditDataDefinition Methods

GetEditValue	**protected**
SetEditValue	**protected**

GetEditValue method

Returns the edited value of a data-aware editor.

```
function GetEditValue: Variant; virtual;
```

Description

The GetEditValue method is called to obtain a value for a data-aware editor. This method is called when initializing an editor. Descendants of TdxEditDataDefinition should override this method to provide a proper value for edited text.

SetEditValue method

Sets the value for the data source associated with a data-aware editor.

```
procedure SetEditValue(const Value: Variant); virtual;
```

Description

The SetEditValue method is called by a data-aware editor to write an appropriate value determined by the Value parameter to the data source. Descendants of TdxEditDataDefinition should override this method to provide a specific action.

You can use this method procedure to raise an exception if the entered value is not correct.

Copyright © 2000 Developer Express Inc.

TdxEditDataDefinition Events

OnActiveChange	**protected**
OnDataChange	**protected**

OnActiveChange event

Occurs when changing the data source is activated or created.

```
type
  TdxEditNotifyEvent = procedure of object;
property OnActiveChange: TdxEditNotifyEvent;
```

Description

Write an OnActiveChange event handler to perform specific actions when the data source has been opened or closed. The data-aware editor has to adjust its properties according to the properties of the associated data source.

OnDataChange event

Occurs when the contents of the data source or data source itself have changed.

```
type
 TdxEditNotifyEvent = procedure of object;
property OnDataChange: TdxEditNotifyEvent;
```

Description

Write an OnDataChange event handler to perform specific actions when the contents of the data source have changed externally. For instance, when a new value was assigned to a field of the data source in the following manner: F.AsString := '123'; without using editor's resources.

TdxInplaceEdit

TdxInplaceEdit is the core class for all ExpressEditors.

Unit

dxCntner

```
TdxInplaceEdit = class(TWinControl);
```

Description

TdxInplaceEdit is the base class for all ExpressEditors and includes core methods and properties.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl

See Also

TdxInplaceMaskEdit; TdxInplaceTextEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceEdit Properties

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read only**
Container	**protected / read only**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Alignment property — read / write

Specifies the manner in which text is aligned within an editor.

```
property Alignment: TAlignment;
```

Description

Use the Alignment property to specify the horizontal placement of a text string within an editor. Text can be aligned either to the right, left or centered.

Value	Meaning	Example
taLeftJustify	Text is left justified: all lines begin at the left edge of an editor.	taLeftJustify
taCenter	Text is centered within an editor.	taCenter
taRightJustify	Text is right justified: all lines end at the right edge of an editor.	taRightJustify

AutoSize property — read / write

Determines whether an editor's auto size is enabled.

```
property AutoSize: Boolean;
```

Description

The AutoSize property is a Boolean expression that specifies whether the size of an editor is permanent or it changes together with font size.

Value	Description	
True	An editor can change its height.	MS Sans Serif 8 MS Sans Serif 14
False	An editor cannot change its height.	MS Sans Serif 8 MS Sans Serif 14

Container property — read only

Refers to the TCustomdxContainer control applied to an editor as a container.

```
property Container : TCustomdxContainer;
```

Description

The Container property specifies the associated container for an editor if the IsInplace property is **True**; Otherwise **nil**.

See Also

TCustomdxContainer

Height property — read / write

Specifies the vertical size of an editor in pixels.

```
property Height;
```

Description

Use the Height property to read or change the height of an editor.

Modified property — read / write

Determines whether the editor's contents are modified.

```
property Modified: Boolean;
```

Description

The Modified property is set to **True** when a user changes the editor's contents; Otherwise **False**. If the contents of an editor are changed programmatically at runtime, this property is not set to **True**.

ReadOnly property — read / write

Indicates whether an editor is used for display purposes only or whether users can edit data within it.

```
property ReadOnly : Boolean;
```

Description

The ReadOnly property prevents users from changing data within an editor. By default, ReadOnly is set to **False**. This property is protected and descendants can publish it to enable changing data within the editor. Users can edit data within the editor if the ReadOnly property is **False**. If ReadOnly is **True**, the editor is used for display purposes only.

StoredValues property — read only

Contains a list of stored values that describe the look & feel and functionality of an editor.

```
type
```

```
 TdxEditStoredValue = (svAlignment, svEditLimit, svEditMask, svIsFloat,
svMaxValue, svMinValue, svReadOnly, svRequired, svDisplayFormat);
 TdxEditStoredValues = set of TdxEditStoredValue;
property StoredValues: TdxEditStoredValues;
```

Description

The possible values for the StoredValues property include:

Values	Description
svAlignment	The value of the Alignment property is stored.
svEditLimit	The value of the EditLimit property is stored.
svEditMask	The value of the EditMask property is stored.
svIsFloat	The value of the IsFloat property is stored.
svMaxValue	The value of the MaxValue property is stored.
svMinValue	The value of the MinValue property is stored.
svReadOnly	The value of the ReadOnly property is stored.
svRequired	The value of the Required property is stored.
svDisplayFormat	The value of the DisplayFormat property is stored.

Style property — read / write

Contains a set of properties that define the appearance of an editor.

```
property Style: TdxEditStyle;
```

Description

The Style property determines the manner in which an editor is displayed on screen. The Style property represents the TdxEditStyle class that is used to control the appearance of an editor. If an editor is connected to a style controller, the TdxEditStyle class contains all the properties specified in the style controller. An editor may have a different value for the same property as the style controller without breaking the connection with it. In such an instance, a user changes the property and the TdxEditStyle class sets a specific state flag for the AssignedValues property. This state flag indicates that the user assigns this property value. Thus, the component uses assigned values - except for the default (or style controller) values - when implementing its style.

See Also

TdxEditStyle

StyleController property — read / write

Specifies the style controller linked to an editor.

```
property StyleController: TdxEditStyleController;
```

Description

Use the StyleController property to specify the current style controller linked to an editor. The style controller is used to set similar properties for all linked editors.

See Also

TdxEditStyleController

Copyright © 2000 Developer Express Inc.

TdxInplaceEdit Methods

CanModify	**public**	Reset	**public**
Deselect	**public**	RestoreDefaults	**public**
InvalidateEdit	**public**	SelectAll	**public**
IsEditClass	**public**	ValidateEdit	**public**

CanModify method

Determines whether a user can edit text within an editor.

```
function CanModify: Boolean; virtual;
```

Description

Descendant editors use the CanModify method internally to determine whether to enable text editing within an editor. If text editing is enabled, the CanModify method returns **True**; Otherwise; **False**.

Deselect method

Removes selection from an editor.

```
procedure Deselect; virtual;
```

Description

The Deselect method is used internally to remove selection from an editor. TdxInplaceEdit descendants can override this method to provide a proper deselect mechanism.

See Also

TdxInplaceTextEdit.Deselect

InvalidateEdit method

Repaints a specific editor.

```
procedure InvalidateEdit;
```

Description

The InvalidateEdit method is used internally to repaint an editor on screen.

IsEditClass method

Determines whether an editor belongs to the EDIT window class.

```
function IsEditClass: Boolean; virtual;
```

Description

The IsEditClass method is used to determine whether an editor belongs to the EDIT window class. The IsEditClass method always returns **False** for TdxInplaceEdit.

Reset method

Cancels all non-posted text changes.

```
procedure Reset;
```

Description

The Reset method cancels all non-posted text changes when a user presses the Escape key.

RestoreDefaults method

Sets the default value for an editor's properties.

```
procedure RestoreDefaults; virtual;
```

Description

The RestoreDefaults method resets all properties specified via the StoredValues property to default values.

SelectAll method

Selects all text within an editor.

```
procedure SelectAll; virtual;
```

Description

The SelectAll method is used internally to select the entire contents of an editor when focused. TdxInplaceEdit descendants can override this method to provide a desired selection mechanism.

See Also

TdxInplaceTextEdit.SelectAll

ValidateEdit method

Raises an exception when an invalid value is entered within an editor.

```
procedure ValidateEdit; virtual;
```

Description

The ValidateEdit method is used internally by editors to raise exceptions when invalid values are entered within an editor. This method can be used to generate an OnValidate event.

See Also

TdxInplaceMaskEdit.ValidateEdit

TdxInplaceEdit Events

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

OnChange event

Occurs after changing the value within an editor.

```
type
 TNotifyEvent = procedure(Sender: TObject) of object;
property OnChange: TNotifyEvent;
```

Description

Write an OnChange event handler to perform specific actions when the value within an editor has changed.

OnMouseEnter event

Occurs when the mouse pointer enters the borders of an editor.

```
type
 TNotifyEvent = procedure(Sender: TObject) of object;
property OnMouseEnter: TNotifyEvent;
```

Description

Write an OnMouseEnter event handler to perform specific actions when the mouse pointer enters the borders of an editor.

OnMouseLeave event

Occurs when the mouse pointer leaves the borders of an editor.

```
type
 TNotifyEvent = procedure(Sender: TObject) of object;
property OnMouseLeave: TNotifyEvent;
```

Description

Write an OnMouseLeave event handler to perform specific actions when the mouse pointer leaves the editor's borders.

OnValidate event

Occurs before the editor accepts data.

```
type
```

```
TdxEditValidateEvent = procedure (Sender: TObject; var ErrorText: string;
var Accept: Boolean) of object;
property OnValidate: TdxEditValidateEvent;
```

Description

Write an OnValidate event handler to validate data changes made within an editor, before the data is finally written to the current editor. If the editor is an in-place editor, this event occurs when a user confirms data input or if the editor is closed and the Modified property is **True**. If the editor is a standalone control, this event fires when it loses focus. The OnValidate event is can be generated manually via the ValidateEdit method.

The EditMask property allows data validation on a character-by-character basis as a user enters it. The OnValidate event allows an application to validate data as a whole. The Sender parameter determines the editor whose data is being validated. The ErrorText parameter specifies the text displayed when an exception is raised. The Accept parameter specifies whether the editor accepts or cancels the changes. If data is accepted, the Accept parameter is **True**. Otherwise; it's **False**.

TdxInplacePopupControl

TdxInplacePopupControl is the ancestor of the dropdown windows used by editors.

Unit

dxCntner

```
TdxInplacePopupControl = class(TCustomControl);
```

Description

Certain editors use dropdown windows to modify their values. The TdxInplacePopupControl class is a common ancestor for dropdown windows that obtain focus during editing. For instance, the dropdown windows used by TdxInplaceCalcEdit or TdxInplaceDateEdit are inherited from the TdxInplacePopupControl class.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TCustomControl

Copyright © 2000 Developer Express Inc.

TdxInplacePopupControl Properties

OwnerControl	**public / read / write**	Shadow	**public / read / write**
PopupBorderStyle	**public / read / write**	ShadowSize	**public / read / write**

OwnerControl property — read / write

```
OwnerControl: TdxInplaceEdit;
```

Description

OwnerControl determines the editor that activates a TdxInplacePopupControl instance. OwnerControl is not a property, but a class member variable.

See Also

TdxInplaceEdit

PopupBorderStyle property — read / write

Specifies the border style of a dropdown window.

```
type
  TdxPopupBorderStyle = pbSingle .. pbFlat;
property PopupBorderStyle: TdxPopupBorderStyle;
```

Description

The PopupBorderStyle proerty is used to specify the border style of the dropdown window activated by an editor. The values of the popup border style include:

Value	Description
pbSingle	Single-line border.
pbFlat	Flat border with a light 3D effect.

The default value of the border style is **pbSingle**.

Shadow property — read / write

Specifies whether to display a shadow.

```
property Shadow: Boolean;
```

Description

The Shadow property specifies whether a dropdown window has a shadow. If the Value of the Shadow property is True, the drop down window is displayed with a shadow.

The default value is **False**.

ShadowSize property read / write

Specifies shadow size.

```
property ShadowSize: Integer;
```

Description

The ShadowSize property specifies the shadow size of the dropdown window activated by an editor in pixels.

The default value of the shadow size is determined by the following constant:

dxEditShadowSize = 3

Copyright © 2000 Developer Express Inc.

TdxInpacePopupControl Methods

HidePopup	**public**
ShowPopup	**public**

HidePopup method

Hides the active dropdown window.

```
procedure HidePopup(ByMouse: Boolean); virtual;
```

Description

The HidePopup method is called whenever a dropdown window loses focus. The ByMouse parameter determines whether a dropdown window is closed on mouse click events.

See Also

TdxInplacePopupControl.ShowPopup

ShowPopup method

Activates a dropdown window.

```
procedure ShowPopup; virtual;
```

Description

The ShowPopup method is used to display a dropdown window on screen. This method is called when a user presses a button within an editor cell to modify its data.

See Also

TdxInplacePopupControl.HidePopup

TdxInplaceTextEdit

TdxInplaceTextEdit is an editor with text editing capabilities.

Unit

dxEditor

```
TdxInplaceTextEdit = class(TdxInplaceEdit, IUnknown, IRichEditOleCallback);
```

Description

TdxInplaceTextEdit descends from TdxInplaceEdit. You can inherit TdxInplaceTextEdit if you wish to create a specific editor with text editing capabilities. If you wish to create an editor with mask support, you should use TdxInplaceMaskEdit as a base control.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit

See Also

TdxInplaceEdit; TdxInplaceMaskEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceTextEdit Properties

In TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

AutoSelect property — read / write

Determines whether the entire text string is automatically selected when an editor receives focus.

```
property AutoSelect : Boolean;
```

Description

AutoSelect is a protected property that can be published by TdxInplaceTextEdit descendants. If the AutoSelect property is **True**, all text is selected when an editor receives focus.

By default, the AutoSelect property is set to **True** for TdxInplaceTextEdit.

CanPaste property — read only

Indicates whether a user can paste Clipboard contents into an editor.

```
property CanPaste: Boolean;
```

Description

When the CanPaste property is **True**, a control can accept the contents of the Windows clipboard. The CanPaste property also controls whether the Paste command is enabled in the context menu.

See Also

TdxInplaceTextEdit.CanRedo; TdxInplaceTextEdit.CanUndo; TdxInplaceTextEdit.Text

CanRedo property — read only

Indicates whether cancelled operations exist within the current.

```
property CanRedo: Boolean;
```

Description

Use the CanRedo property to determine whether a user can re-apply a previously cancelled change to the edited text. If the CanRedo property is **True**, previously cancelled operations exist and the Redo operation can be performed. Otherwise, there are no cancelled operations. This property can be used when enabling or disabling menu items that correspond to the Redo command.

See Also

TdxInplaceTextEdit.CanPaste; TdxInplaceTextEdit.CanUndo; TdxInplaceTextEdit.Text

CanUndo property — read only

Indicates whether there are any completed operations that can be undone within the current editor.

```
property CanUndo: Boolean;
```

Description

Read the CanUndo property to determine whether a user has made any changes to the text that can be undone by calling the Undo method. If the CanUndo property is **True**, there are completed operations and the Undo operation can be performed. Otherwise, there are no previously performed operations. This property can be used when enabling or disabling menu items that correspond to the Undo command.

See Also

TdxInplaceTextEdit.CanPaste; TdxInplaceTextEdit.CanRedo; TdxInplaceTextEdit.Text

CharCase property — read / write

Determines text case within an editor.

```
type
  TEditCharCase = (ecNormal, ecUpperCase, ecLowerCase);
property CharCase : TEditCharCase;
```

Description

The CharCase is a protected property that can be published by TdxInplaceTextEdit descendents. Use the CharCase property to apply a particular case to the contents of a specific editor. Possible CharCase values include:

Value	Description
ecLowerCase	Text is converted to lowercase.
ecNormal	Text is unaltered.
ecUpperCase	Text is converted to UPPERCASE.

When the CharCase property is set to **ecLowerCase** or **ecUpperCase**, character case is converted on the fly when a user types them into an in-place editor. Setting the CharCase property to **ecLowerCase** or **ecUpperCase** changes the actual contents of the text, not just its appearance. All case information is lost and cannot be recaptured by changing CharCase to **ecNormal**.

Copyright © 2000 Developer Express Inc.

By default, the CharCase property for TdxInplaceTextEdit is set to **ecNormal**.

See Also

TdxInplaceEdit.GetDefaultCharCase; TdxInplaceTextEdit.Text

HideSelection property — read / write

Specifies whether text remains selected when focus moves to another control.

```
property HideSelection : Boolean;
```

Description

HideSelection is a protected property that can be published by TdxInplaceTextEdit descendants. Set the HideSelection property to **False** to allow text to remain selected when an editor loses focus. Set the HdeSelection property to **True** to display the selection only when the editor has focus. The HideSelection property is a visual indicator only and does not affect the actual value of the selection. By default, the HideSelection property for TdxInplaceTextEdit is set to **True**.

See Also

TdxInplaceTextEdit.SelLength; TdxInplaceTextEdit.SelStart; TdxInplaceTextEdit.SelText;

TdxInplaceTextEdit.SetSelTextBuf

MaxLength property — read / write

Determines the maximum number of characters a user can enter within an editor.

```
property MaxLength : Integer;
```

Description

MaxLength is a protected property that can be published by TdxInplaceTextEdit descendants. The MaxLength property limits the number of characters that can be entered within an editor. A value of 0 indicates that there is no limit to the number of characters that can be entered by a user at runtime. For instance, you can use the MaxLength property to limit the text length in the editor if this text is to be copied into a fixed-length buffer. By default, the MaxLength property for TdxInplaceTextEdit is set to 0.

Note: *MaxLength will not truncate existing text, it merely prevents users from adding more text after reaching the limit of MaxLength characters. Additionally, when MaxLength is 0, there may be limitations imposed by the operating system on the number of characters that may be entered into an editor.*

See Also

TdxInplaceTextEdit.Text; TdxInplaceTextEdit.DoSetMaxLength;

TdxInplaceTextEdit.DefaultMaxLength

OEMConvert property — read / write

Determines whether the characters typed in an editor are converted from ANSI to OEM and then back to ANSI.

```
property OEMConvert : Boolean;
```

Description

OEMConvert is a protected property that can be published by TdxInplaceTextEdit descendants. To make certain that all characters typed into the editor can be converted to the OEM character set, set the OEMConvert property to **True**. These actions automatically convert all characters from ANSI to OEM and then back to ANSI. Set the MemoOEMConvert property to **False** to avoid excessive processing when mapping to the OEM format is not necessary.

The OEMConvert property is most useful for editors used to enter file names when an application does not use Unicode file names.

By default, the OEMConvert property for TdxInplaceTextEdit is set to **False**.

See Also

TdxInplaceTextEdit.Text

PasswordChar property — read / write

Indicates the character to display instead of the actual text typed within an editor.

```
property PasswordChar : Char;
```

Description

PasswordChar is a protected property that can be published by TdxInplaceTextEdit descendants. The PasswordChar property is used to display special characters instead of the text entered by a user. If the PasswordChar property is set to a null character (ANSI character zero), text is displayed without modification. If PasswordChar is set to any other character, the edit control displays the PasswordChar instead of each character as it is typed. The Text property contains the actual value supplied by the user as it was typed.

By default, the PasswordChar property for TdxInplaceTextEdit is set to a null.

SelectionBar property — read / write

Specifies whether the edited text is indented within an editor.

```
property SelectionBar: Boolean;
```

Description

SelectionBar is a protected property that can be published by TdxInplaceTextEdit descendants. Use the SelectionBar property to specify whether an editor displays an indentation within the control. If SelectionBar is **True**, edited text is displayed with an indent that is equal to the SelectionBarSize constant (by default 8).

SelLength property — read / write

Determines the number of selected characters.

```
property SelLength : Integer;
```

Description

Use the SelLength property to determine the length of selected text. Setting the SelLength property changes selected text length beginning from the position specified by the SelStart property.

Note: *Setting SelLength to a value greater than the number of characters from SelStart to the end of the text, results in the selection of all characters from SelStart to the end of the text. Reading the SelLength property immediately after setting it returns the actual number of selected characters.*

See Also

TdxInplaceTextEdit.SelStart; TdxInplaceTextEdit.SelText

SelStart property — read / write

Determines the position of the first selected character.

```
property SelStart : Integer;
```

Description

Use the SelStart property to determine the position of the first selected character. The SelStart property is 0 based where 0 indicates the first character. If no text is selected, the SelStart property indicates cursor position. Set the SelStart property to remove the current selection and place the cursor just before the character indicated by the supplied value. To select a particular text range, first set the SelStart property to position the cursor, and then set the SelLength property to extend the selection.

See Also

TdxInplaceTextEdit.SelLength; TdxInplaceTextEdit.SelText

SelText property — read / write

Determines the selected portion of text within an editor.

```
property SelText : string;
```

Description

Read the SelText property to determine the selected text value. Set the SelText property to replace the selected text with a new string. If there is no selection, but the edit control has focus, set the SelText property to insert a new string into the text at the cursor.

See Also

TdxInplaceTextEdit.GetSelTextBuf; TdxInplaceTextEdit.ClearSelection; TdxInplaceTextEdit.SelStart; TdxInplaceTextEdit.SelLength; TdxInplaceTextEdit.SetSelTextBuf; TdxInplaceTextEdit.Text

Text property — read / write

Contains the currently displayed text string within an editor.

```
property Text;
```

Description

Read the Text property to obtain text within an editor or set it to specify a new string for an editor.

See Also

TdxInplaceTextEdit.SelText

Copyright © 2000 Developer Express Inc.

TdxInplaceTextEdit Methods

TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
DefaultMaxLength	**public**	SelectionChange	**protected**
Deselect	**public**	SetEditMaxLength	**protected**
DoSetMaxLength	**protected**	SetSelection	**public**
GetSelection	**public**	SetSelLength	**protected**
GetSelLength	**protected**	SetSelStart	**protected**
GetSelStart	**protected**	SetSelTextBuf	**public**
GetSelText	**protected**	Undo	**public**
GetSelTextBuf	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

CheckCharCase method

Checks the char case of the edited text within a text editor.

```
procedure CheckCharCase; virtual;
```

Description

The CheckCharCase method checks whether the CharCase property is equal to **ecNormal**. If not, the CheckCharCase method converts the edited text to upper or lower case based upon the CharCase property value.

See Also

TdxInplaceTextEdit.CharCase

Clear method

Deletes all text from an editor.

```
procedure Clear;
```

Description

Use the Clear method to replace the value of the Text property with an empty string. The Clear method removes all text. To remove selected text only, use the ClearSelection method.

See Also

TdxInplaceTextEdit.ClearSelection; TdxInplaceTextEdit.Text

ClearSelection method

Deletes the selected text from an editor.

```
procedure ClearSelection;
```

Description

Use the ClearSelection method to send a WM_CLEAR message to an editor to delete (clear) the current selection, if any. The ClearSelection method only removes the selected text. Use the Clear method to remove all text.

See Also

TdxInplaceTextEdit.Clear; TdxInplaceTextEdit.Text

ClearUndo method

Clears the Undo buffer.

```
procedure ClearUndo;
```

Description

Use the ClearUndo method to clear the Undo command buffer. The ClearUndo method sends the (EM_EMPTYUNDOBUFFER) message to a window.

See Also

TdxInplaceTextEdit.CanUndo

CopyToClipboard method

Copies the selected text from an editor to the Clipboard in CF_TEXT format.

```
procedure CopyToClipboard;
```

Description

Call the CopyToClipboard method to replace Clipboard contents with the selected text. The CopyToClipboard method does not clear the Clipboard if no text is selected. Calling the CopyToClipboard method performs the same action as sending a WM_COPY message to the edit control.

See Also

TdxInplaceTextEdit.CutToClipboard; TdxInplaceTextEdit.PasteFromClipboard

CutToClipboard method

Copies the selected text to the Clipboard in CF_TEXT format and deletes the selection from an editor.

Copyright © 2000 Developer Express Inc.

```
procedure CutToClipboard;
```

Description

Call the CutToClipboard method to replace Clipboard contents with the selected text and remove the selected text from an editor. If no text is selected, the CutToClipboard method performs no action. Calling the CutToClipboard method performs the same action as sending a WM_CUT message.

See Also

TdxInplaceTextEdit.CopyToClipboard; TdxInplaceTextEdit.PasteFromClipboard

DefaultMaxLength method

Returns the default value for the maximum number of characters a user can enter within an editor.

```
function DefaultMaxLength: Integer, virtual;
```

Description

A value of 0 indicates that there is no limit on character length. The DefaultMaxLength method returns a value of 0 if the text editor is not a data-aware control. In other instances, the DefaultMaxLength method returns the property value of the internal class that specifies the number of characters a user can type into a data-aware editor.

See Also

TdxInplaceTextEdit.MaxLength

Deselect method

Removes text selection from an editor.

```
procedure Deselect; override;
```

Description

Use the Deselect method to remove text selection from an editor. The Deselect method simply changes selection; it does not change actual text. Calling the Deselect method performs the same action as sending an EM_SETSEL message to the editor (to remove the current selection the first message parameter must be 1).

See Also

TdxInplaceEdit.Deselect

DoSetMaxLength method

Returns the MaxLength property value.

```
procedure DoSetMaxLength(Value: Integer);  virtual;
```

Description

The DoSetMaxLength is a protected method called to set the MaxLength property. Descendants can override this method to implement additional code when the MaxLength property is set.

The DoSetMaxLength method sends an EM_EXLIMITTEXT message to the editor window. The Value parameter determines a new value for the MaxLength property.

See Also

TdxInplaceTextEdit.MaxLength

GetSelection method

Returns the selected text from an editor.

```
function GetSelection: TCharRange;
```

Description

Use the GetSelection method to return the selected text from an editor. Calling the GetSelection method performs the same action as sending an EM_EXGETSEL message to the editor.

See Also

TdxInplaceTextEdit.SetSelection

GetSelLength method

Returns the value of the SelLength property.

```
function GetSelLength: Integer;  virtual;
```

Description

The GetSelLength method is called to access the SelLength property. Descendants can override this protected method to implement additional code when the MaxLength property is accessed.

The GetSelLength method calls the GetSelection method and returns the difference between the initial and final positions of the selected text. Said differently, the GetSelLength method returns the number of characters of selected text.

See Also

TdxInplaceTextEdit.SelLength; TdxInplaceTextEdit.SetSelLength

GetSelStart method

Returns the value of the SelStart property.

```
function GetSelStart: Integer; virtual;
```

Description

The GetSelStart method is called to access the SelStart property. Descendants can override this protected method to implement additional code when the SelStart property is accessed.

Copyright © 2000 Developer Express Inc.

The GetSelLength method calls the GetSelection method and returns the initial position of the selected text.

See Also

TdxInplaceTextEdit.SelStart; TdxInplaceTextEdit.SetSelStart

GetSelText method

Returns the SelText property value.

```
function GetSelText: string; virtual;
```

Description

The GetSelText method is called to access the SelText property. This protected method can be overridden by descendants to implement additional code when the SelText property is accessed.

The GetSelText method reads the SelText property to determine the selected text string.

See Also

TdxInplaceTextEdit.SelText; TdxInplaceTextEdit.SetSelText')

GetSelTextBuf method

Copies the selected text to a buffer and returns the number of copied characters.

```
function GetSelTextBuf(Buffer: PChar; BufSize: Integer): Integer;  virtual;
```

Description

Use the GetSelTextBuf method to copy the selected text to the character buffer referenced by the Buffer parameter. If there is no selection, the buffer receives an empty string. The GetSelTextBuf method returns the number of characters actually copied. If the selection contains more characters than specified by the BufSize parameter, the GetSelTextBuf method returns the number of characters determined by the BufSize parameter.

See Also

TdxInplaceTextEdit.SetSelTextBuf

GetTextLenEx method

Returns the length of the underlying text.

```
function GetTextLenEx: Integer;
```

Description

Call the GetTextLenEx method to determine the length of the underlying text for an editor.

See Also

TdxInplaceTextEdit.Text

IsEditClass method

Determines whether an editor belongs to the EDIT window class.

```
function IsEditClass: Boolean; virtual;
```

Description

The IsEditClass method provides a method to determine whether an editor belongs to the EDIT window class. The IsEditClass method always returns **True** for TdxInplaceTextEdit.

See Also

TdxInplaceBlobEdit.IsEditClass; TdxInplaceImageEdit.IsEditClass

PasteFromClipboard method

Pastes the contents of the Clipboard into an editor, replacing the current selection.

```
procedure PasteFromClipboard;
```

Description

Use the PasteFromClipboard method to replace the selected text with the contents of the Clipboard or if no text is selected, to insert the Clipboard's contents at the cursor position. If the Clipboard is empty, or if it does not contain anything in CF_TEXT format, the PasteFromClipboard method performs no action. Calling the PasteFromClipboard method performs the same action as sending the WM_PASTE message to the editor.

See Also

TdxInplaceTextEdit.CopyToClipboard; TdxInplaceTextEdit.CutToClipboard

Redo method

Repeats the previously cancelled operation within an editor.

```
procedure Redo;
```

Description

Call the Redo method to repeat the last cancelled action. The Redo method is in effect only after the Undo command. Calling the Redo method performs the same action as sending the EM_REDO message to the editor.

See Also

TdxInplaceTextEdit.CanRedo; TdxInplaceTextEdit.CopyToClipboard;

TdxInplaceTextEdit.CutToClipboard; TdxInplaceTextEdit.Undo

RestoreDefaults method

Sets the default property values for an editor.

```
procedure RestoreDefaults; override;
```

Description

The RestoreDefaults method calls the inherited RestoreDefaults method, which resets all editor properties - specified via the StoredValues property of an editor - to their default values. Additionally, you can use the RestoreDefaults method to restore the default value of the MaxLength property.

SelectAll method

Selects the entire text within an editor.

```
procedure SelectAll; override;
```

Description

The SelectAll method overrides the SelectAll method of TdxInplaceEdit. Use the SelectAll method to select all text within an editor. To select only a portion of text, use the SelStart and SelLength properties and the SetSelection methods.

See Also

TdxInplaceEdit.SelectAll; TdxInplaceTextEdit.SelLength; TdxInplaceTextEdit.SelStart

SelectionChange method

Generates the OnSelectionChange event.

```
procedure SelectionChange; virtual;
```

Description

Use the SelectionChange method to generate the OnSelectionChange event when text selection within an editor has changed, even if the selection is empty.

See Also

TdxInplaceTextEdit.SelText; TdxInplaceTextEdit.SetSelText; TdxInplaceTextEdit.OnSelectionChange

SetEditMaxLength method

Sets the MaxLength property.

```
procedure SetEditMaxLength(Value: Integer); virtual;
```

Description

The SetEditMaxLength method sets the MaxLength property according to the Value parameter. This protected method can be overridden by descendants to implement additional code when the EditMaxLengthProperty is set.

If the Value parameter is greater than the MaxLength property value, the SetEditMaxLength method calls the DoSetMaxLength method with the Value parameter; Otherwise the MaxLength property value does not change.

See Also

TdxInplaceTextEdit.MaxLength

SetSelection method

Selects a portion of text within an editor.

```
procedure SetSelection(StartPos, EndPos: Longint; ScrollCaret: Boolean);
```

Description

Use the SetSelection method to select a portion of text within an editor. The SetSelection method selects text from StartPos to EndPos. The StartPos and EndPos parameters are passed to the SetSelection method and determine the initial and final position of selection.

See Also

TdxInplaceEdit.SelectAll; TdxInplaceTextEdit.SelLength; TdxInplaceTextEdit.SelStart

SetSelLength method

Sets the value of the SelLength property.

```
procedure SetSelLength(Value: Integer);  virtual;
```

Description

The SetSelLength method is called to access the SelLength property. This protected method can be overridden by descendants to implement additional code when the SelLength property is set.

The SetSelLength method calls the SetSelection method which sends an EM_EXSETSEL message to the editor window specifying the selection length via the Value parameter.

See Also

TdxInplaceTextEdit.GetSelLength; TdxInplaceTextEdit.SelLength; TdxInplaceTextEdit.SelStart

SetSelStart method

Sets the value of the SelStart property.

```
procedure SetSelStart(Value: Integer);  virtual;
```

Description

The SetSelStart method is called to access the SelStart property. This protected method can be overridden by descendants to implement additional code when the SelStart property is set.

The SetSelStart method calls the SetSelection method which sends an EM_EXSETSEL message to the editor window to position the cursor based upon the Value parameter. Said differently, the SetSelStart method sets the initial position of the selected text.

See Also

TdxInplaceTextEdit.GetSelStart; TdxInplaceTextEdit.SelStart

Copyright © 2000 Developer Express Inc.

SetSelTextBuf method

Replaces the selected text with a null-terminated string.

```
procedure SetSelTextBuf(Buffer: PChar);
```

Description

Use the SetSelTextBuf method to replace the current selection with the contents of the null-terminated string pointed to by the Buffer parameter. If no text is selected, the Buffer's contents are inserted at the cursor. The SetSelTextBuf method performs the same action as setting the SelText property with the exception of taking the PCharacter parameter.

See Also

TdxInplaceTextEdit.GetSelTextBuf

Undo method

Cancels the previously performed operation within an editor.

```
procedure Undo;
```

Description

Call the Undo method to cancel changes made to the text of an editor. This method cancels the last completed action. To determine whether any actions have been performed, check the CanUndo property.

See Also

TdxInplaceTextEdit.CanUndo

TdxInplaceTextEdit Events

TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

OnSelectionChange event

Occurs when a cursor changes its location within an editor.

```
property OnSelectionChange: TNotifyEvent;
```

Description

Write an OnSelectionChange event handler to perform specific actions when an operation is performed on the contents of an editor.

See Also

TdxInplaceTextEdit.SelectionChange

Copyright © 2000 Developer Express Inc.

TdxInplaceMaskEdit

TdxInplaceMaskEdit is an editor with masked text editing capabilities.

Unit

dxEditor

```
TdxInplaceMaskEdit = class(TdxInplaceTextEdit);
```

Description

TdxInplaceMaskEdit descends from TdxInplaceTextEdit. It includes additional methods and properties to manage masked text. A user can inherit from TdxInplaceMaskEdit to create a specific editor with masked text editing capabilities.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit

See Also

TdxInplaceEdit; TdxInplaceTextEdit

TdxInplaceMaskEdit Properties

TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

EditMask property — read / write

Specifies the mask that enforces the entry of valid text for a mask editor.

```
property EditMask : string;
```

Description

Used internally to restrict the characters a user can enter into a mask editor to valid characters and formats. If a user attempts to enter an invalid character, the edit control does not accept it. Validation is performed on a character-by-character basis by the ValidateEdit method.

See Also

TCustomMaskEdit.EditMask; TdxInplaceMaskEdit.ValidateEdit

EditText property — read / write

Specifies the text displayed within a mask editor.

```
property EditText : string;
```

Description

The EditText property contains the text value for an edit control after it has been formatted by the EditMask property. Before text is completely entered into a mask editor, the EditText property

includes a blank character for each character that has not yet been entered. As characters are entered, the entered characters replace the blank characters. If literal mask characters are included in the text, and no characters are substituted for blanks, the values of EditText and Text are the same.

Note: *RunTime property.*

See Also

TdxInplaceMaskEdit.EditMask; TdxInplaceMaskEdit.Text

IgnoreMaskBlank property — read / write

Used internally to determine the method used to validate entered text.

```
property IgnoreMaskBlank: Boolean;
```

Description

If the IgnoreMaskBlank property is **True**, the editor ignores characters specified as 'blanks' in the defined mask. It skips spaces and characters defined as 'blank' characters (By default, the underscore '_' character).

See Also

TCustomMaskEdit.EditText; TCustomMaskEditText

IsMasked property — read only

Indicates whether a mask exists for a mask editor.

```
property IsMasked : Boolean;
```

Description

Read the IsMasked property to determine whether the EditMask property is set. If the value of the IsMasked property is **True**, an editor has a mask and the text is validated as it is entered at runtime. If **False**, the editor does not restrict editing at runtime.

See Also

TdxInplaceMaskEdit.EditMask

Text property — read / write

Represents the underlying text for a mask editor before a mask is applied.

```
property Text : string;
```

Description

Use the Text property to determine the underlying text value before it has been formatted by the mask edit. In the following scenarios, the Text property value may differ from the EditText property value that is displayed within the mask editor:

- the mask specifies that literal characters should be removed,
- the mask includes spaces,
- the mask includes characters that have not yet been filled in by a user.

The mask indicates whether the Text property contains blank characters, whether the spaces are replaced by _, and whether literal characters are removed from the mask. If no mask exists, the Text property is a string that appears in an editor. When setting the Text property, text value is formatted using the mask, and the resultant value stored in the EditText property for the purposes of on-screen display.

See Also

TdxInplaceMaskEdit.EditMask; TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.GetTextLen; TdxInplaceMaskEdit.IsMasked; TdxInplaceMaskEdit.ReformatText

MaskState property — read / write

Specifies the manner in which a mask is applied.

```
type
  TMaskedState = set of (msMasked, msReEnter, msDBSetText);
property MaskState : TMaskedState;
```

Description

The MaskState property is used internally to indicate specific actions that have occurred in relation to the mask. The MaskState property includes the following values:

Value	Description
MsMasked	A mask has been assigned. If the MaskState property is set to msMasked, then the IsMasked property is True.
MsReEnter	An invalid character is rejected and the next character should be a valid replacement character.
msDBSetText	Text obtained from a database field that should not be validated.

MaskState is exposed as a protected property so that derived classes can maintain and use this state information in the implementation of properties and methods.

See Also

TCustomMaskEdit.MaskState; TdxInplaceMaskEdit.IsMasked; TdxInplaceMaskEdit.ValidateEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceMaskEdit Methods

TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

CheckCursor method

Moves the cursor to the nearest edited character and selects it if nothing is currently selected.

```
procedure CheckCursor;
```

Description

The CheckCursor method is called whenever the position of the cursor has changed. It ensures that at least one character is always selected. Since editing a masked edit control consists of replacing blank characters in the mask, there must always be a selection to replace. The selection corresponds to one or more non-literal characters in the mask, which are either blank or contain characters rejected by the mask.

See Also

TdxInplaceMaskEdit.GetSel; TdxInplaceMaskEdit.SetCursor; TdxInplaceMaskEdit.SetSel

Clear method

Sets the Text property to an empty string.

```
procedure Clear;
```

Description

Use the Clear method to remove all text entered into a masked edit control. The Clear method sets the value of the Text property to an empty string. It does not clear the EditMask property. If the edit control has a mask, the EditText property is not empty, but all non-literal characters are replaced by blanks.

See Also

TdxInplaceMaskEdit.EditMask; TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.IsMasked;

TdxInplaceMaskEdit.Reset; TdxInplaceMaskEdit.Text

DefaultEditMask method

Returns the default mask value of a data-aware mask editor.

```
function DefaultEditMask: string; virtual;
```

Description

The DefaultEditMask method returns blank if the DataDefinition property of the mask editor is not assigned. Otherwise, the DefaultEditMask method returns the value of the EditMask provided by the DataDefinition.

See Also

TdxInplaceMaskEdit.EditMask; TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.IsMasked;

TdxInplaceMaskEdit.Reset; TdxInplaceMaskEdit.Text

DefaultMaxLength method

Returns the default maximum length of the text displayed within a mask editor.

```
function DefaultMaxLength: Integer; override;
```

Description

The DefaultMaxLength method calls the inherited DefaultMaxLength method if the mask is not applied. Otherwise, the DefaultMaxLength method returns the number of characters displayed when the mask is applied.

See Also

TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.Text; TdxInplaceTextEdit.DefaultMaxLength

Copyright © 2000 Developer Express Inc.

GetBlankText method

Replaces every non-mask character of edited text with a blank.

```
function GetBlankText: string;
```

Description

The GetBlankText method returns a string that represents the edited text, replacing each non-mask character with a blank.

See Also

TCustomMaskEdit.EditText; TCustomMaskEdit.IgnoreMaskBlank; TCustomMaskEdit.Text

GetDisableCloseEditor method

Indicates whether an editor allows you to terminate the editing process.

```
function GetDisableCloseEditor: Boolean; override;
```

Description

Used internally to check whether text editing within an editor is appropriate to possible values.

GetEditingText method

Returns the characters entered into a mask editor.

```
function GetEditingText: string;  override;
```

Description

If an editor ignores the characters specified as 'blanks' in the defined mask (the IgnoreMaskBlank property is True), the GetEditingText method returns the EditText property value. Otherwise, the GetEditingText method returns the value of the Text property. If the value of the EditText property is equal to the returned value of the GetBlankText method, GetEditingText returns a blank for TdxInplaceMaskEdit.

See Also

TdxInplaceEdit.GetEditingText; TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.GetBlankText

GetFirstEditChar method

Returns the index of the first non-literal character in the EditMask property value.

```
function GetFirstEditChar: Integer;
```

Description

The GetFirstEditChar method is used to locate the first position where a user can modify masked text. 0 specifies the first character, 1 specifies the second character, etc. If there is no mask, the GetFirstEditChar method returns zero.

The GetFirstEditChar method can also be used as a starting point for program processing of all non-literal characters in the EditText property. You can use the GetNextEditChar method to continue looping through the edited characters within the EditText property string. The GetLastEditChar method determines when all non-literal characters have been processed.

See Also

TdxInplaceMaskEdit.EditMask; TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.GetLastEditChar; TdxInplaceMaskEdit.GetNextEditChar; TdxInplaceMaskEdit.GetPriorEditChar

GetLastEditChar method

Returns the index of the last non-literal character in the EditMask property value.

```
function GetLastEditChar: Integer;
```

Description

The GetLastEditChar method is used to locate the last position wherein a user can modify masked text. 0 specifies the first character, 1 specifies the second character, etc. If there is no mask, the GetLastEditChar method returns the text length.

See Also

TdxInplaceMaskEdit.EditMask; TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.GetFirstEditChar; TdxInplaceMaskEdit.GetMaxChars; TdxInplaceMaskEdit.GetNextEditChar; TdxInplaceMaskEdit.GetPriorEditChar

GetMaxChars method

Returns the length of edited text.

```
function GetMaxChars: Integer;
```

Description

If there is a mask, the GetMaxChars method returns the EditText property string length, including all blanks. It is similar to MaxLength, because editing in a mask editor consists of replacing non-literal characters. If there is no mask, the GetMaxChars method returns the text length in the editor. In this instance, the value returned by the GetMaxChars method may be less than MaxLength, which is the maximum number of characters that can be entered into an editor.

See Also

TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.GetLastEditChar; TdxInplaceMaskEdit.MaxLength; TdxInplaceMaskEdit.Text

GetNextEditChar method

Returns the first index of a non-literal character equal to or greater than the Offset parameter.

```
function GetNextEditChar(Offset: Integer): Integer;
```

Copyright © 2000 Developer Express Inc.

Description

The GetNextEditChar method can be used to locate the first position beginning from the Offset parameter value where a user can modify masked text. 0 specifies the first character, 1 specifies the second character, etc. If there is no non-literal character beginning from the Offset parameter, this method returns the MaxLength property value.

You may use the GetNextEditChar method to loop through the modified characters in the masked text, starting with the value returned by the GetFirstEditChar method and using the GetLastEditChar method to determine when all non-literal characters are processed.

See Also

TdxInplaceMaskEdit.EditMask; TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.GetFirstEditChar; TdxInplaceMaskEdit.GetLastEditChar; TdxInplaceMaskEdit.GetPriorEditChar

GetPriorEditChar method

Returns the first index of a non-literal character equal to or less than the Offset parameter.

```
function GetPriorEditChar(Offset: Integer): Integer;
```

Description

The GetPriorEditChar method can be used to locate the first position before the Offset parameter value where a user can modify masked text. 0 specifies the first character, 1 specifies the second character, etc. If there is no non-literal character before the Offset parameter, the GetPriorEditChar method returns the index of the first edited character following Offset.

See Also

TdxInplaceMaskEdit.EditMask; TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.GetFirstEditChar; TdxInplaceMaskEdit.GetLastEditChar; TdxInplaceMaskEdit.GetNextEditChar

GetSel method

Returns the endpoints of the current selection in masked text.

```
procedure GetSel(var SelStart: Integer; var SelStop: Integer);  virtual;
```

Description

The GetSel method obtains the indexes of the first and last selected characters (the SelStart to the SelStop parameter accordingly) of EditText, where 0 is the index of the first character. Not all characters in the selection will necessarily be edited, if the mask contains literal characters. Do not apply the same indexes when using the Text property, if there is a mask, since the EditText property value may contain blanks or non-literal characters not found in Text. To programmatically change the selected text you may use the GetNextEditChar method to cycle through the edited characters of the selection from the SelStart to the SelStop parameter.

See Also

TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.GetNextEditChar; TdxInplaceMaskEdit.SetSel; TdxInplaceMaskEdit.Text; TdxInplaceTextEdit.SelText

GetTextLen method

Returns the length of the underlying text.

```
function GetTextLen: Integer;
```

Description

Use the GetTextLen method to determine the length of the underlying text for a mask editor. The underlying text is not formatted by the mask and may differ from EditText displayed within the editor window.

See Also

TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.MaxLength; TdxInplaceMaskEdit.Text

ReformatText method

Applies a new mask to the underlying text and updates the internal representation of masked text.

```
procedure ReformatText(const NewMask: string);
```

Description

The ReformatText method sets the EditMask property at runtime. The NewMask parameter specifies a new value for the EditMask property.

See Also

TdxInplaceMaskEdit.CheckCursor; TdxInplaceMaskEdit.EditMask; TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.MaskState; TdxInplaceMaskEdit.Text

SetCursor method

Moves the cursor to the first edited character at or before the Pos parameter and selects this character.

```
procedure SetCursor(Pos: Integer);
```

Description

The SetCursor method handles positioning of the cursor within the EditText property value so that it is always on an edited character. It also ensures that at least one character is always selected. Since editing a masked edit control consists of replacing blank characters in the mask, there must always be a selection to replace. It corresponds to one or more non-literal characters in the mask, which are either blank or contain characters for a user to re-enter.

See Also

TdxInplaceMaskEdit.CheckCursor; TdxInplaceMaskEdit.GetPriorEditChar; TdxInplaceMaskEdit.SetSel

SetSel method

Selects the characters in the EditText property from the SelStart to the SelStop parameter.

Copyright © 2000 Developer Express Inc.

```
procedure SetSel(SelStart: Integer; SelStop: Integer);
```

Description

The SetSel method selects the indicated range of characters within the EditText property's string value. If SelStart is the same as SelStop, the SetSel method positions the cursor at the SelStart character. When using the SetSel method, set the cursor to the edited position if the objective is to create a selection for a user to replace.

The SetSel method can be used to select non-edited characters that can be then captured by using the SelText property or by copying to the Clipboard. Once the selection has been captured, call the CheckCursor method to return the cursor to the edited position.

See Also

TdxInplaceMaskEdit.CheckCursor; TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.GetSel; TdxInplaceMaskEdit.SetCursor; TdxInplaceTextEdit.SelText

ValidateEdit method

Validates the value of the EditText property against the current mask.

```
procedure ValidateEdit; override;
```

Description

The ValidateEdit method attempts to validate the value of the EditText property each time the mask editor loses focus and after each keystroke. If the value of the EditText property does not match the EditMask property specifications, the ValidateEdit method calls ValidateError to raise an exception, and returns the cursor to the first position where EditText did not comply with EditMask.

See Also

TdxInplaceMaskEdit.EditMask; TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.ValidateError

ValidateError method

Beeps and raises an EDBEditError exception.

```
procedure ValidateError;
```

Description

The ValidateError method is called by the ValidateEdit method when the EditText property value fails to comply with the EditMask property value.

See Also

TdxInplaceMaskEdit.EditMask; TdxInplaceMaskEdit.EditText; TdxInplaceMaskEdit.MaxLength; TdxInplaceMaskEdit.ValidateEdit

TdxInplaceMaskEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxInplaceMemoEdit

TdxInplaceMemoEdit should be used for the display and editing of multi-line text.

Unit

dxExEdtr

```
TdxInplaceMemoEdit = class(TdxInplaceTextEdit);
```

Description

TdxInplaceMemoEdit descends from TdxInplaceTextEdit and allows a user to display and modify multi-line text. At runtime, users can cut, copy, and paste text to and from a memo editor control.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit

TdxInplaceMemoEdit Properties

TdxInplaceMemoEdit

AutoSize	**protected / read / write**	SelectionBar	**protected / read / write**
HideScrollBars	**protected / read / write**	WantReturns	**protected / read / write**
Lines	**public / read / write**	WantTabs	**protected / read / write**
ScrollBars	**protected / read / write**	WordWrap	**protected / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelLength	**public / read / write**
CanUndo	**public / read only**	SelStart	**public / read / write**
CharCase	**protected / read / write**	SelText	**public / read / write**
HideSelection	**protected / read / write**	Text	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
Container	**protected / read / write**	StoredValues	**protected / read / write**
Height	**published / read / write**	Style	**public / read / write**
Modified	**public / read / write**	StyleController	**protected / read / write**

AutoSize property — read / write

Specifies whether a control automatically sizes itself to display all its contents.

```
property AutoSize;
```

Description

Use this property to determine whether the size of a memo editor control is calculated automatically. If this property is set to **True**, then the editor changes size automatically based upon font size.

The default value is **False**.

HideScrollBars property — read / write

Determines whether a TdxInplaceMemoEdit object displays scroll bars.

```
property HideScrollBars: Boolean;
```

Description

If the HideScrollBars property is set to **False**, the TdxInplaceMemoEdit object displays scroll bars.

The default value is **True**.

Copyright © 2000 Developer Express Inc.

See Also

TdxInplaceMemoEdit.ScrollBars

Lines property — read / write

Contains the text lines in a memo control.

```
property Lines: TStrings;
```

Description

Use the Lines property to manipulate text in a memo control on a line-by-line basis. Since the Lines property is a TStrings object, you can use standard methods to count, add, delete or replace text lines.

To work with the entire contents of the memo control, use the Text property instead.

See Also

TdxInplaceMemoEdit.WordWrap; TdxInplaceTextEdit.SelText; TdxInplaceTextEdit.Text

ScrollBars property — read / write

Determines whether a TdxInplaceMemoEdit object uses scroll bars.

```
type
  TScrollStyle = (ssNone, ssHorizontal, ssVertical, ssBoth);
property ScrollBars: TScrollStyle;
```

Description

This property determines which scroll bars are used in the TdxInplaceMemoEdit object when modifying data within a memo editor. The following values are available:

Value	Meaning
ssNone	Memo editor has no scroll bars.
ssHorizontal	Memo editor has a horizontal scroll bar at the bottom edge.
ssVertical	Memo editor has a vertical scroll bar at the right edge.
ssBoth	Memo editor has both horizontal and vertical scroll bars.

The default value is **ssNone**.

See Also

TdxInplaceMemoEdit.HideScrollBars

SelectionBar property — read / write

Specifies whether the selection bar is displayed at the leftmost edge of a memo editor.

```
property SelectionBar;
```

Description

Selection bar is a region at the leftmost edge of an editor. It allows a user to select the entire contents of a text line using the mouse. Set the SelectionBar property to **True** to display it or to **False** to hide it. When the selection bar is hidden, a user can select text lines on a character-by-character basis only.

The default value is **True**.

See Also

TdxInplaceTextEdit.SelectionBar

WantReturns property — read / write

Determines whether a user can insert carriage returns into text.

```
property WantReturns: Boolean;
```

Description

Setting the WantReturns property to **True** enables users to enter return characters into text. If WantReturns is **True**, pressing the Enter key inserts a return character into the text.

The default value is **True**.

See Also

TdxInplaceMemoEdit.WantTabs; TdxInplaceMemoEdit.WordWrap; TdxInplaceTextEdit.Text

WantTabs property — read / write

Determines whether a user can insert tab characters in text.

```
property WantTabs: Boolean;
```

Description

Setting the WantTabs property to **True** enables users to enter tab characters in text.

The default value is **False**.

See Also

TdxInplaceMemoEdit.WantReturns; TdxInplaceMemoEdit.WordWrap; TdxInplaceTextEdit.Text

WordWrap property — read / write

Determines whether a memo editor wraps words at the right margin.

```
property WordWrap: Boolean;
```

Description

Setting the WordWrap property to **True** automatically wraps text to force it to fit within the client area. Wrapping is cosmetic only and any new return characters are not inserted.

The default value is **True**.

See Also

TdxInplaceMemoEdit.IsWordWrap; TdxInplaceMemoEdit.Lines; TdxInplaceMemoEdit.ScrollBars; TdxInplaceMemoEdit.WantReturns; TdxInplaceTextEdit.Text

TdxInplaceMemoEdit Methods

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
DefaultMaxLength	**public**	SelectionChange	**protected**
Deselect	**public**	SetEditMaxLength	**protected**
DoSetMaxLength	**protected**	SetSelection	**public**
GetSelection	**public**	SetSelLength	**protected**
GetSelLength	**protected**	SetSelStart	**protected**
GetSelStart	**protected**	SetSelTextBuf	**public**
GetSelText	**protected**	Undo	**public**
GetSelTextBuf	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

Copyright © 2000 Developer Express Inc.

TdxInplaceMemoEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxInplaceDropDownEdit

The TdxInplaceDropDownEdit object represents an editor with a button and a dropdown window.

Unit

dxExEdtr

```
TdxInplaceDropDownEdit = class(TdxInplaceMaskEdit);
```

Description

The TdxInplaceDropDownEdit object descends from TdxInplaceMaskEdit. This is the base class for all editors with an associated dropdown control. It includes a clickable button and additional features to manage the dropdown control. This editor is used to create different types of editors with the ability to edit data within the dropdown control.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit

See Also

TdxInplaceCalcEdit; TdxInplaceDateEdit; TdxInplaceImageEdit; TdxInplaceLookupEdit; TdxInplacePickEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceDropDownEdit Properties

TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

ButtonGlyph property — read / write

Specifies button glyph.

```
property ButtonGlyph: TBitmap;
```

Description

Determines the glyph used for a command button within an editor.

DropDownRows property — read / write

Specifies the number of rows in a dropdown control.

```
property DropDownRows: Integer;
```

Description

Use the DropDownRows property to determine the number of rows in a dropdown control. The default value of this property is 7.

See Also

TdxInplaceDropDownEdit.DropDownWidth

DropDownWidth property — read / write

Specifies the width of a dropdown window.

```
property DropDownWidth: Integer;
```

Description

Specifies the width of the dropdown window that contains a list of items. The default value of this property is 0. If this value is less than the value of the Width property, DropDownWidth then equals Width.

See Also

TdxInplaceDropDownEdit.DropDownRows

DroppedDown property — read / write

Specifies whether a dropdown window is displayed.

```
property DroppedDown: Boolean;
```

Description

Determines whether a dropdown control associated with an editor is activated.

See Also

TdxInplaceDropDownEdit.DropDownWidth

ImmediateDropDown property — read / write

Determines whether a dropdown window is immediately displayed after pressing a key.

```
property ImmediateDropDown: Boolean;
```

Description

If the ImmediateDropDown property is set to **True**, a dropdown window is activated immediately after pressing a key whenever the editor has focus.

The default value is **True**.

See Also

TdxInplaceDropDownEdit.ImmediatePopup

Copyright © 2000 Developer Express Inc.

ImmediatePopup property read / write

Determines whether a dropdown window is immediately displayed after a mouse click event.

```
property ImmediatePopup: Boolean;
```

Description

If the ImmediatePopup property is set to **False**, a single mouse click within the boundaries of the editor activates the dropdown window.

The default value is **False**.

See Also

TdxInplaceDropDownEdit.ImmediateDropDown

PopupAlignment property read / write

Specifies the manner in which a dropdown window is aligned relative to an editor.

```
property PopupAlignment: TAlignment;
```

Description

Use the Alignment property to specify the horizontal placement of a dropdown window relative to an appropriate editor. It can be aligned either to the right, left, or centered.

The default value is **taLeftJustify**.

See Also

TdxInplaceDropDownEdit.ImmediatePopup; TdxInplaceDropDownEdit.PopupBorder; TdxInplaceDropDownEdit.PopupBorderStyle)

PopupBorder property read / write

Determines the border style of a dropdown window.

```
type
  TdxPopupBorder = (pbDefault, pbSingle, pbFrame3D, pbFlat);
property PopupBorder: TdxPopupBorder;
```

Description

Determines the border style of a dropdown control. Possible values include:

Values	Description	Example
pbDefault	Default border style.	
pbSingle	Single border style.	
pbFrame3D	3D border style.	
pbFlat	Light 3D border style.	

The default value is **pbDefault**.

See Also

TdxInplaceDropDownEdit.PopupBorderStyle

TdxInplaceDropDownEdit Methods

TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

DoButtonDown method

```
procedure DoButtonDown(IsDown: Boolean; Index: Integer); virtual;
```

Description

The DoButtonDown method is called when pressing an edit button. The IsDown parameter specifies whether an edit button is pressed. If this parameter is equal to **True**, it is pressed, if **False** - it is released. The Index parameter determines the index of an edit button.

See Also

TdxInplaceDropDownEdit.DoDropDownKeys; TdxInplaceDropDownEdit.DropDown

DoButtonUp method

```
procedure DoButtonUp(Index: Integer); virtual;
```

Description

The DoButtonUp method is called when a user releases an edit button. The Index parameter determines the index of the edit button.

See Also

TdxInplaceDropDownEdit.DoDropDownKeys; TdxInplaceDropDownEdit.DropDown

DoCloseUp method

Generates the OnCloseUp event.

```
procedure DoCloseUp(var Value: string; var Accept: Boolean); virtual;
```

Description

The DoCloseUp method is called when closing a dropdown window. The Value parameter determines the value selected within a dropdown window. The Accept parameter determines whether to display this value within the editor. If the Accept parameter is set to **True**, this value is displayed.

See Also

TdxInplaceDropDownEdit.DoDropDownKeys; TdxInplaceDropDownEdit.DropDown

DoDropDownKeys method

Activates or deactivates a dropdown control when pressing a specific key.

```
procedure DoDropDownKeys(var Key: Word; Shift: TShiftState);  virtual;
```

Description

The DoDropDownKeys method is used internally by editors to manage dropdown state. It closes or opens a control based upon the pressed key specified by the Key and Shift parameters.

See Also

TdxInplaceDropDownEdit.CloseUp; TdxInplaceDropDownEdit.DropDown

Copyright © 2000 Developer Express Inc.

DropDown method

```
procedure DropDown;  virtual;
```

Description

Provides an interface method to activate the dropdown window associated with an editor. Descendants can override this method to activate a dropdown window as their specific needs dictate.

See Also

TdxInplaceDropDownEdit.CloseUp; TdxInplaceDropDownEdit.DoDropDownKeys

FindListValue method

```
procedure FindListValue(const Value : String); virtual;
```

Description

This method is used internally. It locates the dropdown list value that corresponds to the edited value before activating a dropdown window. The Value parameter determines the value to locate.

PopupBorderStyle method

```
type
  TdxPopupBorderStyle = pbSingle .. pbFlat;
function PopupBorderStyle: TdxPopupBorderStyle;
```

Description

Returns the border style of an editor dropdown window. Possible values include:

Values	Description
pbFlat	Dropdown window has a flat border style.
pbSingle	A single line is drawn around a dropdown window.

See Also

TdxInplaceDropDownEdit.PopupBorder

TdxInplaceDropDownEdit Events

TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

OnCloseUp event

Occurs when the dropdown window associated with an editor is closed.

```
type
  TdxDropDownEditCloseUp = procedure(Sender: TObject; var Value: string;
var Accept: Boolean) of object;
property OnCloseUp: TdxDropDownEditCloseUp;
```

Description

Write an OnCloseUp event handler to perform specific actions when closing a dropdown window. The Value parameter determines the value selected within a dropdown window. The Accept parameter determines whether to display this value within the editor. If the Accept parameter is set to **True**, this value is displayed.

See Also

TdxInplaceDropDownEdit.DoCloseUp

OnEditButtonClick event

Occurs when a user presses an editor button.

```
property OnEditButtonClick: TNotifyEvent;
```

Description

Write an OnEditButtonClick event handler to perform specific actions when a user presses an edit button within an editor.

Copyright © 2000 Developer Express Inc.

TdxInplaceDateEdit

TdxInplaceDateEdit is a button editor with a dropdown calendar control.

Unit

dxExEdtr

```
TdxInplaceDateEdit = class(TdxInplaceDropDownEdit);
```

Description

TdxInplaceDateEdit descends from TdxInplaceDropDownEdit. It includes a dropdown calendar control and additional methods and properties to enhance the feature set of the control. A user can set dates within this editor via the dropdown calendar or enter dates manually.

TdxInplaceDateEdit also support smart date input. It supports: 'Today', 'Yesterday', 'Tomorrow', 'Sunday', 'Monday', 'Tuesday', 'Wednesday', 'Thursday', 'Friday', 'Saturday', 'First', 'Second', 'Third', 'Fourth', 'Final', 'Bom', 'Eom', 'Now'. It even supports '+/-' operations, allowing you to enter dates as follows: "today + 15".

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit

See Also

TdxInplaceDropDownEdit

TdxInplaceDateEdit Properties

TdxInplaceDateEdit

Date	**protected / read / write**	DateValidation	**protected / read / write**
DateButtons	**protected / read / write**	SaveTime	**protected / read / write**
DateOnError	**protected / read / write**	UseEditMask	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Date property — read / write

Determines the currently displayed date value.

```
property Date: TDateTime;
```

Description

Use the Date property to set or return date.

See Also

TdxInplaceDateEdit.DateChange

Copyright © 2000 Developer Express Inc.

DateButtons property read / write

Specifies the buttons to display within the dropdown window of an editor.

```
type
      TDateButton = (btnToday, btnClear);
      TDateButtons = set of TDateButton;
property DateButtons: TDateButtons;
```

Description

Use the DateButtons property to hide or display buttons within a calendar window. Possible values include:

Values	Description
btnToday	Sets the current date and closes the calendar.
btnClear	Clears the displayed date value and closes the calendar.

See Also

TdxInplaceDateEdit.DateChange

DateOnError property read / write

Determines the date to be assigned to an editor in case of invalid date input.

```
type
      TDateOnError = (deToday, deNull);
property DateOnError: TDateOnError;
```

Description

Use the DateOnError property to set the date assigned to the date edit in case of invalid date input. Possible values include:

Values	Description
deToday	The current date is set.
deNull	A NULL date is set.

See Also

TdxInplaceDateEdit.DoValidateInput; TdxInplaceDateEdit.DateChange

DateValidation property read / write

Specifies whether input date requires validation.

```
property DateValidation: Boolean;
```

Description

If the DateValidation property is set to **True**, the date is validated during entry. Otherwise. It is not.

See Also

TdxInplaceDateEdit.DoValidateInput

SaveTime property — read / write

Specifies whether time is stored in the editor.

```
property SaveTime: Boolean;
```

Description

Date can be entered into a date editor together with time values. If this property is set to **True**, the time value must be explicitly modified when another date is selected within the Calendar.

UseEditMask property — read / write

Specifies whether a date editor uses a predefined mask to validate date input.

```
property UseEditMask: Boolean;
```

Description

If the UseEditMask property is set to **True**, a predefined mask is displayed when entering date manually. This mask is defined by Windows Regional Settings.

Copyright © 2000 Developer Express Inc.

TdxInplaceDateEdit Methods

TdxInplaceDateEdit

DateChange	**protected**	DoValidateInput	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

DateChange method

```
procedure DateChange(Sender: TObject);
```

Description

DateChange is used internally. It is called every time a user changes date values within a date editor.

See Also

TdxInplaceDateEdit.OnDateChange

DoValidateInput method

DoValidateInput is an interface method which is called when validating date input.

```
procedure DoValidateInput(const AText: string; var ADate: TDateTime; var
AMessage: string; var AError: Boolean); virtual;
```

Description

DoValidateInput is called each time the DateValidation property is set to **True** and a user enters a date into the editor. The ADate parameter specifies the date entered. The AText parameter specifies the text being edited within the editor. If the AError parameter is **True**, TdxInplaceDateEdit raises an exception. The AMessage parameter specifies the text that appears in the exception dialog box. Descendants can override this method to generate the OnDateValidateInput event.

See Also

TdxInplaceDateEdit.DateValidation; TdxInplaceDateEdit.DoValidatiInput;

TdxInplaceDateEdit.OnDateValidateInput

Copyright © 2000 Developer Express Inc.

TdxInplaceDateEdit Events

TdxInplaceDateEdit

OnDateChange	**protected**	OnDateValidateInput	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

OnDateChange event

Occurs when changing the date within a date editor.

```
property OnDateChange: TNotifyEvent;
```

Description

Write an OnDateChange event handler to perform specific actions when changing the date.

See Also

TdxInplaceDateEdit.DateChange

OnDateValidateInput event

Occurs when validating date input within a date editor.

```
type
  TdxDateValidateInput = procedure(Sender: TObject; const AText: string;
var ADate: TDateTime; var AMessage: string; var AError: Boolean) of object;
property OnDateValidateInput: TdxDateValidateInput;
```

Description

Write an OnDateValidateInput event handler to perform specific actions when validating date input.

See Also

TdxInplaceDateEdit.DoValidateInput

TdxInplaceButtonEdit

Unit

dxExEdtr

```
TdxInplaceButtonEdit = class(TdxInplaceDropDownEdit);
```

Description

The TdxInplaceButtonEdit is an editor that can contain one or more embedded buttons that can be used to execute custom actions.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit

See Also

TdxInplaceDropDownEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceButtonEdit Properties

TdxInplaceButtonEdit

Buttons	**protected / read / write**	ViewStyle	**protected / read / write**
ClickKey	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Buttons property — read / write

Determines a collection of buttons.

```
property Buttons: TdxEditButtons;
```

Description

Editors that support button controls can contain several buttons. At design-time, use the items of this collection property to add, delete, and control the appearance of each button embedded within the control.

ClickKey property — read / write

Specifies the key combination users can enter to quickly access an edit button's functionality.

```
property ClickKey: TShortCut;
```

Description

Use the ClickKey property to allow a user to type a key combination instead of clicking the edit button whose Default property is set to **True**. When setting shortcuts at design time, the Object Inspector provides a large list of key combinations to select from.

ViewStyle property — read / write

Determines the appearance of a specific button editor.

```
type
 TdxButtonEditViewStyle = (vsStandard, vsHideCursor, vsButtonOnly);
property ViewStyle: TdxButtonEditViewStyle;
```

Description

Use this property to determine the manner in which an editor is displayed. Possible values include:

Value	Description	Example
vsStandard	Text within an editor can be modified.	
vsHideCursor	Text within an editor cannot be modified.	
vsButtonOnly	There is no text within an editor, only buttons.	

Copyright © 2000 Developer Express Inc.

TdxInplaceButtonEdit Methods

TdxInplaceButtonEdit

DefaultButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

DefaultButtonClick method

Determines the index of the default button.

```
procedure DefaultButtonClick; virtual;
```

Description

Call the DefaultButtonClick method to determine the index of the button whose Default property value is equal to **True**. The search is performed only among visible buttons.

Copyright © 2000 Developer Express Inc.

TdxInplaceButtonEdit Events

TdxInplaceButtonEdit

OnButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

OnButtonClick event

Occurs when clicking an edit button within an editor.

```
type
 TdxEditButtonClickEvent = procedure (Sender: TObject; AbsoluteIndex:
Integer) of object;
property OnButtonClick: TdxEditButtonClickEvent;
```

Description

Write an OnButtonClick event handler to perform specific actions when clicking an editor button. The AbsolutIndex parameter determines the index of the pressed button. This index is zero-based.

TdxCheckEditStyleController

The TdxCheckEditStyleController allows users to unify the appearance of all linked check editors within a form.

Unit

dxExEdtr

```
TdxCheckEditStyleController = class(TdxEditStyleController)
```

Description

The TdxCheckEditStyleController is a non-visual component. Use the TdxCheckStyleController to change identical properties of all linked check editors simultaneously. For instance, you can use this component to maintain a unified style for all check editors.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TdxStyleController
      - TdxEditStyleController

Copyright © 2000 Developer Express Inc.

TdxCheckEditStyleController Properties

BorderStyle	**published / read / write**
ButtonStyle	**published / read / write**

BorderStyle property read / write

Specifies the border style for all check editors connected to a style controller.

```
type
 TdxEditBorderStyle = (xbsNone, xbsSingle, xbsThick, xbsFlat, xbs3D);
property BorderStyle;
```

Description

Use the BorderStyle property to read or set the border style for all linked check editors. Available values include:

Value	Description
xbsNone	No visible border.
xbsSingle	Single-line border.
xbsThick	Single-line border with a thick line.
xbsFlat	Flat border with a light 3D effect.
xbs3D	Standard border with a 3D effect.

By default, the ButtonStyle property is **xbsNone**.

See Also

TdxEditStyleController.BorderStyle

ButtonStyle property read / write

Specifies the button style for all check editors connected to a style controller.

```
type
 TdxEditButtonViewStyle = (btsDefault, bts3D, btsFlat, btsSimple,
btsHotFlat);
property ButtonStyle;
```

Description

Use the ButtonStyle property to read or set the button style for all linked in-place editors. Available values include:

Value	Description

btsDefault	Default button style.
bts3D	Standard button with a 3D effect.
btsFlat	Flat button with a light 3D effect.
btsSimple	Simple button without a 3D effect and with a transparent border.
btsHotFlat	Flat button without a 3D effect and with a single-line border.

By default, the ButtonStyle property is **bts3D**.

See Also

TdxEditStyleController.ButtonStyle

Copyright © 2000 Developer Express Inc.

TdxInplaceCheckEdit

TdxInplaceCheckEdit is a check box editor.

Unit

dxExEdtr

```
TdxInplaceCheckEdit = class(TdxInplaceEdit);
```

Description

TdxInplaceCheckEdit descends from TdxInplaceEdit. It includes a check box and a caption region. Users can edit data within an editor by checking or unchecking the check box. The caption region contains the description of the check box.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit

TdxInplaceCheckEdit Properties

TdxInplaceCheckEdit

AllowGrayed	**protected / read / write**	GlyphCount	**protected / read / write**
Checked	**protected / read / write**	MultiLine	**protected / read / write**
FullFocusRect	**protected / read / write**	NullStyle	**protected / read / write**
Glyph	**protected / read / write**	State	**protected / read / write**

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

AllowGrayed property — read / write

Determines whether a check editor has two or three states.

```
property AllowGrayed: Boolean;
```

Description

Determines whether a check editor has two (checked, unchecked) or three (checked, unchecked and grayed) states.

See Also

TdxInplaceCheckEdit.State

Checked property — read / write

Specifies whether the check box within an editor is checked.

```
property Checked: Boolean;
```

Description

Use the Checked property to modfy the state of an editor.

See Also

TdxInplaceCheckEdit.State

FullFocusRect property — read / write

Specifies the manner in which the rectangle is drawn around the caption region of a check editor.

```
property FullFocusRect: Boolean;
```

Copyright © 2000 Developer Express Inc.

Description

If the FullFocusRect property is **False**, a focus rectangle is only drawn around caption text. If the FullFocusRect property is **True**, a focus rectangle is drawn around the entire caption region, regardless of actual caption text size.

The default value of the FullFocusRect property is **False**.

Glyph property — read / write

Determines the glyph displayed instead of the editor check box.

```
property Glyph: TBitmap;
```

Description

Use the Glyph property to specify a custom image for a check box. This bitmap can be used for different states of an editor based upon the GlyphCount property value.

See Also

TdxInplaceCheckEdit.GlyphCount

GlyphCount property — read / write

Specifies the manner in which an image is used to represent a check box.

```
property GlyphCount: Integer;
```

Description

Use the GlyphCount property to determine the manner in which an image is used in place of a standard check box to display checked states.

Values include:

Values	Description
0	A glyph is not used. The standard check box is displayed.
1	A full size image is displayed instead of the standard check box.
2	The image is divided into two parts: one part indicates the checked state; the other part indicates the unchecked state of the check editor.
3	The glyph is divided into three parts. Each part determines the state of the check editor (grayed, checked, unchecked). Only one part can be dispayed at a time.
6	The glyph is divided into six parts. Each part determines the state of the check editor (grayed, checked, unchecked) when the check button is pressed and released. Only one part can be dispayed at a time.

When using this property, you should use 0, 3, or 6.

See Also

TdxInplaceCheckEdit.Glyph

MultiLine property read / write

Determines whether the caption region of a check editor can include multiple lines.

```
property MultiLine: Boolean;
```

Description

If the MultiLine property is set to **True**, caption text can be displayed across multiple lines.

By default, MultiLine is **False**.

NullStyle property read / write

Determines the display style for the check box when the value of a check editor is null.

```
type
 TdxShowNullFieldStyle = (nsUnchecked, nsInactive, nsGrayedChecked);
property NullStyle: TdxShowNullFieldStyle;
```

Description

Use the NullStyle property to specify the manner in which a check editor is displayed when its value or the value of the appropriate field is not specified.

Values include:

Values	Description
nsUnchecked	The check box is drawn unchecked.
nsInactive	The check box is drawn as inactive.
nsGrayedChecked	The check box is grayed and checked.

The default value is **nsGrayedChecked**.

Note: *This property is used when the AllowGrayed property is **True**.*

State property read / write

Specifies the current state of a check edit control.

```
type
 TdxCheckBoxState = (cbsUnchecked, cbsChecked, cbsGrayed);
property State: TdxCheckBoxState;
```

Description

Use the State property to set or return the necessary state for a check editor. There are two ways to change the state of a control: to click the control or to change the State property programmatically.

Values include:

Values	Description
cbsUnchecked	The check box has no check mark, indicating that a user has not selected it.
cbsChecked	The check box has a check mark in it, indicating that a user has selected it.
cbsGrayed	The check box is grayed.

The default value is **cbsUnchecked**.

See Also

TdxInplaceCheckEdit.AllowGrayed; TdxInplaceCheckEdit.Checked; TdxInplaceCheckEdit.Toggle

TdxInplaceCheckEdit Methods

TdxInplaceCheckEdit

InvalidateCheckRect	**protected**	Toggle	**protected**

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
Deselect	**public**	RestoreDefaults	**public**
InvalidateEdit	**public**	SelectAll	**public**
IsEditClass	**public**	ValidateEdit	**public**

InvalidateCheckRect method

Repaints the check editor region.

```
procedure InvalidateCheckRect;
```

Description

The InvalidateCheckRect method is used internaly to refresh the rectangle area of a check editor.

Toggle method

Provides an interface which toggles check box state.

```
procedure Toggle;  virtual;
```

Description

Toggle is a virtual protected method that provides an interface to toggle check box state. This method is used internally and TdxInplaceCheckEdit descendants can override it to provide an appropriate switch mechanism.

See Also

TdxInplaceCheckEdit.State

TdxInplaceCheckEdit Events

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxInplaceImageEdit

TdxInplaceImageEdit is a button editor with a dropdown control which can include both an image and a description for a specific value.

Unit

dxExEdtr

```
TdxInplaceImageEdit = class(TdxInplaceDropDownEdit);
```

Description

TdxInplaceImageEdit descends from TdxInplaceDropDownEdit. A user can edit data within this editor by selecting an appropriate value from the dropdown image list.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit

See Also

TdxInplaceDropDownEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceImageEdit Properties

TdxInplaceImageEdit

DefaultImages	**protected / read / write**	LargeImages	**protected / read / write**
Descriptions	**protected / read / write**	MultiLineText	**protected / read / write**
ImageIndexes	**protected / read / write**	ShowDescription	**protected / read / write**
Images	**protected / read / write**	Values	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DefaultImages property — read / write

Specifies the manner in which image indexes are calculated in a dropdown items list.

```
property DefaultImages: Boolean;
```

Description

Use the DefaultImages property to specify whether to index items automatically or manually. If the DefaultImages method returns **True**, the image indexes in the dropdown list are sequential and generated automatically. By default, DefaultImages returns **True**. Descendants can override this method to specify the manner in which items are indexed.

See Also

TdxInplaceImageEdit.ImageIndexes

Descriptions property — read / write

Contains a list of image descriptions.

```
property Descriptions: TStrings;
```

Description

This property contains the list of descriptions associated with an image editor.

See Also

TdxInplaceImageEdit.ShowDescription

ImageIndexes property — read / write

Contains a list of image indexes.

```
property ImageIndexes: TStrings;
```

Description

This property contains the list of image indexes associated with an image editor.

Images property — read / write

Contains a list of images.

```
property Images: TImageList;
```

Description

This property contains the list of images associated with an image editor.

LargeImages property — read / write

Contains a list of large images.

```
property LargeImages: TImageList;
```

Description

TdxInplaceImageEdit can display large images in a dropdown window. The LargeImages property contains the TImageList object that stores large images.

See Also

TdxInplaceImageEdit.Images

Copyright © 2000 Developer Express Inc.

MultiLineText property read / write

Determines whether dropdown list text can include multiple lines.

```
property MultiLineText: Boolean;
```

Description

TdxInplaceImageEdit displays a dropdown window, which contains a list of items. Each item consists of an image and text. If the MultiLineText property is set to **True**, the description can be displayed across multiple text lines. By default, MultiLineText is **False**.

ShowDescription property read / write

Specifies whether descriptions are displayed within an editor.

```
property ShowDescription: Boolean;
```

Description

If this property is set to **True**, then a description is not displayed within an editor, whereas it is present within the dropdown image window.

See Also

TdxInplaceImageEdit.Description

Values property read / write

Specifies the values that correspond to the dropdown window image items.

```
property Values: TStrings;
```

Description

Contains the values associated with an image editor. The first element of Values corresponds to the first item in the dropdown window; the second element corresponds to the second item, etc.

TdxInplaceImageEdit Methods

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxInplaceImageEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxInplaceSpinEdit

TdxInplaceSpinEdit is an editor with spin buttons.

Unit

dxExEdtr

```
TdxInplaceSpinEdit = class(TdxInplaceMaskEdit);
```

Description

TdxInplaceSpinEdit descends from TdxInplaceMaskEdit. Users can edit data within this editor via spin buttons or enter data manually.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceSpinEdit Properties

TdxInplaceSpinEdit

EditorEnabled	**protected / read / write**	MinValue	**protected / read / write**
Increment	**protected / read / write**	UseCtrlIncrement	**protected / read / write**
IntValue	**protected / read / write**	Value	**protected / read / write**
MaxValue	**protected / read / write**	ValueType	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

EditorEnabled property — read / write

Determines whether an editor is enabled.

```
property EditorEnabled: Boolean;
```

Description

Use the EditorEnabled property to allow a user to modify data within a spin editor.

By default, the EditorEnabled property is **True**.

Increment property — read / write

Containes the increment value.

```
property Increment: Double;
```

Description

Use the Increment property to control the granularity of changes made using the up-down spin buttons. Set this property to indicate the number of units between the MinValue and MaxValue properties.

See Also

TdxInplaceSpinEdit.GetIncrement; TdxInplaceSpinEdit.UseCtrlIncrement

IntValue property — read / write

Represents the integer portion of the currently edited value.

```
property IntValue: Integer;
```

Description

Use the IntValue to obtain the integer portion of the edited value.

See Also

TdxInplaceSpinEdit.SetValue; TdxInplaceSpinEdit.Value; TdxInplaceSpinEdit.ValueType

MaxValue property — read / write

Specifies the maximum value a user can set within a spin editor.

```
property MaxValue: Double;
```

Description

If the MaxValue and MinValue properties are set to 0 or 0.0 simultaneously, a spin editor considers no limits for maximum and minimum values. Otherwise, the maximum or minimum value that can be entered is determined by the appropriate property.

See Also

TdxInplaceSpinEdit.MinValue; TdxInplaceSpinEdit.SetEditMaxValue; TdxInplaceSpinEdit.Value

MinValue property — read / write

Specifies the minimum value a user can set within a spin editor.

```
property MinValue: Double;
```

Description

If the MaxValue and MinValue properties are set to 0 or 0.0 simultaneously, a spin editor considers no limits for maximum and minimum values. Otherwise, the maximum or minimum value that can be entered is determined by the appropriate property.

See Also

TdxInplaceSpinEdit.MaxValue; TdxInplaceSpinEdit.SetEditMinValue; TdxInplaceSpinEdit.Value

Copyright © 2000 Developer Express Inc.

UseCtrlIncrement property read / write

Determines the manner in which keyboard keys are used to change an editor's value.

```
property UseCtrlIncrement: Boolean;
```

Description

If the UseCtrlIncrement property is set to **True**, then the Ctrl-Up/Ctrl-Down keys are used to modify an editor's value; Otherwise the Up/Down keys are used to increase/decrease the edited value.

By default, the UseCtrlIncrement property is **False**.

See Also

TdxInplaceSpinEdit.GetIncrement; TdxInplaceSpinEdit.Increment

Value property read / write

Determines the currently edited value within a spin editor.

```
property Value: Double;
```

Description

Use the Value property to set or return the currently edited value.

See Also

TdxInplaceSpinEdit.GetValue; TdxInplaceSpinEdit.SetValue; TdxInplaceSpinEdit.ValueType

ValueType property read / write

Determines spin editor value type.

```
type
 TdxValueType = (vtInt, vtFloat);
property ValueType: TdxValueType;
```

Description

Use the ValueType property to determine the type of edited value. Possible types include:

Values	Description
vtInt	The spin editor is used for integer values.
vtFloat	The spin editor is used for float values.

The default value is **vtInt**.

See Also

TdxInplaceSpinEdit.DefaultValueType; TdxInplaceSpinEdit.Value;

TdxInplaceSpinEdit.SetEditValueType

TdxInplaceSpinEdit Methods

TdxInplaceSpinEdit

DefaultMaxValue	**public**	IsValidChar	**protected**
DefaultMinValue	**public**	SetEditMaxValue	**protected**
DefaultValueType	**public**	SetEditMinValue	**protected**
GetIncrement	**protected**	SetEditValueType	**protected**
GetValue	**protected**	SetValue	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

DefaultMaxValue method

Limits the maximum value of a spin editor.

```
function DefaultMaxValue: Double; virtual;
```

Description

The DefaultMaxValue method returns the parameter, which limits the maximum value within a spin editor.

See Also

TdxInplaceSpinEdit.DefaultMinValue; TdxInplaceSpinEdit.MaxValue

DefaultMinValue method

Limits the minimum value of a spin editor.

```
function DefaultMinValue: Double; virtual;
```

Description

The DefaultMinValue method returns the parameter, which limits the minimum value within a spin editor.

See Also

TdxInplaceSpinEdit.DefaultMaxValue; TdxInplaceSpinEdit.MinValue

DefaultValueType method

Determines the default spin editor value type.

```
type
 TdxValueType = (vtInt, vtFloat);
function DefaultValueType: TdxValueType; virtual;
```

Description

This method sets the spin editor value type. Possible types include:

Values	Description
vtInt	(Default) A spin editor is used for integer values.
vtFloat	A spin editor is used for float values.

See Also

TdxInplaceSpinEdit.SetEditValueType; TdxInplaceSpinEdit.ValueType

GetIncrement method

Provides an interface, which returns the increment value.

```
function GetIncrement: Double;  virtual;
```

Copyright © 2000 Developer Express Inc.

Description

GetIncrement is a virtual protected method. It provides an interface, which returns the increment value stored in the Increment property. TdxInplaceSpinEdit descendants can override this method to provide additional side effects.

See Also

TdxInplaceSpinEdit.Increment

GetValue method

```
function GetValue: Double;  virtual;
```

Description

Returns the data edited within a spin editor according to the ValueType property.

See Also

TdxInplaceSpinEdit.SetValue; TdxInplaceSpinEdit.Value; TdxInplaceSpinEdit.ValueType

IsValidChar method

Indicates whether the newly entered char is valid.

```
function IsValidChar(Key: Char): Boolean;  virtual;
```

Description

IsValidChar is a virtual method. It is used internally to indicate whether the entered char specified by the Key parameter is valid.

SetEditMaxValue method

```
procedure SetEditMaxValue(Value: Double); virtual;
```

Description

Sets a new maximum value for the MaxValue property. The Value parameter specifies new data.

See Also

TdxInplaceSpinEdit.MaxValue; TdxInplaceSpinEdit.DefaultMaxValue

SetEditMinValue method

```
procedure SetEditMinValue(Value: Double); virtual;
```

Description

Sets a new minimum value for the MinValue property. The Value parameter specifies new data.

See Also

TdxInplaceSpinEdit.MinValue; TdxInplaceSpinEdit.DefaultMinValue

SetEditValueType method

```
type
 TdxValueType = (vtInt, vtFloat);
procedure SetEditValueType(Value: TdxValueType); virtual;
```

Description

Sets a new type for the ValueType property. Possible types include:

Values	Description
vtInt	(Default) A spin editor is used for integer values.
vtFloat	A spin editor is used for float values.

See Also

TdxInplaceSpinEdit.DefaultValueType; TdxInplaceSpinEdit.ValueType

SetValue method

```
procedure SetValue(Value: Double);  virtual;
```

Description

Sets a new value for a spin edior based upon the maximum and minimum values. The Value parameter specifies new data.

See Also

TdxInplaceSpinEdit.DefaultMaxValue; TdxInplaceSpinEdit.DefaultMinValue; TdxInplaceSpinEdit.Value

Copyright © 2000 Developer Express Inc.

TdxInplaceSpinEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxInplacePickEdit

TdxInplacePickEdit is a button editor with an associated dropdown list box control.

Unit

dxExEdtr

```
TdxInplacePickEdit = class(TdxInplaceDropDownEdit);
```

Description

TdxInplacePickEdit descends from TdxInplaceDropDownEdit. It includes a dropdown list box control with a given set of possible values. Users can edit data within this editor by selecting a specific value from the dropdown list or enter it manually.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit

See Also

TdxInplaceDropDownEdit

Copyright © 2000 Developer Express Inc.

TdxInplacePickEdit Properties

TdxInplacePickEdit

CanDeleteText	**protected / read / write**	Items	**protected / read / write**
DropDownListStyle	**protected / read / write**	Revertable	**protected / read / write**
ItemIndex	**protected / read / write**	Sorted	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

CanDeleteText property — read / write

Specifies whether a user can delete the displayed value.

```
property CanDeleteText: Boolean;
```

Description

This property is used when the DropDownListStyle property is set to **True**. If the CanDeleteText property is set to **False**, users cannot delete the selected value from the editor. If the CanDeleteText property is set to **True**, users can delete the selected value while the item remains in the dropdown list.

The default value is **False**.

DropDownListStyle property read / write

Determines whether a user can edit data within a pick editor or can only select a value from the dropdown list.

```
property DropDownListStyle: Boolean;
```

Description

If the DropDownListStyle property is set to **True**, a pick editor does not allow data editing. Users can only select a value from the dropdown list. If **False**, users can select a value from the dropdown list or edit data directly within the editor.

The default value is **False**.

ItemIndex property read / write

Determines the index of the displayed item.

```
property ItemIndex: Integer;
```

Description

Use the ItemIndex property to obtain the index of the currently selected item. This index is zero-based. If this property is set to -1, then none of the list items are selected.

See Also

TdxInplacePickEdit.Items

Items property read / write

Contains the strings that appear in the dropdown list box of a pick editor.

```
property Items: TStrings;
```

Description

Use the Items property to add, insert, delete and move items.

See Also

TdxInplacePickEdit.ItemIndex

Revertable property read / write

Specifies whether a user can cycle through list values by double-clicking with the mouse.

```
property Revertable: Boolean;
```

Copyright © 2000 Developer Express Inc.

Description

Set the Revertable property to **True** to allow a user to cycle through list values by double-clicking an appropriate mouse button within a pick editor. When the Revertable property is **True**, list values are displayed within the editor in their stored order. The display process is cyclical. When the last item in the list is displayed, a double-click displays the first item in the list.

The default value is **False**.

Sorted property read / write

Specifies whether list values are sorted.

```
property Sorted: Boolean;
```

Description

If the Sorted property is set to **True**, all values are sorted within a pick list.

The default value is **False**.

TdxInplacePickEdit Methods

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxInplacePickEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxInplaceCalcEdit

TdxInplaceCalcEdit is a button editor with an associated calculator control.

Unit

dxExEdtr

```
TdxInplaceCalcEdit = class(TdxInplaceDropDownEdit);
```

Description

TdxInplaceCalcEdit descends from TdxInplaceDropDownEdit. It includes a dropdown calculator control and provides additional methods necessary to ensure consistency between it and the editor itself. A user can edit data within this editor by calculating the required value via the dropdown calculator or enter data directly into the edit region.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceCalcEdit Properties

TdxInplaceCalcEdit

BeepOnError	**protected / read / write**	QuickClose	**protected / read / write**
ButtonStyle	**protected / read / write**	ShowButtonFrame	**protected / read / write**
Precision	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

BeepOnError property — read / write

Specifies whether a calculator beeps if an error occurs.

```
property BeepOnError: Boolean;
```

Description

The BeepOnError property value is used internally to determine whether a calculator beeps if an error occurs.

By default, the BeepOnError property is **True**.

ButtonStyle property read / write

Determines calculator button style.

```
type
  TdxButtonStyle = (bsStandard, bsFlat, bsExtraFlat);
property ButtonStyle: TdxButtonStyle;
```

Description

Use the ButtonStyle property to determine the manner in which calculator buttons are displayed. Possible styles include:

Values	Description
bsStandard	Calculator buttons are drawn with a double line border.
bsFlat	Calculator buttons are drawn with a single line border.
bsExtraFlat	Calculator buttons are drawn without a border.

By default, this property value is equal to **bsStandard**.

Precision property read / write

Specifies calculation precision.

```
property Precision: Byte;
```

Description

Determines the total number of digits within a calculator editor. By default precision is 13.

QuickClose property read / write

Specifies alternate ways in which to close a dropdown calculator.

```
property QuickClose: Boolean;
```

Description

If the QuickClose property is set to **True**, the dropdown calculator closes when a user presses the '=' keyboard button. By default, the QuickClose property is set to **False** and pressing the '=' key does not close it. In any instance, clicking the '=' button of the dropdown calculator DOES NOT close it.

ShowButtonFrame property read / write

Determines whether buttons are drawn with an oval frame.

```
property ShowButtonFrame: Boolean;
```

Copyright © 2000 Developer Express Inc.

Description

Determines whether an oval frame is drawn around each calculator button. By default, ShowButtonFrame is **False**.

TdxInplaceCalcEdit Methods

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxInplaceCalcEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxInplaceHyperLinkEdit

TdxInplaceHyperLinkEdit is an editor that presents its contents as a hyperlink.

Unit

dxExEdtr

```
TdxInplaceHyperLinkEdit = class(TdxInplaceTextEdit);
```

Description

TdxInplaceHyperLinkEdit is used to edit, display and activate Internet hyperlinks.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceHyperLinkEdit Properties

TdxInplaceHyperLinkEdit

LinkColor	**protected / read / write**	StartKey	**protected / read / write**
SingleClick	**protected / read / write**		

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

LinkColor property — read / write

Specifies the text color of a hyperlink within an editor.

```
property LinkColor: TColor;
```

Description

Use the LinkColor property to modify the color of a hyperlink. By default, this property is set to **clBlue**.

SingleClick property — read / write

Specifies the manner in which a hyperlink is activated.

```
property SingleClick: Boolean;
```

Description

If the SingleClick property is set to **True**, a hyperlink is activated by a single click. If the SingleClick property is set to **False**, it is activated by a double click.

By default, SingleClick is **False**.

StartKey property — read / write

Specifies the shortcut used to activate a hyperlink.

```
property StartKey: TShortCut;
```

Description

Use the StartKey property to define the shortcut used to activate a hyperlink. Pressing this shortcut performs the same action as clicking a hyperlink within the editor.

By default, the StartKey is **Ctrl**+**Enter**.

Copyright © 2000 Developer Express Inc.

TdxInplaceHyperLinkEdit Methods

TdxInplaceHyperLinkEdit

DoStart	**protected**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

DoStart method

Activates a hyperlink.

```
procedure DoStart; virtual;
```

Description

If the text within a hyperlink editor is not empty and represents a valid address, this method activates a hyperlink.

TdxInplaceHyperLinkEdit Events

TdxInplaceHyperLinkEdit

OnStartClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

OnStartClick event

Occurs when activating an edited hyperlink.

```
property OnStartClick: TNotifyEvent;
```

Description

Write an OnStartClick event handler to perform specific actions when launching a hyperlink.

Copyright © 2000 Developer Express Inc.

TdxInplaceTimeEdit

TdxInplaceTimeEdit is an editor with spin buttons.

Unit

dxExEdtr

```
TdxInplaceTimeEdit = class(TdxInplaceSpinEdit);
```

Description

TdxInplaceTimeEdit directly descends from TdxInplaceSpinEdit. It is used to edit time values via the keyboard or spin buttons.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceSpinEdit

TdxInplaceTimeEdit Properties

TdxInplaceTimeEdit

Time	**protected / read / write**	TimeEditFormat	**protected / read / write**

Derived from TdxInplaceSpinEdit

EditorEnabled	**protected / read / write**	MinValue	**protected / read / write**
Increment	**protected / read / write**	UseCtrlIncrement	**protected / read / write**
IntValue	**protected / read / write**	Value	**protected / read / write**
MaxValue	**protected / read / write**	ValueType	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Time property — read / write

Contains currently edited time values.

```
property Time: TTime;
```

Description

Use the Time property to set or return the time within a time editor.

TimeEditFormat property — read / write

Specifies time format.

```
type
```

```
  TdxTimeEditFormat = (tfHourMinSec, tfHourMin, tfHour);
property TimeEditFormat : TdxTimeEditFormat;
```

Description

Use the TimeEditFormat property to specify the manner in which time is represented within an editor. Possible values include:

Values	Description
tfHourMinSec	Hours, minutes and seconds are displayed within the time editor.
tfHourMin	Hours and minutes are displayed within the time editor.
tfHour	Hours are displayed within the time editor.

The default value is **tfHourMinSec**.

TdxInplaceTimeEdit Methods

Derived from TdxInplaceSpinEdit

DefaultMaxValue	**public**	IsValidChar	**protected**
DefaultMinValue	**public**	SetEditMaxValue	**protected**
DefaultValueType	**public**	SetEditMinValue	**protected**
GetIncrement	**protected**	SetEditValueType	**protected**
GetValue	**protected**	SetValue	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxInplaceTimeEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxInplaceCurrencyEdit

TdxInplaceCurrencyEdit allows you to modify currency data within the editor.

Unit

dxExEdtr

```
TdxInplaceCurrencyEdit = class(TdxInplaceMaskEdit);
```

Description

TdxInplaceCurrencyEdit displays data using a currency format.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceCurrencyEdit Properties

TdxInplaceCurrencyEdit

DecimalPlaces	**protected / read / write**	MinValue	**protected / read / write**
DisplayFormat	**protected / read / write**	Value	**protected / read / write**
MaxValue	**protected / read / write**		

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DecimalPlaces property — read / write

Specifies the number of decimal places.

```
property DecimalPlaces: Integer;
```

Description

Specifies the number of digits used for decimal places when a currency editor processes data. The number of decimal places is dispayed only when the currency editor has focus; Otherwise only two digits after the decimal point are displayed.

The default value for this property is 2.

DisplayFormat property — read / write

Determines the manner in which currency values are formatted.

```
property DisplayFormat: string;
```

Description

Use the DisplayFormat property to define the format in which a currency value is displayed within a currency editor. This format is applied when the editor loses its focus.

The default format string is '**$,0.00;-$,0.00**'.

See Also

TdxInplaceCurrencyEdit.DefaultDisplayFormat

MaxValue property — read / write

Determines maximum currency value.

```
property MaxValue: Double;
```

Description

Use the MaxValue property to set the upper limit of a currency value within the editor. If this property is set to 0, then the upper limit is not specified.

The default value for this property is 0.

See Also

TdxInplaceCurrencyEdit.MinValue; TdxInplaceCurrencyEdit.Value;

TdxInplaceCurrencyEdit.DefaultMaxValue

MinValue property — read / write

Determines minimum currency value.

```
property MinValue: Double;
```

Description

Use the MinValue property to set the lower limit of a currency value within the editor. If this property is set to 0, then the lower limit is not specified.

The default value for this property is 0.

See Also

TdxInplaceCurrencyEdit.Value; TdxInplaceCurrencyEdit.DefaultMinValue;

TdxInplaceCurrencyEdit.MaxValue

Value property — read / write

Determines current value.

```
property Value: Double;
```

Copyright © 2000 Developer Express Inc.

Description

Use this property to set or return the value of a currency editor. This property contains the entered value without any display formatting.

See Also

TdxInplaceCurrencyEdit.MaxValue; TdxInplaceCurrencyEdit.MinValue

TdxInplaceCurrencyEdit Methods

TdxInplaceCurrencyEdit

DefaultDisplayFormat	**public**	DefaultMinValue	**public**
DefaultMaxValue	**public**	IsValidChar	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

DefaultDisplayFormat method

Returns the format used to display currency data in a currency editor.

```
function DefaultDisplayFormat: string; virtual;
```

Description

Call this method to obtain the default display fomat. This format is obtained from the DataDefinition if this editor is data-aware or from system variables (CurrencyDecimals, CurrencyString, CurrencyFormat).

Copyright © 2000 Developer Express Inc.

See Also

TdxInplaceCurrencyEdit.DisplayFormat

DefaultMaxValue method

Returns the maximum value of a currency editor.

```
function DefaultMaxValue: Double; virtual;
```

Description

When using a data-aware currency editor, the DefaultMaxValue method returns the parameter that limits the maximum value in the floating-point field associated with a currency editor; Otherwise returns 0.

See Also

TdxInplaceCurrencyEdit.Value; TdxInplaceCurrencyEdit.DefaultMinValue;

TdxInplaceCurrencyEdit.MaxValue

DefaultMinValue method

Returns the minimum value of a currency editor.

```
function DefaultMinValue: Double; virtual;
```

Description

When using a data-aware currency editor, the DefaultMinValue method returns the parameter that limits the minimum value in the floating-point field associated with a currency editor; Otherwise returns 0.

See Also

TdxInplaceCurrencyEdit.DefaultMaxValue; TdxInplaceCurrencyEdit.MinValue;

TdxInplaceCurrencyEdit.Value

IsValidChar method

Indicates whether a given character is valid for currency data entry.

```
function IsValidChar(Key: Char): Boolean;
```

Description

This method returns **True**, if the Key parameter, which represents a key processed by the editor, is a valid character; Otherwise the IsValidChar method returns **False**. Valid characters for currency data include '-', '+', '0'…'9', 'e', 'E', and DecimalSeparators.

TdxInplaceCurrencyEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxPopupToolBarWindow

Use the TdxPopupToolBarWindow object settings to change the behavior of an image toolbar window.

Unit

dxExEdtr

```
TdxPopupToolBarWindow = class(TPersistent);
```

Description

Cut, copy, paste, delete, load, save and custom buttons may be displayed within a toolbar window. Use the OnCustomClick event of the TdxInplaceGraphicEdit to perform specific actions when pressing the custom button. To make a toolbar invisible, set its Visible property to False.

Hierarchy

TObject

TPersistent

TdxPopupToolBarWindow Properties

Alignment	**published**	IsPopupMenu	**published**
Buttons	**published**	ShowCaptions	**published**
CustomButtonCaption	**published**	Visible	**published**
CustomButtonGlyph	**published**		

Alignment property — read / write

Determines the position of an image toolbar relative to an image editor.

```
type
  TdxPopupToolBarAlignment = (ptaLeft, ptaRight, ptaTop, ptaBottom);
property Alignment: TdxPopupToolBarAlignment;
```

Description

Use the Alignment property to set the popup position of an image toolbar. Possible settings include:

Values	Description
ptaLeft	An image toolbar window appears at the left edge of an image editor.
ptaRight	An image toolbar window appears at the right edge of an image editor.
ptaTop	An image toolbar window appears at the top of an image editor.
ptaBottom	An image toolbar window appears at the bottom of an image editor.

The default value is **ptaBottom**.

Buttons property — read / write

Specifies the buttons displayed within an image toolbar.

```
type
  TdxPopupToolBarButton = (ptbCut, ptbCopy, ptbPaste, ptbDelete, ptbLoad,
ptbSave, ptbCustom);
  TdxPopupToolBarButtons = set of TdxPopupToolBarButton;
property Buttons: TdxPopupToolBarButtons;
```

Description

Use the Buttons property to make a specific button visible/invisible in an image toolbar. The following buttons are available.

Values	Description
PtbCut	When pressed, an image is cut to the Clipboard.
PtbCopy	When pressed, an image is copied to the Clipboard.
PtbPaste	When pressed, an image is pasted from the Clipboard.

Copyright © 2000 Developer Express Inc.

PtbDelete	When pressed, an image is deleted.
PtbLoad	When pressed, a file dialog is activated to load an image.
PtbSave	When pressed, a save file dialog is displayed.
PtbCustom	When pressed, users can define a button with a specific behavior.

Use the CustomButtonCaption, CustomButtonGlyph properties and the OnCustomClick event to define the appearance and behavior of a custom button.

See Also

TdxPopupToolBarWindow.CustomButtonCaption; TdxPopupToolBarWindow.CustomButtonGlyph; TdxPopupToolBarWindow.ShowCaptions

ShowCaptions property — read / write

Determines whether the button captions of a toolbar are displayed.

```
property ShowCaptions: Boolean;
```

Description

Set the ShowCaptions property to False to hide the captions of image toolbar buttons.

The deault value is **True**.

See Also

TdxPopupToolBarWindow.Buttons

CustomButtonCaption property — read / write

Specifies the caption of a custom button.

```
property CustomButtonCaption: string;
```

Description

A user can add his/her own custom button to an image toolbar. The CustomButtonCaption property contains the caption of this button.

See Also

TdxPopupToolBarWindow.Buttons; TdxPopupToolBarWindow.CustomButtonGlyph

CustomButtonGlyph property — read / write

Specifies the glyph for a custom button.

```
property CustomButtonGlyph: TBitmap;
```

Description

A user can add his/her own custom button to an image toolbar. Use the CustomButtonGlyph property to specify the glyph for this button.

See Also

TdxPopupToolBarWindow.Buttons; TdxPopupToolBarWindow.CustomButtonCaption

IsPopupMenu property — read / write

Specifies whether a toolbar window is displayed as a popup menu.

```
property IsPopupMenu: Boolean;
```

Description

Set the IsPopupMenu property to False to display the image toolbar window as a popup toolbar.

By default, the IsPopupMenu property is **True**.

Visible property — read / write

Specifies whether a toolbar window can be displayed.

```
property Visible: Boolean;
```

Description

Set the Visible property to False to prevent an image toolbar window from being displayed.

The default value is **True**.

TdxInplaceGraphicEdit

TdxInplaceGraphicEdit is an editor that works with images.

Unit

dxExEdtr

```
TdxInplaceGraphicEdit = class(TdxInplaceEdit);
```

Description

TdxInplaceGraphicEdit provides properties and methods to work with different image types (*.jpg, *.jpeg, *.bmp, *.ico, *.emf, *.wmf).

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit

TdxInplaceGraphicEdit Properties

TdxInplaceGraphicEdit

AutoSize	**protected / read / write**	Picture	**protected / read / write**
Center	**protected / read / write**	QuickDraw	**protected / read / write**
ClipboardFormat	**protected / read / write**	Stretch	**protected / read / write**
CustomFilter	**protected / read / write**	ToolbarLayout	**protected / read / write**
CustomGraphic	**protected / read / write**	ToolbarPos	**protected / read / write**
DblClickActivate	**protected / read / write**	ToolbarPosStored	**protected / read / write**
GraphicTransparency	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

AutoSize property — read / write

Specifies whether it is possible to automatically resize a graphic editor box to fully display its contents.

```
property AutoSize;
```

Description

Set the AutoSize property to **True** before loading a picture to automatically resize a component. If the AutoSize property is **False** and picture width or height is larger than the width or height of the graphic editor box, the picture may be cropped to fit editor box size.

Value	Description
True	A box can be automatically resized to fully display a picture.
False	Only the user can change box size.

By default, the AutoSize property is **False**.

Center property — read / write

Determines whether a picture is aligned by its center within the editor box.

```
property Center: Boolean;
```

Description

If the Center property is **True**, a picture is centered; Otherwise it is aligned at the top-left corner of a graphic editor box.

Copyright © 2000 Developer Express Inc.

By default, the Center property is **True**.

ClipboardFormat property read / write

Specifies Clipboard format.

```
property ClipboardFormat: Word;
```

Description

By default, this property sets the format to CF_PICTURE.

CustomFilter property read / write

Determines the filter used to display specific files in the Files list box when loading graphics.

```
property CustomFilter: string;
```

Description

Used to define filters for the Load File Dialog window to display specific files in the Files list box. Enter wildcards and extensions to define your filter. For instance, if this property is set to the "*.BMP" filter, only files with a .BMP extension are displayed. This property can be specified as Bitmaps|*.bmp and does not give a reference to the Filter property of the TOpenPictureDialog or the TOpenDialog.

See Also

TdxInplaceGraphicEdit.LoadFromFile

CustomGraphic property read / write

Determines whether a graphic editor displays custom images.

```
property CustomGraphic: Boolean;
```

Description

Set the CustomGraphic property to True, if an editor is used to display non-bitmap images, i.e. JPEG, GIF, ICON, etc. If the CustomGraphic property is False (default value), images are considered as a TBitmap.

DblClickActivate property read / write

Specifies whether a popup menu can be activated by a double-click event within an editor.

```
property DblClickActivate: Boolean;
```

Description

If the DblClickActivate property value is set to True, a double-click event within the editor activates the associated popup menu (or toolbar). If the DblClickActivate property value is set to False, the associated popup menu (or toolbar) is activated when the editor receives focus.

By default, the DblClickActivate property is **True**.

GraphicTransparency property — read / write

Determines graphic transparency type.

```
type
  TdxGraphicEditTransparency = (gtDefault, gtOpaque, gtTransparent);
property GraphicTransparency: TdxGraphicEditTransparency;
```

Description

Use the GraphicTransparency property to specify the manner in which an image is displayed within an editor. Set the GraphicTransparency property to gtDefault (the default value) to use settings appropriate to the graphic itself (transparent for metafiles, opaque for bitmaps). Set the property to gtOpaque to make the background opaque. Set the property to gtTransparent to make the background transparent.

Picture property — read / write

Determines the image that appears within a graphic editor.

```
property Picture: TPicture;
```

Description

Set the Picture property to a TPicture object that contains the picture (icon, metafile, bitmap graphics, or user-defined graphics) to be displayed within a graphic editor.

See Also

TdxInplaceGraphicEdit.ClearPicture; TdxInplaceGraphicEdit.AssignPicture

QuickDraw property — read / write

Specifies whether an image is displayed using a palette.

```
property QuickDraw: Boolean;
```

Description

Set QuickDraw to specify whether a custom palette should be used when displaying an image. If **False**, the palette is used to provide the best possible image quality at the expense of additional processing time. If **True**, no special palette is used, which provides faster processing, but results in poorer picture quality.

By default, the QuickDraw property is **False**.

Copyright © 2000 Developer Express Inc.

Stretch property read / write

Determines whether loaded graphics fit within a graphic editor box.

```
property Stretch: Boolean;
```

Description

When loading an image into a graphic editor, set the Stretch property to **True** to automatically resize it to fit within the graphic editor. (Stretch does not impact the image size of icon (.ICO) files.)

By default, the Stretch property is **False**.

ToolbarLayout property read / write

Determines the layout of the popup toolbar window used to provide shortcuts for menu commands.

```
property ToolbarLayout: TdxPopupToolBarWindow;
```

Description

The ToolbarLayout property provides access to the TdxPopupToolBarWindow class used to describe the popup toolbar window that provides shortcuts for menu commands. This toolbar contains Copy, Cut, Paste, Load and other functions used when working with an image within a graphic editor.

See Also

TdxInplaceGraphicEdit.ToolbarPos; TdxInplaceGraphicEdit.ToolbarPosStored

ToolbarPos property read / write

Defines a toolbar window location on-screen in pixels.

```
property ToolbarPos: TPoint;
```

Description

Use the ToolbarPos property to determine the location of a toolbar window relative to the top-left corner in pixels.

See Also

TdxInplaceGraphicEdit.ToolbarLayout; TdxInplaceGraphicEdit.ToolbarPosStored

ToolbarPosStored property read / write

Determines whether the position of a toolbar window is stored.

```
property ToolbarPosStored: Boolean;
```

Description

If the ToolbarPosStored property is set to **True**, the position of a toolbar window is stored. When the toolbar window is activated, it is displayed at the same position.

By default, the ToolbarPosStored property is **True**.

See Also

TdxInplaceGraphicEdit.ToolbarLayout; TdxInplaceGraphicEdit.ToolbarPos

Copyright © 2000 Developer Express Inc.

TdxInplaceGraphicEdit Methods

TdxInplaceGraphicEdit

AssignPicture	**protected**	GetGraphicClass	**protected**
ClearPicture	**public**	LoadFromFile	**public**
CopyToClipboard	**public**	PasteFromClipboard	**public**
CustomClick	**protected**	SaveToFile	**public**
CutToClipboard	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
Deselect	**public**	RestoreDefaults	**public**
InvalidateEdit	**public**	SelectAll	**public**
IsEditClass	**public**	ValidateEdit	**public**

AssignPicture method

Generates the OnAssignPicture event.

```
procedure AssignPicture(Picture: TPicture); virtual;
```

Description

Use the AssignPicture method to generate the OnAssignPicture event. Descendants can override it to perform specific actions.

See Also

TdxInplaceGraphicEdit.OnAssignPicture

ClearPicture method

Clears the picture associated with a graphic editor.

```
procedure ClearPicture; virtual;
```

Description

This method is used to clear the image within a graphic editor.

See Also

TdxInplaceGraphicEdit.Picture

CopyToClipboard method

Copies the picture selected within an editor to the Clipboard.

```
procedure CopyToClipboard;
```

Description

Use the CopyToClipboard method to replace Clipboard contents with the selected picture. The CopyToClipboard method does not clear the Clipboard if a picture is not selected.

See Also

TdxInplaceGraphicEdit.PasteFromClipboard; TdxInplaceGraphicEdit.CutToClipboard;

TdxInplaceGraphicEdit.ClipboardFormat

CustomClick method

Provides an interface, which is called when clicking the Custom button.

```
procedure CustomClick; virtual;
```

Description

The CustomClick method calls the OnCustomClick event handler when clicking the Custom button. Descendants can override this method to generate the OnCustomClick event for the Custom button.

See Also

TdxInplaceGraphicEdit.OnCustomClick

CutToClipboard method

Cuts the selected picture to the Clipboard.

```
procedure CutToClipboard;
```

Description

Use the CutToClipboard method to replace Clipboard contents with the selected picture and to delete the selected picture from a graphic editor. The CutToClipboard method does not clear the Clipboard if a picture is not selected.

See Also

TdxInplaceGraphicEdit.CopyToClipboard; TdxInplaceGraphicEdit.PasteFromClipboard;

TdxInplaceGraphicEdit.ClipboardFormat

GetGraphicClass method

Determines the image class drawn within a graphic editor.

```
type
  TGraphicClass = class of TGraphic;
function GetGraphicClass: TGraphicClass; virtual;
```

Description

The GetGraphicClass function returns the image class drawn within a graphic editor. It is called when the editor draws an image. If GetGraphicClass returns nil, the image is considered a bitmap.

Copyright © 2000 Developer Express Inc.

See Also

TdxInplaceGraphicEdit.OnGetGraphicClass

By default, GetGraphicClass returns nil. Descendants override this method to obtain a desired value.

LoadFromFile method

Loads a picture into a graphic editor using the Open dialog.

```
procedure LoadFromFile;
```

Description

Use this method to activate the File Open dialog and to select a picture to load into a graphic editor.

See Also

TdxInplaceGraphicEdit.SaveToFile

PasteFromClipboard method

Loads a picture into a graphic editor from the Clipboard.

```
procedure PasteFromClipboard;
```

Description

Use this method to load a picture into a graphic editor from the Clipboard.

See Also

TdxInplaceGraphicEdit.CopyToClipboard; TdxInplaceGraphicEdit.CutToClipBoard

SaveToFile method

Saves a picture from a graphic editor to a file via the Save As dialog.

```
procedure SaveToFile;
```

Description

Use this method to save a picture from a graphic editor to the file specified by the Save As dialog.

See Also

TdxInplaceGraphicEdit.LoadFromFile

TdxInplaceGraphicEdit Events

TdxInplaceGraphicEdit

OnAssignPicture	**protected**	OnGetGraphicClass	**protected**
OnCustomClick	**protected**		

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

OnAssignPicture event

Occurs when assigning a picture to a graphic editor.

```
type
 TdxGraphicEditAssignPictureEvent = procedure(Sender: TObject; var Picture:
TPicture) of object;
property OnAssignPicture: TdxGraphicEditAssignPictureEvent;
```

Description

Write an OnAssignPicture event handler to perform specific actions when assigning a picture, specified by the Picture parameter, to a graphic editor.

See Also

TdxInplaceGraphicEdit.AssignPicture

OnCustomClick event

Occurs when clicking the Custom button within a popup toolbar window.

```
property OnCustomClick: TNotifyEvent;
```

Description

A user can add his\her own button to the popup toolbar via the CustomButtonCaption and CustomButtonGlyph properties of the TdxPopupToolBarWindow object. Write an OnCustomClick event handler to perform specific actions when clicking the Custom button.

See Also

TdxInplaceGraphicEdit.CustomClick

OnGetGraphicClass event

Occurs when accessing graphic class.

```
type
 TGraphicClass = class of TGraphic;
```

```
 TdxGraphicEditGraphicClassEvent = procedure(Sender: TObject; var
GraphicClass: TGraphicClass) of object;
property OnGetGraphicClass: TdxGraphicEditGraphicClassEvent;
```

Description

Write an OnGetGraphicClass event handler to perform specific actions when accessing graphic class.

See Also

TdxInplaceGraphicEdit.GetGraphicClass

TdxInplaceBlobEdit

TdxInplaceBlobEdit is a button editor with the ability to display and edit BLOB data.

Unit

dxExEdtr

```
TdxInplaceBlobEdit = class(TdxInplaceDropDownEdit);
```

Description

TdxInplaceBlobEdit is a TdxInplaceDropDownEdit descendant. It includes additional methods to work with BLOB data. Using a BLOB editor, you can view and edit Memo BLOBs and view Picture BLOBs. Additionally, it can automatically determine OLE BLOB type.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit

See Also

TdxInplaceDateEdit; TdxInplaceCalcEdit; TdxInplaceImageEdit; TdxInplacePickEdit; TdxInplaceMemoEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceBlobEdit Properties

TdxInplaceBlobEdit

AlwaysSaveText	**protected / read / write**	MemoWordWrap	**protected / read / write**
BlobEditKind	**protected / read / write**	PictureAutoSize	**protected / read / write**
BlobPaintStyle	**protected / read / write**	PictureClipboardFormat	**protected / read / write**
BlobText	**protected / read / write**	PictureGraphicClass	**protected / read / write**
MemoCharCase	**protected / read / write**	PictureFilter	**protected / read / write**
MemoHideScrollBars	**protected / read / write**	PictureTransparency	**protected / read / write**
MemoMaxLength	**protected / read / write**	PopupWidth	**protected / read / write**
MemoOEMConvert	**protected / read / write**	PopupHeght	**protected / read / write**
MemoScrollBars	**protected / read / write**	ShowExPopupItems	**protected / read / write**
MemoSelectionBar	**protected / read / write**	ShowPicturePopup	**protected / read / write**
MemoWantReturns	**protected / read / write**	SizeablePopup	**protected / read / write**
MemoWantTabs	**protected / read / write**	Text	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**		

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

AlwaysSaveText property — read / write

Specifies whether the text entered into a dropdown window is saved.

```
property AlwaysSaveText: Boolean;
```

Description

Set the AlwaysSaveText property to **True** to save the entered text when a dropdown window is closed.

The default value is **True**.

See Also

TdxInplaceBlobEdit.Text

BlobEditKind property — read / write

Determines the BLOB data associated with a BLOB editor.

```
type
  TdxBlobEditKind = (bekMemo, bekPict, bekOle, bekBlob);
property BlobEditKind: TdxBlobEditKind;
```

Description

Use the BlobEditKind property to specify BLOB type:

Value	Description
bekMemo	Represents memo data.
bekPict	Represents an image.
bekOle	Represents an OLE object.
bekBlob	Represents BLOB data.

The default value is **bekMemo**.

BlobPaintStyle property — read / write

```
type
  TdxBlobPaintStyle = (bpsDefault, bpsIcon, bpsText);
property BlobPaintStyle: TdxBlobPaintStyle;
```

Description

Use the BlobPaintStyle property to specify the manner in which BLOB data is displayed within an editor when a dropdown window is closed:

Value	Description
bpsDefault	Identification text in braces is used: (GRAPHIC) - for an image (MEMO) - for a memo

Copyright © 2000 Developer Express Inc.

bpsIcon	Identification icon is used.
bpsText	Identification text is used.

The default value is **bpsIcon**.

See Also

TdxInplaceBlobEdit.BlobText

BlobText property — read / write

Contains the text string displayed within an editor.

```
property BlobText: string;
```

Description

Use the BlobText property to determine the text string dispayed within a BLOB editor. This text is displayed only when the BlobPaintStyle property is set to **bpsText**.

See Also

TdxInplaceBlobEdit.BlobPaintStyle; TdxInplaceBlobEdit.Text

MemoCharCase property — read / write

Determines text case within a BLOB memo editor.

```
type
  TEditCharCase = (ecNormal, ecUpperCase, ecLowerCase);
property MemoCharCase: TEditCharCase;
```

Description

MemoCharCase is a protected property and TdxInplaceTextEdit descendants may publish it to allow setting of property values at design time. You can use this property to alter the contents of a BLOB editor. Possible MemoCharCase values include:

Value	Description
ecLowerCase	Text is converted to lowercase.
ecNormal	Text is unaltered.
ecUpperCase	Text is converted to UPPERCASE.

When the MemoCharCase property is set to **ecLowerCase** or **ecUpperCase**, character case is converted when a user enters text into an in-place editor. Modifying the MemoCharCase property to **ecLowerCase** or **ecUpperCase** changes the actual contents of the text, not just its appearance. All case information is lost and cannot be recaptured by changing the MemoCharCase property to **ecNormal**.

By default, this property is set to **ecNormal**.

See Also

TdxInplaceTextEdit.CharCase

MemoHideScrollBars property read / write

Specifies whether scroll bars are displayed in a dropdown window.

```
property MemoHideScrollBars: Boolean;
```

Description

If the MemoHideScrollBars property is set to **True**, scroll bars are hidden when not in use. This property is only in effect when the MemoScrollBars property is not set to **ssNone**.

The default value is **True**.

See Also

TdxInplaceBlobEdit.MemoScrollBars

MemoMaxLength property read / write

Determines the maximum length of memo text in characters.

```
property MemoMaxLength: Integer;
```

Description

The MemoMaxLength property determines the maximum length of text edited in a BLOB editor. If the MemoMaxLength property is 0, there is no limit to the maximum length of memo text in characters.

The default value is 0.

See Also

TdxInplaceTextEdit.MaxLength

MemoOEMConvert property read / write

Determines whether the characters typed in a dropdown window of a BLOB editor are converted from ANSI to OEM and then back.

```
property MemoOEMConvert: Boolean;
```

Description

MemoOEMConvert is a protected property and TdxInplaceBlobEdit descendants may publish it to allow setting of property values at design time. To make certain that all characters typed into an in-place editor can be converted to the OEM character set, set this property to True. This converts all characters from ANSI to OEM and then back to ANSI. Set the MemoOEMConvert property to False to avoid excessive processing when mapping to the OEM format is not necessary. This property is most useful for editors used to enter file names when an application does not use Unicode file names.

By default, this property for TdxInplaceBlobEdit is set to **False**.

See Also

TdxInplaceTextEdit.OEMConvert

MemoScrollBars property — read / write

Specifies which scroll bars are displayed within a dropdown window.

```
type
  TScrollStyle = (ssNone, ssHorizontal, ssVertical, ssBoth);
property MemoScrollBars: TScrollStyle;
```

Description

Use this property to specify the scroll bars for a dropdown window when it displays memo text.

Value	Description
ssNone	There are no scroll bars within a dropdown window.
ssHorizontal	A horizontal scroll bar is displayed.
ssVertical	A vertical scroll bar is displayed.
ssBoth	Both the vertical and horizontal scroll bars are displayed.

The default value is **ssNone**.

See Also

TdxInplaceBlobEdit.MemoHideScrollBars

MemoSelectionBar property — read / write

Specifies whether the selection bar is displayed at the leftmost edge of a dropdown window.

```
property MemoSelectionBar: Boolean;
```

Description

This property is used when a BLOB editor is used as a memo editor. Selection bar is a region at the leftmost edge of a dropdown window in a BLOB editor. It allows a user to select the entire contents of individual text lines using a mouse. Set the MemoSelectionBar property to **True** to display it or **False** to hide it. When the selection bar is hidden, a user can select text lines on a character-by-character basis only.

The default value is **True**.

See Also

TdxInplaceMemoEdit.SelectionBar

MemoWantReturns property read / write

Determines whether the RETURN character is accepted during editing.

```
property MemoWantReturns: Boolean;
```

Description

Determines whether a BLOB editor dropdown window accepts the RETURN character when pressing the Enter key on the keyboard.

The default value is **True**.

See Also

TdxInplaceBlobEdit.MemoWantTabs; TdxInplaceMemoEdit.WantReturns

MemoWantTabs property read / write

Determines whether the TAB character is accepted during editing.

```
property MemoWantTabs: Boolean;
```

Description

Determines whether a BLOB editor dropdown window accepts the TAB character when pressing the tab key on the keyboard.

The default value is **True**.

See Also

TdxInplaceBlobEdit.MemoWantReturns; TdxInplaceMemoEdit.WantTabs

MemoWordWrap property read / write

Determines whether to wrap words in a dropdown window when it displays a memo.

```
property MemoWordWrap: Boolean;
```

Description

Set the MemoWordWrap property to **True** to wrap words within a dropdown window. This property is only in effect when the horizontal scroll bar is not displayed.

The default value is **True**.

See Also

TdxInplaceMemoEdit.WordWrap

PictureAutoSize property read / write

Determines whether a dropdown window has the same size as the picture from BLOB data.

Copyright © 2000 Developer Express Inc.

```
property PictureAutoSize: Boolean;
```

Description

If the PictureAutoSize property is True, the size of a dropdown window changes to display the entire picture.

The default value is **True**.

PictureClipboardFormat property read / write

Specifies the format of Clipboard data.

```
property PictureClipboardFormat: Word;
```

Description

Possible values include:

Value	Description
CF_BITMAP	Windows bitmap graphic.
CF_METAFILEPICT	Windows metafile graphic.
CF_PICTURE	A TPicture type object.

See Also

TdxInplaceGraphicEdit.ClipboardFormat

PictureGraphicClass property read / write

Determines edited image type.

```
type
 TGraphicClass = class (TGraphic);
property PictureGraphicClass: TGraphicClass;
```

Description

This property contains image type: a bitmap, an icon, etc. If the PictureGraphicClass property is nil (the default value), the image is considered to be a bitmap.

See Also

TdxInplaceBlobEdit.GetGraphicClass; TdxInplaceBlobEdit.OnGetGraphicClass

PictureFilter property read / write

Determines the filter used to display specific files in the Files list box when selecting a picture to load.

```
property PictureFilter: string;
```

Description

Used to define file filters for the Load File Dialog window. Enter wildcards and extensions to define your filter. For instance, if this property is set to "*.BMP", only files with a .BMP extension are displayed.

See Also

TdxInplaceGraphicEdit.CustomFilter

PictureTransparency property — read / write

Determines whether a picture can be transparent.

```
type
  TdxGraphicEditTransparency = (gtDefault, gtOpaque, gtTransparent);
property PictureTransparency: TdxGraphicEditTransparency;
```

Description

Possible values include:

Value	Description
gtDefault	Default value.
gtOpaque	A picture is not transparent.
gtTransparent	A picture is transparent.

The default value is **gtDefault**.

See Also

TdxInplaceGraphicEdit.GraphicTransparency

PopupWidth property — read / write

Determines the width of a dropdown window for a BLOB editor.

```
property PopupWidth: Integer;
```

Description

Use this property to specify the width of a dropdown window in pixels.

The default value is **200**.

See Also

TdxInplaceBlobEdit.PopupHeight; TdxInplaceBlobEdit.SizeablePopup

PopupHeight property — read / write

Specifies the height of a dropdown window.

Copyright © 2000 Developer Express Inc.

```
property PopupHeight: Integer;
```

Description

Use this property to specify the height of a dropdown window in pixels.

The default value is **140**.

See Also

TdxInplaceBlobEdit.PopupWidth; TdxInplaceBlobEdit.SizeablePopup

ShowExPopupItems property — read / write

Determines whether a popup menu includes extended items.

```
property ShowExPopupItems: Boolean;
```

Description

If BLOB data is displayed as an image, a BLOB editor can include a popup menu to modify its contents. The ShowExPopupItems property determines whether the popup menu includes the *Save to file* and *Load from file* extended menu items. If ShowExPopupItems is True, the extended items are displayed.

By default, the ShowExPopupItems property is **True**.

ShowPicturePopup property — read / write

Determines whether a popup menu is displayed when pressing the right mouse button within a dropdown window.

```
property ShowPicturePopup: Boolean;
```

Description

Determines whether a popup menu is activated when pressing the right mouse button within a dropdown window. This popup menu contains Copy and Paste functions to provide easy editing of BLOB objects.

By default, ShowPicturePopup is **True**.

SizeablePopup property — read / write

Determines whether a dropdown window is sizeable.

```
property SizeablePopup: Boolean;
```

Description

If this property is set to **True**, users can change the size of a dropdown window wherein BLOB data is displayed. When set to sizeable, a sizing grip is displayed at the bottom-right corner of the window.

The default value is **True**.

See Also

TdxInplaceBlobEdit.PopupHeight; TdxInplaceBlobEdit.PopupWidth

Text property read / write

Contains the text displayed within a dropdown window.

```
property Text: string;
```

Description

Use the Text property to read or set the text string displayed within a dropdown window. The Text value determines the contents of a dropdown window only when the BlobEditKind property is set to **bekMemo** (when the BLOB editor is used as a memo editor).

See Also

TdxInplaceMaskEdit.Text; TdxInplaceBlobEdit_BlobText

Copyright © 2000 Developer Express Inc.

TdxInplaceBlobEdit Methods

TdxInplaceBlobEdit

AssignPicture	**protected**	SavePopupSize	**protected**
GetGraphicClass	**protected**	SetBlobValue	**protected**
IsSizeablePopup	**protected**		

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

AssignPicture method

Generates the OnAssignPicture event.

```
procedure AssignPicture(Picture: TPicture); virtual;
```

Description

TdxInplaceBlobEdit descendants can be used to modify any BLOB data, including images, within a BLOB editor. The AssignPicture method is called when a user saves an edited image. The Picture parameter specifies the saved image. Descendants can override it to perform specific actions when saving pictures.

See Also

TdxInplaceBlobEdit.OnAssignPicture

GetGraphicClass method

Returns the graphic class for an image and generates the OnGetGraphicClass event.

```
function GetGraphicClass: TGraphicClass; virtual;
```

Description

The GetGraphicClass method returns the class of an image drawn in a graphic editor.

See Also

TdxInplaceBlobEdit.PictureGraphicClass; TdxInplaceBlobEdit.OnGetGraphicClass

IsSizeablePopup method

Provides the interface, which determines whether the dropdown window of a BLOB viewer/editor is sizeable.

```
function IsSizeablePopup: Boolean; virtual;
```

Description

IsSizeablePopup is a virtual protected method. It provides the interface, which determines whether a specific dropdown window is sizeable. This method always returns **True** for the TdxInplaceBlobEdit class. TdxInplaceBlobEdit descendants can override this method to provide a proper return value.

See Also

TdxInplaceBlobEdit.SavePopupSize

SavePopupSize method

Provides the interface, which saves the size of the dropdown window of a BLOB viewer/editor.

```
procedure SavePopupSize(W, H: Integer); virtual;
```

Description

SavePopupSize is a virtual protected method. It provides the interface, which saves the size of a specific dropdown window. The W and H parameters determine the current Width and Height of a dropdown window. TdxInplaceBlobEdit descendants override this method to provide proper window saving mechanisms.

Copyright © 2000 Developer Express Inc.

See Also

TdxInplaceBlobEdit.IsSizeablePopup

SetBlobValue method

Sets the data value for a new BLOB.

```
procedure SetBlobValue(Sender: TObject); virtual;
```

Description

Used to set the data value for a new BLOB after the popup control has been closed. This method is in effect only for Memo and Picture BLOBs.

TdxInplaceBlobEdit Events

TdxInplaceBlobEdit

OnAssignPicture	**protected**	OnGetGraphicClass	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

OnAssignPicture event

Occurs when assigning a picture to a BLOB editor.

```
type
  TdxGraphicEditAssignPictureEvent = procedure(Sender: TObject; var
Picture: TPicture) of object;
property OnAssignPicture: TdxGraphicEditAssignPictureEvent;
```

Description

This event is generated each time a user pastes an image into a dropdown window. The Picture parameter specifies the pasted image. Write an OnAssignPicture event handler to display specific formats (i.e. JPEG or GIF) in a dropdown BLOB window.

See Also

TdxInplaceBlobEdit.AssignPicture

OnGetGraphicClass event

Occurs when accessing the graphic class of an image.

```
type
 TGraphicClass = class of TGraphic;
  TdxGraphicEditGraphicClassEvent = procedure(Sender: TObject; var
GraphicClass: TGraphicClass) of object;
property OnGetGraphicClass: TdxGraphicEditGraphicClassEvent;
```

Description

The OnGetGraphicsClass event is generated when a picture is drawn. The GraphicClass parameter determines the graphic class of an image. Write an OnGetGraphicClass event handler to display different image types, if necessary.

Copyright © 2000 Developer Express Inc.

See Also

TdxInplaceBlobEdit.GetGraphicClass; TdxInplaceBlobEdit.PictureGraphicClass

TdxInplaceMRUEdit

TdxInplaceMRUEdit is a button type editor with the ability to view and edit a list of most recently used items (MRU).

Unit

dxExEdtr

```
TdxInplaceMRUEdit = class(TdxInplacePickEdit);
```

Description

The TdxInplaceMRUEdit class maintains a list of most recently used items. This list is maintained automatically and additional coding is not necessary. The TdxInplaceMRUEdit class is a TdxInplacePickEdit descendant and can be used as a pick editor to select a value from a list of most recently used items.

TdxInplaceMRUEdit is an editor with a button control. It can include one or two clickable buttons. One of these buttons is always used to activate a dropdown list of items. The other button can be used to perform specific actions.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePickEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceMRUEdit Properties

TdxInplaceMRUEdit

ImmediateDropDown	**protected / read / write**	ShowEllipsis	**protected / read / write**
MaxItemCount	**protected / read / write**		

Derived from TdxInplacePickEdit

CanDeleteText	**protected / read / write**	Items	**protected / read / write**
DropDownListStyle	**protected / read / write**	Revertable	**protected / read / write**
ItemIndex	**protected / read / write**	Sorted	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

ImmediateDropDown property — read / write

Specifies whether a dropdown control opens immediately after pressing a key.

```
property ImmediateDropDown: Boolean;
```

Description

If the ImmediateDropDown property is set to **True**, incremental search is activated and the dropdown window of the recently used items is automatically displayed when a user begins entering data via the keyboard.

If the ImmediateDropDown property is set to **False**, incremental search is activated without displaying the dropdown window.

The default value of this property is **False**.

See Also

TdxInplaceDropDownEdit.ImmediateDropDown

MaxItemCount property — read / write

Determines the maximum number of items in a dropdown list.

```
property MaxItemCount: Integer;
```

Description

Use the MaxItemCount property to specify the maximum number of items stored in the dropdown list of a MRU-editor. A new value is stored as a new item within the dropdown list when the editor loses focus. The most recently used item is placed at the top of the list. When a new item is placed into the list, it shifts other items down and becomes the first item.

If the number of stored items within a dropdown list is equal to the value of the MaxItemCount property, the following operations are performed when a user enters a new value within an editor. The dropdown list hides its lowest item, all other items are shifted down and the new item is placed at the top of the list. All these changes are made when the editor loses focus.

If the value of the MaxItemCount property is 0, there is no limit to the number of list items. When the number of list items becomes greater than the value of the DropDownRows property, a vertical scroll bar appears at the right edge of the dropdown window.

See Also

TdxInplaceMRUEdit.AddItem

ShowEllipsis property — read / write

Determines whether an additional button is displayed within an editor.

```
property ShowEllipsis: Boolean;
```

Description

Set the ShowEllipsis property to **False**, if you do not wish to use and display an additional button within the editor. If this property is **True**, you can write an OnButtonClick event handler to perform specific actions when pressing this button.

Copyright © 2000 Developer Express Inc.

TdxInplaceMRUEdit Methods

In TdxInplaceMRUEdit

AddItem	**public**	ButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

AddItem method

Adds a new item to the dropdown items list.

```
procedure AddItem(const Value: string); virtual;
```

Description

Call the AddItem method to add a string specified by the Value parameter as a new item to the item list. If the value specified by the Value parameter is already in the list, it is moved to the top of the list.

See Also

TdxInplaceMRUEdit.MaxItemCount

ButtonClick method

Generates the OnButtonClick event.

```
procedure ButtonClick; virtual;
```

Description

The ButtonClick method is used to generate the OnButtonClick event. A user can write an event handler to perform specific actions when clicking a button.

See Also

TdxInplaceMRUEdit.OnButtonClick

Copyright © 2000 Developer Express Inc.

TdxInplaceMRUEdit Events

TdxInplaceMRUEdit

OnButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

OnButtonClick event

Occurs when clicking a button within an editor.

```
property OnButtonClick: TNotifyEvent;
```

Description

Write an OnButtonClick event handler to perform specific actions when clicking the additional (ellipsis) button.

See Also

TdxINplaceMRUEdit.ButtonClick

TdxInplacePopupEdit

TdxInplacePopupEdit is a button type editor with a dropdown window, which can be used to embed another control within it.

Unit

dxExEdtr

```
TdxInplacePopupEdit = class(TdxInplaceDropDownEdit);
```

Description

TdxInplacePopupEdit is a TdxInplaceDropDownEdit descendant and it inherits its basic methods and properties. It includes a dropdown window used to host a specific control. At runtime, a user can work with this control within the dropdown window of the TdxInplacePopupEdit class.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit

Copyright © 2000 Developer Express Inc.

TdxInplacePopupEdit Properties

TdxInplacePopupEdit

PopupForm	**public / read only**	PopupFormCaption	**protected / read / write**
HideEditCursor	**protected / read / write**	PopupHeight	**protected / read / write**
PopupAutoSize	**protected / read / write**	PopupMinHeight	**protected / read / write**
PopupControl	**protected / read / write**	PopupMinWidth	**protected / read / write**
PopupClientEdge	**protected / read / write**	PopupSizeable	**protected / read / write**
PopupFlatBorder	**protected / read / write**	PopupWidth	**protected / read / write**
PopupFormBorderStyle	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

HideEditCursor property — read / write

Specifies whether an edit cursor is displayed within a popup editor.

```
property HideEditCursor: Boolean;
```

Description

The HideEditCursor property specifies whether the value displayed within the edit region of an editor can be modified. Set the HideEditCursor property to **True** to hide the edit cursor and to prevent editing within the popup editor.

The default value is **False**.

PopupAutoSize property — read / write

Specifies whether a dropdown window is of the same size as a popup control.

```
property PopupAutoSize: Boolean;
```

Description

The PopupAutoSize property specifies whether a dropdown window automatically changes its size based upon the size of a control. If **True**, it is the same size as the control. Otherwise, its width and height are determined by the PopupWidth and PopupHeight properties.

The default value is **True**.

See Also

TdxPopupEditForm.Sizeable; TdxInplacePopupEdit.PopupSizeable

PopupControl property — read / write

Specifies the control to be displayed within a dropdown window.

```
property PopupControl: TControl;
```

Description

Use the PopupControl property to specify the control (dropdown control), stored within the dropdown window of a popup editor. A dropdown control can be any component registered in the IDE and derived from TControl. This control must be initially invisible, since its position changes when the dropdown window activates (the control 'jumps' from its previous location to the dropdown window).

PopupClientEdge property — read / write

Specifies the border style of a dropdown window.

```
property PopupClientEdge: Boolean;
```

Description

If the PopupClientEdge property is set to **True**, a dropdown window has a sunken border.

The default value is **False**.

See Also

TdxInplacePopupEdit.PopupBorderStyle

Copyright © 2000 Developer Express Inc.

PopupFlatBorder property — read / write

Specifies whether the dropdown window border is flat.

```
property PopupFlatBorder: Boolean;
```

Description

Set the PopupFlatBorder property to **False** to provide the 3-D style for a dropdown window's border.

The default value is **True**.

See Also

TdxInplacePopupEdit.PopupBorderStyle

PopupForm property — read only

Specifies the popup form used as a dropdown window for a popup editor.

```
property PopupForm: TdxPopupEditForm;
```

Description

The PopupForm property indicates the popup form, which contains the displayed control and drops down when a user clicks the combo button within the popup editor.

See Also

TdxPopupEditForm

PopupFormBorderStyle property — read / write

Specifies the border style for a dropdown window.

```
type
 TdxPopupEditFormBorderStyle = (pbsDialog, pbsDialogHelp, pbsSimple,
pbsSysPanel);
property PopupFormBorderStyle: TdxPopupEditFormBorderStyle;
```

Description

Use this property to specify the border style for a dropdown window. The following values are available:

Values	Description
pbsDialog	The Dropdown window has a standard border along with a “Close” button.
pbsDialogHelp	The Dropdown window has a standard border along with a “Close” and a “What’s This?” button.
pbsSimple	The Dropdown window has a simple single-line border around the control.
pbsSysPanel	The Dropdown window has a single-line border and a status bar at its bottom

with a “Close” button and a sizing grip.

This property only impacts dropdown window style. The default value is **pbsDialog**.

See Also

TdxInplacePopupEdit.PopupFlatBorder; TdxInplacePopupEdit.PopupFormCaption

PopupFormCaption property — read / write

Determines the caption of a dropdown window.

```
property PopupFormCaption: string;
```

Description

Use the PopupFormCaption property to determine a dropdown window's caption.

***Note**: The caption is displayed only when the border style of a dropdown window is equal to **pbsDialog** or **pbsDialogHelp**.*

See Also

TdxInplacePopupEdit.PopupBorderStyle

PopupHeight property — read / write

Determines the height of a dropdown window.

```
property PopupHeight: Integer;
```

Description

Use the PopupHeight property to determine the height of a popup editor dropdown window. The PopupHeight property has an integer value, which specifies its height in pixels. This property is not in effect when the PopupAutoSize property is set to True and it cannot be less than the PopupMinHeight property.

The default value is **200**.

See Also

TdxInplacePopupEdit.PopupMinHeight; TdxInplacePopupEdit.PopupWidth

PopupMinHeight property — read / write

Determines the minimum height of a dropdown window.

```
property PopupMinHeight: Integer;
```

Description

Use the PopupMinHeight property to determine the minimum height of a popup editor dropdown window.

Copyright © 2000 Developer Express Inc.

The default value is **100**.

See Also

TdxInplacePopupEdit.PopupHeight; TdxInplacePopupEdit.PopupMinWidth

PopupMinWidth property — read / write

Determines the minimum width of a dropdown window.

```
property PopupMinWidth: Integer;
```

Description

Use the PopupMinWidth property to specify the minimum width of a popup editor dropdown window.

The default value is **100**.

See Also

TdxInplacePopupEdit.PopupMinHeight; TdxInplacePopupEdit.PopupHeight

PopupSizeable property — read / write

Specifies whether the size of a dropdown window can be changed.

```
property PopupSizeable: Boolean;
```

Description

Set the PopupSizeable property to **False** to prevent sizing of a dropdown window at runtime. If the PopupSizeable property is set to **True**, a user can change the size of a dropdown window. The default value is **True**.

See Also

TdxPopupEditForm.Sizeable

PopupWidth property — read / write

Determines the width of a popup form.

```
property PopupWidth: Integer;
```

Description

Use the PopupWidth property to determine the width of a popup editor dropdown window. The PopupWidth property has an integer value, which specifies its width in pixels. This property is not in effect when the PopupAutoSize property is set to **True** and it cannot be less than the PopupMinWidth property. The default value is **250**.

See Also

TdxInplacePopupEdit.PopupHeight; TdxInplacePopupEdit.PopupMinWidth

Copyright © 2000 Developer Express Inc.

TdxInplacePopupEdit Methods

TdxInplacePopupEdit

CalcSize	**protected**	InitializePopup	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

CalcSize method

Calculates the size of a dropdown window.

```
procedure CalcSize(APopupForm: TdxPopupEditForm); virtual;
```

Description

The CalcSize method is used to calculate the size of a dropdown window. The APopupForm parameter specifies the popup form represented by the TdxPopupEditForm class.

InitializePopup method

Initializes a dropdown window.

```
procedure InitializePopup(APopupForm: TdxPopupEditForm); virtual;
```

Description

The InitializePopup method is used to initialize the dropdown window before its display. The InitializePopup method sets the default values for the popup edit form specified by the APopupForm parameter.

See Also

TdxInplacePopupEdit.OnInitPopup

Copyright © 2000 Developer Express Inc.

TdxInplacePopupEdit Events

TdxInplacePopupEdit

OnCloseQuery	**protected**	OnInitPopup	**protected**
OnCloseUp	**protected**	OnPopup	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

OnCloseQuery event

Occurs when a dropdown window is about to be closed.

```
type
  TdxPopupEditCloseQueryEvent = procedure (Sender: TObject; var CanClose:
Boolean) of object;
property OnCloseQuery: TdxPopupEditCloseQueryEvent;
```

Description

Write an OnCloseQuery event handler to determine whether a dropdown window can be closed. Set the CanClose parameter within the event handler to **False** to prevent the closing of the window. The OnCloseQuery event is generated when pressing the Close button or Alt-F4. For instance, a user can write an event handler to check whether the edited value is valid.

OnCloseUp event

Occurs immediately after a dropdown window has closed.

```
type
  TdxPopupEditCloseUpEvent = procedure (Sender: TObject; var Text: string;
var Accept: Boolean) of object;
property OnCloseUp: TdxPopupEditCloseUpEvent;
```

Description

Write an OnCloseUp event handler to confirm or discard any changes made in a popup editor via a dropdown window. The Text parameter specifies the text edited within the edit region of an editor. Set the Accept parameter to True to confirm changes in the editor. If the Accept parameter is False, all changes are canceled.

See Also

TdxPopupEditForm.ClosePopup

OnInitPopup event

Occurs when a dropdown window is about to be initialized.

```
property OnInitPopup: TNotifyEvent;
```

Description

Write an OnInitPopup event handler to tune the settings of a dropdown window and to determine which control will be displayed as a dropdown control. This feature allows using different dropdown windows in different situations via a single popup editor.

See Also

TdxInplacePopupEdit.InitializePopup

OnPopup event

Occurs before displaying a dropdown window.

```
type
  TdxPopupEditPopupEvent = procedure (Sender: TObject; const EditText:
string) of object;
property OnPopup: TdxPopupEditPopupEvent;
```

Description

Write an OnPopup event handler to initialize data in a dropdown control before activating the dropdown form. The EditText parameter specifies the text displayed in the popup editor. For instance, you can use this text to position the cursor at a specific record in a dropdown grid.

See Also

TdxInplacePopupEdit.OnInitPopup

Copyright © 2000 Developer Express Inc.

TdxPopupEditForm

TdxPopupEditForm is used as a dropdown window for a popup and extended lookup editor.

Unit

dxExEdtr

```
TdxPopupEditForm = class(TCustomForm)
```

Description

Popup and extended lookup editors display a dropdown window to aid in the modification of data values. They can display any control, including complex forms within the dropdown window. A control is 'wrapped' by the TdxPopupEditForm class.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TScrollingWinControl
          - TCustomForm

TdxPopupEditForm Properties

ClientEdge	**public / read / write**	PopupMinWidth	**public / read / write**
FlatBorder	**public / read / write**	Sizeable	**public / read / write**
PopupFormBorderStyle	**public / read / write**	SizingCorner	**protected / read / write**
PopupMinHeight	**public / read / write**		

ClientEdge property — read / write

Specifies the border style for a popup form.

```
property ClientEdge: Boolean;
```

Description

If the ClientEdge property is set to **True**, the popup form has a sunken border.

The default value is **False**.

See Also

TdxPopupEditForm.PopupFormBorderStyle

FlatBorder property — read / write

Specifies the border style for a popup form.

```
property FlatBorder: Boolean;
```

Description

If the FlatBorder property is set to True, the border has a 2D look. Otherwise, it has a 3D look.

The default value is **True**.

See Also

TdxPopupEditForm.PopupFormBorderStyle

PopupFormBorderStyle property — read / write

Specifies the border style for a dropdown window.

```
type
 TdxPopupEditFormBorderStyle = (pbsDialog, pbsDialogHelp, pbsSimple,
pbsSysPanel);
property PopupFormBorderStyle: TdxPopupEditFormBorderStyle;
```

Copyright © 2000 Developer Express Inc.

Description

Use this property to specify the border style for a dropdown window. The following values are available:

Values	Description
PbsDialog	The Dropdown window has a standard border along with a “Close” button.
PbsDialogHelp	The Dropdown window has a standard border along with a “Close” and a “What’s This?” button.
PbsSimple	The Dropdown window has a simple single-line border around the control.
PbsSysPanel	The Dropdown window has a single-line border and a status bar at its bottom with a “Close” button and a sizing grip.

This property affects only dropdown window style. The default value is **pbsDialog**.

See Also

TdxPopupEditForm.PopupFormFlatBorder; TdxPopupEditForm.ClientEdge

PopupMinHeight property — read / write

Determines the minimum height of a popup form.

```
property PopupMinHeight: Integer;
```

Description

Use the PopupMinHeight property to determine the minimum height of the popup form from a popup editor.

The default value is **100**.

See Also

TdxPopupEditForm.PopupMinWidth

PopupMinWidth property — read / write

Determines the minimum width of a dropdown window.

```
property PopupMinWidth: Integer;
```

Description

Use the PopupMinWidth property to specify the minimum width of the dropdown window of a popup editor.

The default value is **100**.

See Also

TdxPopupEditForm.PopupMinHeight

Sizeable property read / write

Specifies whether a popup form is sizeable.

```
property Sizeable : Boolean;
```

Description

If the Sizeable property is set to **True**, a user can change the size of a form; Otherwise, form size is fixed.

By default, the Sizeable property is set to **True**.

See Also

TdxPopupEditForm.SizingCorner

SizingCorner property read / write

Specifies the location of the sizing grip.

```
type
  TdxCorner = (coTopLeft, coTopRight, coBottomLeft, coBottomRight);
property SizingCorner : TdxCorner;
```

Description

This property specifies the corner at which the sizing grip is drawn. Possible values include:

Values	Description
coTopLeft	The sizing grip is displayed at the top-left corner.
coTopRight	The sizing grip is displayed at the top-right corner.
coBottomLeft	The sizing grip is displayed at the bottom-left corner.
coBottomRight	The sizing grip is displayed at the bottom-right corner.

***Note**: The sizing grip is displayed only when the border style is set to **pbsSysPanel** and the Sizeable property is **True**.*

See Also

TdxPopupEditForm.Sizeable

Copyright © 2000 Developer Express Inc.

TdxPopupEditForm Methods

ClosePopup	**public / read / write**
ShowPopup	**public / read / write**

ClosePopup method

Closes a popup form.

```
procedure ClosePopup(Accept: Boolean); virtual;
```

Description

This method closes a dropdown window. The Accept parameter determines whether the popup form can be closed. If a popup form contains a button with the **mrOk** or **mrCancel** modal result, the popup form is automatically closed when the button is pressed. The *Accept* parameter passed to an **OnCloseUp** event handler is determined by the modal result of the pressed button.

See Also

TdxPopupEditForm.ShowPopup

ShowPopup method

Displays a popup form on screen.

```
procedure ShowPopup; virtual;
```

Description

This method displays a dropdown window on screen. Descendants can override it to activate the dropdown window based upon their specific programming needs.

See Also

TdxPopupEditForm.ClosePopup

TdxInplaceLookupEdit

TdxInplaceLookupEdit is a button editor with a linked dropdown lookup list.

Unit

dxDBEdtr

```
TdxInplaceLookupEdit = class(TdxInplaceDropDownEdit);
```

Description

TdxInplaceLookupEdit descends from TdxInplaceDropDownEdit. It includes a dropdown lookup list box and provides additional methods for managing the list box. This editor is used to create a lookup list box from a lookup table. Users can edit data within this editor by selecting the required value from the pick list or directly entering it into the editor.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit

See Also

TdxInplaceDropDownEdit

Copyright © 2000 Developer Express Inc.

TdxInplaceLookupEdit Properties

TdxInplaceLookupEdit

CanDeleteText	**protected / read / write**	ListSource	**protected / read / write**
ClearKey	**protected / read / write**	LookupKeyValue	**protected / read / write**
Field	**protected / read / write**	LookupMode	**protected / read only**
KeyFieldName	**protected / read / write**	Revertable	**protected / read / write**
ListFieldName	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

CanDeleteText property — read / write

Specifies whether a user can delete the displayed value.

```
property CanDeleteText: Boolean;
```

Description

This property is used when the DropDownListStyle property is set to **True**. If the CanDeleteText property is set to **False**, a user cannot delete the selected value from the editor. If the CanDeleteText property is set to **True**, users can delete the selected value without removing this item from the dropdown list.

The default value is **False**.

*Note: The DropDownListStyle property is always set to **True** for TdxInplaceLookupEdit.*

ClearKey property read / write

Specifies the short cut that clears the editor's value.

```
property ClearKey: TShortCut;
```

Description

The ClearKey property specifies the shortcut key combination that clears data values (sets to Null) within an editor.

Field property read / write

Determines the field associated with a lookup editor.

```
property Field: TField;
```

Description

Every data-aware editor is associated with a dataset field. The Field property specifies the field associated with a lookup editor.

See Also

TdxInplaceLookupEdit.ListFieldNames

KeyFieldName property read / write

Specifies the name of the key field.

```
property KeyFieldName: string;
```

Description

Use the KeyFieldName property to set the name of the key field for TdxInplaceLookupEdit descendant objects. The Key Field is used to navigate a data source.

ListFieldName property read / write

Determines field names in a lookup list.

```
property ListFieldName: string;
```

Description

Use the ListFieldName property to specify the fields that appear in a dropdown list. Multiple field names can appear in the dropdown list. To display multiple field names, you must separate each field name with a semicolon.

Copyright © 2000 Developer Express Inc.

See Also

TdxInplaceLookupEdit.Field

ListSource property — read / write

Specifies the data source used for TdxInplaceLookupEdit descendant objects.

```
property ListSource: TDataSource;
```

Description

Set this property value to the name of the data source you want to use as a list source for TdxInplaceLookupEdit descendant objects.

LookupKeyValue property — read / write

Specifies the key field for the default record of an editor.

```
property LookupKeyValue: Variant;
```

Description

Use the LookupKeyValue property to set the default record displayed within an editor. This property value specifies the key field value of the default record. The key field is specified by the KeyFieldName property.

LookupMode property — read only

Specifies whether a TdxInplaceLookupEdit descendant object corresponds to a lookup field.

```
property LookupMode: Boolean;
```

Description

Returns **True** if a TdxInplaceLookupEdit descendant object corresponds to a lookup field.

Revertable property — read / write

Specifies whether a user can cycle through lookup list values via a double click event.

```
property Revertable: Boolean;
```

Description

Set the Revertable property to True to allow a user to cycle through list values by double-clicking the appropriate mouse button within a pick editor. When the Revertable property is True, list values are displayed within the editor in their stored order. The display process is circular. When the last item of the list is displayed, a double click displays the first item in the list.

The default value is **False**.

TdxInplaceLookupEdit Methods

TdxInplaceLookupEdit

ClearField	**protected**	IsEditable	**public**
DoCloseUp	**protected**	SetKeyValue	**protected**
DoIncremental	**protected**		

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoDropDownKeys	**protected**	PopupBorderStyle	**public**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

ClearField method

Clears data values (sets to Null).

Copyright © 2000 Developer Express Inc.

```
procedure ClearField;  virtual;
```

Description

The ClearField method is used to clear the contents of the dataset field associated with a lookup editor. This method is used internally.

See Also

TdxInplaceLookupEdit.Field

DoCloseUp method

Generates the OnCloseUp event handler when closing a dropdown window.

```
procedure DoCloseUp(var Value: Variant; var Accept: Boolean); virtual;
```

Description

TdxInplaceLookupEdit uses a dropdown list to modify data in the associated field. The DoCloseUp method is called when closing a dropdown window with a lookup list. The Value parameter determines an item selected in the dropdown list. The Accept parameter determines whether the dropdown window can be closed. Set the Accept parameter within the DoCloseUp procedure to **False** to prevent closing. By default, the DoCloseUp method generates the OnCloseUp event handler. Descendants can override it to perform specific actions when closing a dropdown window.

DoIncremental method

Locates a specific record in a dataset.

```
procedure DoIncremental(Distance: Integer; Circle: Boolean); virtual;
```

Description

The DoIncremental method changes the current value within an editor to the next value within a lookup dataset. The Distance parameter indicates the number of records to search through. If the Circle parameter is True, searching resumes from the beginning. Said differently, the cursor moves from the last record to the first.

IsEditable method

Specifies whether a user can edit values within an editor.

```
function IsEditable: Boolean;
```

Description

Use the IsEditable method to specify whether an associated field can be edited. This method returns **True** if the ReadOnly property is set to **False** and there is an assigned data field whose FieldKind property is set to fkLookup.

SetKeyValue method

Sets a new value for data edited within a lookup editor.

```
procedure SetKeyValue(AValue : Variant); virtual;
```

Description

The SetKeyValue is a virtual protected method. A new value is specified by the AValue parameter. TdxInplaceLookupEdit descendants can override this method to provide appropriate mechanisms to set new data values, i.e. data-aware descendants can save AValue to a dataset field.

See Also

TdxInplaceDBTreeListLookupEdit.SetKeyValue

Copyright © 2000 Developer Express Inc.

TdxInplaceLookupEdit Events

TdxInplaceLookupEdit

OnCloseUp	**protected**

Derived from TdxInplaceDropDownEdit

OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

OnCloseUp event

Occurs when closing the dropdown window associated with a lookup editor.

```
type
  TdxPickColumnCloseUp = procedure(Sender: TObject; var Value: Variant; var
Accept: Boolean) of object;
property OnCloseUp: TdxPickColumnCloseUp;
```

Description

Write an OnCloseUp event handler to perform specific actions when closing a dropdown window. The Value parameter determines the value selected within the dropdown window. The Accept parameter determines whether to display this value within the editor. If the Accept parameter is set to **True**, this value is displayed.

TdxEditButton

Determines the properties and methods of an edit button placed within a button editor.

Unit

dxExEdtr

```
TdxEditButton = class(TCollectionItem);
```

Description

TdxEditButton is a collection item belonging to the TdxEditButtons collection. These items are used to control the appearance and behavior of individual buttons within a TdxButtonEdit control.

Hierarchy

TObject

- TPersistent
  - TCollectionItem

Copyright © 2000 Developer Express Inc.

TdxEditButton Properties

Default	**published / read / write**	LeftAlignment	**published / read / write**
Glyph	**published / read / write**	Visible	**published / read / write**
Kind	**published / read / write**	Width	**published / read / write**

Default property — read / write

Specifies whether a button is the default button.

```
property Default: Boolean;
```

Description

Set the Default property to **True** to specify a button as default. The default button is activated when a user presses the key combination defined within the ClickKey property.

Glyph property — read / write

Specifies the image drawn within a specific edit button.

```
property Glyph: TBitmap;
```

Description

Determines the glyph for an editor button. The glyph is drawn on the button if the Kind property is set to bkGlyph.

Kind property — read / write

Determines edit button type.

```
type
  TdxEditButtonKind = (bkEllipsis, bkDown, bkGlyph);
property Kind: TdxEditButtonKind;
```

Description

Use the Kind property to specify the appearance of a button's glyph. Possible values include:

Values	Description	
bkEllipsis	A button displays the standard "Ellipsis" glyph.	
bkDown	A button displays the standard "Down" glyph.	
bkGlyph	A custom glyph is displayed.	

The default value is **bkEllipsis**.

LeftAlignment property read / write

Specifies the location of an edit button within its associated editor.

```
property LeftAlignment: Boolean;
```

Description

Set the LeftAlignment property to **True** to align a button to the left edge of a button editor. If this property is set to **False**, the button is displayed at the right edge of the button editor.

True

False

The default value is **False**.

Visible property read / write

Specifies whether a button is displayed within its editor.

```
property Visible: Boolean;
```

Description

Set the Visible property to **False** to hide a button. If this property is set to **True**, the button is displayed within its editor.

The default value is **True**.

Width property read / write

Determines button width.

```
property Width: Integer;
```

Description

Use the Width property to set the width of an editor button in pixels. If the Width property is set to 0, both the **bkEllipsis** and **bkDown** buttons have a standard width (width is equal to height). For **bkGlyth**, the width of the button is determined by the width of the assigned glyph.

The default value is **0**.

Copyright © 2000 Developer Express Inc.

TdxEditButton Methods

Assign	**public**
RestoreDefaults	**public**

Assign method

Copies the contents of the source button to a new button.

```
procedure Assign(Source: TPersistent); override;
```

Description

If the Source parameter is a TdxEditButton object, the Assign method copies the Default, Glyph, Kind, LeftAlignment, Visible, and Width properties from the source button.

RestoreDefaults method

Restores the default values of a button.

```
procedure RestoreDefaults; virtual;
```

Description

Call the RestoreDefaults method to set all properties of a specific button to default values.

TdxEditButtons

Represents a collection of edit buttons.

Unit

dxExEdtr

```
TdxEditButtons = class(TCollection);
```

Description

The TdxEditButtons class maintains a list of buttons represented by the TCollectionItem descendent TdxEditButton - for an associated control. At design time, you can use the standard collection editor provided by Delphi or C++ Builder to add, remove, and re-arrange individual TdxButtonEdit items.

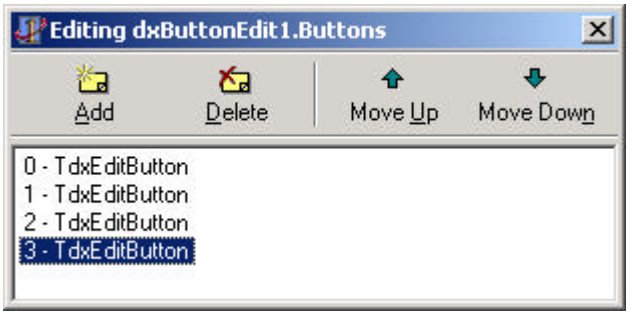

Hierarchy

TObject

TPersistent

TCollection

TdxEditButtons Properties

Items	**public / read / write**	VisibleCount	**public / read only**
Owner	**public / read only**	VisibleItems	**public / read / write**

Items property — read / write

Specifies the list of edit buttons a given collection owns.

```
property Items[Index: Integer]: TdxEditButton;
```

Description

The Items property is an array of edit buttons. You can access a specific button using the Index parameter that determines the button's index in the Items array.

Owner property — read only

Specifies the owner of an edit button.

```
property Owner: TComponent;
```

Description

Use the Owner property to locate the component to which a specific button belongs.

VisibleCount property — read only

Determines the number of visible buttons in a button editor.

```
property VisibleCount: Integer;
```

Description

Use the VisibleCount property to access the total number of visible buttons. The count includes only those buttons whose visible property is set to true. The VisibleCount property is often used in conjunction with the VisibleItems property to iterate through the list of visible buttons. Since the VisibleItems indexed property is 0 based, the index of the last visible button is one less than the number returned by the VisibleCount property.

VisibleItems property — read / write

Specifies the list of visible edit buttons within a button editor.

```
property VisibleItems[Index: Integer]: TdxEditButton;
```

Description

The VisibleItems are those buttons within a component whose visible property is set to true. The index of the VisibleItems property is zero based and is often used in conjunction with the VisibleCount property to iterate through the list of visible buttons.

TdxEditButtons Methods

DefaultMaxValue	**public**	DefaultValueType	**public**
DefaultMinValue	**public**	GetIncrement	**public**

Add method

Adds a new button to the button editor.

```
function Add: TdxEditButton;
```

Description

Call the Add method to create a new instance of the TdxEditButton class. The new item is placed at the end of the Items array.

GetAbsoluteIndex method

Returns the absolute index of a visible button.

```
function GetAbsoluteIndex(VisibleIndex: Integer): Integer;
```

Description

Call the GetAbsoluteIndex method to obtain the absolute index of a button in the Items array based upon its visible index value.

GetVisibleIndex method

Returns the visible index of a button.

```
function GetVisibleIndex(AbsoluteIndex: Integer): Integer;
```

Description

Call the GetVisibleIndex method to obtain the visible index of a button in the VisibleItems array based upon its absolute index value. If an edit button is invisible within a button editor, the GetVisibleIndex method returns –1.

RestoreDefaults method

Restores the default values of all buttons within a specific collection.

```
procedure RestoreDefaults;
```

Description

Call the RestoreDefaults method to set all properties for all buttons within a button editor (visible and invisible) to their default values.

Copyright © 2000 Developer Express Inc.

TCustomdxEdit

TCustomdxEdit is the ancestor class of the TdxEdit control.

Unit

dxEdLib

```
TCustomdxEdit = class(TdxInplaceTextEdit);
```

Description

TCustomdxEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit

TCustomdxEdit Properties

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TCustomdxEdit Methods

TCustomdxEdit

IsInplace	**public**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
DefaultMaxLength	**public**	SelectionChange	**protected**
Deselect	**public**	SetEditMaxLength	**protected**
DoSetMaxLength	**protected**	SetSelection	**public**
GetSelection	**public**	SetSelLength	**protected**
GetSelLength	**protected**	SetSelStart	**protected**
GetSelStart	**protected**	SetSelTextBuf	**public**
GetSelText	**protected**	Undo	**public**
GetSelTextBuf	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxEdit.

TCustomdxEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxEdit

TdxEdit is an improved version of the Windows single-line edit control.

Unit

dxEdLib

```
TdxEdit = class(TCustomdxEdit);
```

Description

TdxEdit controls can be used in applications to display and edit text. TdxEdit implements the generic behavior introduced in the TCustomdxEdit class. TdxEdit publishes most properties inherited from the TCustomdxEdit class, but does not introduce any new behaviors. For specialized edit controls, use other descendant classes of the TCustomdxEdit class or derive from it.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TCustomdxEdit

TdxEdit Properties

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**published / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**	Text	**published / read / write**

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxEdit Methods

Derived from TCustomdxEdit

IsInplace	**public**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
DefaultMaxLength	**public**	SelectionChange	**protected**
Deselect	**public**	SetEditMaxLength	**protected**
DoSetMaxLength	**protected**	SetSelection	**public**
GetSelection	**public**	SetSelLength	**protected**
GetSelLength	**protected**	SetSelStart	**protected**
GetSelStart	**protected**	SetSelTextBuf	**public**
GetSelText	**protected**	Undo	**public**
GetSelTextBuf	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

TdxEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxMaskEdit

TCustomdxMaskEdit is the ancestor of the TdxMaskEdit control.

Unit

dxEdLib

```
TCustomdxMaskEdit = class(TdxInplaceMaskEdit);
```

Description

TCustomdxMaskEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit

TCustomdxMaskEdit Properties

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TCustomdxMaskEdit Methods

TCustomdxMaskEdit

IsInplace	**public**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxMaskEdit.

TCustomdxMaskEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxMaskEdit

TdxMaskEdit is an improved version of the standard edit box that allows the use of different masks for data validation.

Unit

dxEdLib

```
TdxMaskEdit = class(TCustomdxMaskEdit);
```

Description

Use the TdxMaskEdit object to place a masked edit control onto your form. Masked edit controls validate the text a user enters based upon a specific mask. This mask determines a valid format for the entered text. The mask can also format the text displayed to the end user.

TdxMaskEdit implements the generic behavior introduced in TCustomdxMaskEdit. TdxMaskEdit publishes most properties and methods inherited from TCustomdxMaskEdit, but does not introduce any new behaviors.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TCustomdxMaskEdit

TdxMaskEdit Properties

Derived from TdxInplaceMaskEdit

EditMask	**published / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**published / read / write**	Text	**published / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxMaskEdit Methods

Derived from TCustomdxMaskEdit

IsInplace	**public**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxMaskEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxMemo

TCustomdxMemo is the ancestor class of the TdxMemo control.

Unit

dxEdLib

```
TCustomdxMemo = class(TdxInplaceMemoEdit);
```

Description

TCustomdxMemo contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMemoEdit

TCustomdxMemo Properties

Derived from TdxInplaceMemoEdit

AutoSize	**protected / read / write**	SelectionBar	**protected / read / write**
HideScrollBars	**protected / read / write**	WantReturns	**protected / read / write**
Lines	**public / read / write**	WantTabs	**protected / read / write**
ScrollBars	**protected / read / write**	WordWrap	**protected / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelLength	**public / read / write**
CanUndo	**public / read only**	SelStart	**public / read / write**
CharCase	**protected / read / write**	SelText	**public / read / write**
HideSelection	**protected / read / write**	Text	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
Container	**protected / read / write**	StoredValues	**protected / read / write**
Height	**published / read / write**	Style	**public / read / write**
Modified	**public / read / write**	StyleController	**protected / read / write**

Copyright © 2000 Developer Express Inc.

TCustomdxMemo Methods

TCustomdxMemo

IsInplace	**public**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
DefaultMaxLength	**public**	SelectionChange	**protected**
Deselect	**public**	SetEditMaxLength	**protected**
DoSetMaxLength	**protected**	SetSelection	**public**
GetSelection	**public**	SetSelLength	**protected**
GetSelLength	**protected**	SetSelStart	**protected**
GetSelStart	**protected**	SetSelTextBuf	**public**
GetSelText	**protected**	Undo	**public**
GetSelTextBuf	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxMemo.

TCustomdxMemo Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxMemo

TdxMemo is an edit control that allows editing memo/text data.

Unit

dxEdLib

```
TdxMemo = class(TCustomdxMemo);
```

Description

Use TdxMemo to drop a multiline edit control onto a form. Multiline edit box allows a user to enter more than one text line. Use it in your application to present large blocks of information to the end user.

TdxMemo implements the generic behavior introduced in TCustomdxMemo. TdxMemo publishes most properties inherited from TCustomdxMemo, but does not introduce any new behaviors.



***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMemoEdit
              - TCustomdxMemo

TdxMemo Properties

Derived from TdxInplaceMemoEdit

AutoSize	**protected / read / write**	SelectionBar	**published / read / write**
HideScrollBars	**published / read / write**	WantReturns	**published / read / write**
Lines	**published / read / write**	WantTabs	**published / read / write**
ScrollBars	**published / read / write**	WordWrap	**published / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**published / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelLength	**public / read / write**
CanUndo	**public / read only**	SelStart	**public / read / write**
CharCase	**published / read / write**	SelText	**public / read / write**
HideSelection	**published / read / write**	Text	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
Container	**protected / read / write**	StoredValues	**protected / read / write**
Height	**published / read / write**	Style	**published / read / write**
Modified	**public / read / write**	StyleController	**published / read / write**

Copyright © 2000 Developer Express Inc.

TdxMemo Methods

TCustomdxMemo

IsInplace	**public**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
DefaultMaxLength	**public**	SelectionChange	**protected**
Deselect	**public**	SetEditMaxLength	**protected**
DoSetMaxLength	**protected**	SetSelection	**public**
GetSelection	**public**	SetSelLength	**protected**
GetSelLength	**protected**	SetSelStart	**protected**
GetSelStart	**protected**	SetSelTextBuf	**public**
GetSelText	**protected**	Undo	**public**
GetSelTextBuf	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

TdxMemo Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxDateEdit

TCustomdxDateEdit is the ancestor class of the TdxDateEdit control.

Unit

dxEdLib

```
TCustomdxDateEdit = class(TdxInplaceDateEdit);
```

Description

TCustomdxDateEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceDateEdit

TCustomdxDateEdit Properties

Derived from TdxInplaceDateEdit

Date	**protected / read / write**	DateValidation	**protected / read / write**
DateButtons	**protected / read / write**	SaveTime	**protected / read / write**
DateOnError	**protected / read / write**	UseEditMask	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TCustomdxDateEdit Methods

TCustomdxDateEdit

IsInplace	**public**

Derived from TdxInplaceDateEdit

DateChange	**protected**	DoValidateInput	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

IsInplace method

Determines whether the edit control is used as a standalone control or as an inplace editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxDateEdit

Copyright © 2000 Developer Express Inc.

TCustomdxDateEdit Events

Derived from TdxInplaceDateEdit

OnDateChange	**protected**	OnDateValidateInput	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxDateEdit

TdxDateEdit is an edit control with a dropdown calendar.

Unit

dxEdLib

```
TdxDateEdit = class(TCustomdxDateEdit);
```

Description

TdxDateEdit is a visual component specifically designed for the display and manipulation of date information. TdxDateEdit includes a dropdown calendar from which users can select necessary dates.

TdxDateEdit implements the generic behavior introduced in TCustomdxDateEdit. TdxDateEdit publishes most properties inherited from TCustomdxDateEdit, but does not introduce any new behaviors.



***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit

TdxInplaceDropDownEdit

TdxInplaceDateEdit

TCustomdxDateEdit

TdxDateEdit Properties

Derived from TdxInplaceDateEdit

Date	**published / read / write**	DateValidation	**published / read / write**
DateButtons	**published / read / write**	SaveTime	**published / read / write**
DateOnError	**published / read / write**	UseEditMask	**published / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxDateEdit Methods

Derived from TCustomdxDateEdit

IsInplace	**public**

Derived from TdxInplaceDateEdit

DateChange	**protected**	DoValidateInput	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxDateEdit Events

Derived from TdxInplaceDateEdit

OnDateChange	**published**	OnDateValidateInput	**published**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxButtonEdit

TCustomdxButtonEdit is the ancestor class of the TdxButtonEdit control.

Unit

dxEdLib

```
TCustomdxButtonEdit = class(TdxInplaceButtonEdit);
```

Description

TCustomdxButtonEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceButtonEdit

TCustomdxButtonEdit Properties

Derived from TdxInplaceButtonEdit

Buttons	**protected / read / write**	ViewStyle	**protected / read / write**
ClickKey	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TCustomdxButtonEdit Methods

TCustomdxButtonEdit

IsInplace	**public**

Derived from TdxInplaceButtonEdit

DefaultButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

IsInplace method

Determines whether the edit control is used as a standalone control or as an inplace editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxButtonEdit.

Copyright © 2000 Developer Express Inc.

TCustomdxButtonEdit Events

Derived from TdxInplaceButtonEdit

OnButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxButtonEdit

TdxButtonEdit is a standard edit box with an embedded command button(s).

Unit

dxEdLib

```
TdxButtonEdit = class(TCustomdxButtonEdit);
```

Description

The button click action is exposed as an event so that a developer can respond in a manner appropriate to his/her application.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceButtonEdit
                - TCustomdxButtonEdit

Copyright © 2000 Developer Express Inc.

TdxButtonEdit Properties

Derived from TdxInplaceButtonEdit

Buttons	**published / read / write**	ViewStyle	**published / read / write**
ClickKey	**published / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**published / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**published / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxButtonEdit Methods

Derived from TCustomdxButtonEdit

IsInplace	**public**

Derived from TdxInplaceButtonEdit

DefaultButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxButtonEdit Events

Derived from TdxInplaceButtonEdit

OnButtonClick	published

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxCheckEdit

TCustomdxCheckEdit is the ancestor class of the TdxCheckEdit control.

Unit

dxEdLib

```
TCustomdxCheckEdit = class(TdxInplaceCheckEdit);
```

Description

TCustomdxCheckEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceCheckEdit

Copyright © 2000 Developer Express Inc.

TCustomdxCheckEdit Properties

Derived from TdxInplaceCheckEdit

AllowGrayed	**protected / read / write**	GlyphCount	**protected / read / write**
Checked	**protected / read / write**	MultiLine	**protected / read / write**
FullFocusRect	**protected / read / write**	NullStyle	**protected / read / write**
Glyph	**protected / read / write**	State	**protected / read / write**

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

TCustomdxCheckEdit Methods

TCustomdxCheckEdit

IsInplace	**public**

Derived from TdxInplaceCheckEdit

InvalidateCheckRect	**protected**	Toggle	**protected**

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
Deselect	**public**	RestoreDefaults	**public**
InvalidateEdit	**public**	SelectAll	**public**
IsEditClass	**public**	ValidateEdit	**public**

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxCheckEdit.

TCustomdxCheckEdit Events

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxCheckEdit

TdxCheckEdit is a check box edit control.

Unit

dxEdLib

```
TdxCheckEdit = class(TCustomdxCheckEdit);
```

Description

The TdxCheckEdit component is an extended version of the standard check box control. A user can check the box to select an option, or uncheck it to deselect an option.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceCheckEdit
            - TCustomdxCheckEdit

Copyright © 2000 Developer Express Inc.

TdxCheckEdit Properties

Derived from TdxInplaceCheckEdit

AllowGrayed	**published / read / write**	GlyphCount	**published / read / write**
Checked	**published / read / write**	MultiLine	**published / read / write**
FullFocusRect	**published / read / write**	NullStyle	**published / read / write**
Glyph	**published / read / write**	State	**published / read / write**

Derived from TdxInplaceEdit

Alignment	**publis hed / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / w rite**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxCheckEdit Methods

Derived from TCustomdxCheckEdit

IsInplace	**public**

Derived from TdxInplaceCheckEdit

InvalidateCheckRect	**protected**	Toggle	**protected**

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
Deselect	**public**	RestoreDefaults	**public**
InvalidateEdit	**public**	SelectAll	**public**
IsEditClass	**public**	ValidateEdit	**public**

Copyright © 2000 Developer Express Inc.

TdxCheckEdit Events

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxImageEdit

TCustomdxImageEdit is the ancestor class of the TdxImageEdit control.

Unit

dxEdLib

```
TCustomdxImageEdit = class(TdxInplaceImageEdit);
```

Description

TCustomdxImageEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceImageEdit

Copyright © 2000 Developer Express Inc.

TCustomdxImageEdit Properties

Derived from TdxInplaceImageEdit

DefaultImages	**protected / read / write**	LargeImages	**protected / read / write**
Descriptions	**protected / read / write**	MultiLineText	**protected / read / write**
ImageIndexes	**protected / read / write**	ShowDescription	**protected / read / write**
Images	**protected / read / write**	Values	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

TCustomdxImageEdit Methods

TCustomdxImageEdit

IsInplace	**public**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Copyright © 2000 Developer Express Inc.

Description

The IsInplace method always returns **False** for TCustomdxImageEdit.

TCustomdxImageEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxImageEdit

TdxImageEdit is a button editor with a dropdown control, which can include both an image and a description for a specific value.

Unit

dxEdLib

```
TdxImageEdit = class(TCustomdxImageEdit);
```

Description

A user can edit data within this editor by selecting a value from the dropdown image pick list.



***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceImageEdit
                - TCustomdxImageEdit

TdxImageEdit Properties

Derived from TdxInplaceImageEdit

DefaultImages	**published / read / write**	LargeImages	**published / read / write**
Descriptions	**published / read / write**	MultiLineText	**published / read / write**
ImageIndexes	**published / read / write**	ShowDescription	**published / read / write**
Images	**published / read / write**	Values	**published / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**published / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**published / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**published / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxImageEdit Methods

Derived from TCustomdxImageEdit

IsInplace	**public**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxImageEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxSpinEdit

TCustomdxSpinEdit is the ancestor class of the TdxSpinEdit control.

Unit

dxEdLib

```
TCustomdxSpinEdit = class(TdxInplaceSpinEdit);
```

Description

TCustomdxSpinEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceSpinEdit

TCustomdxSpinEdit Properties

Derived from TdxInplaceSpinEdit

EditorEnabled	**protected / read / write**	MinValue	**protected / read / write**
Increment	**protected / read / write**	UseCtrlIncrement	**protected / read / write**
IntValue	**protected / read / write**	Value	**protected / read / write**
MaxValue	**protected / read / write**	ValueType	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TCustomdxSpinEdit Methods

TCustomdxSpinEdit

IsInplace	**public**

Derived from TdxInplaceSpinEdit

DefaultMaxValue	**public**	IsValidChar	**protected**
DefaultMinValue	**public**	SetEditMaxValue	**protected**
DefaultValueType	**public**	SetEditMinValue	**protected**
GetIncrement	**protected**	SetEditValueType	**protected**
GetValue	**protected**	SetValue	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxSpinEdit.

Copyright © 2000 Developer Express Inc.

TCustomdxSpinEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxSpinEdit

TdxSpinEdit is an editor with spin buttons to increment or decrement numeric values.

Unit

dxEdLib

```
TdxSpinEdit = class(TCustomdxSpinEdit);
```

Description

TdxSpinEdit includes a spin button. Users can edit data within this editor by using the spin buttons or by entering data manually.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceSpinEdit
                - TCustomdxSpinEdit

Copyright © 2000 Developer Express Inc.

TdxSpinEdit Properties

Derived from TdxInplaceSpinEdit

EditorEnabled	**published / read / write**	MinValue	**published / read / write**
Increment	**published / read / write**	UseCtrlIncrement	**protected / read / write**
IntValue	**public / read / write**	Value	**published / read / write**
MaxValue	**published / read / write**	ValueType	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxSpinEdit Methods

Derived from TCustomdxSpinEdit

IsInplace	**public**

Derived from TdxInplaceSpinEdit

DefaultMaxValue	**public**	IsValidChar	**protected**
DefaultMinValue	**public**	SetEditMaxValue	**protected**
DefaultValueType	**public**	SetEditMinValue	**protected**
GetIncrement	**protected**	SetEditValueType	**protected**
GetValue	**protected**	SetValue	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxSpinEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxPickEdit

TCustomdxPickEdit is the ancestor class of the TdxPickEdit control.

Unit

dxEdLib

```
TCustomdxPickEdit = class(TdxInplacePickEdit);
```

Description

TCustomdxPickEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePickEdit

Copyright © 2000 Developer Express Inc.

TCustomdxPickEdit Properties

Derived from TdxInplacePickEdit

CanDeleteText	**protected / read / write**	Items	**protected / read / write**
DropDownListStyle	**protected / read / write**	Revertable	**protected / read / write**
ItemIndex	**protected / read / write**	Sorted	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

TCustomdxPickEdit Methods

TCustomdxPickEdit

IsInplace	**public**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Copyright © 2000 Developer Express Inc.

Description

The IsInplace method always returns **False** for TCustomdxPickEdit.

TCustomdxPickEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxPickEdit

TdxPickEdit is a button editor with an associated dropdown list box control, which contains a set of predefined values.

Unit

dxEdLib

```
TdxPickEdit = class(TCustomdxPickEdit);
```

Description

TdxPickEdit allows users to select from a predefined list of values via a dropdown list. It incorporates a dropdown window, which contains a given set of possible values. Users can edit data within this editor by selecting a value from the pick list or by entering it manually.



***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePickEdit
                - TCustomdxPickEdit

TdxPickEdit Properties

Derived from TdxInplacePickEdit

CanDeleteText	**published / read / write**	Items	**published / read / write**
DropDownListStyle	**published / read / write**	Revertable	**published / read / write**
ItemIndex	**protected / read / write**	Sorted	**published / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**published / read / write**
DropDownRows	**published / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**published / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**published / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**published / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxPickEdit Methods

Derived from TCustomdxPickEdit

IsInplace	**public**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxPickEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxCalcEdit

TCustomdxCalcEdit is the ancestor class of the TdxCalcEdit control.

Unit

dxEdLib

```
TCustomdxCalcEdit = class(TdxInplaceCalcEdit);
```

Description

TCustomdxCalcEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceCalcEdit

TCustomdxCalcEdit Properties

Derived from TdxInplaceCalcEdit

BeepOnError	**protected / read / write**	QuickClose	**protected / read / write**
ButtonStyle	**protected / read / write**	ShowButtonFrame	**protected / read / write**
Precision	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**prote cted / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TCustomdxCalcEdit Methods

TCustomdxCalcEdit

IsInplace	**public**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxCalcEdit.

Copyright © 2000 Developer Express Inc.

TCustomdxCalcEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxCalcEdit

TdxCalcEdit is a button edit control with a dropdown calculator window.

Unit

dxEdLib

```
TdxCalcEdit = class(TCustomdxCalcEdit);
```

Description

TdxCalcEdit incorporates a dropdown calculator control. A user can edit data within this editor by calculating the required value via the popup calculator or by entering data directly into the editor.

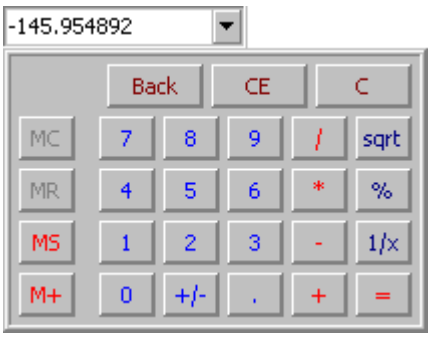

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceCalcEdit
                - TCustomdxCalcEdit

Copyright © 2000 Developer Express Inc.

TdxCalcEdit Properties

Derived from TdxInplaceCalcEdit

BeepOnError	**published / read / write**	QuickClose	**published / read / write**
ButtonStyle	**published / read / write**	ShowButtonFrame	**published / read / write**
Precision	**published / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**published / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxCalcEdit Methods

Derived from TCustomdxCalcEdit

IsInplace	**public**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxCalcEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxHyperLinkEdit

TCustomdxHyperLinkEdit is the ancestor class of the TdxHyperLinkEdit control.

Unit

dxEdLib

```
TCustomdxHyperLinkEdit = class(TdxInplaceHyperLinkEdit);
```

Description

TCustomdxHyperLinkEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceHyperLinkEdit

Copyright © 2000 Developer Express Inc.

TCustomdxHyperLinkEdit Properties

TCustomdxHyperLinkEdit

ReadOnly	**protected / read / write**

Derived from TdxInplaceHyperLinkEdit

LinkColor	**protected / read / write**	StartKey	**protected / read / write**
SingleClick	**protected / read / write**		

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	Modified	**public / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**

ReadOnly property — read / write

Indicates whether an editor is used for display purposes only.

```
property ReadOnly;
```

Description

Set the ReadOnly property to **False** to prevent users from changing data within an editor. By default, the ReadOnly property is set to **True**. This property is protected but descendants can publish it to allow its modification at design time.

TCustomdxHyperLinkEdit Methods

TCustomdxHyperLinkEdit

IsInplace	**public**

Derived from TdxInplaceHyperLinkEdit

DoStart	**protected**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxHyperLinkEdit.

Copyright © 2000 Developer Express Inc.

TCustomdxHyperLinkEdit Events

Derived from TdxInplaceHyperLinkEdit

OnStartClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxHyperLinkEdit

TdxHyperLinkEdit is a hyperlink (URL) editor, which can activate the default web-browser on a user's system.

Unit

dxEdLib

```
TdxHyperLinkEdit = class(TCustomdxHyperLinkEdit);
```

Description

TdxHyperLinkEdit is an editor that presents its contents as hyperlinks. TdxHyperLinkEdit edits and processes hyperlinks in its edit region.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceHyperLinkEdit
              - TCustomdxHyperLinkEdit

Copyright © 2000 Developer Express Inc.

TdxHyperLinkEdit Properties

Derived from TCustomdxHyperLinkEdit

ReadOnly	**published / read / write**

Derived from TdxInplaceHyperLinkEdit

LinkColor	**published / read / write**	StartKey	**published / read / write**
SingleClick	**published / read / write**		

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**published / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**	Text	**published / read / write**

Derived from TdxInplaceEdit

Alignment	**published / read / write**	Modified	**public / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**

TdxHyperLinkEdit Methods

TCustomdxHyperLinkEdit

IsInplace	**public**

Derived from TdxInplaceHyperLinkEdit

DoStart	**protected**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

Copyright © 2000 Developer Express Inc.

TdxHyperLinkEdit Events

Derived from TdxInplaceHyperLinkEdit

OnStartClick	**published**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxTimeEdit

TCustomdxTimeEdit is the ancestor class of the TdxTimeEdit control.

Unit

dxEdLib

```
TCustomdxTimeEdit = class(TdxInplaceTimeEdit);
```

Description

TCustomdxTimeEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceSpinEdit
                - TdxInplaceTimeEdit

Copyright © 2000 Developer Express Inc.

TCustomdxTimeEdit Properties

Derived from TdxInplaceTimeEdit

Time	**protected / read / write**	TimeEditFormat	**protected / read / write**

Derived from TdxInplaceSpinEdit

EditorEnabled	**protected / read / write**	MinValue	**protected / read / write**
Increment	**protected / read / write**	UseCtrlIncrement	**protected / read / write**
IntValue	**protected / read / write**	Value	**protected / read / write**
MaxValue	**protected / read / write**	ValueType	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

TCustomdxTimeEdit Methods

TCustomdxTimeEdit

IsInplace	**public**

Derived from TdxInplaceSpinEdit

DefaultMaxValue	**public**	IsValidChar	**protected**
DefaultMinValue	**public**	SetEditMaxValue	**protected**
DefaultValueType	**public**	SetEditMinValue	**protected**
GetIncrement	**protected**	SetEditValueType	**protected**
GetValue	**protected**	SetValue	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

IsInplace method

Determines whether the edit control is used as a standalone control or as an inplace editor.

Copyright © 2000 Developer Express Inc.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxTimeEdit.

TCustomdxTimeEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxTimeEdit

TdxTimeEdit represents an editor to view and modify time values.

Unit

dxEdLib

```
TdxTimeEdit = class(TCustomdxTimeEdit);
```

Description

TdxTimeEdit is used to edit time values via the keyboard or spin buttons.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceSpinEdit
                - TdxInplaceTimeEdit
                - TCustomdxTimeEdit

TdxTimeEdit Properties

Derived from TdxInplaceTimeEdit

Time	**published / read / write**	TimeEditFormat	**published / read / write**

Derived from TdxInplaceSpinEdit

EditorEnabled	**protected / read / write**	MinValue	**protected / read / write**
Increment	**protected / read / write**	UseCtrlIncrement	**protected / read / write**
IntValue	**protected / read / write**	Value	**protected / read / write**
MaxValue	**protected / read / write**	ValueType	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxTimeEdit Methods

Derived from TCustomdxTimeEdit

IsInplace	**public**

Derived from TdxInplaceSpinEdit

DefaultMaxValue	**public**	IsValidChar	**protected**
DefaultMinValue	**public**	SetEditMaxValue	**protected**
DefaultValueType	**public**	SetEditMinValue	**protected**
GetIncrement	**protected**	SetEditValueType	**protected**
GetValue	**protected**	SetValue	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxTimeEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxCurrencyEdit

TCustomdxCurrencyEdit is the ancestor class of the TdxCurrencyEdit control.

Unit

dxEdLib

```
TCustomdxCurrencyEdit = class(TdxInplaceCurrencyEdit);
```

Description

TCustomdxCurrencyEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceCurrencyEdit

TCustomdxCurrencyEdit Properties

Derived from TdxInplaceCurrencyEdit

DecimalPlaces	**protected / read / write**	MinValue	**protected / read / write**
DisplayFormat	**protected / read / write**	Value	**protected / read / write**
MaxValue	**protected / read / write**		

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TCustomdxCurrencyEdit Methods

TCustomdxCurrencyEdit

IsInplace	**public**

Derived from TdxInplaceCurrencyEdit

DefaultDisplayFormat	**public**	DefaultMinValue	**public**
DefaultMaxValue	**public**	IsValidChar	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxCurrencyEdit.

Copyright © 2000 Developer Express Inc.

TCustomdxCurrencyEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxCurrencyEdit

TdxCurrencyEdit displays and edits currency values based upon regional settings.

Unit

dxEdLib

```
TdxCurrencyEdit = class(TCustomdxCurrencyEdit);
```

Description

TdxCurrencyEdit displays data using a currency format. TdxCurrencyEdit allows you to modify currency data within its edit region.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceCurrencyEdit
                - TCustomdxCurrencyEdit

Copyright © 2000 Developer Express Inc.

TdxCurrencyEdit Properties

Derived from TdxInplaceCurrencyEdit

DecimalPlaces	**published / read / write**	MinValue	**published / read / write**
DisplayFormat	**published / read / write**	Value	**published / read / write**
MaxValue	**published / read / write**		

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxCurrencyEdit Methods

Derived from TCustomdxCurrencyEdit

IsInplace	**public**

Derived from TdxInplaceCurrencyEdit

DefaultDisplayFormat	**public**	DefaultMinValue	**public**
DefaultMaxValue	**public**	IsValidChar	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxCurrencyEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxGraphicEdit

TCustomdxGraphicEdit is the ancestor class of the TdxGraphicEdit control.

Unit

dxEdLib

```
TCustomdxGraphicEdit = class(TdxInplaceGraphicEdit);
```

Description

TCustomdxGraphicEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceGraphicEdit

Copyright © 2000 Developer Express Inc.

TCustomdxGraphicEdit Properties

Derived from TdxInplaceGraphicEdit

AutoSize	**protected / read / write**	Picture	**protected / read / write**
Center	**protected / read / write**	QuickDraw	**protected / read / write**
ClipboardFormat	**protected / read / write**	Stretch	**protected / read / write**
CustomFilter	**protected / read / write**	ToolbarLayout	**protected / read / write**
CustomGraphic	**protected / read / write**	ToolbarPos	**protected / read / write**
DblClickActivate	**protected / read / write**	ToolbarPosStored	**protected / read / write**
GraphicTransparency	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

TCustomdxGraphicEdit Methods

TCustomdxGraphicEdit

IsInplace	**public**

Derived from TdxInplaceGraphicEdit

AssignPicture	**protected**	GetGraphicClass	**protected**
ClearPicture	**public**	LoadFromFile	**public**
CopyToClipboard	**public**	PasteFromClipboard	**public**
CustomClick	**protected**	SaveToFile	**public**
CutToClipboard	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
Deselect	**public**	RestoreDefaults	**public**
InvalidateEdit	**public**	SelectAll	**public**
IsEditClass	**public**	ValidateEdit	**public**

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxGraphicEdit.

TCustomdxGraphicEdit Events

Derived from TdxInplaceGraphicEdit

OnAssignPicture	**protected**	OnGetGraphicClass	**protected**
OnCustomClick	**protected**		

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxGraphicEdit

TdxGraphicEdit displays graphics within its edit region.

Unit

dxEdLib

```
TdxGraphicEdit = class(TCustomdxGraphicEdit);
```

Description

TdxGraphicEdit incorporates a popup menu (or a toolbar), which is used to provide shortcuts for comman menu commands. This popup menu (toolbar) displays a Cut, Copy, Paste, Delete, Load, Save, and Custom button.

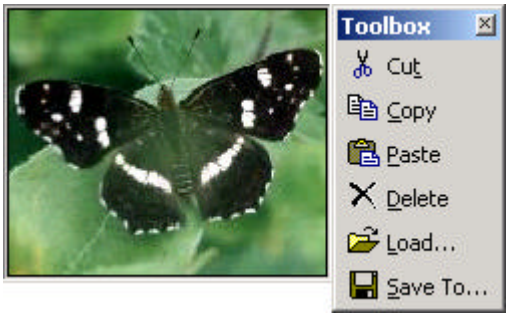

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceGraphicEdit
            - TCustomdxGraphicEdit

TdxGraphicEdit Properties

Derived from TdxInplaceGraphicEdit

AutoSize	**published / read / write**	Picture	**published / read / write**
Center	**published / read / write**	QuickDraw	**published / read / write**
ClipboardFormat	**public / read / write**	Stretch	**published / read / write**
CustomFilter	**published / read / write**	ToolbarLayout	**published / read / write**
CustomGraphic	**protected / read / write**	ToolbarPos	**public / read / write**
DblClickActivate	**published / read / write**	ToolbarPosStored	**published / read / write**
GraphicTransparency	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**published / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxGraphicEdit Methods

TCustomdxGraphicEdit

IsInplace	**public**

Derived from TdxInplaceGraphicEdit

AssignPicture	**protected**	GetGraphicClass	**protected**
ClearPicture	**public**	LoadFromFile	**public**
CopyToClipboard	**public**	PasteFromClipboard	**public**
CustomClick	**protected**	SaveToFile	**public**
CutToClipboard	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
Deselect	**public**	RestoreDefaults	**public**
InvalidateEdit	**public**	SelectAll	**public**
IsEditClass	**public**	ValidateEdit	**public**

Copyright © 2000 Developer Express Inc.

TdxGraphicEdit Events

Derived from TdxInplaceGraphicEdit

OnAssignPicture	**protected**	OnGetGraphicClass	**protected**
OnCustomClick	**published**		

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxBlobEdit

TCustomdxBlobEdit is the ancestor class of the TdxBlobEdit control.

Unit

dxEdLib

```
TCustomdxBlobEdit = class(TdxInplaceBlobEdit);
```

Description

TCustomdxBlobEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceBlobEdit

Copyright © 2000 Developer Express Inc.

TCustomdxBlobEdit Properties

Derived from TdxInplaceBlobEdit

AlwaysSaveText	**protected / read / write**	MemoWordWrap	**protected / read / write**
BlobEditKind	**protected / read / write**	PictureAutoSize	**protected / read / write**
BlobPaintStyle	**protected / read / write**	PictureClipboardFormat	**protected / read / write**
BlobText	**protected / read / write**	PictureGraphicClass	**protected / read / write**
MemoCharCase	**protected / read / write**	PictureFilter	**protected / read / write**
MemoHideScrollBars	**protected / read / write**	PictureTransparency	**protected / read / write**
MemoMaxLength	**protected / read / write**	PopupWidth	**protected / read / write**
MemoOEMConvert	**protected / read / write**	PopupHeght	**protected / read / write**
MemoScrollBars	**protected / read / write**	ShowExPopupItems	**protected / read / write**
MemoSelectionBar	**protected / read / write**	ShowPicturePopup	**protected / read / write**
MemoWantReturns	**protected / read / write**	SizeablePopup	**protected / read / write**
MemoWantTabs	**protected / read / write**	Text	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**		

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

TCustomdxBlobEdit Methods

TCustomdxBlobEdit

IsInplace	**public**

Derived from TdxInplaceBlobEdit

AssignPicture	**protected**	SavePopupSize	**protected**
GetGraphicClass	**protected**	SetBlobValue	**protected**
IsSizeablePopup	**protected**		

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxBlobEdit.

TCustomdxBlobEdit Events

Derived from TdxInplaceBlobEdit

OnAssignPicture	**protected**	OnGetGraphicClass	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxBlobEdit

TdxBlobEdit is a button type editor with the ability to display and edit BLOB data. The contents of BLOBs are displayed within a sizeable dropdown window.

Unit

dxEdLib

```
TdxBlobEdit = class(TCustomdxBlobEdit);
```

Description

TdxBlobEdit inherits specific methods to manipulate BLOB data. It supports both the display and the editing of a Memo BLOB and the display of a Picture BLOB. It can automatically determine OLE BLOB data.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceBlobEdit
                - TCustomdxBlobEdit

TdxBlobEdit Properties

Derived from TdxInplaceBlobEdit

AlwaysSaveText	**published / read / write**	MemoWordWrap	**published / read / write**
BlobEditKind	**published / read / write**	PictureAutoSize	**published / read / write**
BlobPaintStyle	**published / read / write**	PictureClipboardFormat	**publi? / read / write**
BlobText	**published / read / write**	PictureGraphicClass	**publi? / read / write**
MemoCharCase	**published / read / write**	PictureFilter	**published / read / write**
MemoHideScrollBars	**published / read / write**	PictureTransparency	**published / read / write**
MemoMaxLength	**published / read / write**	PopupWidth	**published / read / write**
MemoOEMConvert	**published / read / write**	PopupHeght	**published / read / write**
MemoScrollBars	**published / read / write**	ShowExPopupItems	**published / read / write**
MemoSelectionBar	**published / read / write**	ShowPicturePopup	**published / read / write**
MemoWantReturns	**published / read / write**	SizeablePopup	**published / read / write**
MemoWantTabs	**published / read / write**	Text	**publi? / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**		

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxBlobEdit Methods

Derived from TCustomdxBlobEdit

IsInplace	**public**

Derived from TdxInplaceBlobEdit

AssignPicture	**protected**	SavePopupSize	**protected**
GetGraphicClass	**protected**	SetBlobValue	**protecte d**
IsSizeablePopup	**protected**		

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxBlobEdit Events

Derived from TdxInplaceBlobEdit

OnAssignPicture	**protected**	OnGetGraphicClass	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxMRUEdit

TCustomdxMRUEdit is the ancestor class of the TdxMRUEdit control.

Unit

dxEdLib

```
TCustomdxMRUEdit = class(TdxInplaceMRUEdit);
```

Description

TCustomdxMRUEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePickEdit
                - TdxInplaceMRUEdit

Copyright © 2000 Developer Express Inc.

TCustomdxMRUEdit Properties

Derived from TdxInplaceMRUEdit

ImmediateDropDown	**protected / read / write**	ShowEllipsis	**protected / read / write**
MaxItemCount	**protected / read / write**		

Derived from TdxInplacePickEdit

CanDeleteText	**protected / read / write**	Items	**protected / read / write**
DropDownListStyle	**protected / read / write**	Revertable	**protected / read / write**
ItemIndex	**protected / read / write**	Sorted	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

TCustomdxMRUEdit Methods

TCustomdxMRUEdit

IsInplace	**public**

Derived from TdxInplaceMRUEdit

AddItem	**public**	ButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxMRUEdit.

TCustomdxMRUEdit Events

Derived from TdxInplaceMRUEdit

OnButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxMRUEdit

TdxMRUEdit is a button type editor with the ability to display and edit a list of the most recently used (MRU) items.

Unit

dxEdLib

```
TdxMRUEdit = class(TCustomdxMRUEdit);
```

Description

TdxMRUEdit maintains a list of most recently used items. This list is automatically maintained by the editor, so no additional coding is necessary. TdxMRUEdit can be used as a pick editor to select a value from a list of most recently used items.

TdxMRUEdit is an editor with a button control. It can include one or two clickable buttons. One of these buttons is always used to activate a dropdown list of items. The other button can be programmed by a user to perform specific operations. If you wish to create a specific editor which maintains a list of the most recently used items, you have to inherit a new editor from the TCustomdxMRUEdit class, not from TdxMRUEdit.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePickEdit
                - TdxInplaceMRUEdit
                - TCustomdxMRUEdit

TdxMRUEdit Properties

Derived from TdxInplaceMRUEdit

ImmediateDropDown	**published / read / write**	ShowEllipsis	**published / read / write**
MaxItemCount	**published / read / write**		

Derived from TdxInplacePickEdit

CanDeleteText	**published / read / write**	Items	**published / read / write**
DropDownListStyle	**published / read / write**	Revertable	**published / read / write**
ItemIndex	**public / read / write**	Sorted	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**published / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**published / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**published / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**published / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxMRUEdit Methods

Derived from TCustomdxMRUEdit

IsInplace	**public**

Derived from TdxInplaceMRUEdit

AddItem	**public**	ButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxMRUEdit Events

Derived from TdxInplaceMRUEdit

OnButtonClick	**published**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxPopupEdit

TCustomdxPopupEdit is the ancestor class of the TdxPopupEdit control.

Unit

dxEdLib

```
TCustomdxPopupEdit = class(TdxInplacePopupEdit);
```

Description

TCustomdxPopupEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePopupEdit

TCustomdxPopupEdit Properties

Derived from TdxInplacePopupEdit

PopupForm	**public / read only**	PopupFormCaption	**protected / read / write**
HideEditCursor	**protected / read / write**	PopupHeight	**protected / read / write**
PopupAutoSize	**protected / read / write**	PopupMinHeight	**protected / read / write**
PopupControl	**protected / read / write**	PopupMinWidth	**protected / read / write**
PopupClientEdge	**protected / read / write**	PopupSizeable	**protected / read / write**
PopupFlatBorder	**protected / read / write**	PopupWidth	**protected / read / write**
PopupFormBorderStyle	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TCustomdxPopupEdit Methods

TCustomdxPopupEdit

IsInplace	**public**

Derived from TdxInplacePopupEdit

CalcSize	**protected**	InitializePopup	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxPopupEdit.

Copyright © 2000 Developer Express Inc.

TCustomdxPopupEdit Events

Derived from TdxInplacePopupEdit

OnCloseQuery	**protected**	OnInitPopup	**protected**
OnCloseUp	**protected**	OnPopup	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxPopupEdit

TdxPopupEdit is a button type editor with a dropdown window which can display another control.

Unit

dxEdLib

```
TdxPopupEdit = class(TCustomdxPopupEdit);
```

Description

The TdxPopupEdit incorporates a dropdown window used to host a specific control. At runtime, a user can work with this embedded control within the dropdown window of the TdxPopupEdit component.

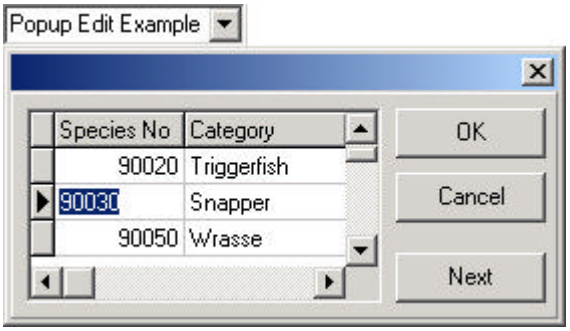

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePopupEdit
                - TCustomdxPopupEdit

Copyright © 2000 Developer Express Inc.

TdxPopupEdit Properties

Derived from TdxInplacePopupEdit

PopupForm	**public / read only**	PopupFormCaption	**published / read / write**
HideEditCursor	**published / read / write**	PopupHeight	**published / read / write**
PopupAutoSize	**published / read / write**	PopupMinHeight	**published / read / write**
PopupControl	**published / read / write**	PopupMinWidth	**published / read / write**
PopupClientEdge	**published / read / write**	PopupSizeable	**published / read / write**
PopupFlatBorder	**published / read / write**	PopupWidth	**published / read / write**
PopupFormBorderStyle	**published / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**published / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**published / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxPopupEdit Methods

Derived from TCustomdxPopupEdit

IsInplace	**public**

Derived from TdxInplacePopupEdit

CalcSize	**protected**	InitializePopup	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxPopupEdit Events

Derived from TdxInplacePopupEdit

OnCloseQuery	**published**	OnInitPopup	**published**
OnCloseUp	**published**	OnPopup	**published**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxLookupEdit

TCustomdxLookupEdit is the class from which a TdxLookupEdit component is derived.

Unit

dxDBELib

```
TCustomdxLookupEdit = class(TCustomdxDBLookupEdit);
```

Description

TCustomdxLookupEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxLookupEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceLookupEdit
                - TCustomdxDBLookupEdit

Copyright © 2000 Developer Express Inc.

TCustomdxLookupEdit Properties

Derived from TCustomdxDBLookupEdit

DataField	**protected / read / write**
DataSource	**protected / read / write**

Derived from TdxInplaceLookupEdit

CanDeleteText	**protected / read / write**	LookupMode	**protected / read only**
ClearKey	**protected / read / write**	LookupKeyValue	**protected / read / write**
Field	**protected / read / write**	ListSource	**protected / read / write**
KeyFieldNa me	**protected / read / write**	Revertable	**protected / read / write**
ListFieldName	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

TCustomdxLookupEdit Methods

Derived from TCustomdxDBLookupEdit

Create	**public**
IsInplace	**public**

Derived from TdxInplaceLookupEdit

ClearField	**protected**	IsEditable	**public**
DoCloseUp	**protected**	SetKeyValue	**protected**
DoIncremental	**protected**		

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoDropDownKeys	**protected**	PopupBorderStyle	**public**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectionChange	**protected**
Deselect	**public**	SelectAll	**public**
DoSetMaxLength	**protecte d**	SetSelection	**public**
GetSelection	**public**	SetEditMaxLength	**protected**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TCustomdxLookupEdit Events

Derived from TdxInplaceLookupEdit

OnCloseUp	**protected**

Derived from TdxInplaceDropDownEdit

OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxLookupEdit

TdxLookupEdit represents a control with a linked dropdown lookup list.

Unit

dxDBELib

```
TdxLookupEdit = class(TCustomdxLookupEdit);
```

Description

The TdxLookupEdit component is used to create an unbound lookup list box from a lookup table. Unbound mode gives you the ability to edit field values using a dropdown list with field values from the same data source. Users can edit data within this component by selecting the required value from the lookup list or by entering it directly into the editor.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceLookupEdit
                - TCustomdxDBLookupEdit
                - TCustomdxLookupEdit

Copyright © 2000 Developer Express Inc.

TdxLookupEdit Properties

Derived from TCustomdxDBLookupEdit

DataField	**protected / read / write**
DataSource	**protected / read / write**

Derived from TdxInplaceLookupEdit

CanDeleteText	**protected / read / write**	LookupMode	**public / read only**
ClearKey	**protected / read / write**	LookupKeyValue except Delphi 4	**public / read / write**
Field	**protected / read / write**	LookupKeyValue for Delphi 4	**published / read / write**
KeyFieldName	**published / read / write**	ListSource	**published / read / write**
ListFieldName	**protected / read / write**	Revertable	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

TdxLookupEdit Methods

Derived from TCustomdxDBLookupEdit

Create	**public**
IsInplace	**public**

Derived from TdxInplaceLookupEdit

ClearField	**protected**	IsEditable	**public**
DoCloseUp	**protected**	SetKeyValue	**protected**
DoIncremental	**protected**		

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoDropDownKeys	**protected**	PopupBorderStyle	**public**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectionChange	**protected**
Deselect	**public**	SelectAll	**public**
DoSetMaxLength	**protected**	SetSelection	**public**
GetSelection	**public**	SetEditMaxLength	**protected**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxLookupEdit Events

Derived from TdxInplaceLookupEdit

OnCloseUp	**protected**

Derived from TdxInplaceDropDownEdit

OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxEditDataLink

TdxEditDataLink is a class used by data-aware editors to coordinate TDataSource and TDataSet actions, and to respond to data events.

Unit

dxDBELib

```
TdxEditDataLink = class(TDataLink);
```

Description

Use the TdxEditDataLink and its descendants to leverage common functionality that is necessary for the proper operation of data-aware controls. This class provides most of the necessary functionality to implement a datasource property in the control that contains it and respond to data events.

The constructor of a data-aware object should call the TdxEditDataLink constructor and initialize any relevant properties. The data-aware object can then link to TDataSource using the DataSource property of TdxEditDataLink.

Hierarchy

TObject

- TPersistent
  - TDataLink

TdxEditDataLink Properties

Field	**public / read / write**
FieldName	**publisc / read / write**

Field property read / write

Determines the field associated with an editor.

```
property Field: TField;
```

Description

Specifies the field component controlled by the TdxEditDataLink object.

FieldName property read / write

Specifies the field name bound to a TdxEditDataLink control.

```
property FieldName: string;
```

Description

Use the FieldName property to set the FieldName property of a data-aware editor.

TdxEditDataLink Methods

Create	**public**
Modified	**public**
Reset	**public**

Create method

Creates a TdxEditDataLink instance.

```
constructor Create(ADBDataDefinition: TdxEditDBDataDefinition);
```

Description

The Create method is called from the constructor of any data-aware object that uses TdxEditDataLink to implement its DataSource property.

Modified method

Determines whether data associated with an editor is modified.

```
procedure Modified;
```

Description

Sets the value of the private variable, which indicates a modification has taken place, to **True**.

Reset method

Ignores all pending changes and generates the OnDataChange event.

```
procedure Reset;
```

Description

An editor that owns the TdxEditDataLink object calls its Reset method to cancel edits to a field. The Reset method calls the OnDataChange (or OnLayOutChange) event handler without writing any pending changes to the underlying record in the dataset.

Copyright © 2000 Developer Express Inc.

TdxEditDBDataDefinition

TdxEditDBDataDefinition is a class used by data-aware editors to implement a data source.

Unit

dxDBELib

```
TdxEditDBDataDefinition = class(TdxEditDataDefinition);
```

Description

Use the TdxEditDBDataDefinition to work with data associated with a data-aware editor. This class provides access to the standard DataSet. If you wish to provide access to any other dataset, you should not inherit a class from TdxEditDBDataDefinition but instead from the TdxEditDataDefinition class.

Hierarchy

TObject

- TPersistent
  - TdxEditDataDefinition

TCustomdxDBEdit

TCustomdxDBEdit is the class from which a TdxDBEdit control is derived.

Unit

dxDBELib

```
TCustomdxDBEdit = class(TCustomdxEdit);
```

Description

TCustomdxDBEdit contains the core properties and methods that are used to implement standard behaviors inherited by TdxDBEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TCustomdxEdit

Copyright © 2000 Developer Express Inc.

TCustomdxDBEdit Properties

TCustomdxDBEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains data. The TDataSource component specified in the DataSource property provides access to the dataset that contains this field.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property — read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access for the editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

TCustomdxDBEdit Methods

TCustomdxDBEdit

Create	**public**

Derived from TCustomdxEdit

IsInplace	**public**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
DefaultMaxLength	**public**	SelectionChange	**protected**
Deselect	**public**	SetEditMaxLength	**protected**
DoSetMaxLength	**protected**	SetSelection	**public**
GetSelection	**public**	SetSelLength	**protected**
GetSelLength	**protected**	SetSelStart	**protected**
GetSelStart	**protected**	SetSelTextBuf	**public**
GetSelText	**protected**	Undo	**public**
GetSelTextBuf	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

Create method

Creates a TCustomdxDBEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

Copyright © 2000 Developer Express Inc.

TCustomdxDBEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxDBEdit

TdxDBEdit represents a single-line edit control that can display and edit fields in a dataset.

Unit

dxDBELib

```
TdxDBEdit = class(TCustomdxDBEdit);
```

Description

The TdxDBEdit component allows editing database fields that contain only a single text line. If a field contains lengthy data, it is best to use the TdxDBMemo component.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TCustomdxEdit
              - TCustomdxDBEdit

Copyright © 2000 Developer Express Inc.

TdxDBEdit Properties

Derived from TCustomdxDBEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**	Text	**public / read / write**

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxDBEdit Methods

Derived from TCustomdxDBEdit

Create	**public**

Derived from TCustomdxEdit

IsInplace	**public**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
DefaultMaxLength	**public**	SelectionChange	**protected**
Deselect	**public**	SetEditMaxLength	**protected**
DoSetMaxLength	**protected**	SetSelection	**public**
GetSelection	**public**	SetSelLength	**protected**
GetSelLength	**protected**	SetSelStart	**protected**
GetSelStart	**protected**	SetSelTextBuf	**public**
GetSelText	**protected**	Undo	**public**
GetSelTextBuf	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

Copyright © 2000 Developer Express Inc.

TdxDBEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxDBMaskEdit

TCustomdxDBMaskEdit is the class from which a TdxDBMaskEdit control is derived.

Unit

dxDBELib

```
TCustomdxDBMaskEdit = class(TCustomdxMaskEdit);
```

Description

TCustomdxDBMaskEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBMaskEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TCustomdxMaskEdit

Copyright © 2000 Developer Express Inc.

TCustomdxDBMaskEdit Properties

TCustomdxDBMaskEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset wherein this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property — read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access for the editor. You should set both the DataSource and DataField properties to connect the editor to the appropriate field.

Copyright © 2000 Developer Express Inc.

TCustomdxDBMaskEdit Methods

TCustomdxDBMaskEdit

Create	**public**

Derived from TCustomdxMaskEdit

IsInplace	**public**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Create method

Creates a TCustomdxDBMaskEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call the Create method to create and initialize a TCustomdxDBMaskEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

Copyright © 2000 Developer Express Inc.

TCustomdxDBMaskEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxDBMaskEdit

TdxDBMaskEdit implements a generic masked edit control that can display and edit fields in a dataset.

Unit

dxDBELib

```
TdxDBMaskEdit = class(TCustomdxDBMaskEdit);
```

Description

Maked edit controls validate text entered by users and format them for display. TdxDBMaskEdit implements the generic behavior introduced in TCustomdxDBMaskEdit and publishes most of the properties and methods inherited from TCustomdxDBMaskEdit, but does not introduce any new behavior.



***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TCustomdxMaskEdit
                - TCustomdxDBMaskEdit

Copyright © 2000 Developer Express Inc.

TdxDBMaskEdit Properties

Derived from TCustomdxDBMaskEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**published / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**published / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxDBMaskEdit Methods

Derived from TCustomdxDBMaskEdit

Create	**public**

Derived from TCustomdxMaskEdit

IsInplace	**public**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxDBMaskEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxDBMemo

TCustomdxDBMemo is the class from which a TdxDBMemo control is derived.

Unit

dxDBELib

```
TCustomdxDBMemo = class(TCustomdxMemo);
```

Description

TCustomdxDBMemo contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBMemo.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMemoEdit
              - TCustomdxMemo

Copyright © 2000 Developer Express Inc.

TCustomdxDBMemo Properties

TCustomdxDBMemo

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplaceMemoEdit

AutoSize	**protected / read / write**	SelectionBar	**protected / read / write**
HideScrollBars	**protected / read / write**	WantReturns	**protected / read / write**
Lines	**public / read / write**	WantTabs	**protected / read / write**
ScrollBars	**protected / read / write**	WordWrap	**protected / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelLength	**public / read / write**
CanUndo	**public / read only**	SelStart	**public / read / write**
CharCase	**protected / read / write**	SelText	**public / read / write**
HideSelection	**protected / read / write**	Text	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
Container	**protected / read / write**	StoredValues	**protected / read / write**
Height	**published / read / write**	Style	**public / read / write**
Modified	**public / read / write**	StyleController	**protected / read / write**

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property — read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access for this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

Copyright © 2000 Developer Express Inc.

TCustomdxDBMemo Methods

TCustomdxDBMemo

Create	**public**

Derived from TCustomdxMemo

IsInplace	**public**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
DefaultMaxLength	**public**	SelectionChange	**protected**
Deselect	**public**	SetEditMaxLength	**protected**
DoSetMaxLength	**protected**	SetSelection	**public**
GetSelection	**public**	SetSelLength	**protected**
GetSelLength	**protected**	SetSelStart	**protected**
GetSelStart	**protected**	SetSelTextBuf	**public**
GetSelText	**protected**	Undo	**public**
GetSelTextBuf	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

Create method

Creates a TCustomdxDBMemo instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBMemo instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

TCustomdxDBMemo Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxDBMemo

TdxDBMemo represents a multi-line edit control that can display and edit dataset fields.

Unit

dxDBELib

```
TdxDBMemo = class(TCustomdxDBMemo);
```

Description

Use the TdxDBMemo component to allow users to edit fields with lengthy textual data or to simply display the contents of such fields with the help of the Text property.



***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMemoEdit
              - TCustomdxMemo
                - TCustomdxDBMemo

TdxDBMemo Properties

Derived from TCustomdxDBMemo

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceMemoEdit

AutoSize	**protected / read / write**	SelectionBar	**published / read / write**
HideScrollBars	**published / read / write**	WantReturns	**published / read / write**
Lines	**public / read / write**	WantTabs	**published / read / write**
ScrollBars	**published / read / write**	WordWrap	**published / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**published / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelLength	**public / read / write**
CanUndo	**public / read only**	SelStart	**public / read / write**
CharCase	**published / read / write**	SelText	**public / read / write**
HideSelection	**published / read / write**	Text	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
Container	**protected / read / write**	StoredValues	**protected / read / write**
Height	**published / read / write**	Style	**published / read / write**
Modified	**public / read / write**	StyleController	**published / read / write**

Copyright © 2000 Developer Express Inc.

TdxDBMemo Methods

Derived from TCustomdxDBMemo

Create	**public**

Derived from TCustomdxMemo

IsInplace	**public**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
DefaultMaxLength	**public**	SelectionChange	**protected**
Deselect	**public**	SetEditMaxLength	**protected**
DoSetMaxLength	**protected**	SetSelection	**public**
GetSelection	**public**	SetSelLength	**protected**
GetSelLength	**protected**	SetSelStart	**protected**
GetSelStart	**protected**	SetSelTextBuf	**public**
GetSelText	**protected**	Undo	**public**
GetSelTextBuf	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

TdxDBMemo Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxDBDateEdit

TCustomdxDBDateEdit is the class from which a TdxDBDateEdit control is derived.

Unit

dxDBELib

```
TCustomdxDBDateEdit = class(TCustomdxDateEdit);
```

Description

TCustomdxDBDateEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBDateEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceDateEdit
                - TCustomdxDateEdit

TCustomdxDBDateEdit Properties

TCustomdxDBDateEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplaceDateEdit

Date	**protected / read / write**	DateValidation	**protected / read / write**
DateButtons	**protected / read / write**	SaveTime	**protected / read / write**
DateOnError	**protected / read / write**	UseEditMask	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

Copyright © 2000 Developer Express Inc.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access for this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

TCustomdxDBDateEdit Methods

TCustomdxDBDateEdit

Create	**public**

Derived from TCustomdxDateEdit

IsInplace	**public**

Derived from TdxInplaceDateEdit

DateChange	**protected**	DoValidateInput	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

Create method

Creates a TCustomdxDBDateEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBDateEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

TCustomdxDBDateEdit Events

Derived from TdxInplaceDateEdit

OnDateChange	**protected**	OnDateValidateInput	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxDBDateEdit

TdxDBDateEdit is a button editor with an associated dropdown calendar control used to display and edit date information in a dataset.

Unit

dxDBELib

```
TdxDBDateEdit = class(TCustomdxDBDateEdit);
```

Description

A user can edit data within this editor by selecting the required date value from the dropdown calendar or by entering it manually.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceDateEdit
                - TCustomdxDateEdit
                - TCustomdxDBDateEdit

TdxDBDateEdit Properties

Derived from TCustomdxDBDateEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceDateEdit

Date	**public / read / write**	DateValidation	**published / read / write**
DateButtons	**published / read / write**	SaveTime	**published / read / write**
DateOnError	**published / read / write**	UseEditMask	**published / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxDBDateEdit Methods

TCustomdxDBDateEdit

Create	**public**

Derived from TCustomdxDateEdit

IsInplace	**public**

Derived from TdxInplaceDateEdit

DateChange	**protected**	DoValidateInput	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxDBDateEdit Events

Derived from TdxInplaceDateEdit

OnDateChange	**published**	OnDateValidateInput	**published**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxDBButtonEdit

TCustomdxDBButtonEdit is the class from which the TdxDBButtonEdit component is derived.

Unit

dxDBELib

```
TCustomdxDBButtonEdit = class(TCustomdxButtonEdit);
```

Description

TCustomdxDBButtonEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBButtonEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceButtonEdit
                - TCustomdxButtonEdit

Copyright © 2000 Developer Express Inc.

TCustomdxDBButtonEdit Properties

TCustomdxDBButtonEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplaceButtonEdit

Buttons	**protected / read / write**	ViewStyle	**protected / read / write**
ClickKey	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

Copyright © 2000 Developer Express Inc.

TCustomdxDBButtonEdit Methods

TCustomdxDBButtonEdit

Create	**public**

Derived from TCustomdxButtonEdit

IsInplace	**public**

Derived from TdxInplaceButtonEdit

DefaultButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Create method

Creates a TCustomdxDBButtonEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBButtonEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

Copyright © 2000 Developer Express Inc.

TCustomdxDBButtonEdit Events

Derived from TdxInplaceButtonEdit

OnButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxDBButtonEdit

TdxDBButtonEdit is a single-line editor that can display and edit fields in the dataset with embedded button controls.

Unit

dxDBELib

```
TdxDBButtonEdit = class(TCustomdxDBButtonEdit);
```

Description

Use the TdxDBButtonEdit component to edit an individual field in an underlying dataset. This component can contain one or more clickable buttons that can be used to execute custom actions.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceButtonEdit
                - TCustomdxButtonEdit
                - TCustomdxDBButtonEdit

Copyright © 2000 Developer Express Inc.

TdxDBButtonEdit Properties

TCustomdxDBButtonEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceButtonEdit

Buttons	**published / read / write**	ViewStyle	**published / read / write**
ClickKey	**published / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**published / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxDBButtonEdit Methods

Derived from TCustomdxDBButtonEdit

Create	**public**

Derived from TCustomdxButtonEdit

IsInplace	**public**

Derived from TdxInplaceButtonEdit

DefaultButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxDBButtonEdit Events

Derived from TdxInplaceButtonEdit

OnButtonClick	**published**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxDBCheckEdit

TCustomdxDBCheckEdit is the class from which a TdxDBCheckEdit component is derived.

Unit

dxDBELib

```
TCustomdxDBCheckEdit = class(TCustomdxCheckEdit);
```

Description

TCustomdxDBCheckEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBCheckEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceCheckEdit
            - TCustomdxCheckEdit

TCustomdxDBCheckEdit Properties

TCustomdxDBCheckEdit

DataField	**protected / read / write**	ValueGrayed	**protected / read / write**
DataSource	**protected / read / write**	ValueUnchecked	**protected / read / write**
ValueChecked	**protected / read / write**		

Derived from TdxInplaceCheckEdit

AllowGrayed	**protected / read / write**	GlyphCount	**protected / read / write**
Checked	**protected / read / write**	MultiLine	**protected / read / write**
FullFocusRect	**protected / read / write**	NullStyle	**protected / read / write**
Glyph	**protected / read / write**	State	**protected / read / write**

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property — read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access for this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

ValueChecked property read / write

Specifies the field value that corresponds to the checked state of a checkbox.

```
property ValueChecked: string;
```

Description

Use the ValueChecked property to specify the field value represented by the check box when it is checked. When a user checks the check box, the field value is set to ValueChecked.

ValueGrayed property read / write

Specifies the field value that corresponds to the grayed state of a checkbox.

```
property ValueGrayed: string;
```

Description

Use the ValueGrayed property to specify the field value represented by the check box when it is grayed.

ValueUnchecked property read / write

Specifies the field value that corresponds to the unchecked state of a checkbox.

```
property ValueUnchecked: string;
```

Description

Use the ValueUnchecked property to specify the field value represented by the check box when it is unchecked. When a user unchecks the check box, the field value is set to ValueUnchecked.

Copyright © 2000 Developer Express Inc.

TCustomdxDBCheckEdit Methods

TCustomdxDBCheckEdit

Create	**public**	LoadDisplayValue	**protected**

Derived from TCustomdxCheckEdit

IsInplace	**public**

Derived from TdxInplaceCheckEdit

InvalidateCheckRect	**protected**	Toggle	**protected**

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
Deselect	**public**	RestoreDefaults	**public**
InvalidateEdit	**public**	SelectAll	**public**
IsEditClass	**public**	ValidateEdit	**public**

Create method

Creates a TCustomdxDBCheckEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBCheckEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

LoadDisplayValue method

Used to obtain the text string edited within a data-aware editor.

```
procedure LoadDisplayValue(var Data: Variant; IsPaintCopy: Boolean);
override;
```

Description

This method assigns the value returned by the DataDefinition.GetEditValue function to the Data parameter.

TCustomdxDBCheckEdit Events

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxDBCheckEdit

TdxDBCheckEdit is a check box component that works with dataset fields.

Unit

dxDBELib

```
TdxDBCheckEdit = class(TCustomdxDBCheckEdit);
```

Description

A user can edit data within a database field by checking or unchecking a check box. You can employ the TdxDBCheckEdit component to edit Boolean fields.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceCheckEdit
            - TCustomdxCheckEdit
              - TCustomdxDBCheckEdit

TdxDBCheckEdit Properties

Derived from TCustomdxDBCheckEdit

DataField	**published / read / write**	ValueGrayed	**published / read / write**
DataSource	**published / read / write**	ValueUnchecked	**published / read / write**
ValueChecked	**published / read / write**		

Derived from TdxInplaceCheckEdit

AllowGrayed	**published / read / write**	GlyphCount	**published / read / write**
Checked	**protected / read / write**	MultiLine	**published / read / write**
FullFocusRect	**published / read / write**	NullStyle	**published / read / write**
Glyph	**published / read / write**	State	**protected / read / write**

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxDBCheckEdit Methods

Derived from TCustomdxDBCheckEdit

Create	**public**	LoadDisplayValue	**protected**

Derived from TCustomdxCheckEdit

IsInplace	**public**

Derived from TdxInplaceCheckEdit

InvalidateCheckRect	**protected**	Toggle	**protected**

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
Deselect	**public**	RestoreDefaults	**public**
InvalidateEdit	**public**	SelectAll	**public**
IsEditClass	**public**	ValidateEdit	**public**

TdxDBCheckEdit Events

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxDBImageEdit

TCustomdxDBImageEdit is the class from which a TdxDBImageEdit control is derived.

Unit

dxDBELib

```
TCustomdxDBImageEdit = class(TCustomdxImageEdit);
```

Description

TCustomdxDBImageEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBImageEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceImageEdit
                - TCustomdxImageEdit

TCustomdxDBImageEdit Properties

TCustomdxDBImageEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplaceImageEdit

DefaultImages	**protected / read / write**	LargeImages	**protected / read / write**
Descriptions	**protected / read / write**	MultiLineText	**protected / read / write**
ImageIndexes	**protected / read / write**	ShowDescription	**protected / read / write**
Images	**protected / read / write**	Values	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

TCustomdxDBImageEdit Methods

TCustomdxDBImageEdit

Create	**public**

Derived from TCustomdxImageEdit

IsInplace	**public**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

Create method

Creates a TCustomdxDBImageEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBImageEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

TCustomdxDBImageEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxDBImageEdit

TdxDBImageEdit is a component with a dropdown control which can include both an image and a description for a specific field value.

Unit

dxDBELib

```
TdxDBImageEdit = class(TCustomdxDBImageEdit);
```

Description

A user can edit the data of an associated field by selecting the required value from a dropdown image pick list.



***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceImageEdit
                - TCustomdxImageEdit
                - TCustomdxDBImageEdit

TdxDBImageEdit Properties

Derived from TCustomdxDBImageEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceImageEdit

DefaultImages	**published / read / write**	LargeImages	**published / read / write**
Descriptions	**published / read / write**	MultiLineText	**published / read / write**
ImageIndexes	**published / read / write**	ShowDescription	**published / read / write**
Images	**published / read / write**	Values	**published / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**published / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**published / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxDBImageEdit Methods

Derived from TCustomdxDBImageEdit

Create	**public**

Derived from TCustomdxImageEdit

IsInplace	**public**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxDBImageEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxDBSpinEdit

TCustomdxDBSpinEdit is the class from which a TdxDBSpinEdit control is derived.

Unit

dxDBELib

```
TCustomdxDBSpinEdit = class(TCustomdxSpinEdit);
```

Description

TCustomdxDBSpinEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBSpinEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceSpinEdit
                - TCustomdxSpinEdit

TCustomdxDBSpinEdit Properties

TCustomdxDBSpinEdit

DataField	**protected / read / write**
DataSource	**protected / read / write**

Derived from TdxInplaceSpinEdit

EditorEnabled	**protected / read / write**	MinValue	**protected / read / write**
Increment	**protected / read / write**	UseCtrlIncrement	**protected / read / write**
IntValue	**protected / read / write**	Value	**protected / read / write**
MaxValue	**protected / read / write**	ValueType	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

Copyright © 2000 Developer Express Inc.

DataSource property read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

TCustomdxDBSpinEdit Methods

TCustomdxDBSpinEdit

Create	**public**

Derived from TCustomdxSpinEdit

IsInplace	**public**

Derived from TdxInplaceSpinEdit

DefaultMaxValue	**public**	IsValidChar	**protected**
DefaultMinValue	**public**	SetEditMaxValue	**protected**
DefaultValueType	**public**	SetEditMinValue	**protected**
GetIncrement	**protected**	SetEditValueType	**protected**
GetValue	**protected**	SetValue	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protecte d**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

Create method

Creates a TCustomdxDBSpinEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBSpinEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

TCustomdxDBSpinEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxDBSpinEdit

TdxDBSpinEdit is a component with spin buttons used to display and edit dataset fields.

Unit

dxDBELib

```
TdxDBSpinEdit = class(TCustomdxDBSpinEdit);
```

Description

Users can edit data in an associated field via the SpinEdit using spin buttons or manually entering the desired value within the editor.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceSpinEdit
                - TCustomdxSpinEdit
                - TCustomdxDBSpinEdit

TdxDBSpinEdit Properties

Derived from TCustomdxDBSpinEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceSpinEdit

EditorEnabled	**published / read / write**	MinValue	**published / read / write**
Increment	**published / read / write**	UseCtrlIncrement	**protected / read / write**
IntValue	**public / read / write**	Value	**published / read / write**
MaxValue	**published / read / write**	ValueType	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxDBSpinEdit Methods

Derived from TCustomdxDBSpinEdit

Create	**public**

Derived from TCustomdxSpinEdit

IsInplace	**public**

Derived from TdxInplaceSpinEdit

DefaultMaxValue	**public**	IsValidChar	**protected**
DefaultMinValue	**public**	SetEditMaxValue	**protected**
DefaultValueType	**public**	SetEditMinValue	**protected**
GetIncrement	**protected**	SetEditValueType	**protected**
GetValue	**protected**	SetValue	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxDBSpinEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxDBPickEdit

TCustomdxDBPickEdit is the class from which a TdxDBPickEdit control is derived.

Unit

dxDBELib

```
TCustomdxDBPickEdit = class(TCustomdxPickEdit);
```

Description

TCustomdxDBPickEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBPickEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePickEdit
                - TCustomdxPickEdit

TCustomdxDBPickEdit Properties

TCustomdxDBPickEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplacePickEdit

CanDeleteText	**protected / read / write**	Items	**protected / read / write**
DropDownListStyle	**protected / read / write**	Revertable	**protected / read / write**
ItemIndex	**protected / read / write**	Sorted	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

Copyright © 2000 Developer Express Inc.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

TCustomdxDBPickEdit Methods

TCustomdxDBPickEdit

Create	**public**

Derived from TCustomdxPickEdit

IsInplace	**public**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

Create method

Creates a TCustomdxDBPickEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBPickEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

TCustomdxDBPickEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxDBPickEdit

TdxDBPickEdit is a component with an associated dropdown list box control which contains a set of possible values.

Unit

dxDBELib

```
TdxDBPickEdit = class(TCustomdxDBPickEdit);
```

Description

Users can edit the data of an associated field by selecting the required value from the pick list or by entering it manually.



***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePickEdit
                - TCustomdxPickEdit
                - TCustomdxDBPickEdit

TdxDBPickEdit Properties

Derived from TCustomdxDBPickEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplacePickEdit

CanDeleteText	**published / read / write**	Items	**published / read / write**
DropDownListStyle	**published / read / write**	Revertable	**published / read / write**
ItemIndex	**protected / read / write**	Sorted	**published / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**published / read / write**
DropDownRows	**published / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**published / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**published / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**published / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxDBPickEdit Methods

Derived from TCustomdxDBPickEdit

Create	**public**

Derived from TCustomdxPickEdit

IsInplace	**public**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxDBPickEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxDBCalcEdit

TCustomdxDBCalcEdit is the class from which a TdxDBCalcEdit control is derived.

Unit

dxDBELib

```
TCustomdxDBCalcEdit = class(TCustomdxCalcEdit);
```

Description

TCustomdxDBCalcEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBCalcEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceCalcEdit
                - TCustomdxCalcEdit

TCustomdxDBCalcEdit Properties

TCustomdxDBCalcEdit

DataField	**protected / read / write**
DataSource	**protected / read / write**

Derived from TdxInplaceCalcEdit

BeepOnError	**protected / read / write**	QuickClose	**protected / read / write**
ButtonStyle	**protected / read / write**	ShowButtonFrame	**protected / read / write**
Precision	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

Copyright © 2000 Developer Express Inc.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

TCustomdxDBCalcEdit Methods

TCustomdxDBCalcEdit

Create	**public**

Derived from TCustomdxCalcEdit

IsInplace	**public**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

Create method

Creates a TCustomdxDBCalcEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBCalcEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

TCustomdxDBCalcEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxDBCalcEdit

TdxDBCalcEdit is a component with an associated calculator control.

Unit

dxDBELib

```
TdxDBCalcEdit = class(TCustomdxDBCalcEdit);
```

Description

A user can edit the data of an associated dataset field by calculating the required value via the popup calculator or entering data directly into the editor.

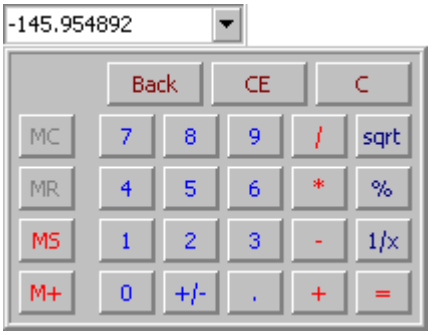

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceCalcEdit
                - TCustomdxCalcEdit
                - TCustomdxDBCalcEdit

TdxDBCalcEdit Properties

Derived from TCustomdxDBCalcEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceCalcEdit

BeepOnError	**published / read / write**	QuickClose	**published / read / write**
ButtonStyle	**published / read / write**	ShowButtonFrame	**published / read / write**
Precision	**published / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**published / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxDBCalcEdit Methods

Derived from TCustomdxDBCalcEdit

Create	**public**

Derived from TCustomdxCalcEdit

IsInplace	**public**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxDBCalcEdit Events

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

.Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxDBHyperLinkEdit

TCustomdxDBHyperLinkEdit is the class from which a TdxDBHyperLinkEdit control is derived.

Unit

dxDBELib

```
TCustomdxDBHyperLinkEdit = class(TCustomdxHyperLinkEdit);
```

Description

TCustomdxDBHyperLinkEdit contains the basic methods and properties that are used to implement standard behavior inherited by TdxDBHyperLinkEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceHyperLinkEdit
              - TCustomdxHyperLinkEdit

TCustomdxDBHyperLinkEdit Properties

TCustomdxDBHyperLinkEdit

DataField	**protected / read / write**
DataSource	**protected / read / write**

Derived from TCustomdxHyperLinkEdit

ReadOnly	**protected / read / write**

Derived from TdxInplaceHyperLinkEdit

LinkColor	**protected / read / write**	StartKey	**protected / read / write**
SingleClick	**protected / read / write**		

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	Modified	**public / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property — read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

TCustomdxDBHyperLinkEdit Methods

TCustomdxDBHyperLinkEdit

Create	**public**

Derived from TCustomdxHyperLinkEdit

DoStart	**protected**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

Create method

Creates a TCustomdxDBHyperLinkEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBHyperLinkEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

Copyright © 2000 Developer Express Inc.

TCustomdxDBHyperLinkEdit Events

Derived from TdxInplaceHyperLinkEdit

OnStartClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxDBHyperLinkEdit

TdxDBHyperLinkEdit represents data from an associated dataset field as a hyperlink.

Unit

dxDBELib

```
TdxDBHyperLinkEdit = class(TCustomdxDBHyperLinkEdit);
```

Description

The TdxDBHyperLinkEdit component edits and processes hyperlinks associated with a dataset field.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceHyperLinkEdit
              - TCustomdxHyperLinkEdit
                - TCustomdxDBHyperLinkEdit

Copyright © 2000 Developer Express Inc.

TdxDBHyperLinkEdit Properties

Derived from TCustomdxDBHyperLinkEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TCustomdxHyperLinkEdit

ReadOnly	**published / read / write**

Derived from TdxInplaceHyperLinkEdit

LinkColor	**published / read / write**	StartKey	**published / read / write**
SingleClick	**published / read / write**		

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**published / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**	Text	**published / read / write**

Derived from TdxInplaceEdit

Alignment	**published / read / write**	Modified	**public / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**

TdxDBHyperLinkEdit Methods

Derived from TCustomdxDBHyperLinkEdit

Create	**public**

Derived from TCustomdxHyperLinkEdit

IsInplace	**public**

Derived from TdxInplaceHyperLinkEdit

DoStart	**protected**

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	GetTextLenEx	**public**
Clear	**public**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**	ValidateEdit	**public**

Copyright © 2000 Developer Express Inc.

TdxDBHyperLinkEdit Events

Derived from TdxInplaceHyperLinkEdit

OnStartClick	**published**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	published	OnMouseLeave	published
OnMouseEnter	published	OnValidate	published

TCustomdxDBTimeEdit

TCustomdxDBTimeEdit is the class from which a TdxDBTimeEdit component is derived.

Unit

dxDBELib

```
TCustomdxDBTimeEdit = class(TCustomdxTimeEdit);
```

Description

TCustomdxDBTimeEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBTimeEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceSpinEdit
                - TdxInplaceTimeEdit
                - TCustomdxTimeEdit

Copyright © 2000 Developer Express Inc.

TCustomdxDBTimeEdit Properties

TCustomdxDBTimeEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplaceTimeEdit

Time	**protected / read / write**	TimeEditFormat	**protected / read / write**

Derived from TdxInplaceSpinEdit

EditorEnabled	**protected / read / write**	MinValue	**protected / read / write**
Increment	**protected / read / write**	UseCtrlIncrement	**protected / read / write**
IntValue	**protected / read / write**	Value	**protected / read / write**
MaxValue	**protected / read / write**	ValueType	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

TCustomdxDBTimeEdit Methods

TCustomdxDBTimeEdit

Create	**public**

Derived from TCustomdxTimeEdit

IsInplace	**public**

Derived from TdxInplaceSpinEdit

DefaultMaxValue	**public**	IsValidChar	**protected**
DefaultMinValue	**public**	SetEditMaxValue	**protected**
DefaultValueType	**public**	SetEditMinValue	**protected**
GetIncrement	**protected**	SetEditValueType	**protected**
GetValue	**protected**	SetValue	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Create method

Creates a TCustomdxDBTimeEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBTimeEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

Copyright © 2000 Developer Express Inc.

TCustomdxDBTimeEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxDBTimeEdit

TdxDBSpinEdit represents an editor with spin buttons used to display and edit time values.

Unit

dxDBELib

```
TdxDBTimeEdit = class(TCustomdxDBTimeEdit);
```

Description

TdxDBTimeEdit is used to edit time values using both the keyboard and/or spin buttons.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceSpinEdit
                - TdxInplaceTimeEdit
                - TCustomdxTimeEdit
                - TCustomdxDBTimeEdit

Copyright © 2000 Developer Express Inc.

TdxDBTimeEdit Properties

Derived from TCustomdxDBTimeEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceTimeEdit

Time	**published / read / write**	TimeEditFormat	**published / read / write**

Derived from TdxInplaceSpinEdit

EditorEnabled	**protected / read / write**	MinValue	**protected / read / write**
Increment	**protected / read / write**	UseCtrlIncrement	**protected / read / write**
IntValue	**protected / read / write**	Value	**protected / read / write**
MaxValue	**protected / read / write**	ValueType	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**publis hed / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxDBTimeEdit Methods

Derived from TCustomdxDBTimeEdit

Create	**public**

Derived from TCustomdxTimeEdit

IsInplace	**public**

Derived from TdxInplaceSpinEdit

DefaultMaxValue	**public**	IsValidChar	**protected**
DefaultMinValue	**public**	SetEditMaxValue	**protected**
DefaultValueType	**public**	SetEditMinValue	**protected**
GetIncrement	**protected**	SetEditValueType	**protected**
GetValue	**protected**	SetValue	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxDBTimeEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxDBCurrencyEdit

TCustomdxDBCurrencyEdit is the class from which a TdxDBCurrencyEdit component is derived.

Unit

dxDBELib

```
TCustomdxDBCurrencyEdit = class(TCustomdxCurrencyEdit);
```

Description

TCustomdxDBCurrencyEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBCurrencyEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceCurrencyEdit
                - TCustomdxCurrencyEdit

Copyright © 2000 Developer Express Inc.

TCustomdxDBCurrencyEdit Properties

TCustomdxDBCurrencyEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplaceCurrencyEdit

DecimalPlaces	**protected / read / write**	MinValue	**protected / read / write**
DisplayFormat	**protected / read / write**	Value	**protected / read / write**
MaxValue	**protected / read / write**		

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

Copyright © 2000 Developer Express Inc.

TCustomdxDBCurrencyEdit Methods

TCustomdxDBCurrencyEdit

Create	**public**

Derived from TCustomdxCurrencyEdit

IsInplace	**public**

Derived from TdxInplaceCurrencyEdit

DefaultDisplayFormat	**public**	DefaultMinValue	**public**
DefaultMaxValue	**public**	IsValidChar	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Create method

Creates a TCustomdxDBCurrencyEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBCurrencyEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

Copyright © 2000 Developer Express Inc.

TCustomdxDBCurrencyEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxDBCurrencyEdit

TdxDBCurrencyEdit allows users to modify currency data.

Unit

dxDBELib

```
TdxDBCurrencyEdit = class(TCustomdxDBCurrencyEdit);
```

Description

The TdxDBCurrencyEdit component displays and edits currency formatted data.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceCurrencyEdit
                - TCustomdxCurrencyEdit
                - TCustomdxDBCurrencyEdit

Copyright © 2000 Developer Express Inc.

TdxDBCurrencyEdit Properties

Derived from TCustomdxDBCurrrencyEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceCurrencyEdit

DecimalPlaces	**published / read / write**	MinValue	**published / read / write**
DisplayFormat	**published / read / write**	Value	**published / read / write**
MaxValue	**published / read / write**		

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**published / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxDBCurrencyEdit Methods

Derived from TCustomdxDBCurrencyEdit

Create	**public**

Derived from TCustomdxCurrencyEdit

IsInplace	**public**

Derived from TdxInplaceCurrencyEdit

DefaultDisplayFormat	**public**	DefaultMinValue	**public**
DefaultMaxValue	**public**	IsValidChar	**protected**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxDBCurrencyEdit Events

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	published	OnMouseLeave	published
OnMouseEnter	published	OnValidate	published

TCustomdxDBGraphicEdit

TCustomdxDBGraphicEdit is the class from which a TdxDBGraphicEdit component is derived.

Unit

dxDBELib

```
TCustomdxDBGraphicEdit = class(TCustomdxGraphicEdit);
```

Description

TCustomdxDBGraphicEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBGraphicEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceGraphicEdit
            - TCustomdxGraphicEdit

Copyright © 2000 Developer Express Inc.

TCustomdxDBGraphicEdit Properties

TCustomdxDBGraphicEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplaceGraphicEdit

AutoSize	**protected / read / write**	Picture	**protected / read / write**
Center	**protected / read / write**	QuickDraw	**protected / read / write**
ClipboardFormat	**protected / read / write**	Stretch	**protected / read / write**
CustomFilter	**protected / read / write**	ToolbarLayout	**protected / read / write**
CustomGraphic	**protected / read / write**	ToolbarPos	**protected / read / write**
DblClickActivate	**protected / read / write**	ToolbarPosStored	**protected / read / write**
GraphicTransparency	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
Container	**protected / read / write**	StoredValues	**protected / read / write**
Height	**published / read / write**	Style	**public / read / write**
Modified	**public / read / write**	StyleController	**protected / read / write**

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property — read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

TCustomdxDBGraphicEdit Methods

TCustomdxDBGraphicEdit

Create	**public**

Derived from TCustomdxGraphicEdit

IsInplace	**public**

Derived from TdxInplaceGraphicEdit

AssignPicture	**protected**	GetGraphicClass	**protected**
ClearPicture	**public**	LoadFromFile	**public**
CopyToClipboard	**public**	PasteFromClipboard	**public**
CustomClick	**protected**	SaveToFile	**public**
CutToClipboard	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
Deselect	**public**	RestoreDefaults	**public**
InvalidateEdit	**public**	SelectAll	**public**
IsEditClass	**public**	ValidateEdit	**public**

Create method

Creates a TCustomdxDBGraphicEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBGraphicEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

Copyright © 2000 Developer Express Inc.

TCustomdxDBGraphicEdit Events

Derived from TdxInplaceGraphicEdit

OnAssignPicture	**protected**	OnGetGraphicClass	**protected**
OnCustomClick	**protected**		

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxDBGraphicEdit

TdxDBGraphicEdit represents an editor that displays images obtained from a database field.

Unit

dxDBELib

```
TdxDBGraphicEdit = class(TCustomdxDBGraphicEdit);
```

Description

TdxDBGraphicEdit is an edit component with a dropdown window that contains an image from a specific database field.

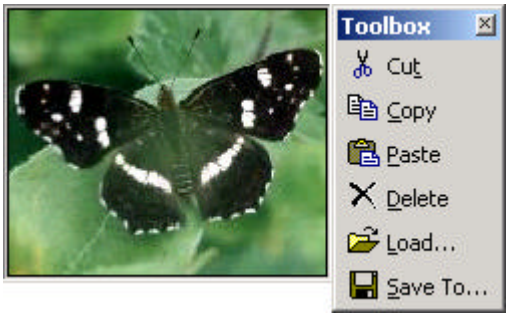

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceGraphicEdit
            - TCustomdxGraphicEdit
              - TCustomdxDBGraphicEdit

Copyright © 2000 Developer Express Inc.

TdxDBGraphicEdit Properties

Derived from TCustomdxDBGraphicEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceGraphicEdit

AutoSize	**protected / read / write**	Picture	**public / read / write**
Center	**published / read / write**	QuickDraw	**published / read / write**
ClipboardFormat	**public / read / write**	Stretch	**published / read / write**
CustomFilter	**published / read / write**	ToolbarLayout	**published / read / write**
CustomGraphic	**published / read / write**	ToolbarPos	**public / read / write**
DblClickActivate	**published / read / write**	ToolbarPosStored	**published / read / write**
GraphicTransparency	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**published / read / write**
Container	**protected / read / write**	StoredValues	**protected / read / write**
Height	**published / read / write**	Style	**published / read / write**
Modified	**public / read / write**	StyleController	**published / read / write**

TdxDBGraphicEdit Methods

Derived from TCustomdxDBGraphicEdit

Create	**public**

Derived from TCustomdxGraphicEdit

IsInplace	**public**

Derived from TdxInplaceGraphicEdit

AssignPicture	**protected**	GetGraphicClass	**protected**
ClearPicture	**public**	LoadFromFile	**public**
CopyToClipboard	**public**	PasteFromClipboard	**public**
CustomClick	**protected**	SaveToFile	**public**
CutToClipboard	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
Deselect	**public**	RestoreDefaults	**public**
InvalidateEdit	**public**	SelectAll	**public**
IsEditClass	**public**	ValidateEdit	**public**

Copyright © 2000 Developer Express Inc.

TdxDBGraphicEdit Events

Derived from TdxInplaceGraphicEdit

OnAssignPicture	**published**	OnGetGraphicClass	**published**
OnCustomClick	**published**		

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxDBLookupEdit

TCustomdxDBLookupEdit is the class from which a TdxDBLookupEdit component is derived.

Unit

dxDBELib

```
TCustomdxDBLookupEdit = class(TdxInplaceLookupEdit);
```

Description

TCustomdxDBLookupEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBLookupEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceLookupEdit

Copyright © 2000 Developer Express Inc.

TCustomdxDBLookupEdit Properties

TCustomdxDBLookupEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplaceLookupEdit

CanDeleteText	**protected / read / write**	ListSource	**protected / read / write**
ClearKey	**protected / read / write**	LookupKeyValue	**protected / read / write**
Field	**protected / read / write**	LookupMode	**protected / read only**
KeyFieldName	**protected / read / write**	Revertable	**protected / read / write**
ListFieldName	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**published / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property — read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

Copyright © 2000 Developer Express Inc.

TCustomdxDBLookupEdit Methods

TCustomdxDBLookupEdit

Create	**public**	IsInplace	**public**

Derived from TdxInplaceLookupEdit

ClearField	**protected**	IsEditable	**public**
DoCloseUp	**protected**	SetKeyValue	**protected**
DoIncremental	**protected**		

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoDropDownKeys	**protected**	PopupBorderStyle	**public**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Create method

Creates a TCustomdxDBLookupEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBLookupEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

IsInplace method

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns False for TCustomdxDBLookupEdit.

Copyright © 2000 Developer Express Inc.

TCustomdxDBLookupEdit Events

Derived from TdxInplaceLookupEdit

OnCloseUp	**protected**

Derived from TdxInplaceDropDownEdit

OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxDBLookupEdit

TdxDBLookupEdit represents a control with a linked dropdown lookup list.

Unit

dxDBELib

```
TdxDBLookupEdit = class(TCustomdxDBLookupEdit);
```

Description

The TdxDBLookupEdit component is used to create a lookup list box from a lookup table. Users can edit data within this component by selecting the required value from the lookup list or by entering it directly into the editor. This component uses the dropdown list to modify data in an associated field.

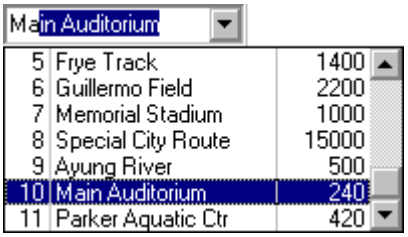

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceLookupEdit
                - TCustomdxDBLookupEdit

TdxDBLookupEdit Properties

Derived from TCustomdxDBLookupEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceLookupEdit

CanDeleteText	**published / read / write**	ListSource	**published / read / write**
ClearKey	**published / read / write**	LookupKeyValue	**published / read / write**
Field	**protected / read / write**	LookupMode	**published / read only**
KeyFieldName	**published / read / write**	Revertable	**published / read / write**
ListFieldName	**published / read / w rite**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**published / read / write**
DropDownRows	**published / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**published / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**published / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxDBLookupEdit Methods

Derived from TCustomdxDBLookupEdit

Create	**public**	IsInplace	**public**

Derived from TdxInplaceLookupEdit

ClearField	**protected**	IsEditable	**public**
DoCloseUp	**protected**	SetKeyValue	**protected**
DoIncremental	**protected**		

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoDropDownKeys	**protected**	PopupBorderStyle	**public**

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxDBLookupEdit Events

Derived from TdxInplaceLookupEdit

OnCloseUp	**published**

Derived from TdxInplaceDropDownEdit

OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxDBBlobEdit

TCustomdxDBBlobEdit is the class from which a TdxDBBlobEdit component is derived.

Unit

dxDBELib

```
TCustomdxDBBlobEdit = class(TCustomdxBlobEdit);
```

Description

TCustomdxDBBlobEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBBlobEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceBlobEdit
                - TCustomdxBlobEdit

Copyright © 2000 Developer Express Inc.

TCustomdxDBBlobEdit Properties

TCustomdxDBBlobEdit

BlobKind	**protected / read / write**	DataSource	**protected / read / write**
DataField	**protected / read / write**		

Derived from TdxInplaceBlobEdit

AlwaysSaveText	**protected / read / write**	MemoWordWrap	**protected / read / write**
BlobEditKind	**protected / read / write**	PictureAutoSize	**protected / read / write**
BlobPaintStyle	**protected / read / write**	PictureClipboardFormat	**protected / read / write**
BlobText	**protected / read / write**	PictureGraphicClass	**protected / read / write**
MemoCharCase	**protected / read / write**	PictureFilter	**protected / read / write**
MemoHideScrollBars	**protected / read / write**	PictureTransparency	**protected / read / write**
MemoMaxLength	**protected / read / write**	PopupWidth	**protected / read / write**
MemoOEMConvert	**protected / read / write**	PopupHeght	**protected / read / write**
MemoScrollBars	**protected / read / write**	ShowExPopupItems	**protected / read / write**
MemoSelectionBar	**protected / read / write**	ShowPicturePopup	**protected / read / write**
MemoWantReturns	**protected / read / write**	SizeablePopup	**protected / read / write**
MemoWantTabs	**protected / read / write**	Text	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**		

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

BlobKind property — read / write

Specifies the type of BLOB field.

```
type
      TdxBlobKind = (bkAuto, bkBlob, bkMemo, bkPict, bkOle);
property BlobKind: TdxBlobKind;
```

Description

Use the BlobKind property to specify the type of BLOB field associated with the editor. Possible values include:

Value	Description
bkAuto	The editor recognizes the type of a BLOB field automatically (can contain all the following values).
bkBlob	Binary Large Object field (ftBlob).
bkMemo	Text memo field (ftMemo) or formatted text memo field (ftFmtMemo).
bkPict	Bitmap field (ftGraphic).
bkOle	Paradox OLE field (ftParadoxOle) or dBase OLE field (ftDBaseOle).

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property — read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

Copyright © 2000 Developer Express Inc.

TCustomdxDBBlobEdit Methods

TCustomdxDBBlobEdit

AssignEditProperties	**protected**	IsInplace	**public**
Create	**public**		

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

AssignEditProperties method

```
procedure AssignEditProperties; override;
```

Description

Calls the CalcBlobEditKind method and obtaines the associated field type and returns the appropriate value for the BlobEditKind property.

Create method

Creates a TCustomdxDBBlobEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBBlobEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

IsInplace method

```
class function IsInplace: Boolean; override;
```

Description

Always returns **False** for TCustomdxDBBlobEdit.

Copyright © 2000 Developer Express Inc.

TCustomdxDBBlobEdit Events

Derived from TdxInplaceBlobEdit

OnAssignPicture	**protected**	OnGetGraphicClass	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxDBBlobEdit

TdxDBBlobEdit represents a control that displays and edits BLOB data.

Unit

dxDBELib

```
TdxDBBlobEdit = class(TCustomdxDBBlobEdit);
```

Description

The TdxDBBlobEdit component allows a user to display and edit Memo BLOBs or display Picture BLOBs contained within a field. It can also automatically determine the type of OLE BLOBs.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplaceBlobEdit
                - TCustomdxBlobEdit
                - TCustomdxDBBlobEdit

TdxDBBlobEdit Properties

Derived from TCustomdxDBBlobEdit

BlobKind	**published / read / write**	DataSource	**published / read / write**
DataField	**published / read / write**		

Derived from TdxInplaceBlobEdit

AlwaysSaveText	**published / read / write**	MemoWordWrap	**published / read / write**
BlobEditKind	**protected / read / write**	PictureAutoSize	**published / read / write**
BlobPaintStyle	**published / read / write**	PictureClipboardFormat	**publi? / read / write**
BlobText	**protected / read / write**	PictureGraphicClass	**publi? / read / write**
MemoCharCase	**published / read / write**	PictureFilter	**published / read / write**
MemoHideScrollBars	**published / read / write**	PictureTransparency	**published / read / write**
MemoMaxLength	**published / read / write**	PopupWidth	**published / read / write**
MemoOEMConvert	**published / read / write**	PopupHeght	**published / read / write**
MemoScrollBars	**published / read / write**	ShowExPopupItems	**published / read / write**
MemoSelectionBar	**published / read / write**	ShowPicturePopup	**published / read / write**
MemoWantReturns	**published / read / write**	SizeablePopup	**published / read / write**
MemoWantTabs	**published / read / write**	Text	**publi? / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**published / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**		

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxDBBlobEdit Methods

Derived from TCustomdxDBBlobEdit

AssignEditProperties	**protected**	IsInplace	**public**
Create	**public**		

Derived from TdxInplaceBlobEdit

AssignPicture	**protected**	SavePopupSize	**protected**
GetGraphicClass	**protected**	SetBlobValue	**protected**
IsSizeablePopup	**protected**		

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxDBBlobEdit Events

Derived from TdxInplaceBlobEdit

OnAssignPicture	**published**	OnGetGraphicClass	**published**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

TCustomdxDBMRUEdit

TCustomdxDBMRUEdit defines the basic methods and properties for TdxDBMRUEdit.

Unit

dxDBELib

```
TCustomdxDBMRUEdit = class(TCustomdxMRUEdit);
```

Description

TCustomdxDBMRUEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBMRUEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePickEdit
                - TdxInplaceMRUEdit
                - TCustomdxMRUEdit

Copyright © 2000 Developer Express Inc.

TCustomdxDBMRUEdit Properties

TCustomdxDBMRUEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplaceMRUEdit

ImmediateDropDown	**protected / read / write**	ShowEllipsis	**protected / read / write**
MaxItemCount	**protected / read / write**		

Derived from TdxInplacePickEdit

CanDeleteText	**protected / read / write**	Items	**protected / read / write**
DropDownListStyle	**protected / read / write**	Revertable	**protected / read / write**
ItemIndex	**protected / read / write**	Sorted	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property — read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

Copyright © 2000 Developer Express Inc.

TCustomdxDBMRUEdit Methods

TCustomdxDBMRUEdit

Create	**public**

Derived from TCustomdxMRUEdit

IsInplace	**public**

Derived from TdxInplaceMRUEdit

AddItem	**public**	ButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Create method

Creates a TCustomdxDBMRUEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBMRUEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

Copyright © 2000 Developer Express Inc.

TCustomdxDBMRUEdit Events

Derived from TdxInplaceMRUEdit

OnButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

TdxDBMRUEdit

TdxDBMRUEdit is a button type date-aware editor that can list and edit a summary of the most recently used (MRU) items.

Unit

dxDBELib

```
TdxDBMRUEdit = class(TCustomdxDBMRUEdit);
```

Description

The TdxDBMRUEdit component maintains a list of the most recently used items. This list is automatically maintained by the editor, so no additional coding is necessary on your part. While TdxDBMRUEdit descends from TdxInplacePickEdit, it can be used as a pick editor to search most recently entered values within the MRU items list.

TdxDBMRUEdit is an editor with a button control. It can include one or two clickable button controls. One of these buttons is always used to display the dropdown items list. The other button can be used to perform other actions. If you wish to create a specific editor that maintains a MRU list, you should inherit TCustomdxDBMRUEdit.

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePickEdit
                - TdxInplaceMRUEdit
                - TCustomdxMRUEdit
                - TCustomdxDBMRUEdit

TdxDBMRUEdit Properties

Derived from TCustomdxDBMRUEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceMRUEdit

ImmediateDropDown	**published / read / write**	ShowEllipsis	**published / read / write**
MaxItemCount	**published / read / write**		

Derived from TdxInplacePickEdit

CanDeleteText	**published / read / write**	Items	**published / read / write**
DropDownListStyle	**published / read / write**	Revertable	**published / read / write**
ItemIndex	**public / read / write**	Sorted	**protected / read / write**

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediatePopup	**protected / read / write**
DropDownRows	**published / read / write**	PopupAlignment	**published / read / write**
DropDownWidth	**published / read / write**	PopupBorder	**published / read / write**
DroppedDown	**public / read / write**		

Derived from TdxInplaceMaskEdit

EditMask	**published / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**protected / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxDBMRUEdit Methods

Derived from TCustomdxDBMRUEdit

Create	**public**

Derived from TCustomdxMRUEdit

IsInplace	**public**

Derived from TdxInplaceMRUEdit

AddItem	**public**	ButtonClick	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxDBMRUEdit Events

Derived from TdxInplaceMRUEdit

OnButtonClick	**published**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TCustomdxDBPopupEdit

TCustomdxDBPopupEdit is the class from which a TdxDBPopupEdit control is derived.

Unit

dxDBELib

```
TCustomdxDBPopupEdit = class(TCustomdxPopupEdit);
```

Description

TCustomdxDBPopupEdit contains the basic properties and methods that are used to implement standard behaviors inherited by TdxDBPopupEdit.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePopupEdit
                - TCustomdxPopupEdit

TCustomdxDBPopupEdit Properties

TCustomdxDBPopupEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplacePopupEdit

PopupForm	**public / read only**	PopupFormCaption	**protected / read / write**
HideEditCursor	**protected / read / write**	PopupHeight	**protected / read / write**
PopupAutoSize	**protected / read / write**	PopupMinHeight	**protected / read / write**
PopupControl	**protected / read / write**	PopupMinWidth	**protected / read / write**
PopupClientEdge	**protected / read / write**	PopupSizeable	**protected / read / write**
PopupFlatBorder	**protected / read / write**	PopupWidth	**protected / read / write**
PopupFormBorderStyle	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

DataField property — read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

TCustomdxDBPopupEdit Methods

TCustomdxDBPopupEdit

Create	**public**

Derived from TCustomdxPopupEdit

IsInplace	**public**

Derived from TdxInplacePopupEdit

CalcSize	**protected**	InitializePopup	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

Create method

Creates a TCustomdxDBPopupEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBPopupEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

TCustomdxDBPopupEdit Events

Derived from TdxInplacePopupEdit

OnCloseQuery	**protected**	OnInitPopup	**protected**
OnCloseUp	**protected**	OnPopup	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxDBPopupEdit

TdxPopupEdit is a button type editor with a dropdown window which can display another control.

Unit

dxDBELib

```
TdxDBPopupEdit = class(TCustomdxDBPopupEdit);
```

Description

The TdxPopupEdit component maintains a dropdown window used to host a specific control. At runtime, a user can work with this embedded control within the dropdown window of the TdxPopupEdit component. This component uses the result value of the embedded control to modify data in an associated field.

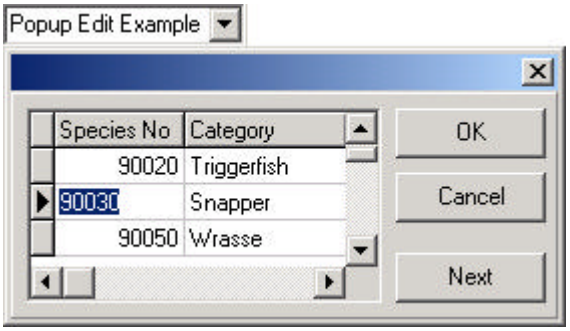

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePopupEdit
                - TCustomdxPopupEdit
                - TCustomdxDBPopupEdit

TdxDBPopupEdit Properties

Derived from TCustomdxDBPopupEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplacePopupEdit

PopupForm	**public / read only**	PopupFormCaption	**published / read / write**
HideEditCursor	**published / read / write**	PopupHeight	**published / read / write**
PopupAutoSize	**published / read / write**	PopupMinHeight	**published / read / write**
PopupControl	**published / read / write**	PopupMinWidth	**published / read / write**
PopupClientEdge	**published / read / write**	PopupSizeable	**published / read / write**
PopupFlatBorder	**published / read / write**	PopupWidth	**published / read / write**
PopupFormBorderStyle	**published / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**published / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**published / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**published / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**published / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**published / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

TdxDBPopupEdit Methods

Derived from TCustomdxDBPopupEdit

Create	**public**

Derived from TCustomdxPopupEdit

IsInplace	**public**

Derived from TdxInplacePopupEdit

CalcSize	**protected**	InitializePopup	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxDBPopupEdit Events

Derived from TdxInplacePopupEdit

OnCloseQuery	**published**	OnInitPopup	**published**
OnCloseUp	**published**	OnPopup	**published**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**
OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Copyright © 2000 Developer Express Inc.

TdxInplaceExtLookupEdit

Represents an editor that modifies data via a dropdown window which contains the ExpressQuantumGrid.

Unit

dxExGrEd

```
TdxInplaceExtLookupEdit = class(TdxInplacePopupEdit);
```

Description

Use TdxInplaceExtLookupEdit to create an extended lookup editor. When activating a dropdown window, the extended lookup editor displays an instance of the TdxDBGrid class, which can implement all ExpressQuantumGrid features. This dropdown grid automatically supports incremental search.

TdxInplaceExtLookupEdit applies the TdxDBGridLayout object to define the look and feel of a grid within the dropdown window.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePopupEdit

TdxInplaceExtLookupEdit Properties

TdxInplaceExtLookupEdit

CanDeleteText	**protected / read / write**	Field	**protected / read / write**
ChooseByDblClick	**protected / read / write**	PickListField	**protected / read / write**
ClearKey	**protected / read / write**	UseDefaultSettings	**protected / read / write**
DBGridLayout	**protected / read / write**		

Derived from TdxInplacePopupEdit

PopupForm	**public / read only**	PopupFormCaption	**protected / read / write**
HideEditCursor	**protected / read / write**	PopupHeight	**protected / read / write**
PopupAutoSize	**protected / read / write**	PopupMinHeight	**protected / read / write**
PopupControl	**protected / read / write**	PopupMinWidth	**protected / read / write**
PopupClientEdge	**protected / read / write**	PopupSizeable	**protected / read / write**
PopupFlatBorder	**protected / read / write**	PopupWidth	**protected / read / write**
PopupFormBorderStyle	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**protected / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

CanDeleteText property — read / write

Specifies whether a user can delete the value displayed within an editor.

Copyright © 2000 Developer Express Inc.

```
property CanDeleteText: Boolean;
```

Description

If the CanDeleteText property is set to **False**, users cannot delete the selected value from an editor. If the CanDeleteText property is set to **True**, users can delete the selected value without removing this item from the dropdown list.

The default value is **False**.

ChooseByDblClick property — read / write

Specifies whether a double click within a grid cell selects a given value.

```
property ChooseByDblClick: Boolean;
```

Description

If the ChooseByDblClick property is set to **True**, a user can set a new value for an editor by double-clicking a row displayed within the dropdown window.

ClearKey property — read / write

Specifies the shortcut used to clear an editor's value.

```
property ClearKey: TShortCut;
```

Description

When a user starts editing within an editor, he or she can press this shortcut key to quickly clear the contents of the editor.

DBGridLayout property — read / write

Determines the grid layout used for a dropdown window.

```
property DBGridLayout: TdxDBGridLayout;
```

Description

TdxInplaceExtLookupEdit uses a specific layout to create a grid within the dropdown window. Use this property to specify this layout.

Field property — read / write

Determines the field associated with a column.

```
property Field: TField;
```

Description

Every column in a data-aware grid is associated with a dataset field. This property specifies the field associated with a column.

PickListField property read / write

Specifies the field whose data is added to the current cell of a grid.

```
property PickListField: string;
```

Description

Generally, a grid within a dropdown window includes multiple columns, but only one of them can be used to select the value for the editor. The PickListField property specifies which column in the dropdown grid to be used as the basis of the editor's value.

UseDefaultSettings property read / write

Determines dropdown grid style.

```
property UseDefaultSettings: Boolean;
```

Description

The Grid layout editor allows you to customize the characteristics of a dropdown grid to meet specific application requirements. If the UseDefaultSettings property is **True**, the dropdown grid uses several predefined settings for its properties: The BorderStyle property is set to **bsNone**. Both the Editing and ColumnMoving options are disabled and the InvertSelect, MouseScroll and AutoSearch options are enabled.

Copyright © 2000 Developer Express Inc.

TdxInplaceExtLookupEdit Methods

Derived from TdxInplacePopupEdit

CalcSize	**protected**	InitializePopup	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

TdxInplaceExtLookupEdit Events

Derived from TdxInplacePopupEdit

OnCloseQuery	**protected**	OnInitPopup	**protected**
OnCloseUp	**protected**	OnPopup	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TCustomdxDBExtLookupEdit

TCustomdxDBExtLookupEdit is the ancestor class of the TdxExtLookupEdit control.

Unit

dxExGrEd

```
TCustomdxDBExtLookupEdit = class(TdxInplaceExtLookupEdit);
```

Description

TCustomdxDBExtLookupEdit contains the basic methods and properties that are used to implement standard behaviors inherited by all its descendants.

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePopupEdit
                - TdxInplaceExtLookupEdit

TCustomdxDBExtLookupEdit Properties

TCustomdxDBExtLookupEdit

DataField	**protected / read / write**	DataSource	**protected / read / write**

Derived from TdxInplaceExtLookupEdit

CanDeleteText	**protected / read / write**	Field	**protected / read / write**
ChooseByDblClick	**protected / read / write**	PickListField	**protected / read / write**
ClearKey	**protected / read / write**	UseDefaultSettings	**protected / read / write**
DBGridLayout	**protected / read / write**		

Derived from TdxInplacePopupEdit

PopupForm	**public / read only**	PopupFormCaption	**protected / read / write**
HideEditCursor	**protected / read / write**	PopupHeight	**protected / read / write**
PopupAutoSize	**protected / read / write**	PopupMinHeight	**protected / read / write**
PopupControl	**protected / read / write**	PopupMinWidth	**protected / read / write**
PopupClientEdge	**protected / read / write**	PopupSizeable	**protected / read / write**
PopupFlatBorder	**protected / read / write**	PopupWidth	**protected / read / write**
PopupFormBorderStyle	**protected / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**protected / read / write**	ImmediateDropDown	**protected / read / write**
DropDownRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**protected / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**protected / read / write**	ReadOnly	**protected / read / write**
AutoSize	**protected / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**public / read / write**
Height	**published / read / write**	StyleController	**protected / read / write**
Modified	**public / read / write**		

Copyright © 2000 Developer Express Inc.

DataField property read / write

Determines the field from which an edit control displays its data.

```
property DataField: string;
```

Description

Use the DataField property to determine the field name from which an editor obtains its data. The TDataSource component specified in the DataSource property provides access to the dataset in which this field is located.

If the DataField property refers to a database field that contains integer or floating-point data, only integer or floating-point data can be entered within the editor. Invalid characters are not accepted.

DataSource property read / write

Links an edit control to a dataset.

```
property DataSource: TDataSource;
```

Description

Use the DataSource property to specify the data source component for a data-aware editor. This data source provides data access to this editor. You should set both the DataSource and DataField properties to connect the editor to a specific field.

TCustomdxDBExtLookupEdit Methods

TCustomdxDBExtLookupEdit

Create	**public**	IsInplace	**public**

Derived from TdxInplacePopupEdit

CalcSize	**protected**	InitializePopup	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

Create method

Creates a TCustomdxDBExtLookupEdit instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

Call Create to create and initialize a TCustomdxDBExtLookupEdit instance. Derived objects that override the Create method must call the inherited Create method before performing any additional initialization.

IsInplace method

Determines whether the edit control is used as a standalone control or as an in-place editor.

```
class function IsInplace: Boolean; override;
```

Description

The IsInplace method always returns **False** for TCustomdxDBExtLookupEdit.

TCustomdxDBExtLookupEdit Events

Derived from TdxInplacePopupEdit

OnCloseQuery	**protected**	OnInitPopup	**protected**
OnCloseUp	**protected**	OnPopup	**protected**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**protected**

Derived from TdxInplaceEdit

OnChange	**protected**	OnMouseLeave	**protected**
OnMouseEnter	**protected**	OnValidate	**protected**

Copyright © 2000 Developer Express Inc.

TdxDBExtLookupEdit

Represents an extended lookup editor whose dropdown window includes the ExpressQuantumGrid.

Unit

dxExGrEd

```
TdxDBExtLookupEdit = class(TCustomdxDBExtLookupEdit);
```

Description

When activating a dropdown window, an extended lookup editor displays the TdxDBGrid object, which can implement all ExpressQuantumGrid features. The dropdown grid automatically supports incremental search.

TdxDBExtLookupEdit applies TdxDBGridLayout objects to define the look and feel of a grid within the dropdown window.

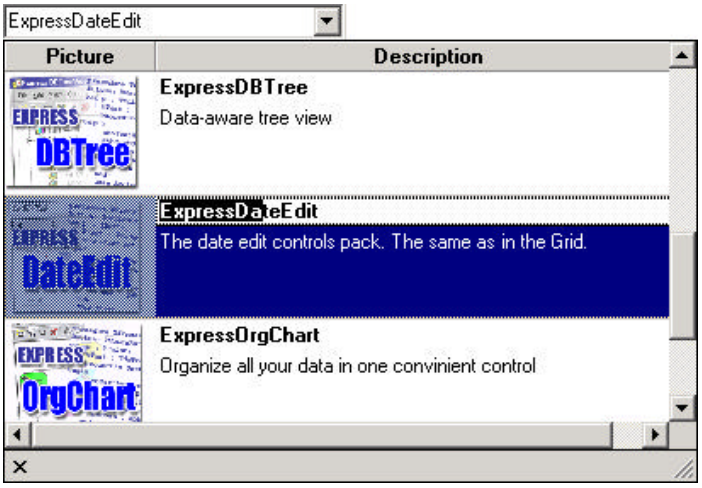

***Note**: Inplace and standalone editors of the ExpressQuantumGrid Suite require Windows RichEdit component 2.0 or higher to work properly. If the editors on your or client's machine do not work, make certain that the riched20.dll library is in the Windows system folder (Windows\System or WINNT\System32). Copy the specified DLL to fix the problem.*

Hierarchy

TObject
- TPersistent
  - TComponent
    - TControl
      - TWinControl
        - TdxInplaceEdit
          - TdxInplaceTextEdit
            - TdxInplaceMaskEdit
              - TdxInplaceDropDownEdit
                - TdxInplacePopupEdit
                - TdxInplaceExtLookupEdit
                - TCustomdxDBExtLookupEdit

TdxDBExtLookupEdit Properties

Derived from TCustomdxDBExtLookupEdit

DataField	**published / read / write**	DataSource	**published / read / write**

Derived from TdxInplaceExtLookupEdit

CanDeleteText	**published / read / write**	Field	**protected / read / write**
ChooseByDblClick	**published / read / write**	PickListField	**published / read / write**
ClearKey	**published / read / write**	UseDefaultSettings	**published / read / write**
DBGridLayout	**published / read / write**		

Derived from TdxInplacePopupEdit

PopupForm	**public / read only**	PopupFormCaption	**published / read / write**
HideEditCursor	**published / read / write**	PopupHeight	**published / read / write**
PopupAutoSize	**published / read / write**	PopupMinHeight	**published / read / write**
PopupControl	**published / read / write**	PopupMinWidth	**published / read / write**
PopupClientEdge	**published / read / write**	PopupSizeable	**published / read / write**
PopupFlatBorder	**published / read / write**	PopupWidth	**published / read / write**
PopupFormBorderStyle	**published / read / write**		

Derived from TdxInplaceDropDownEdit

ButtonGlyph	**published / read / write**	ImmediateDropDown	**published / read / write**
DropDow nRows	**protected / read / write**	ImmediatePopup	**protected / read / write**
DropDownWidth	**protected / read / write**	PopupAlignment	**protected / read / write**
DroppedDown	**public / read / write**	PopupBorder	**protected / read / write**

Derived from TdxInplaceMaskEdit

EditMask	**protected / read / write**	IsMasked	**public / read only**
EditText	**public / read / write**	MaskState	**protected / read / write**
IgnoreMaskBlank	**protected / read / write**	Text	**public / read / write**

Derived from TdxInplaceTextEdit

AutoSelect	**published / read / write**	OEMConvert	**protected / read / write**
CanPaste	**public / read only**	PasswordChar	**protected / read / write**
CanRedo	**public / read only**	SelectionBar	**protected / read / write**
CanUndo	**public / read only**	SelLength	**public / read / write**
CharCase	**protected / read / write**	SelStart	**public / read / write**
HideSelection	**protected / read / write**	SelText	**public / read / write**
MaxLength	**protected / read / write**		

Derived from TdxInplaceEdit

Alignment	**published / read / write**	ReadOnly	**published / read / write**
AutoSize	**published / read / write**	StoredValues	**protected / read / write**
Container	**protected / read / write**	Style	**published / read / write**
Height	**published / read / write**	StyleController	**published / read / write**
Modified	**public / read / write**		

TdxDBExtLookupEdit Methods

Derived from TCustomdxDBExtLookupEdit

Create	**public**	IsInplace	**public**

Derived from TdxInplacePopupEdit

CalcSize	**protected**	InitializePopup	**protected**

Derived from TdxInplaceDropDownEdit

DoButtonDown	**protected**	DropDown	**protected**
DoButtonUp	**protected**	FindListValue	**protected**
DoCloseUp	**protected**	PopupBorderStyle	**public**
DoDropDownKeys	**protected**		

Derived from TdxInplaceMaskEdit

CheckCursor	**protected**	GetNextEditChar	**protected**
Clear	**public**	GetPriorEditChar	**protected**
DefaultEditMask	**public**	GetSel	**protected**
DefaultMaxLength	**public**	GetTextLen	**public**
GetBlankText	**public**	ReformatText	**protected**
GetDisableCloseEditor	**protected**	SetCursor	**protected**
GetEditingText	**public**	SetSel	**protected**
GetFirstEditChar	**protected**	ValidateEdit	**public**
GetLastEditChar	**protected**	ValidateError	**protected**
GetMaxChars	**protected**		

Derived from TdxInplaceTextEdit

CheckCharCase	**protected**	IsEditClass	**public**
ClearSelection	**public**	PasteFromClipboard	**public**
ClearUndo	**public**	Redo	**public**
CopyToClipboard	**public**	RestoreDefaults	**public**
CutToClipboard	**public**	SelectAll	**public**
Deselect	**public**	SelectionChange	**protected**
DoSetMaxLength	**protected**	SetEditMaxLength	**protected**
GetSelection	**public**	SetSelection	**public**
GetSelLength	**protected**	SetSelLength	**protected**
GetSelStart	**protected**	SetSelStart	**protected**
GetSelText	**protected**	SetSelTextBuf	**public**
GetSelTextBuf	**public**	Undo	**public**
GetTextLenEx	**public**		

Derived from TdxInplaceEdit

CanModify	**public**	Reset	**public**
InvalidateEdit	**public**		

Copyright © 2000 Developer Express Inc.

TdxDBExtLookupEdit Events

Derived from TdxInplacePopupEdit

OnCloseQuery	**published**	OnInitPopup	**published**
OnCloseUp	**published**	OnPopup	**published**

Derived from TdxInplaceDropDownEdit

OnCloseUp	**protected**	OnEditButtonClick	**protected**

Derived from TdxInplaceTextEdit

OnSelectionChange	**published**

Derived from TdxInplaceEdit

OnChange	**published**	OnMouseLeave	**published**
OnMouseEnter	**published**	OnValidate	**published**

Index

A

Add....240
AddItem....207, 208
AddLink....20
Alignment....174
  TdxPopupToolBarWindow....174
AllowGrayed....122
  TdxInplaceCheckEdit....122
AlwaysSaveText....189
Assign....37, 237
  TdxEditStyle....37
AssignEditProperties....549, 550
AssignedValues....31
AssignPicture....183, 199
AutoSelect
  TdxInplaceTextEdit....61
AutoSize....47, 90, 178
  TdxInplaceMemoEdit....90

B

BeepOnError....151
  TdxInplaceCalcEdit....151
BeginUpdate....20
BlobEditKind....190
BlobKind....548
BlobPaintStyle....190
BlobText....191
BorderStyle....25, 119
  TdxCheckEditStyleController....119
ButtonClick....208
ButtonGlyph....97
  TdxInplaceDropDownEdit....97
Buttons....113, 174
  TdxInplaceButtonEdit....113
ButtonStyle....119, 120, 152
  TdxCheckEditStyleController....119
  TdxInplaceCalcEdit....152

C

CalcSize....217, 218
CanDeleteText....145, 227, 578
  TdxInplaceLookupEdit....228
  TdxInplacePickEdit....145
CanPaste....61
CanRedo....62
CanUndo....62
Center....178
  TdxInplaceGraphicEdit....178
Changed....36
  TdxEditStyle....36
CharCase....62, 63
  TdxInplaceTextEdit....62, 63
CheckCursor....81
  TdxInplaceMaskEdit....81
Checked....122
  TdxInplaceCheckEdit....122
ChooseByDblClick....579
Clear....82
  TdxInplaceMaskEdit....82
ClearField....230, 231
ClearKey....228, 579
ClearPicture....183
ClearSelection....68
ClickKey....114
  TdxInplaceButtonEdit....113
ClientEdge....222
ClipboardFormat....179
ClosePopup....225
CopyToClipboard....68, 183, 184
Create36, 400, 404, 414, 423, 433, 444, 453, 463, 473, 483, 493, 502, 512, 521, 530, 540, 550, 560, 571, 587
  TCustomdxDBBlobEdit....550
  TCustomdxDBButtonEdit....444
  TCustomdxDBCheckEdit....453
  TCustomdxDBDateEdit....433
  TCustomdxDBEdit....404
  TCustomdxDBImageEdit....463
  TCustomdxDBMaskEdit....413
  TCustomdxDBMemo....423
  TdxEditDataLink....400
CustomButtonCaption....175
CustomButtonGlyph....175
CustomClick....184
CustomFilter....179
CustomGraphic....179
CustomGraphic....179
CutToClipboard....184

D

DataField403, 411, 421, 430, 441, 451, 460, 470, 480, 490, 500, 509, 519, 529, 537, 548, 557, 568, 585
  TCustomdxDBButtonEdit....441
  TCustomdxDBCheckEdit....451
  TCustomdxDBDateEdit....430
  TCustomdxDBEdit....403
  TCustomdxDBImageEdit....460
  TCustomdxDBMaskEdit....411
  TCustomdxDBMemo....421
DataSource....403, 411, 421, 431, 442, 451, 461, 471, 481, 491, 500, 510, 520, 529, 538, 548, 558, 569, 585
  TCustomdxDBButtonEdit....442
  TCustomdxDBCheckEdit....451
  TCustomdxDBDateEdit....431
  TCustomdxDBEdit....403
  TCustomdxDBImageEdit....461
  TCustomdxDBMaskEdit....411
  TCustomdxDBMemo....421
Date....106
  TdxInplaceDateEdit....106
DateButtons....107
  TdxInplaceDateEdit....107
DateChange....110
  TdxInplaceDateEdit....109
DateOnError....107
  TdxInplaceDateEdit....107
DateValidation....107
  TdxInplaceDateEdit....107
DBGridLayout....579
DblClickActivate....179, 180
DecimalPlaces....167
  TdxInplaceCurrencyEdit....167
Default....235
DefaultBorderColor....37
DefaultBorderStyle....38
DefaultButtonClick....116
  TdxInplaceButtonEdit....115
DefaultButtonStyle....38
DefaultDisplayFormat....170
  TdxInplaceCurrencyEdit....170
DefaultEdges....40
DefaultEditMask....82
  TdxInplaceMaskEdit....82
DefaultHotTrack....40
DefaultImages....129
  TdxInplaceImageEdit....129
DefaultMaxLength....69, 82
  TdxInplaceMaskEdit....82
DefaultMaxValue....140, 171

TdxInplaceCurrencyEdit ... 171
TdxInplaceSpinEdit ... 139
DefaultMinValue ... 140, 171
TdxInplaceCurrencyEdit ... 171
TdxInplaceSpinEdit ... 140
DefaultValueType ... 140
TdxInplaceSpinEdit ... 140
Descriptions ... 130
TdxInplaceImageEdit ... 130
Deselect ... 51, 69
TdxInplaceEdit ... 51
DisplayFormat ... 168
TdxInplaceCurrencyEdit ... 167
DisplayValue ... 43
DoButtonDown ... 101
TdxInplaceDropDownEdit ... 101
DoButtonUp ... 102
TdxInplaceDropDownEdit ... 102
DoCloseUp ... 102, 231
TdxInplaceDropDownEdit ... 102
TdxInplaceLookupEdit ... 231
DoDropDownKeys ... 102
TdxInplaceDropDownEdit ... 102
DoIncremental ... 231
DoStart ... 159
TdxInplaceHyperLinkEdit ... 159
DoValidateInput ... 110
TdxInplaceDateEdit ... 110
DropDown ... 103
TdxInplaceDropDownEdit ... 103
DropDownListStyle ... 146
TdxInplacePickEdit ... 146
DropDownRows ... 97
DropDownWidth ... 98
DroppedDown ... 98

E

EditMask ... 78
EditorEnabled ... 135
EditStyleController ... 36
EditText ... 78, 79
EditValue ... 43
EndUpdate ... 21

F

Field ... 228, 399, 579, 580
TdxEditDataLink ... 399
FieldName ... 399
TdxEditDataLink ... 399
FindListValue ... 103
FlatBorder ... 222
FullFocusRect ... 122

G

GetAbsoluteIndex ... 240
GetBlankText ... 83
GetDefaultEditStyleController ... 41
GetDisableCloseEditor ... 83
GetEditingText ... 83
GetEditValue ... 44
GetFirstEditChar ... 83, 84
GetGraphicClass ... 184, 185, 200
GetIncrement ... 141
GetLastEditChar ... 84
GetMaxChars ... 84
GetNextEditChar ... 85
GetPriorEditChar ... 85
GetSel ... 85
GetSelLength ... 70
GetSelStart ... 70
GetSelText ... 71
GetSelTextBuf ... 71
GetTextLen ... 86
GetValue ... 141
GetVisibleIndex ... 240
Glyph ... 123, 235
GlyphCount ... 123
GraphicTransparency ... 180

H

HideEditCursor ... 211
HidePopup ... 59
HideScrollBars ... 90
HideSelection ... 63
HotTrack ... 28, 35

I

ImageIndexes ... 130
Images ... 130
ImmediateDropDown ... 98, 205, 206
ImmediatePopup ... 99
Increment ... 135
InitializePopup ... 218
IntValue ... 136
InvalidateCheckRect ... 126
InvalidateEdit ... 51
IsEditable ... 231
IsEditClass ... 72
IsInplace ... 243, 251, 259, 268, 278, 286, 295, 304, 313, 322, 330, 339, 348, 356, 365, 375, 384, 540, 550, 587
TCustomdxBlobEdit ... 365
TCustomdxButtonEdit ... 278
TCustomdxCalcEdit ... 322
TCustomdxCheckEdit ... 286
TCustomdxCurrencyEdit ... 348
TCustomdxDateEdit ... 268
TCustomdxDBBlobEdit ... 550
TCustomdxEdit ... 243
TCustomdxGraphicEdit ... 356
TCustomdxHyperLinkEdit ... 330
TCustomdxImageEdit ... 295
TCustomdxMaskEdit ... 251
TCustomdxMemo ... 259
TCustomdxMRUEdit ... 375
TCustomdxPickEdit ... 313
TCustomdxPopupEdit ... 384
TCustomdxSpinEdit ... 304
TCustomdxTimeEdit ... 338
IsMasked ... 79
IsPopupMenu ... 176
IsSizeablePopup ... 200
IsValidChar ... 141, 171
ItemIndex ... 146
Items ... 146, 239

K

KeyFieldName ... 228
Kind ... 235

L

LargeImages ... 130
LeftAlignment ... 236
Lines ... 91
LinkColor ... 157
Links ... 19
ListFieldName ... 228
ListSource ... 229
LoadDisplayValue ... 453
TCustomdxDBCheckEdit ... 453
LoadFromFile ... 185
LookupKeyValue ... 229
LookupMode ... 229

M

MaskState ... 80

MaxItemCount 206
MaxLength 63
MaxValue 136, 168
MemoCharCase 191
MemoHideScrollBars 192
MemoMaxLength 192
MemoOEMConvert 192
MemoScrollBars 193
MemoSelectionBar 193
MemoWantReturns 194
MemoWantTabs 194
MemoWordWrap 194
MinValue 136, 168
Modified 400
TdxEditDataLink 400
MultiLine 124
MultiLineText 131

N

NullStyle 124

O

OEMConvert 64
OnActiveChange 45
OnAssignPicture 186, 202
OnButtonClick 117, 209
OnCloseQuery 219
OnCloseUp 104, 219, 233
OnCustomClick 186
OnDataChange 45
OnDateChange 111
OnDateValidateInput 111
OnEditButtonClick 104
OnGetGraphicClass 186, 202
OnInitPopup 220
OnPopup 220
OnSelectionChange 76
OnStartClick 160
OnStyleChanged 29
Owner 239
OwnerControl 57

P

PasswordChar 64
PasteFromClipboard 72, 185
PickListField 580
Picture 180
PictureAutoSize 194
PictureClipboardFormat 195
PictureFilter 195
PictureGraphicClass 195
PictureTransparency 196
PopupAlignment 99
PopupAutoSize 212
PopupBorder 99
PopupBorderStyle 103
PopupClientEdge 212
PopupControl 212
PopupFlatBorder 213
PopupForm 213
PopupFormBorderStyle 213, 222
PopupFormCaption 214
PopupHeight 196, 214
PopupMinHeight 214
PopupMinHieght 223
PopupMinWidth 215, 223
PopupSizeable 215
PopupWidth 196, 215
Precision 152

Q

QuickClose 152
QuickDraw 180

R

ReadOnly 48, 329
ReformatText 86
RemoveLink 21
Reset 400
TdxEditDataLink 400
RestoreDefaults 237, 240
Revertable 147, 229

S

SavePopupSize 200
SaveTime 108
SaveToFile 185
ScrollBars 91
SelectAll 52, 73
SelectionBar 91
SelLength 65
SelStart 65
SelText 65
SetBlobValue 201
SetCursor 86
SetEditMaxValue 141
SeteditMinValue 141
SetEditValue 44
SetEditVlueType 142
SetKeyValue 231, 232
SetSel 87
SetSelLength 74
SetSelStart 74
SetSelTextBuf 75
SetValue 142
Shadow 28, 35
ShowButtonFrame 152
ShowCaptions 175
ShowDescription 131
ShowEllipsis 206
ShowExPopupItems 197
ShowPicturePopup 197
ShowPopup 59, 225
SingleClick 157
Sizeable 224
SizeablePopup 197
SizingCorner 224
Sorted 147
StartKey 157
State 124
Stretch 181

T

TCustomdxBlobEdit 365
IsInplace 365
TCustomdxButtonEdit 275, 278
IsInplace 278
TCustomdxCalcEdit 319, 321
IsInplace 321
TCustomdxCheckEdit 284, 286
IsInplace 286
TCustomdxCurrencyEdit 345, 347
IsInplace 347
TCustomdxDateEdit 265, 268
IsInplace 268
TCustomdxDBBlobEdit 546
AssignEditProperties 549
BlobKind 548
Create 550
DataField 548
DataSource 548
IsInplace 550
TCustomdxDBButtonEdit 440, 441, 442, 444
Create 444
DataField 441, 442
DataSource 442
TCustomdxDBCalcEdit 489

Create....493
DataField....490
DataSource....491
TCustomdxDBCheckEdit....450, 451, 452, 453
Create....453
DataField....451
DataSource....451
ValueChecked....452
ValueGrayed....452
ValueUnchecked....452
TCustomdxDBCheckEdit
LoadDisplayValue....453
TCustomdxDBCurrencyEdit....518
Create....521
DataField....519
DataSource....520
TCustomdxDBDateEdit....429, 430, 431, 433
Create....433
DataField....430, 431
DataSource....431
TCustomdxDBEdit....402, 403, 404
Create....404
DataField....403
DataSource....403
TCustomdxDBExtLookupEdit....583, 587
Create....587
DataField....585
DataSource....585
IsInplace....587
TCustomdxDBGraphicEdit....528
Create....530
DataField....529
DataSource....529
TCustomdxDBHyperLinkEdit....499
Create....502
DataField....500
DataSource....500
TCustomdxDBImageEdit....459, 460, 461, 463
Create....463
DataField....461
DataSource....461
TCustomdxDBLookupEdit....536, 540
Create....540
DataField....537
DataSource....538
IsInplace....540
TCustomdxDBMaskEdit....410, 411, 413, 414
Create....413
DataField....411
DataSource....412
TCustomdxDBMemo....420, 421, 423
Create....423
DataField....421
DataSource....422
TCustomdxDBMRUEdit....556
Create....560
DataField....557
DataSource....558
TCustomdxDBPickEdit....479
Create....483
DataField....480
DataSource....481
TCustomdxDBPopupEdit....567
Create....571
DataField....568
DataSource....569
TCustomdxDBSpinEdit....469
Create....473
DataField....470
DataSource....471
TCustomdxDBTimeEdit....508
Create....512
DataField....509
DataSource....510
TCustomdxEdit....241, 243
IsInplace....243
TCustomdxGraphicEdit....354, 356
IsInplace....356
TCustomdxHyperLinkEdit....328, 330
IsInplace....330
TCustomdxImageEdit....292, 294
IsInplace....294
TCustomdxMaskEdit....249, 251
IsInplace....251
TCustomdxMemo....257, 259
IsInplace....259
TCustomdxMRUEdit....372, 375
IsInplace....375
TCustomdxPickEdit....310, 312
IsInplace....312
TCustomdxPopupEdit....384
IsInplace....384
TCustomdxSpinEdit....301, 303
IsInplace....303
TCustomdxTimeEdit....336, 339
IsInplace....338
TdxBlobEdit....367
TdxButtonEdit....280
TdxCalcEdit....324
TdxCheckEdit....288
TdxCheckEditStyleController....118, 119
BorderStyle....119
ButtonStyle....119
TdxCurrencyEdit....350
TdxDateEdit....270
TdxDBBlobEdit....552
TdxDBButtonEdit....446
TdxDBCalcEdit....495
TdxDBCheckEdit....455
TdxDBCurrencyEdit....524
TdxDBDateEdit....435
TdxDBEdit....406
TdxDBExtLookupEdit....589
TdxDBGraphicEdit....532
TdxDBHyperLinkEdit....504
TdxDBImageEdit....465
TdxDBLookupEdit....542
TdxDBMaskEdit....416
TdxDBMemo....425
TdxDBMRUEdit....562
TdxDBPickEdit....485
TdxDBPopupEdit....573
TdxDBSpinEdit....475
TdxDBTimeEdit....514
TdxEdit....245
TdxEditButton....234, 237
Assign....237
Default....235
Glyph....235
Kind....235
LeftAlignment....236
RestoreDefaults....237
Visible....236
Width....236
TdxEditButtons....238
Add....240
GetAbsoluteIndex....240
GetVisibleIndex....240
Items....239
Owner....239
RestoreDefaults....240
VisibleCount....239
VisibleItems....239
TdxEditDataDefinition
DisplayValue....43
EditValue....43
GetEditValue....44
OnActiveChange....45
OnDataChange....45
SetEditValue....44

TdxEditDataLink 398, 399, 400
Create 400
Field 399
FieldName 399
Modified 400
Reset 400
TdxEditDBDataDefinition 401
TdxEditStyle 30, 36, 37
DefaultButtonTransparence 39
DefaultShadow 40
Destroy 37
Edges 34
Edit 31
RestoreDefaults 41
TdxEditStyleController 24
BorderColor 25
ButtonStyle 26
ButtonTransparence 27
Edges 27
TdxGraphicEdit 358
TdxHyperLinkEdit 332
TdxImageEdit 297
TdxInplaceBlobEdit 188
AlwaysSaveText 189
AssignPicture 199
BlobEditKind 190
BlobPaintStyle 190
BlobText 191
GetGraphicClass 200
IsSizeablePopup 200
MemoCharCase 191
MemoHideScrollBars 192
MemoMaxLength 192
MemoOEMConvert 192
MemoScrollBars 193
MemoSelectionBar 193
MemoWantReturns 194
MemoWantTabs 194
MemoWordWrap 194
OnAssignPicture 202
OnGetGraphicClass 202
PictureAutoSize 194, 195
PictureClipboardFormat 195
PictureFilter 195
PictureGraphicClass 195
PictureTransparency 196
PopupHeight 196
PopupWidth 196
SavePopupSize 200
SetBlobValue 201
ShowExPopupItems 197
ShowPicturePopup 197
SizeablePopup 197
Text 198
TdxInplaceButtonEdit 112
Buttons 113
ClickKey 113
DefaultButtonClick 115
OnButtonClick 117
ViewStyle 114
TdxInplaceCalcEdit 150
BeepOnError 151
ButtonStyle 152
Precision 152
QuickClose 152
ShowButtonFrame 153
TdxInplaceCheckEdit 121
AllowGrayed 122
Checked 122
FullFocusRect 123
Glyph 123
GlyphCount 123
InvalidateCheckRect 126
MultiLine 124
NullStyle 124
State 124
Toggle 126
TdxInplaceCurrencyEdit 166
DecimalPlaces 167
DefaultDisplayFormat 170
DefaultMaxValue 171
DefaultMinValue 171
DisplayFormat 167
IsValidChar 171
MaxValue 168
Min Value 168
Value 168, 169
TdxInplaceDateEdit 105
Date 106
DateButtons 107
DateChange 109
DateOnError 107
DateValidation 108
DoValidateInput 110
OnDateChange 111
OnDateValidateInput 111
SaveTime 108
UseEditMask 108
TdxInplaceDropDownEdit 96
ButtonGlyph 97
DoButtonDown 101
DoButtonUp 102
DoCloseUp 102
DoDropDownKeys 102
DropDown 103
DropDownRows 97
DropDownWidth 98
DroppedDown 98
FindListValue 103
ImmediateDropDown 98
ImmediatePopup 99
OnCloseUp 104
OnEditButtonClick 104
PopupAlignment 99
PopupBorder 99
PopupBorderStyle 103
TdxInplaceEdit 46
Alignment 47
CanModify 51
Container 48
Height 48
IsEditClass 52
Modified 48
OnChange 54
OnMouseEnter 54
OnMouseLeave 54
OnValidate 55
Reset 52
RestoreDefaults 52
StoredValues 49
Style 49
StyleController 49
TdxInplaceExtLookupEdit 577, 579
CanDeleteText 578, 579
ChooseByDblClick 579
ClearKey 579
DBGridLayout 579
Field 579
PickListField 580
UseDefaultSettings 580
TdxInplaceGraphicEdit 177
AssignPicture 183
AutoSize 178
Center 178, 179
ClearPicture 183
ClipboardFormat 179
CopyToClipboard 183
CustomClick 184
CustomFilter 179
CustomGraphic 179

CutToClipboard....184
DblClickActivate....179
GetGraphicClass....184
GraphicTransparency....180
LoadFromFile....185
OnAssignPicture....186
OnCustomClick....186
OnGetGraphicClass....186
PasteFromClipboard....185
Picture....180
QuickDraw....180
SaveToFile....185
Stretch....181
ToolbarLayout....181
ToolbarPos....181
ToolbarPosStored....181, 182
TdxInplaceHyperLinkEdit....156
DoStart....159
LinkColor....157
OnStartClick....160
SingleClick....157
StartKey....158
TdxInplaceImageEdit....128
DefaultImages....129
Descriptions....130
ImageIndexes....130
Images....130
LargeImages....130
MultiLineText....131
ShowDescription....131
Values....131
TdxInplaceLookupEdit....226
CanDeleteText....227
ClearField....230
ClearKey....228
DoCloseUp....231
DoIncremental....231
Field....228
IsEditable....231
KeyFieldName....228
ListFieldName....228
ListSource....229
LookupKeyValue....229
LookupMode....229
OnCloseUp....233
Revertable....229
SetKeyValue....231
TdxInplaceMaskEdit....77
CheckCursor....81
Clear....82
DefaultEditMask....82
DefaultMaxLength....82
EditMaskK....78
EditText....78
GetBlankText....83
GetDisableCloseEditor....83
GetEditingText....83
GetFirstEditChar....83
GetLastEditChar....84
GetMaxChars....84
GetNextEditChar....84
GetPriorEditChar....85
GetSel....85
GetTextLen....86
IgnoreMaskBlank....79
IsMasked....79
MaskState....80
ReformatText....86
SetCursor....86
SetSel....86
Text....79
ValidateEdit....87
ValidateError....87
TdxInplaceMemoEdit....89
AutoSize....90
HideScrollBars....90
Lines....91
ScrollBars....91
SelectionBar....91, 92
WantReturns....92
WantTabs....92
WordWrap....92
TdxInplaceMRUEdit....204
AddItem....207
ButtonClick....208
ImmediateDropDown....205
MaxItemCount....206
OnButtonClick....209
ShowEllipsis....206
TdxInplacePickEdit....144
CanDeleteText....145
DropDownListStyle....146
ItemIndex....146
Items....146
Revertable....146
Sorted....147
TdxInplacePopupControl....56
PopupBorderStyle....57
Shadow....57
ShadowSize....58
TdxInplacePopupEdit....210
CaclSize....217
HideEditCursor....211, 212
InitializePopup....218
OnCloseQuery....219
OnCloseUp....219
OnInitPopup....220
OnPopup....220
PopupAutoSize....212
PopupClientedge....212
PopupClientEdge....212
PopupControl....212
PopupFlatBorder....213
PopupForm....213
PopupFormBorderStyle....213
PopupFormCaption....214
PopupHeight....214
PopupMinHeight....214
PopupMinWidth....215
PopupSizeable....215
PopupWidth....215
TdxInplaceSpinEdit....134
DefaultMaxValue....139
DefaultMinValue....140
DefaultValueType....140
EditorEnabled....135
GetIncrement....140
GetValue....141
Increment....135, 136
IntValue....136
IsValidChar....141
MaxValue....136
MinValue....136
SetEditMaxValue....141
SeteditMinValue....141
SetEditVlueType....142
SetValue....142
UseCtrlIncrement....137
Value....137
ValueType....137
TdxInplaceTextEdit....60
AutoSelect....61
CheckCharCase....67
Clear....67
ClearUndo....68
CutToClipboard....69
DoSetMaxLength....70
GetSelection....70
GetTextLenEx....71
OnSelectionChange....76

Redo ... 72
RestoreDefaults ... 72, 73
SelectionBar ... 64
SelectionChange ... 73
SetEditMaxLength ... 73
SetSelection ... 74
Undo ... 75
TdxInplaceTimeEdit ... 161
Time ... 162
TimeEditFormat ... 163
TdxMaskEdit ... 253
TdxMemo ... 261
TdxMRUEdit ... 377
TdxPickEdit ... 315
TdxPopupEdit ... 386
TdxPopupEditForm ... 221
ClientEdge ... 222
ClosePopup ... 225
FlatBorder ... 222
PopupFormBorderStyle ... 222
PopupMinHeight ... 223
PopupMinHieght ... 223
PopupMinWidth ... 223
ShowPopup ... 225
Sizeable ... 224
SizingCorner ... 224
TdxPopupToolBarWindow
CustomButtonGlyph ... 175
IsPopupMenu ... 176
TdxPopupToolBarWindow ... 173
Alignment ... 174
Buttons ... 174
CustomButtonCaption ... 175
CustomButtonGlyph ... 176
IsPopupMenu ... 176
ShowCaptions ... 175
Visible ... 176
TdxSpinEdit ... 306
TdxStyleController ... 18
Changed ... 20, 21
OnStyleChanged ... 23
StyleChanged ... 22
TdxTimeEdit ... 341
Text ... 65, 66, 79, 80, 198
Time ... 162
TimeEditFormat ... 162
Toggle ... 126
ToolbarLayout ... 181
ToolbarPos ... 181
ToolbarPosStored ... 181

U

Update ... 22
UseCtrlIncrement ... 137
UseDefaultSettings ... 580
UseEditMask ... 108

V

ValidateEdit ... 52, 87
ValidateError ... 87
Value ... 137, 168
ValueChecked ... 452
TCustomdxDBCheckEdit ... 452
ValueGrayed ... 452
TCustomdxDBCheckEdit ... 452
Values ... 131
ValueType ... 137
ValueUnchecked ... 452
TCustomdxDBCheckEdit ... 452
ViewStyle ... 114
Visible ... 176, 236
VisibleCount ... 239
VisibleItems ... 239

W

WantReturns ... 92
WantTabs ... 92
Width ... 236
WordWrap ... 93