




Sequence - Diagram

1. Dimension


I. Object Dimension

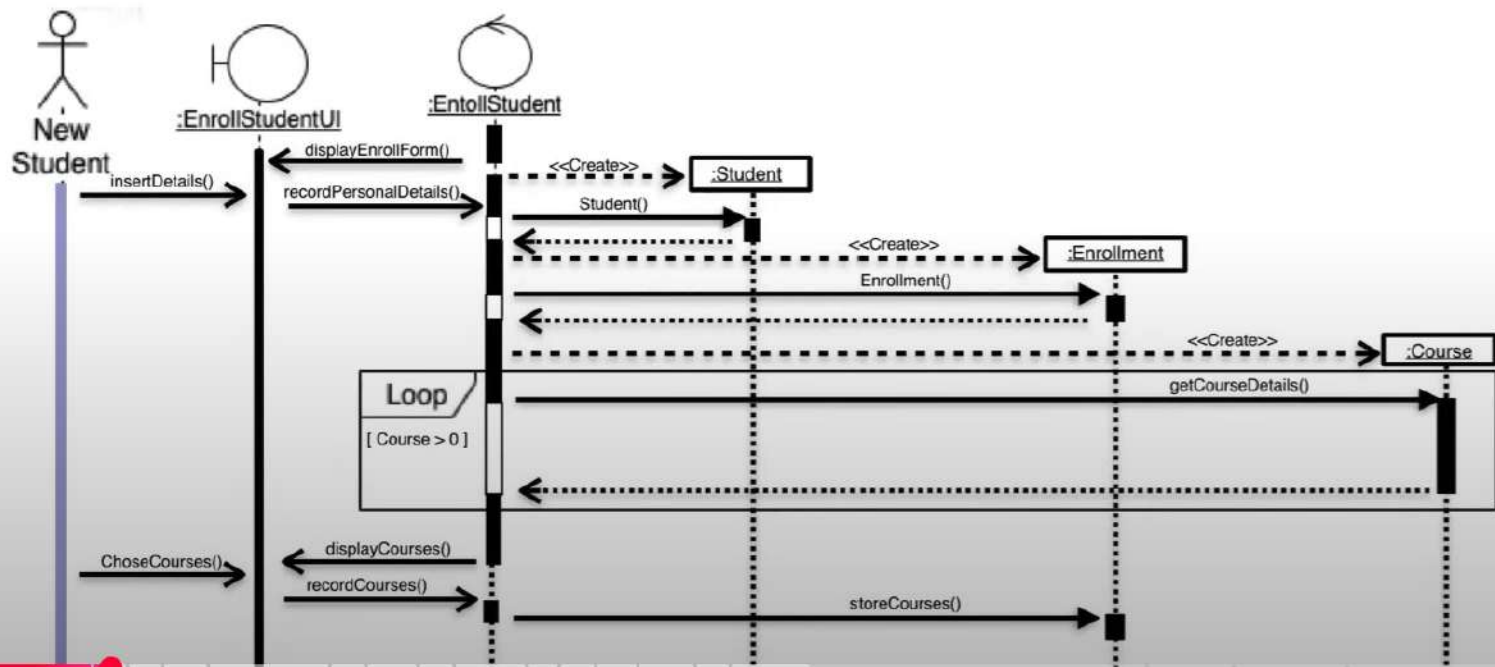

Sequence - Diagram

1. Dimension

II. Time Dimension

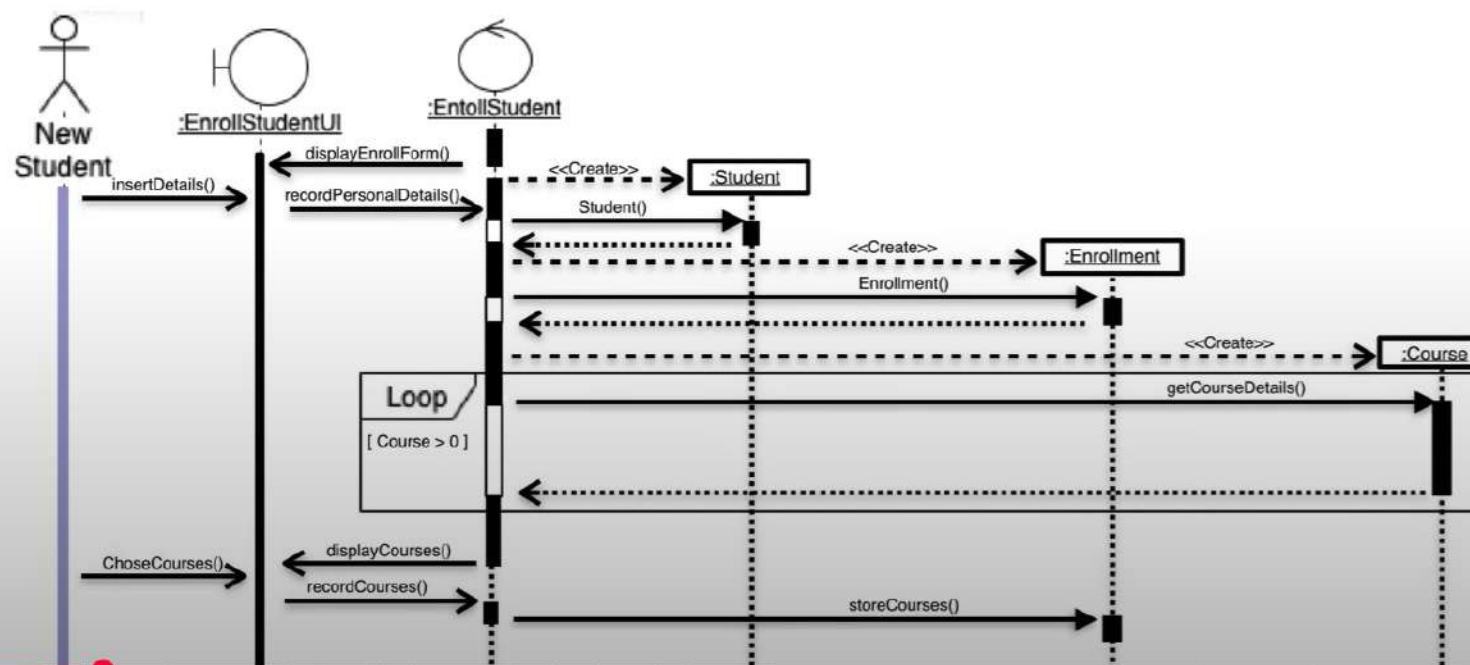




Sequence - Diagram

2. Actor

Anyone how use to perform a certain function in the system is actors.




who or what is going to using our system is Actors like customer, staff, admin, bank, student, teacher, etc.



Sequence - Diagram

3. LifeLine


A lifeline represents an individual participant in the interaction.

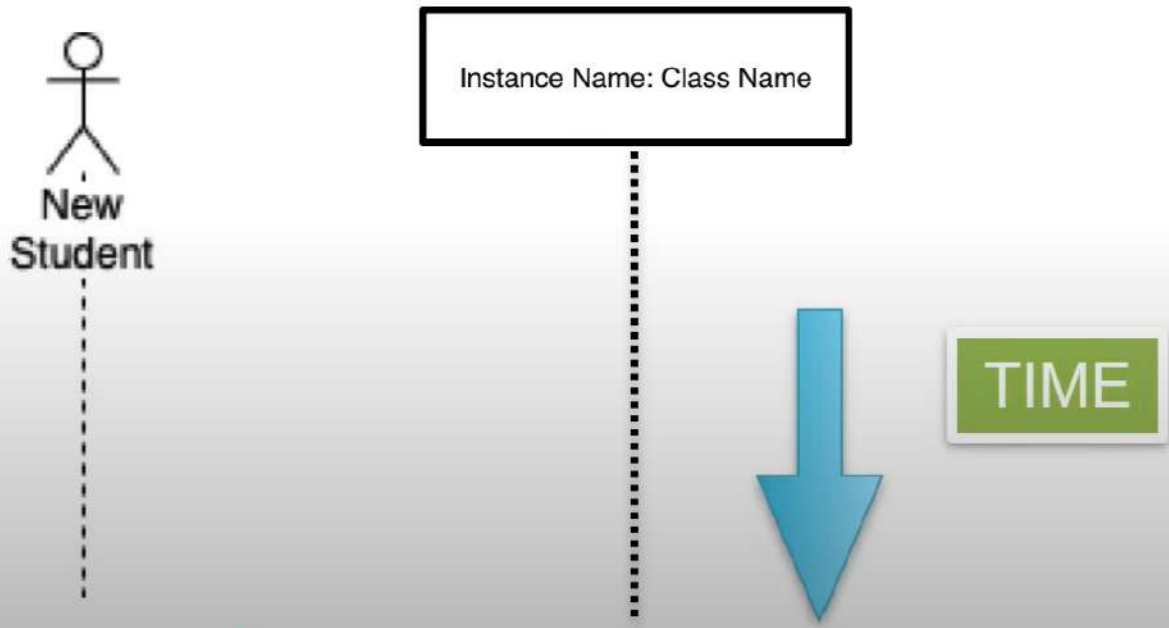

Sequence - Diagram


4. Activations

A thin rectangle box on a lifeline represents the time needed for an object to complete a task.

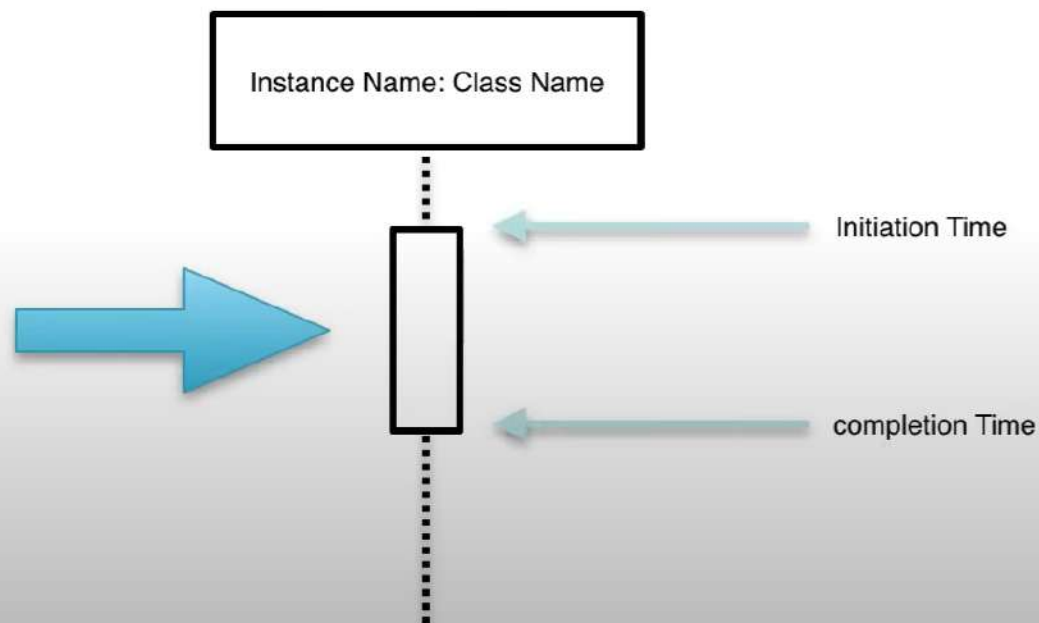

5. Message


A message defines a particular communication between Lifelines of an interaction which means showing how the objects interact with each other by sending and receiving *messages*.

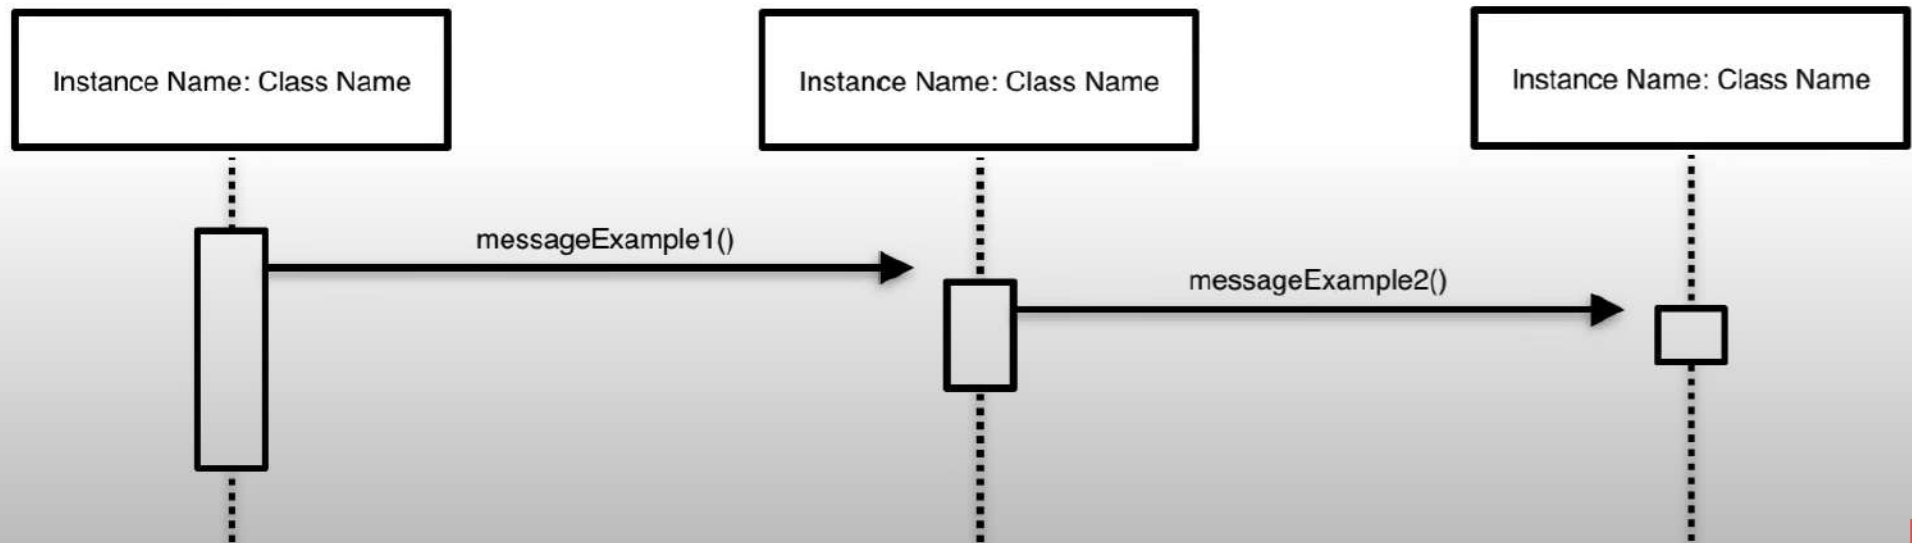

5. Message

5.1. Synchronous Messages


Represented by a solid line with a solid arrowhead. This symbol is used when a sender must wait for a response to a message before it continues.

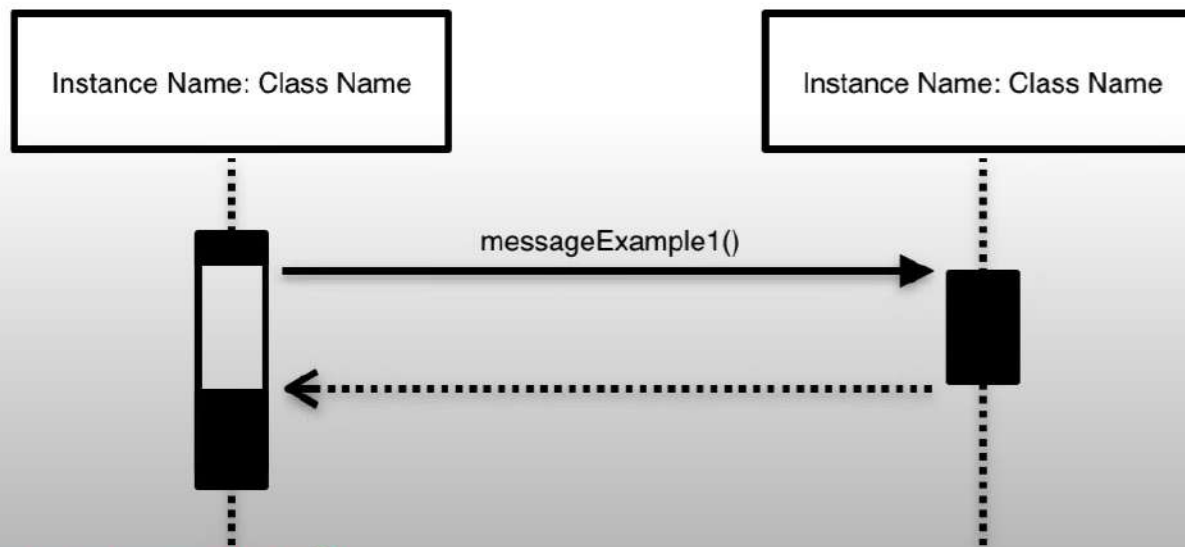

5. Message

5.2. Asynchronous Messages


An asynchronous message does not wait for a response from the receiver before the sender continues.

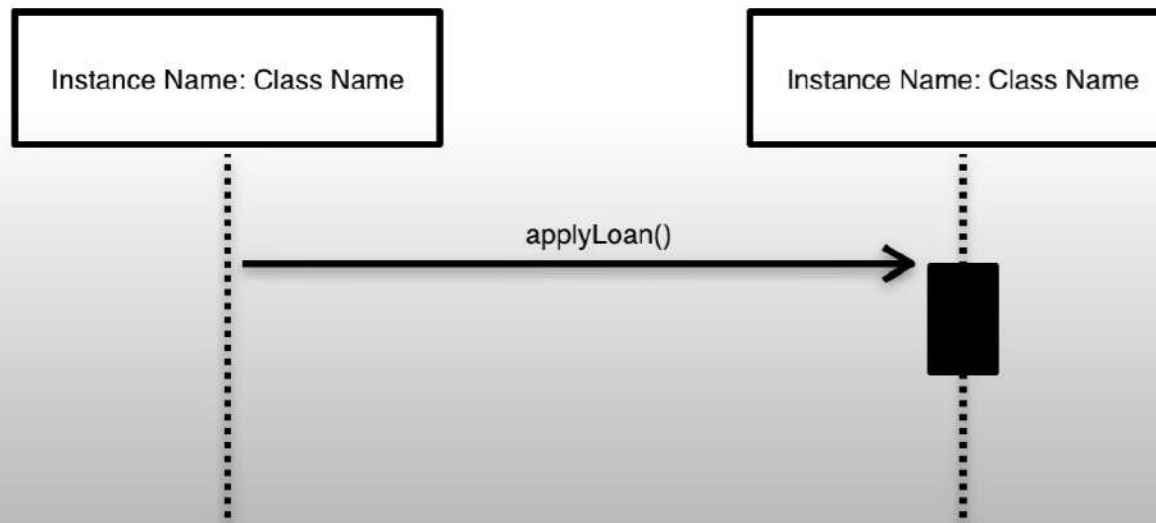

5. Message

5.3. Return Message


A return message is used to indicate that the message receiver is done processing the message and is returning control over to the message caller.

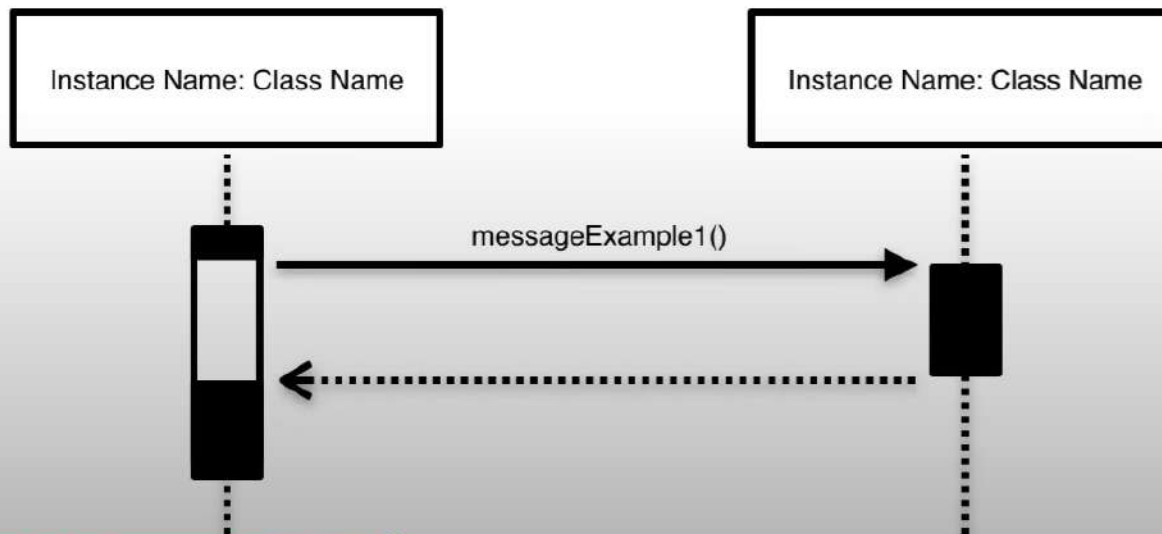

5. Message

5.4. Create Message


To represent the new object created in the process of the execution, create a message is used.

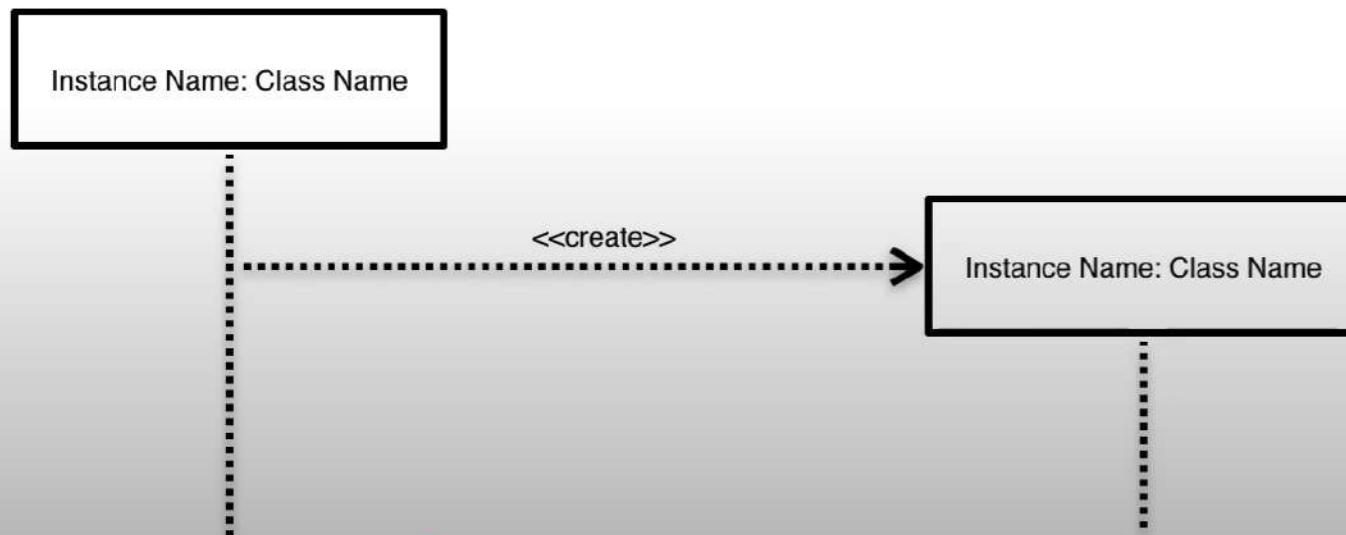

5. Message

5.5. Reflexive Messages.


When an object sends a message to itself, it is called a reflexive message.

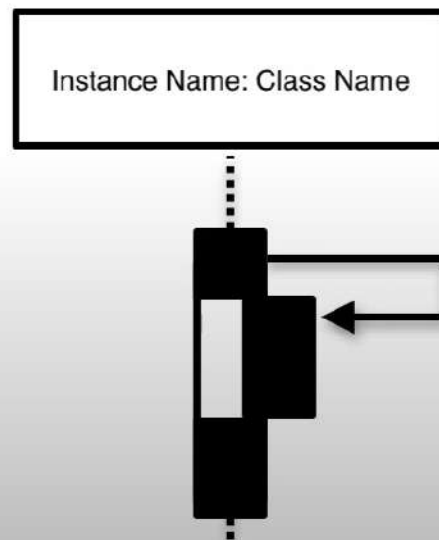

5. Message

5.6. Object Destruction


Object destruction represents the request of destroying the lifecycle of the target lifeline

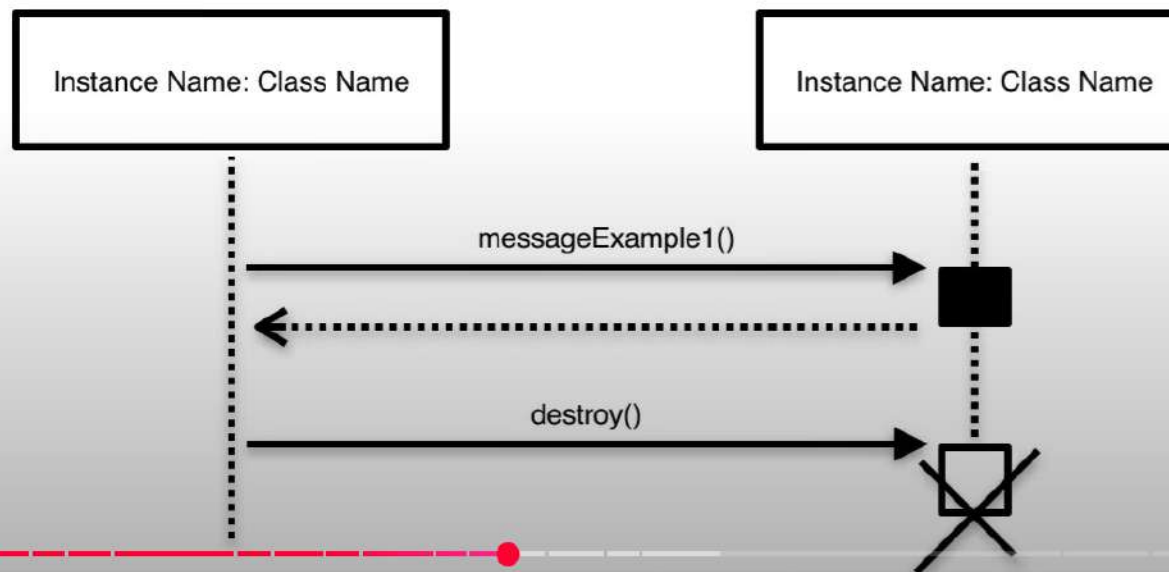

5. Message


5.7. Comment

A comment or note can be used to reflect the various remarks to the elements.

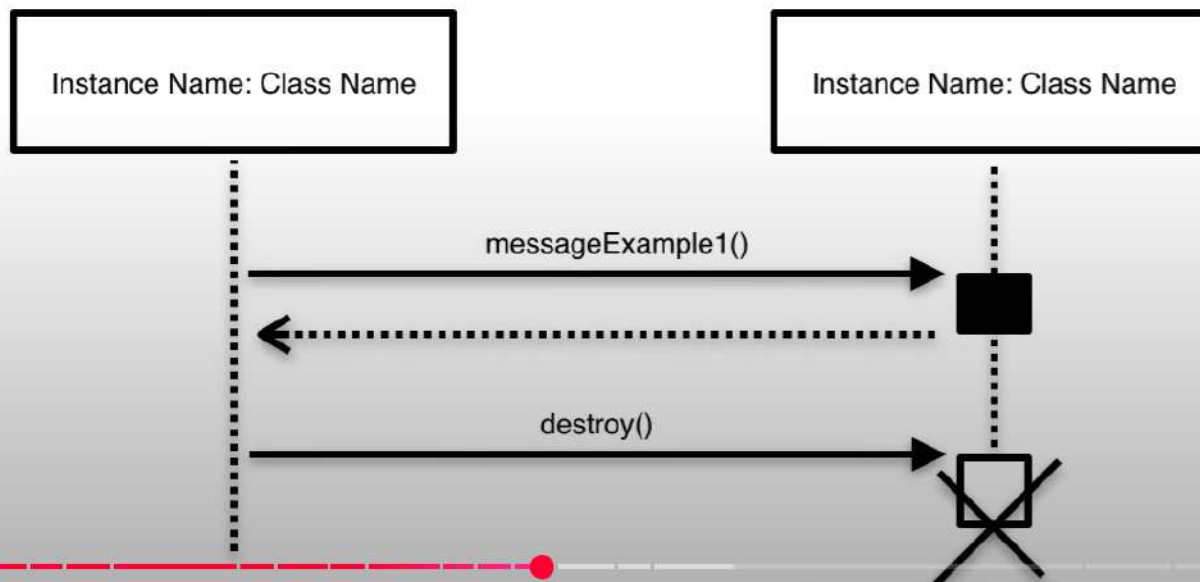

6. Focus of Control


The focus of control indicates times during activation when processing is taking place within that object.

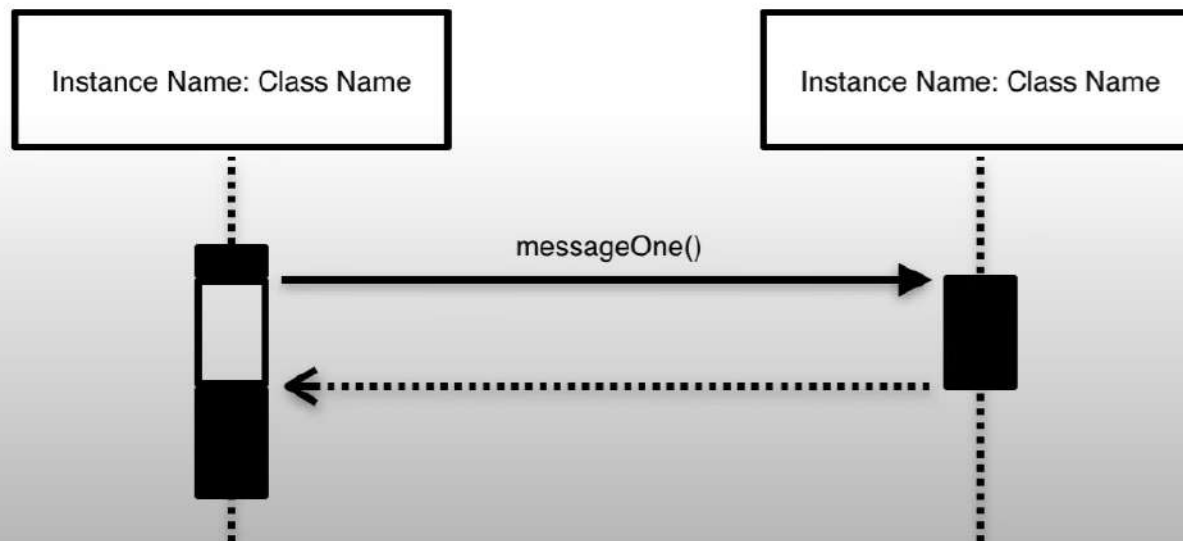

7. Control Object

The control object is to manage the collaboration of objects which gives effect to the Use Case Process.


: EntrollStudent

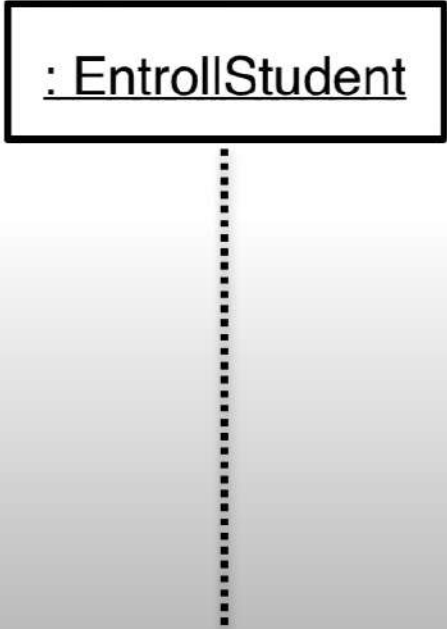

8. Boundary Object

Most use cases imply at least one boundary object that manages the dialogue between the actor and the system.

: EntrollStudentUI

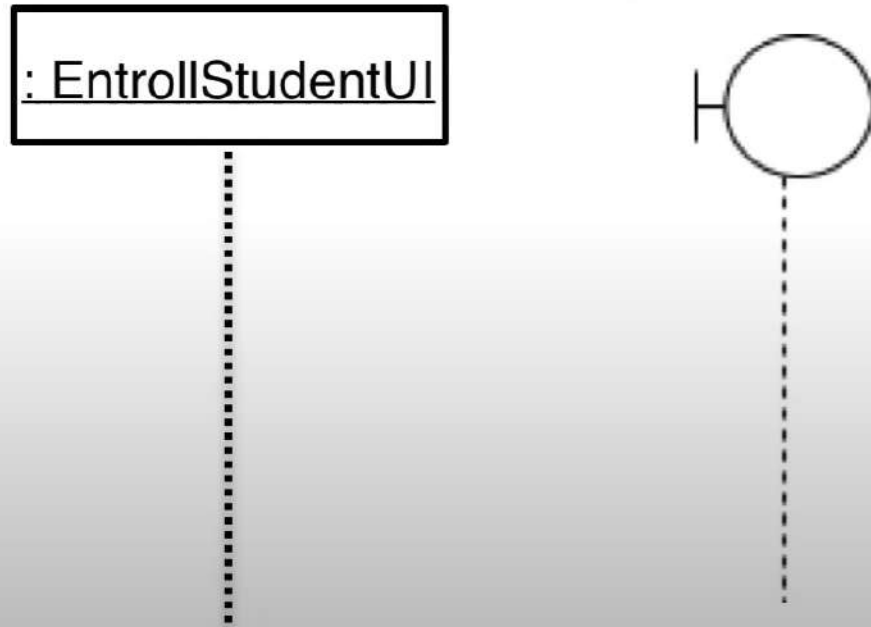

```
sequenceDiagram
    participant UI as : EntrollStudentUI
    participant Actor as 
```



Boundary Lifeline



Sequence


9. Guards

To model conditions, like if condition in prog

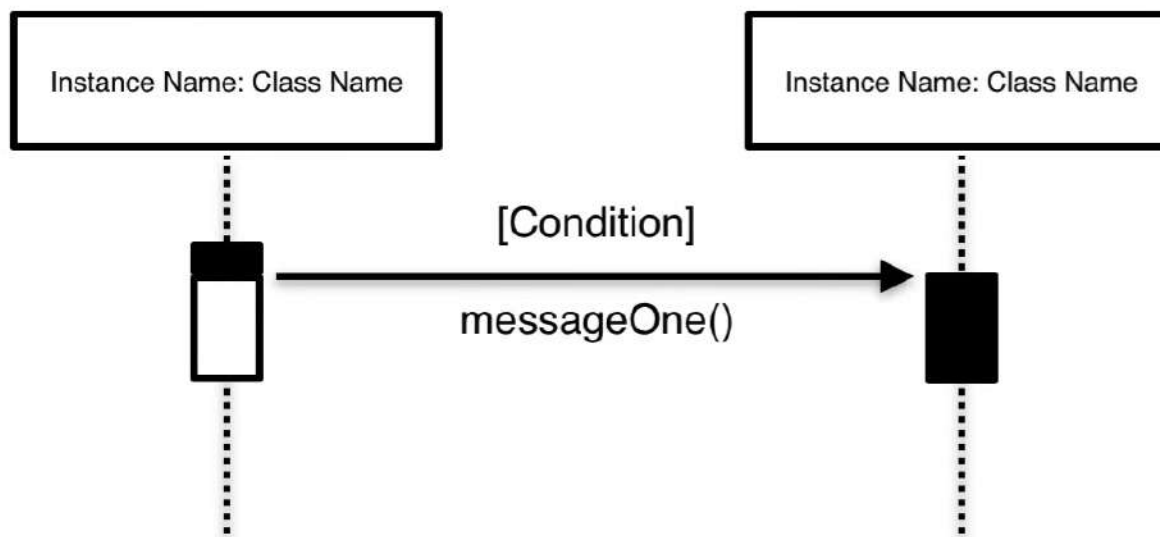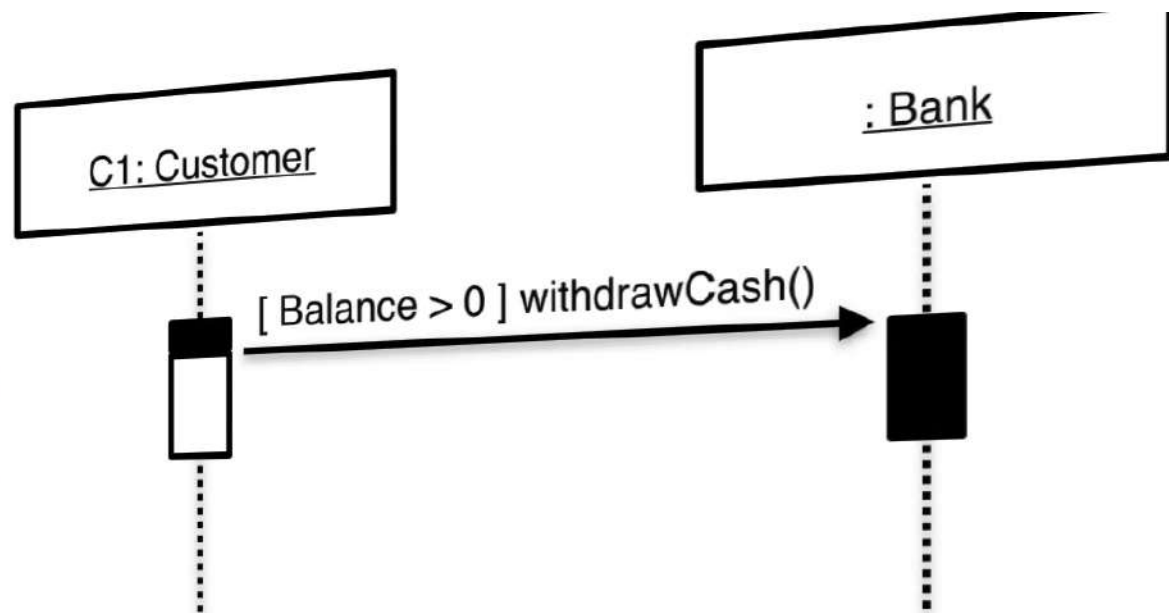


10. Alternative

Alternative in sequence diagram symbolizes a choice between two or more message sequences.

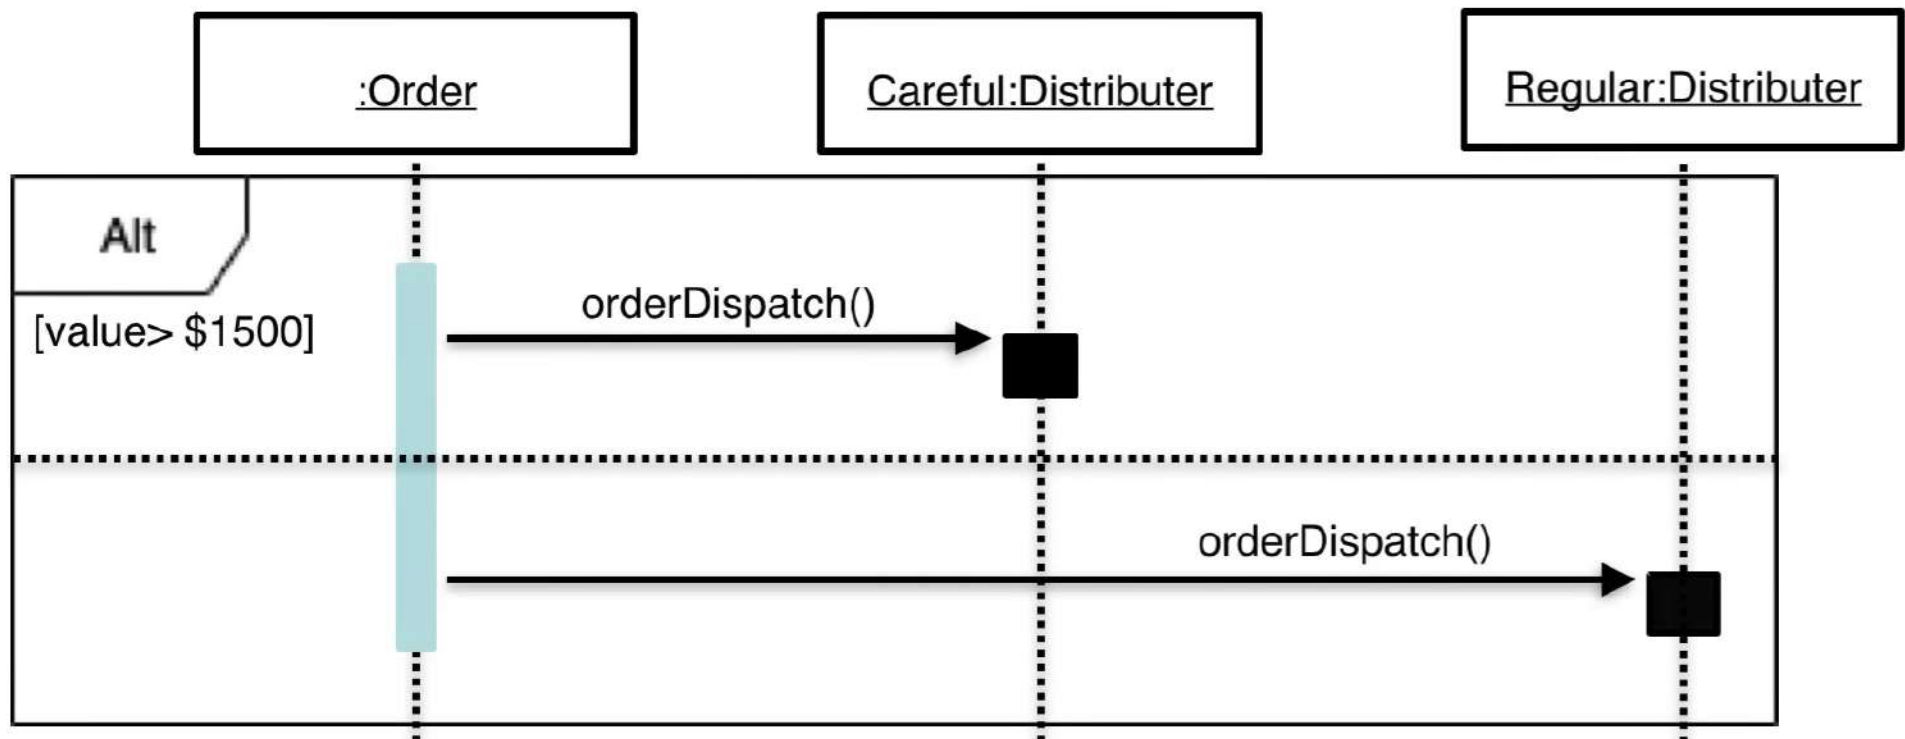


11. Optional

Optional is similar to Guards where the fragment executes only if the supplied condition is true.

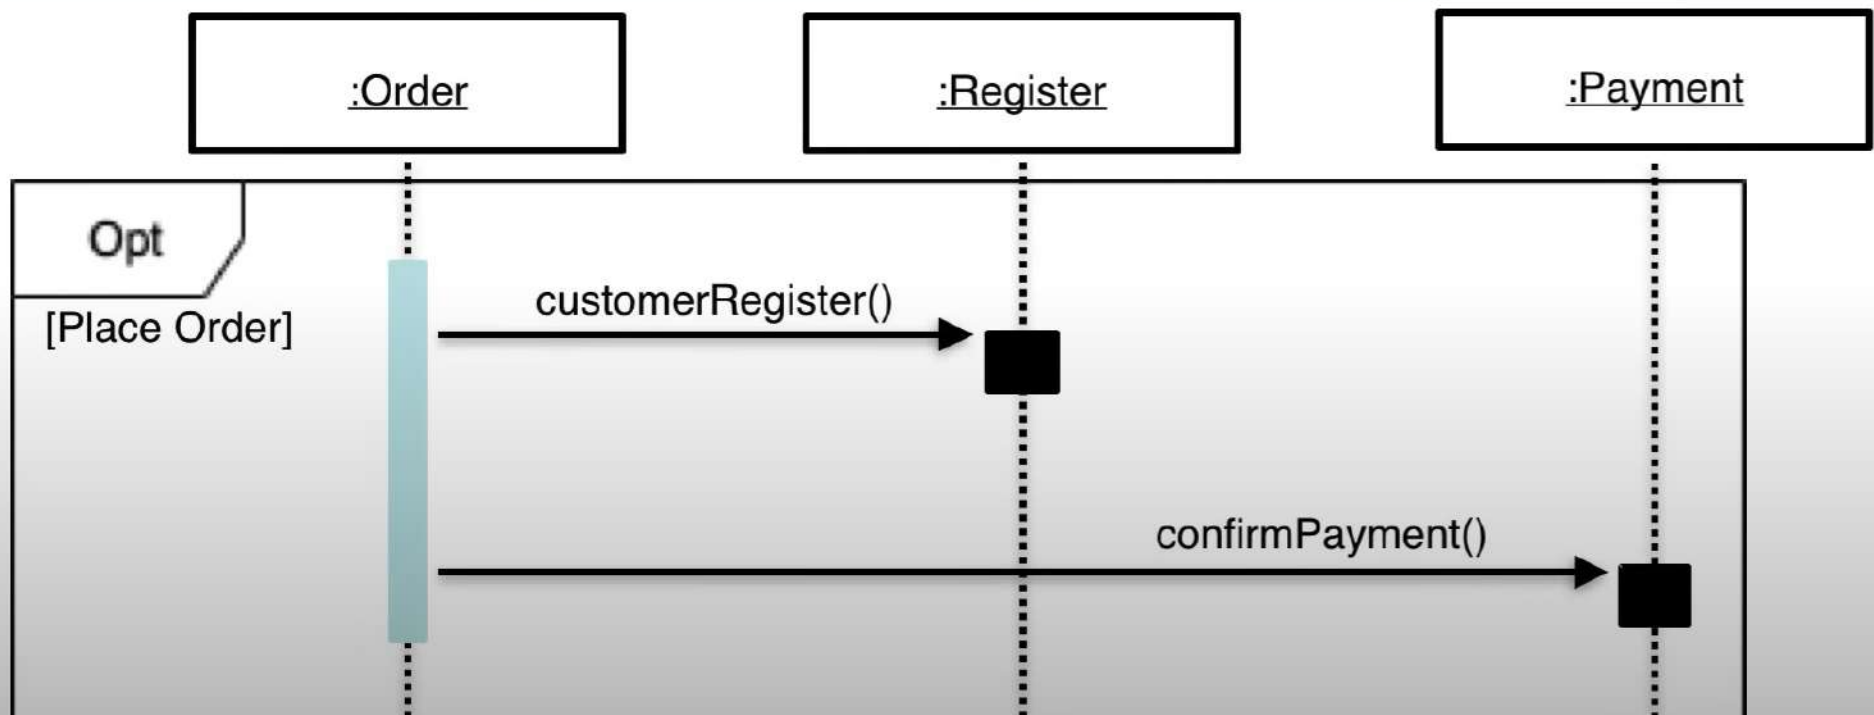


12. Parallel

If the condition is match, each fragment or the message will execute parallel.

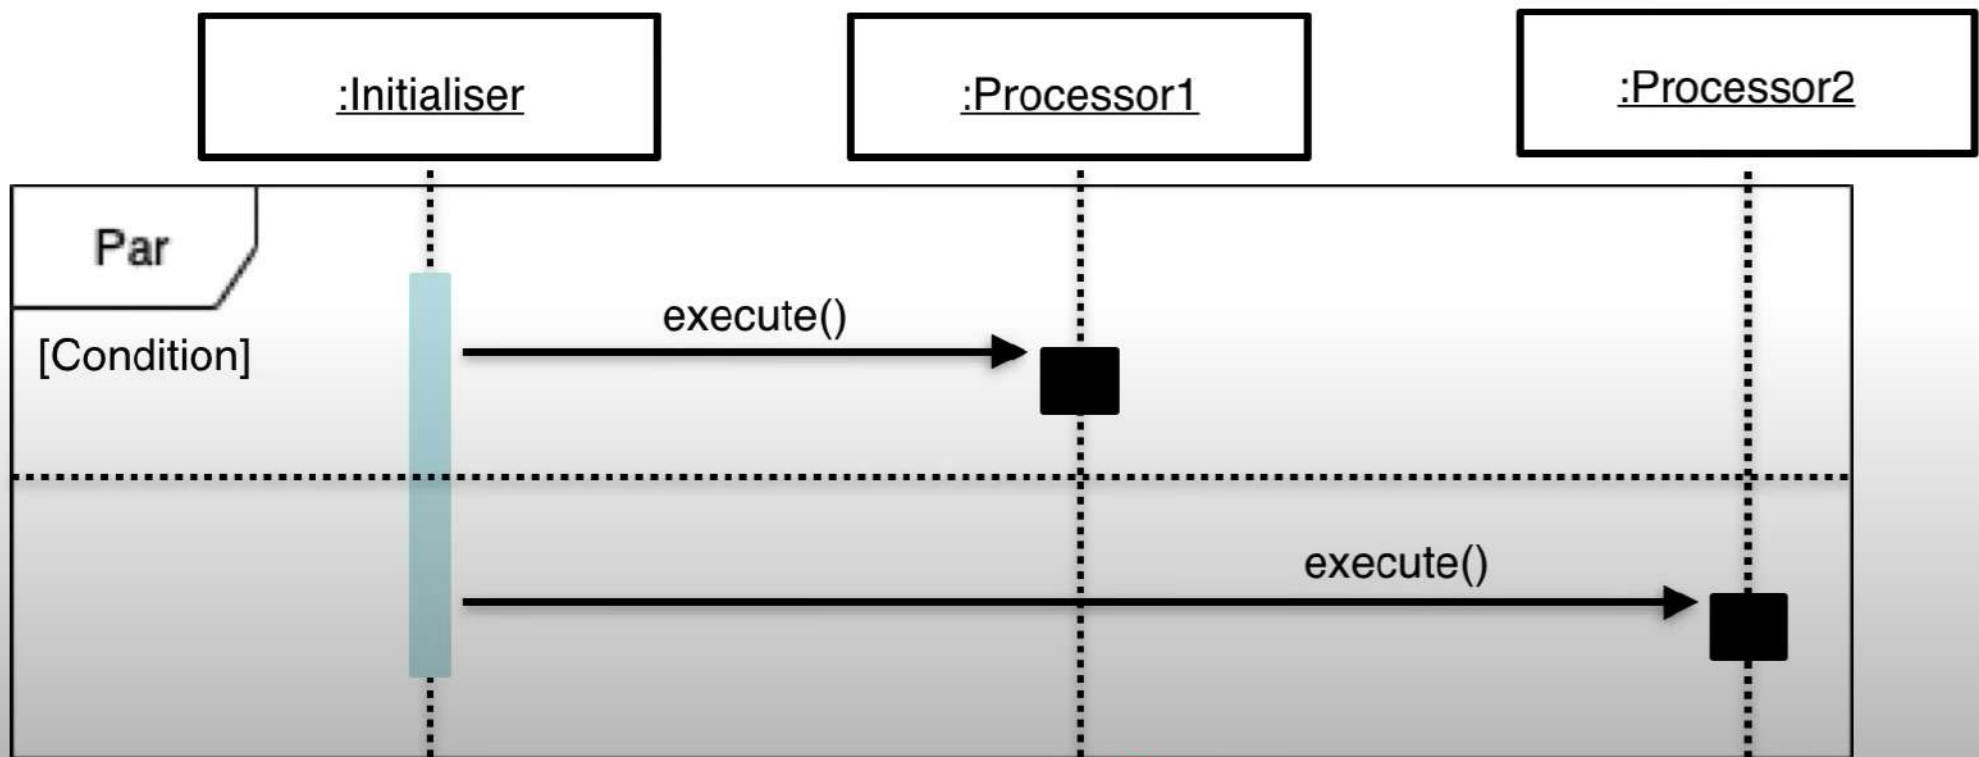

13. Loops

Loops fragment is used to represent a repetitive sequence.

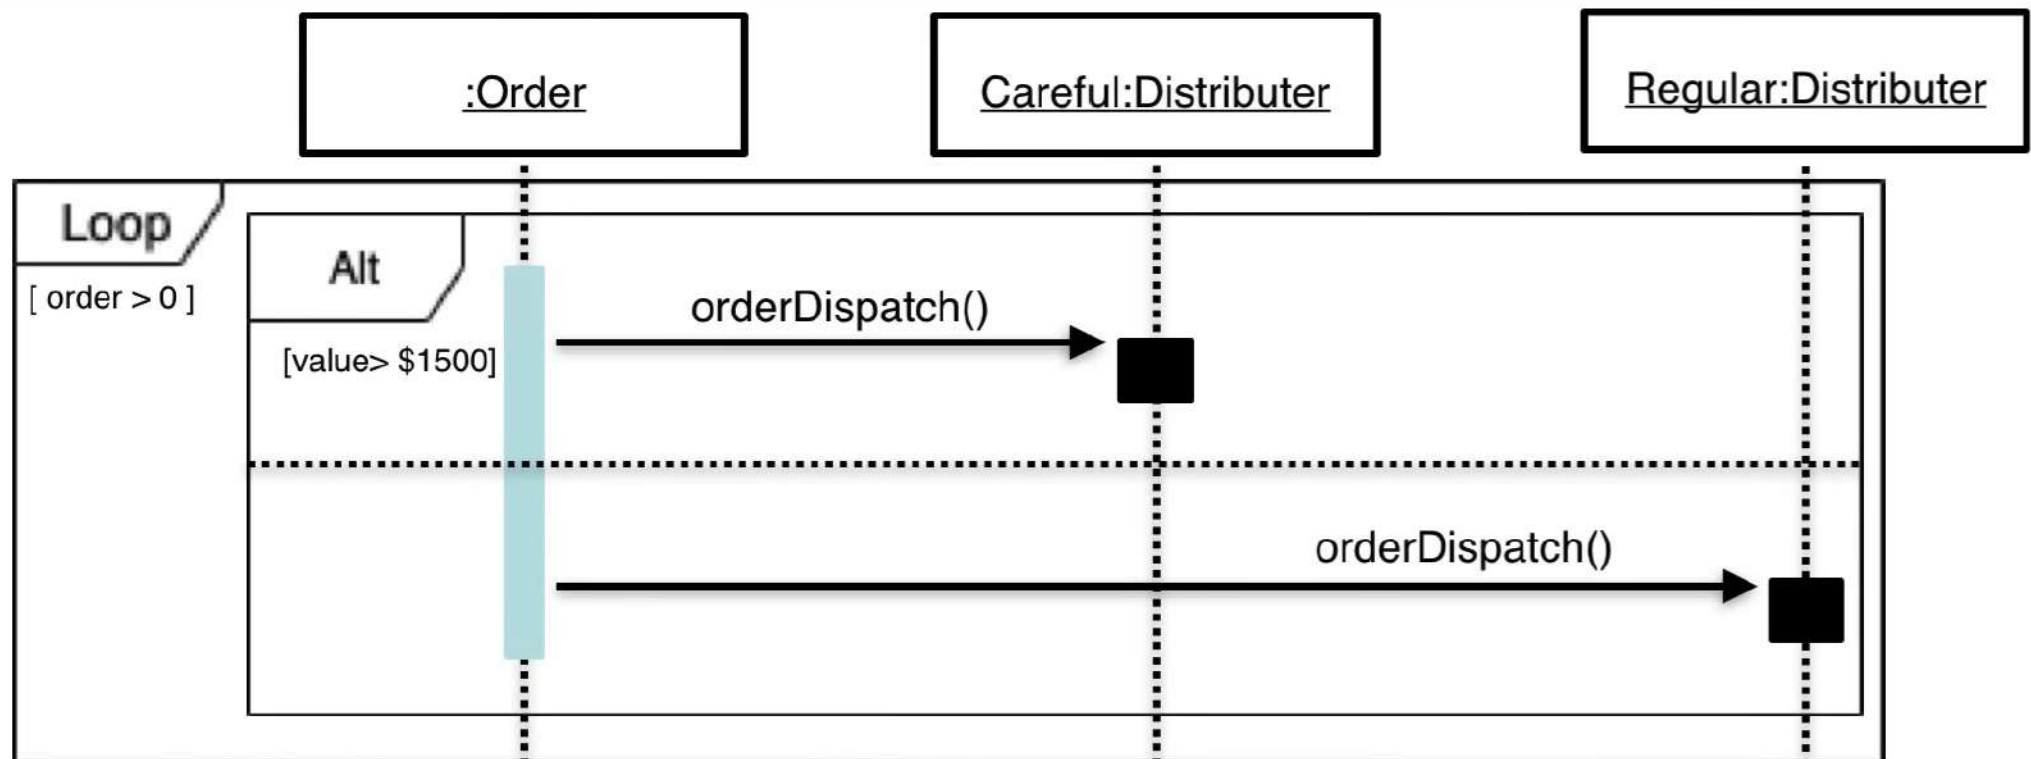

14. Sequence Diagram

The entire sequence diagram is surround by the box or frame.

