

Git in 4 Weeks - Part 4 Labs

Revision 2.70 - 06/18/24

Brent Laster for Tech Skill Transformations LLC

Important: Prior to Lab 12, you will need to have your GitHub Personal Access Token (PAT) available. If you need to generate one again, follow the instructions at the link below to generate the token. Keep a copy of it somewhere so you can copy and paste it to use in the labs.

[Instructions](#)

Direct link is below if you need it (same as link for “Instructions” above)

<https://docs.github.com/en/authentication/keeping-your-account-and-data-secure/managing-your-personal-access-tokens#creating-a-personal-access-token-classic>

Lab 11 - Working with Worktrees

Purpose: In this lab, we'll get some experience with how to work on multiple branches at the same time.


1. In my GitHub space, I have a project called *calc2* which is a simple javascript calculator program. It has multiple branches for *features*, *documentation*, etc. For this lab, I have split it up into three separate projects:
 - *super_calc*, a version of the calc2 project with only the main and feature branches
 - *sub_ui*, a separate repository consisting of only the content of the ui branch split out from the calc2 project
 - *sub_docs*, a separate repository consisting of only the content of the docs branch split out from the calc2 project

Log in to your GitHub account and fork the three projects from the following listed locations. (As a reminder, the **Fork** button is in the upper-right corner of the pages.) This will prepare your area on GitHub for doing this lab, as well as the labs on subtrees. Also make sure to **uncheck** the "Copy the main branch only" option as shown below.

https://github.com/skillrepos/super_calc.git

https://github.com/skillrepos/sub_ui.git

https://github.com/skillrepos/sub_docs.git

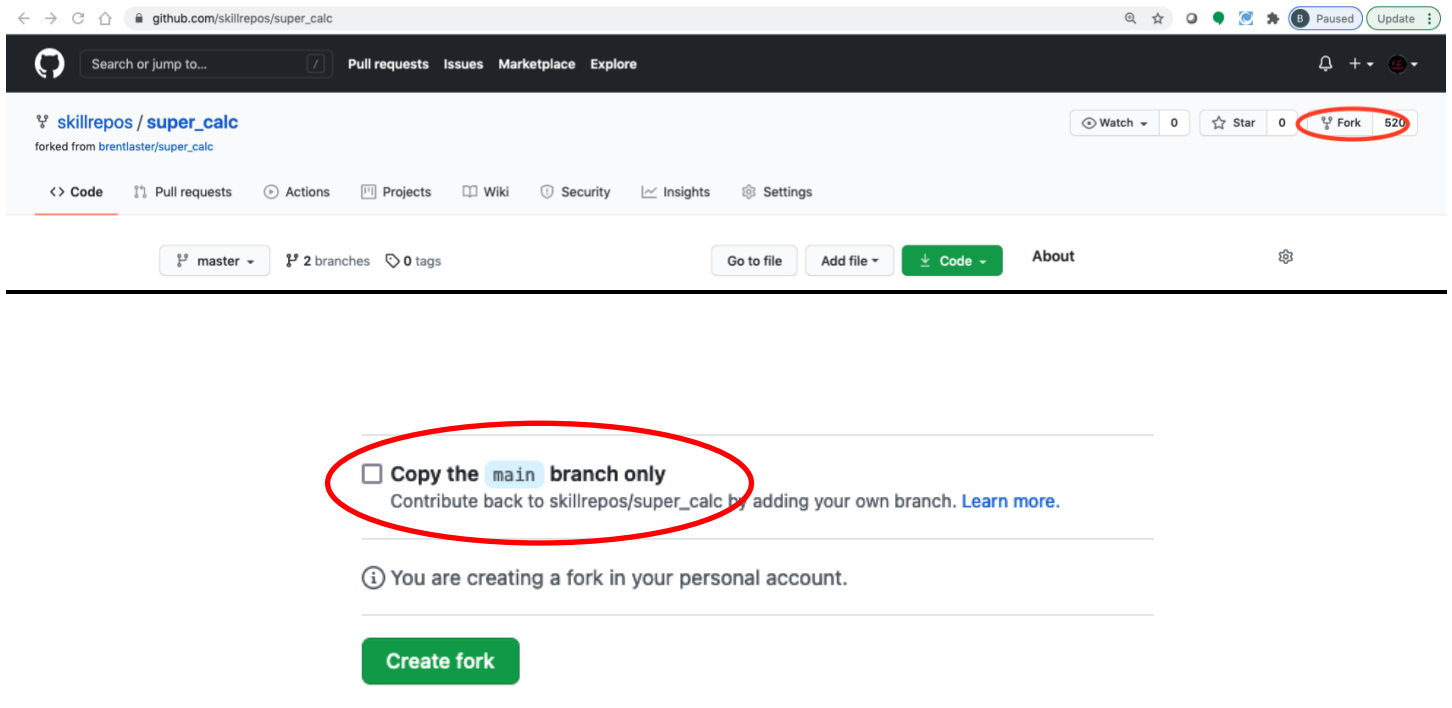

2. In a new directory, clone down the super_calc project that you forked in step 1, using the following command:

```
$ git clone https://github.com/<your github userid>/super_calc.git
```

3. Now, change into the cloned directory - super_calc.

```
$ cd super_calc
```

4. In this case, you want to work on both the main branch and the features branch at the same time. You can work on the main branch in this directory, but you need to create a separate working tree (worktree) for working on the features branch. You can do that with the **worktree add** command, passing the **-b** to create a new local branch from the remote tracking branch.

```
$ git worktree add -b features ../super_calc_features origin/features
```

5. Change into the new subdirectory with the new worktree. Note that you are on the features branch. Edit the calc.html file and update the line in the file surrounded by <title> and </title>. The process is described below.

```
$ cd ../super_calc_features
```

```
$ git branch (note which one is selected automatically)
```

Edit calc.html and change

```
<title>Calc</title>
```

to

```
<title> github_user_id's Calc</title>
```

substituting in your GitHub user ID for "github_user_id".

6. Save your changes and commit them back into the repository.

```
$ git commit -am "Updating title"
```

7. Switch over to your original worktree.

```
$ cd ../super_calc
```

8. Look at what branches you have there.

```
$ git branch
```

9. Note that you have the features branch you created for the other worktree. Do a log on that branch; you can see your new commit just as if you had done it in this worktree.

```
$ git log --oneline features
```

10. You no longer need your separate worktree. However, before you remove it, take a look at what worktrees are currently there.

```
$ git worktree list
```

11. You can now remove the worktree. First, remove the actual directory; then use the prune option to get rid of the worktree reference.

```
$ rm -rf ../super_calc_features  
$ git worktree prune
```

```
=====
```

END OF LAB

```
=====
```

Lab 12 - Working with Pull Requests - Part 1

Purpose: In this lab, we'll see how to create and merge pull requests within a GitHub repository

In the last lab, you created a new branch named "features" and committed a change into it. We can leverage this commit to create a Pull Request to work with in GitHub.

1. Let's go ahead and push the change over to our remote on the GitHub side to a new branch. (You can use a different name in place of "dev" if you want. Just use that name consistently wherever "dev" is used here.)

```
$ git push origin features:dev
```

2. At this point, you'll be prompted for a Private Access Token or password (unless you've setup ssh access). Wherever it asks for a token or a password, you can just copy and paste in the token you generated in GitHub prior to this lab. An example dialog that may come up is shown below. If instead, you are on the command line and prompted for a password, just paste the token in at the prompt. Note that it will not show up on the line, but you can just hit enter afterwards.



3. In addition to pushing your changes to the new branch, GitHub will also provide a link in the output that you can go to to create a pull request for this change.

```
:super_calc developer$ git push origin features:dev
```

```
Enumerating objects: 5, done.
```

```
Counting objects: 100% (5/5), done.
```

```
Delta compression using up to 16 threads
```

```
Compressing objects: 100% (2/2), done.
```

```
Writing objects: 100% (3/3), 292 bytes / 292.00 KiB/s, done.
```

```
Total 3 (delta 1), reused 0 (delta 0)
```

```
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
```

```
remote:
```

```
remote: Create a pull request for 'dev' on GitHub by visiting:
```

```
remote: https://github.com/<github-userid>/super\_calc/pull/new/dev
```


remote:

To https://github.com/tupstudent/super_calc

*[new branch] features -> dev

4. Highlight the link in the output (the one that ends with `.../super_calc/pull/new/dev`) and then open that link. (You may be able to right-click and have an option to open it, or you can simply copy and paste it into the browser.
5. You'll now be on the screen to open a pull request. Notice that it defaulted to the original project. But we want to do a pull request between two branches in the same project NOT from your project to the parent one. So first, make sure to change the "base repository: skillrepos/super_calc" to "<your github userid>/super_calc".

Change the base repository now. Click on the "base repository" box and then type in the dialog.

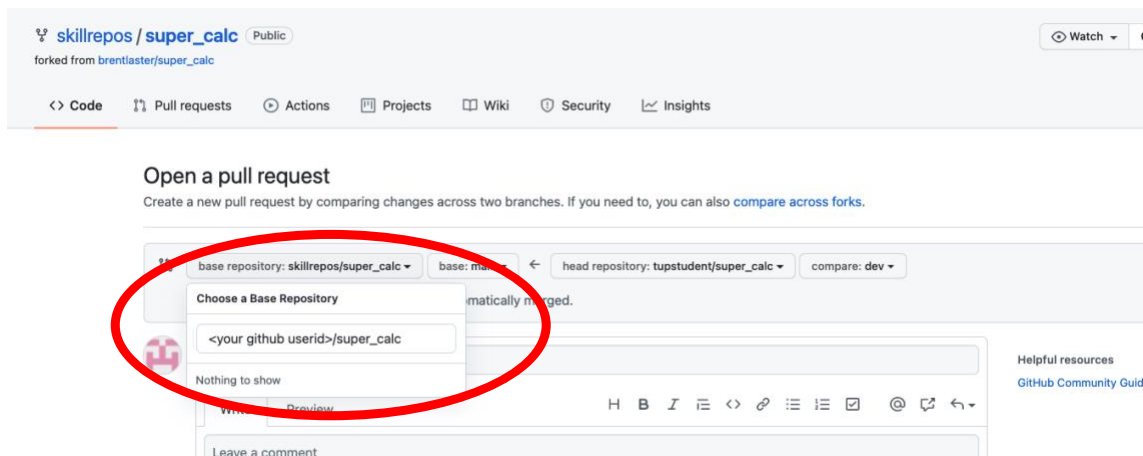

6. At this point, your current project should be back to `<your-github-userid>/super_calc` at the top. Next, ensure that the "main" branch is selected in the left dropdown and the "dev" branch in the right dropdown - as shown in the figure. You can also change the title or comment if you want. Afterwards, you can click on the "Create pull request" button.

Open a pull request

Create a new pull request by comparing changes across two branches. If you need to, you can also [compare across forks](#).

base: main ← compare: dev ✓ Able to merge. These branches can be automatically merged.

Dev

Write Preview

Leave a comment

Attach files by dragging & dropping, selecting or pasting them.

Create pull request

- The pull request will open at "github.com/<your github userid>/super_calc/pull/1". You will now be able to see the changes that will be merged in if we proceed. When ready, go ahead and select the "Merge pull request" button.

github.com/tupstudent/super_calc/pull/1

Dev #1

Open tupstudent wants to merge 5 commits into main from dev

Conversation 0 Commits 5 Checks 0 Files changed 1

tupstudent commented 2 minutes ago

No description provided.

sasbcl and others added 5 commits 9 years ago

- add max function d803b91
- add exp function 482365d
- add min function 3753e5a
- add avg function b372aa6
- Updating title 4b1f5e5

Add more commits by pushing to the dev branch on tupstudent/super_calc.

Continuous integration has not been set up
GitHub Actions and several other apps can be used to automatically catch bugs and enforce style.

✓ This branch has no conflicts with the base branch
Merging can be performed automatically.




Merge pull request You can also open this in GitHub Desktop or view command line instructions.

- Click on the "Confirm merge" button.


Dev #1










 Open tupstudent wants to merge 5 commits into `main` from `dev` 

 Conversation 0  Commits 5  Checks 0  Files changed 1


 tupstudent commented 4 minutes ago Owner  

No description provided.

 sasbcl and others added 5 commits 9 years ago

-   add max function d003b91
-   add exp function 482365d
-   add min function 3753e5a
-   add avg function b372aa6
-  Updating title 4b1f5e5

Add more commits by pushing to the `dev` branch on `tupstudent/super_calc`.



 Merge pull request #1 from tupstudent/dev

Dev




Confirm merge Cancel

9. After this, you should see the screen indicating your Merge Request has been successfully merged and closed.


Dev #1










 Merged tupstudent merged 5 commits into `main` from `dev`  13 seconds ago



 Conversation 0  Commits 5  Checks 0  Files changed 1


 tupstudent commented 8 minutes ago Owner  

No description provided.

 sasbcl and others added 5 commits 9 years ago

-   add max function d003b91
-   add exp function 482365d
-   add min function 3753e5a
-   add avg function b372aa6
-  Updating title 4b1f5e5

  tupstudent merged commit 4fcfee9 into `main` 13 seconds ago Revert

 Pull request successfully merged and closed
You're all set—the `dev` branch can be safely deleted. Delete branch

Lab 13 - Working with Pull Requests - Part 2

© 2024 Tech Skills Transformations LLC & Brent Laster

Purpose: In this lab, we'll see how to deal with pull requests when there's a conflict

1. Back in your terminal, make sure you are on the main branch. Then create a new branch called "test".

```
$ git checkout main
```

```
$ git checkout -b test
```

2. Then, as you did before, edit the calc.html file and add in "Test" instead of your GitHub userid.

Edit calc.html and change

```
<title>Calc</title>
```

to

```
<title>Test Calc</title>
```

3. Save your changes and commit them back into the repository. Then push the new branch back to the remote. (Enter your PAT when prompted as before.)

```
$ git commit -am "add test title"
```

```
$ git push origin test:test
```

4. You'll see the same automatic message giving you a URL to go to create a new pull request. Something like:

Total 3 (delta 1), reused 0 (delta 0)

remote: Resolving deltas: 100% (1/1), completed with 1 local object.

remote:

remote: Create a pull request for 'test' on GitHub by visiting:

remote: https://github.com/<your github userid>/super_calc/pull/new/test


remote:

To https://github.com/<your github userid>/super_calc.git


```
* [new branch]    test -> test
```

5. Open/go to the link in the middle of the message for "Create a pull request...". You'll be at a similar screen as before. Change the project in the left top dropdown to be the same project as the one on the right. (As you did back

in the previous lab.) At that point, the targets will switch to "base:main" and "compare:test". But there will be a warning message "Can't automatically merge." Go ahead and click the button to "Create pull request".

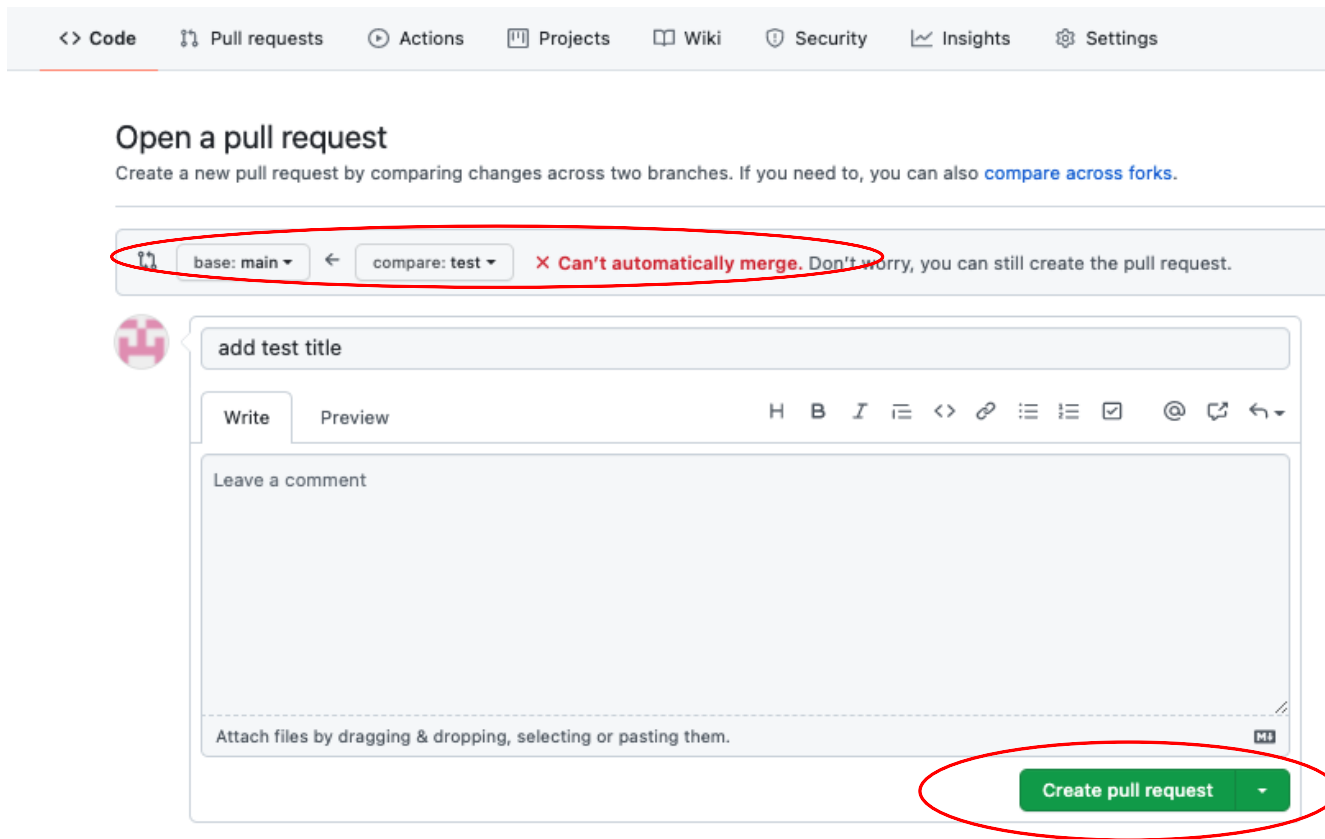

6. Notice the error message near the bottom "This branch has conflicts that must be resolved". Also there is a "Resolve conflicts" button. Click on that.

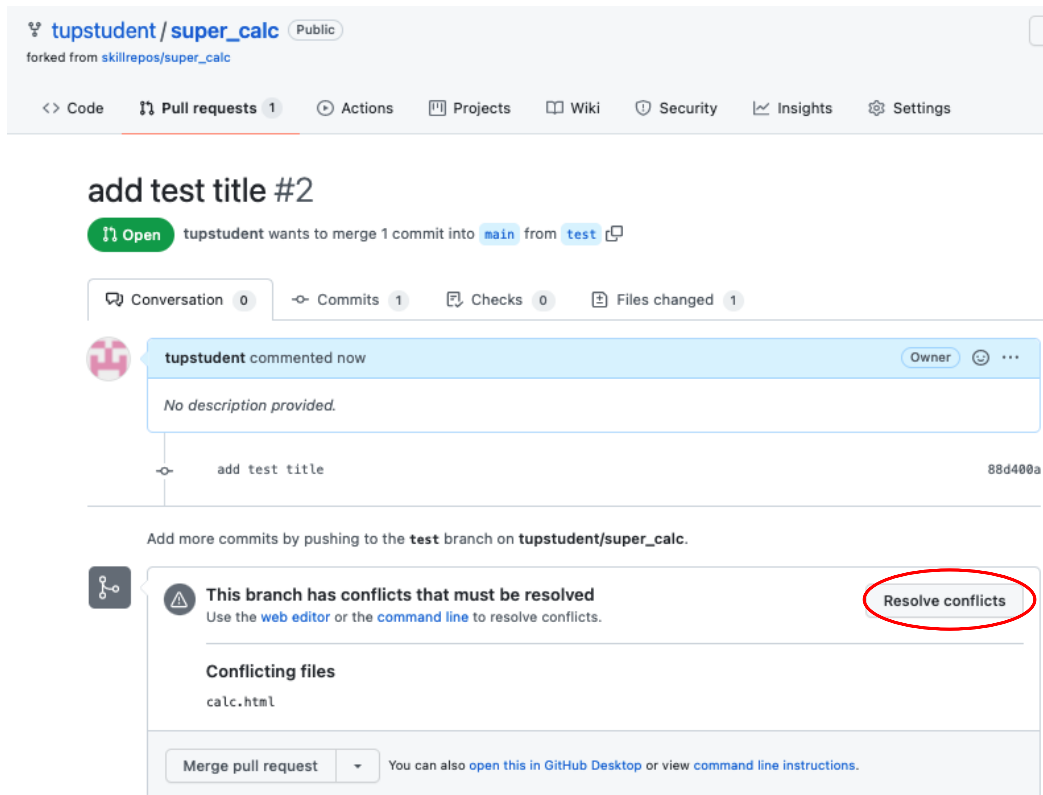

7. This will now put you on a screen showing the conflicts.

add test title #2

Resolving conflicts between `test` and `main` and committing changes → `test`

1 conflicting file	calc.html
calc.html calc.html	<pre> 1 <html> 2 <head> 3 <==== test 4 <title>Test Calc</title> 5 ===== 6 <title>tupstudent's Calc</title> 7 >==== main 8 9 <script language=javascript type="text/javascript"> 10 11 var plus,minus,divide,multiply,max,pow,min,avg 12</pre>

8. You can highlight and hit the "Del" key to get rid of lines 3, 5, 6, and 7 to remove the markers and resolve the conflict. Then you can click on the "Mark as resolved" button.

add test title #2

Resolving conflicts between `test` and `main` and committing changes → `test`

1 conflicting file

calc.html

```
1 <html>
2 <head>
3
4   <title>Test Calc</title>
5
6
7 <script language=javascript type="text/javascript">
8
9   var plus,minus,divide,multiply,max,pow,min,avg
```

1 conflict Prev Next Mark as resolved

9. At this point, the check should turn green, the status should indicate "Resolved" and you can click the new green "Commit merge" button.

< Code Pull requests 1 Actions Projects Wiki Security Insights Settings

add test title #2

Resolving conflicts between `test` and `main` and committing changes → `test`

1 conflicting file

calc.html

```
1 <html>
2 <head>
3
4   <title>Test Calc</title>
5
6
7 <script language=javascript type="text/javascript">
8
9   var plus,minus,divide,multiply,max,pow,min,avg
```

✓ Resolved

Commit merge

10. Now you can merge the pull request.

add test title #2

Open tupstudent wants to merge 1 commit into `main` from `test`

Conversation 0 Commits 1 Checks 0 Files changed 1

techupskills commented 10 minutes ago

No description provided.

add test title 5c6f1ce

Add more commits by pushing to the `test` branch on `techupskills/super_calc`.

Continuous integration has not been set up

GitHub Actions and several other apps can be used to automatically catch bugs and enforce style.

✓ This branch has no conflicts with the base branch

Merging can be performed automatically.

Merge pull request You can also open this in GitHub Desktop or view command line instructions.

Write Preview H B I ≡ <> @ ↩

11. Click the button to Confirm. And then you'll have another completed pull request.

The screenshot shows a GitHub pull request page for a repository. The top navigation bar includes links for Code, Pull requests (1), Actions, Projects, Wiki, Security, Insights, and Settings. The pull request title is "add test title #2". A purple "Merged" badge is visible, along with the text "tupstudent merged 2 commits into main from test 3 minutes ago". Below the title, there are tabs for Conversation (0), Commits (1), Checks (0), and Files changed (1). A comment by "tupstudent" is shown, stating "No description provided." Below the comment, a commit history is displayed, showing "add test title" and "Merge branch 'main' into test". A "Verified" badge is next to the merge commit. At the bottom, a message states "Pull request successfully merged and closed" and "You're all set—the test branch can be safely deleted." with a "Delete branch" button.

12. If you click on the "Pull requests" link in the line that begins with "<> Code" you can see the pull request summary. Then if you click on the "2 Closed" link, you can see the ones that you successfully completed.

The screenshot shows the GitHub Pull requests page. The top navigation bar includes links for Code, Pull requests (1), Actions, Projects, Wiki, Security, Insights, and Settings. The "Pull requests" link is highlighted with a red circle. Below the navigation bar, there are filters and a search bar. The search bar contains the text "is:pr is:closed". To the right of the search bar, there are buttons for "Labels 9" and "Milestones 0", and a "New pull request" button. Below the search bar, there is a link to "Clear current search query, filters, and sorts". A table of pull requests is displayed, with columns for Author, Label, Projects, Milestones, Reviews, Assignee, and Sort. The table shows two pull requests: "add test title" and "Dev". The "add test title" pull request is highlighted with a red circle, and the "2 Closed" link in the table header is also highlighted with a red circle.

=====

END OF LAB

=====

Lab 14 - Subtrees

Purpose: In this lab, we'll see one way to manage "groups" of repositories in Git

1. Start out in the *super_calc* directory for the *super_calc* repository that you used in the last two labs. You'll want to be in the main branch.

```
$ git checkout main
```

2. You're going to add another repository (the *sub_docs* one) as a subtree to *super_calc*.

```
$ git subtree add -P sub_docs --squash https://github.com/<your github user id>/sub_docs main
```

Even though you don't have much history in this repository, you used the `--squash` command to compress it. Note that the `-P` stands for prefix, which is the name your subdirectory gets.

3. Look at the directory structure; note that the *sub_docs* subdirectory is there under your *super_calc* project. Also, if you do a `git log`, you can see where the subproject was added, and the history squashed.

```
$ ls sub_docs  
$ git log --oneline
```

Note that there is only one set of history here because there is only one project effectively - even though we have added a repository as a subproject.

4. Now, you will see how to update a subproject that is included as a subtree when the remote repository is updated. First, clone the *sub_docs* project down into a different area.

```
$ cd ..  
$ git clone https://github.com/<your github user id>/sub_docs sub_docs_temp
```

5. Change into the *sub_docs_temp* project, and create a simple file. Then stage it, commit it, and push it. (Enter your PAT when prompted as before.)

```
$ cd sub_docs_temp  
$ echo "readme content" > readme.txt  
$ git add .  
$ git commit -m "Adding readme file"  
$ git push
```

6. Go back to the *super_calc* project where you have *sub_docs* as a subtree.

```
$ cd ../super_calc
```

7. To simplify future updating of your subproject, add a remote reference for the subtree's remote repository.

```
$ git remote add sub_docs_remote https://github.com/<your github user id>/sub_docs
```

8. You want to update your subtree project from the remote. To do this, you can use the following subtree pull command. Note that it's similar to your add command, but with a few differences:

- You use the long version of the prefix option.
- You are using the remote reference you set up in the previous step.
- You don't have to use the squash option, but you add it as a good general practice.

```
$ git subtree pull --prefix sub_docs sub_docs_remote main --squash
```

Because this creates a merge commit, you will get prompted to enter a commit message in an editor session. You can add your own message or just exit the editor to accept the automatically generated message.

9. After the command from step 8 completes, you can see the new README file that you created in your subproject *sub_docs*. If you look at the log, you can also see another record for the squash and merge commit that occurred.

```
$ ls sub_docs
$ git log --oneline
```

10. Changes you make locally in the subproject can be promoted the same way using the subtree push command. Change into the subproject, make a simple change to your new README file, and then stage and commit it.

```
$ cd sub_docs
$ echo update >> readme.txt
$ git commit -am "update readme"
```

11. Change back to the directory of the *super_project*. Then use the subtree push command below to push back to the project's remote repository. (Enter your PAT when prompted as before.)

```
$ cd ..
$ git subtree push --prefix sub_docs sub_docs_remote main
```

Note the similarity between the form of the subtree push command and the other subtree commands you've used.

=====

END OF LAB

=====

Lab 15: Creating a post-commit hook

Purpose: In this lab, we'll see how to put a post-commit hook in place to be active in our local Git environment. The hook could be created in many different programming languages, but we'll use shell scripting here because it's portable among most unix implementations (including the Git bash shell for Windows).

Setup:

Suppose that you want to mirror out copies of files when you commit them into your local repository - but only for branches that start with "web". Further you must have the config value of `hooks.webdir` set to a valid directory on your system.

1. The code for the hook is already done for you. Clone down a copy of the repo containing it.

```
$ cd ..
```

```
$ git clone https://github.com/skillrepos/git4-hooks
```

2. In the cloned directory are two files - `post-commit-v1.txt` and `post-commit-v2.txt`. You can start out doing this lab with the v1 version, but on some systems, you may need to switch out the v2 version if v1 doesn't work as expected. You can also see the current set of sample hooks in the `.git/hooks` directory.

```
$ cd git4-hooks
```

```
$ ls (and cat files if desired)
```

```
$ ls .git/hooks
```

3. Move (or copy) the `post-commit-v1.txt` file to the `.git/hooks` directory as the name `post-commit` WITHOUT the extension, and make it executable.

```
$ mv post-commit-v1.txt .git/hooks/post-commit
```

```
$ chmod +x .git/hooks/post-commit
```

4. Create a directory (somewhere outside of your local Git working directory) for the hook to eventually mirror your code into.

```
$ mkdir (mirror-directory-name) (such as mkdir ../mirror)
```

5. In your working directory configure the `hooks.webdir` value to point to the location you set above.

```
$ git config hooks.webdir (mirror-directory-name)
```

(make sure to use the correct absolute or relative path to get to the directory you created above, such as `git config hooks.webdir ../mirror`)

© 2024 Tech Skills Transformations LLC & Brent Laster

6. Next, we'll test out our hook. In your working directory, create a new file, then stage and commit it.

```
$ echo stuff > some-file-name
```

```
$ git add .
```

```
$ git commit -m "new file"
```

7. Notice that after you do the commit, you should see the *"Running post-commit hook"* message. (This comes from the 4th line of our script that is the hook.) However, the hook won't do anything else because the branch is main and not web*. To verify that's the case, you can inspect the directory you created for the mirror.

```
$ ls (mirror-directory-name)
```

There should be nothing there.

8. Now, let's set things up so our hook will mirror out the contents of our repository. Create a new branch and switch to it. You can name it anything you want as long as it starts with "web". An example is shown below.

```
$ git checkout -b webtest
```

9. Create another file and stage and commit it into your repository.

```
$ echo stuff > another-file-name
```

```
$ git add .
```

```
$ git commit -m "new file"
```

10. This time, the hook should fire since we have the config value defined and are in a branch that starts with "web". You should see the "Running" message from the hook and then be able to see the contents of your repository in the directory that you configured.

```
$ ls (mirror-directory-name)
```

11. If the hook doesn't seem to work, you may need to repeat step 3 with the post-commit-v2.txt version of the hook and then steps 8 and 9.

=====

END OF LAB

=====