```
PROBLEMS    OUTPUT    DEBUG CONSOLE    TERMINAL    PORTS

PS C:\Users\JCool> mkdir project 8

PS C:\Users\JCool> cd project8
PS C:\Users\JCool\project8> npm install -g @angular/cli

added 285 packages in 13s

67 packages are looking for funding
  run `npm fund` for details
PS C:\Users\JCool\project8> ng version

     _                      _                 ____ _     ___
    / \   _ __   __ _ _   _| | __ _ _ __     / ___| |   |_ _|
   / △ \ | '_ \ / _` | | | | |/ _` | '_ \   | |   | |    | |
  / ___ \| | | | (_| | |_| | | (_| | | | |  | |___| |___ | |
 /_/   \_\_| |_|\__, |\__,_|_|\__,_|_| |_|   \____|_____|___|
                   |___/


Angular CLI       : 21.2.6
Node.js           : 24.13.0
Package Manager   : npm 11.6.2
Operating System  : win32 x64

PS C:\Users\JCool\project8> ng new cli 1
```

```
PROBLEMS    OUTPUT    DEBUG CONSOLE    TERMINAL    PORTS

PS C:\Users\JCool\project8> ng new cli1

Would you like to share pseudonymous usage data about this project with the Angular Team
at Google under Google's Privacy Policy at https://policies.google.com/privacy. For more
details and how to change this setting, see https://angular.dev/cli/analytics.

  No
Global setting: disabled
Local setting: No local workspace configuration file.
Effective status: disabled
✓ Which stylesheet system would you like to use? CSS            [ https://developer.mozilla.org/docs/Web/CSS                    ]
✓ Do you want to enable Server-Side Rendering (SSR) and Static Site Generation (SSG/Prerendering)? No
✓ Which AI tools do you want to configure with Angular best practices? https://angular.dev/ai/develop-with-ai None
CREATE cli1/.prettierrc (173 bytes)
CREATE cli1/angular.json (1970 bytes)
CREATE cli1/package.json (779 bytes)
CREATE cli1/README.md (1516 bytes)
CREATE cli1/tsconfig.json (990 bytes)
CREATE cli1/.editorconfig (331 bytes)
CREATE cli1/.gitignore (666 bytes)
CREATE cli1/tsconfig.app.json (444 bytes)
CREATE cli1/tsconfig.spec.json (456 bytes)
CREATE cli1/.vscode/extensions.json (134 bytes)
CREATE cli1/.vscode/launch.json (490 bytes)
CREATE cli1/.vscode/mcp.json (188 bytes)
CREATE cli1/.vscode/tasks.json (1020 bytes)
```

```
PROBLEMS    OUTPUT    DEBUG CONSOLE    TERMINAL    PORTS

PS C:\Users\JCool\project8> ng new cli1
CREATE cli1/src/app/app.ts (298 bytes)
CREATE cli1/src/app/app.css (0 bytes)
CREATE cli1/src/app/app.html (20488 bytes)
CREATE cli1/src/app/app.config.ts (324 bytes)
CREATE cli1/src/app/app.routes.ts (80 bytes)
CREATE cli1/public/favicon.ico (15086 bytes)
✓ Packages installed successfully.
warning: in the working copy of 'package-lock.json', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'package.json', LF will be replaced by CRLF the next time Git touches it
    Successfully initialized git.
PS C:\Users\JCool\project8> cd cli1
PS C:\Users\JCool\project8\cli1> ng serve --open
Initial chunk files | Names         | Raw size
main.js             | main          | 48.46 kB |
styles.css          | styles        | 95 bytes |

                    | Initial total | 48.55 kB

Application bundle generation complete. [1.580 seconds] - 2026-04-06T02:01:21.899Z

Watch mode enabled. Watching for file changes...
NOTE: Raw file sizes do not reflect development server per-request transformations.
  → Local:   http://localhost:4200/
  → press h + enter to show help
```

```
PROBLEMS    OUTPUT    DEBUG CONSOLE    TERMINAL    PORTS

PS C:\Users\JCool> cd project8
PS C:\Users\JCool\project8> cd cli1
PS C:\Users\JCool\project8\cli1> ng generate component foo
CREATE src/app/foo/foo.spec.ts (533 bytes)
CREATE src/app/foo/foo.ts (185 bytes)
CREATE src/app/foo/foo.css (0 bytes)
CREATE src/app/foo/foo.html (19 bytes)
PS C:\Users\JCool\project8\cli1>
```

EXPLORER

PROJECT8

- cli1
  - .angular
  - .vscode
  - node_modules
  - public
  - src
    - app
      - foo
    - app.config.ts
    - app.css
    - app.html M
    - app.routes.ts
    - app.spec.ts
    - app.ts M
    - index.html
    - main.ts
    - styles.css
  - .editorconfig
  - .gitignore
  - .prettierrc
  - angular.json
  - package-lock.json
  - package.json
  - README.md
  - tsconfig.app.json
  - tsconfig.json
  - tsconfig.spec.json

OUTLINE

TIMELINE

app.html M × | app.ts M

cli1 > src > app > app.html > app-foo

```html
<h1>Hello World! </h1>
<h1>Johnny Sewell</h1>
<app-foo></app-foo>
```

PROBLEMS | OUTPUT | DEBUG CONSOLE | TERMINAL | PORTS

esbuild - cli1

```
PS C:\Users\JCool\Project8> npm start
npm error errno -4058
npm error enoent Could not read package.json: Error: ENOENT: no such file or directory, open 'C:\Users\JCool\Project8\package.json'
npm error enoent This is related to npm not being able to find a file.
npm error enoent
npm error A complete log of this run can be found in: C:\Users\JCool\AppData\Local\npm-cache\_logs\2026-04-06T02_12_08_052Z-debug-0.log
PS C:\Users\JCool\Project8> cd cli1
PS C:\Users\JCool\Project8\cli1> npm start

> cli1@0.0.0 start
> ng serve

Initial chunk files | Names         | Raw size
main.js             | main          |  4.02 kB |
styles.css          | styles        | 95 bytes |

                    | Initial total |  4.12 kB

Application bundle generation complete. [1.552 seconds] - 2026-04-06T02:12:37.290Z

Watch mode enabled. Watching for file changes...
NOTE: Raw file sizes do not reflect development server per-request transformations.
10:12:37 PM [vite] (client) Re-optimizing dependencies because vite config has changed
  ➜  Local:   http://localhost:4200/
  ➜  press h + enter to show help
```

EXPLORER

PROJECT8

- cli1
  - .angular
  - .vscode
  - node_modules
  - public
  - src
    - app
      - foo
    - app.config.ts
    - app.css
    - app.html M
    - app.routes.ts
    - app.spec.ts
    - app.ts M
    - index.html
    - main.ts
    - styles.css
  - .editorconfig
  - .gitignore
  - .prettierrc
  - angular.json
  - package-lock.json
  - package.json
  - README.md
  - tsconfig.app.json
  - tsconfig.json
  - tsconfig.spec.json

OUTLINE

TIMELINE

app.html M | app.ts M ×

cli1 > src > app > app.ts > App

```typescript
import { Foo } from './foo/foo'; // Changed FooComponent to Foo
import { Component, signal } from '@angular/core';
import { RouterOutlet } from '@angular/router';

@Component({
    selector: 'app-root',
    standalone: true,
    imports: [Foo], // Changed FooComponent to Foo here too
    templateUrl: './app.html',
})
export class App {
    protected readonly title = signal('cli1');
}
```

PROBLEMS | OUTPUT | DEBUG CONSOLE | TERMINAL | PORTS

esbuild - cli1

```
PS C:\Users\JCool\Project8> npm start
npm error errno -4058
npm error enoent Could not read package.json: Error: ENOENT: no such file or directory, open 'C:\Users\JCool\Project8\package.json'
npm error enoent This is related to npm not being able to find a file.
npm error enoent
npm error A complete log of this run can be found in: C:\Users\JCool\AppData\Local\npm-cache\_logs\2026-04-06T02_12_08_052Z-debug-0.log
PS C:\Users\JCool\Project8> cd cli1
PS C:\Users\JCool\Project8\cli1> npm start

> cli1@0.0.0 start
> ng serve

Initial chunk files | Names         | Raw size
main.js             | main          |  4.02 kB |
styles.css          | styles        | 95 bytes |

                    | Initial total |  4.12 kB

Application bundle generation complete. [1.552 seconds] - 2026-04-06T02:12:37.290Z

Watch mode enabled. Watching for file changes...
NOTE: Raw file sizes do not reflect development server per-request transformations.
10:12:37 PM [vite] (client) Re-optimizing dependencies because vite config has changed
  ➜  Local:   http://localhost:4200/
  ➜  press h + enter to show help
```

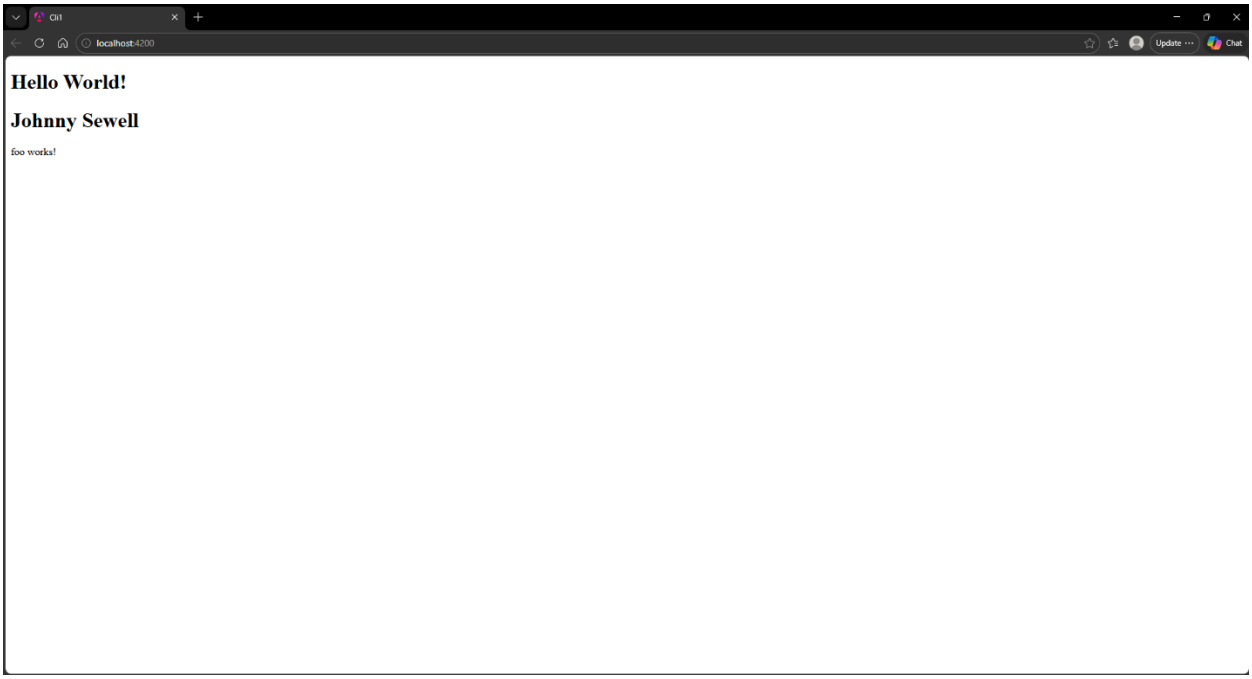
Cli1
localhost:4200
Update
Chat
Hello World!
Johnny Sewell
foo works!