


Original transaction topology

Recovered neighborhood

ego paths plus separate recovered-node component

behavioral-homophily k-NN graph

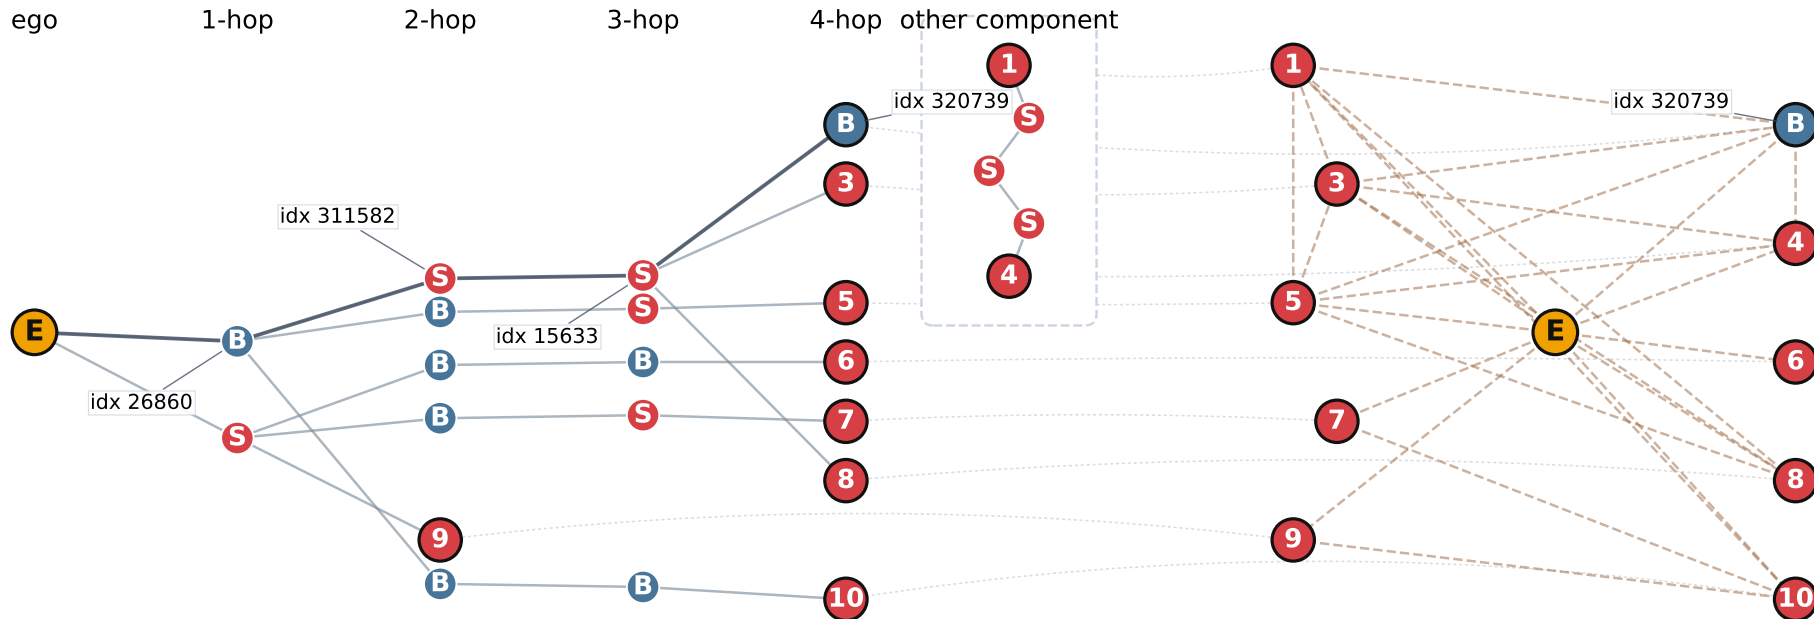

8/10 recovered nodes reachable in the ego transaction component (1 at 2-hop, 7 at 4-hop); 2 shown in a separate transaction component