

# Data type constraints

DATA CLEANING IN PYTHON



**Adel Nehme**

Content Developer @ DataCamp

# Course outline



Diagnose dirty  
data

# Course outline



Diagnose dirty  
data



Side effects of  
dirty data

# Course outline



Diagnose dirty  
data



Side effects of  
dirty data



Clean data

# Course outline



Diagnose dirty  
data



Side effects of  
dirty data



Clean data

## Chapter 1 - Common data problems

# Why do we need to clean data?



# Why do we need to clean data?



# Why do we need to clean data?



*Garbage in Garbage out*



# Data type constraints

Datatype	Example
Text data	First name, last name, address ...
Integers	# Subscribers, # products sold ...
Decimals	Temperature, \$ exchange rates ...
Binary	Is married, new customer, yes/no, ...
Dates	Order dates, ship dates ...
Categories	Marriage status, gender ...

Python data type
<code>str</code>
<code>int</code>
<code>float</code>
<code>bool</code>
<code>datetime</code>
<code>category</code>

# Strings to integers

```
# Import CSV file and output header
sales = pd.read_csv('sales.csv')
sales.head(2)
```

	SalesOrderID	Revenue	Quantity
0	43659	23153\$	12
1	43660	1457\$	2

```
# Get data types of columns
sales.dtypes
```

```
SalesOrderID    int64
Revenue         object
Quantity        int64
dtype: object
```

# String to integers

```
# Get DataFrame information  
sales.info()
```

```
<class 'pandas.core.frame.DataFrame'>  
RangeIndex: 31465 entries, 0 to 31464  
Data columns (total 3 columns):  
SalesOrderID      31465 non-null int64  
Revenue           31465 non-null object  
Quantity          31465 non-null int64  
dtypes: int64(2), object(1)  
memory usage: 737.5+ KB
```

# String to integers

```
# Print sum of all Revenue column  
sales['Revenue'].sum()
```

```
'23153$1457$36865$32474$472$27510$16158$5694$6876$40487$807$6893$9153$6895$4216..'
```

```
# Remove $ from Revenue column  
sales['Revenue'] = sales['Revenue'].str.strip('$')  
sales['Revenue'] = sales['Revenue'].astype(int)
```

```
# Verifiy that Revenue is now an integer  
assert sales['Revenue'].dtype == 'int'
```

# The assert statement

```
# This will pass  
assert 1+1 == 2
```

```
# This will not pass  
assert 1+1 == 3
```

```
AssertionError                                Traceback (most recent call last)  
      assert 1+1 == 3  
AssertionError:
```

# Numeric or categorical?

```
... marriage_status ...  
...          3 ...  
...          1 ...  
...          2 ...
```

0 = Never married    1 = Married    2 = Separated    3 = Divorced

```
df['marriage_status'].describe()
```

```
marriage_status  
...  
mean          1.4  
std           0.20  
min           0.00  
50%          1.8 ...
```

# Numeric or categorical?

```
# Convert to categorical
df["marriage_status"] = df["marriage_status"].astype('category')

df.describe()
```

```
marriage_status
count          241
unique           4
top              1
freq           120
```

# Let's practice!

DATA CLEANING IN PYTHON



# Data range constraints

DATA CLEANING IN PYTHON



**Adel Nehme**

Content Developer @ DataCamp


# Motivation

```
movies.head()
```

```
   movie_name  avg_rating
0  The Godfather         5
1  Frozen 2           3
2  Shrek              4
...
```

# Motivation

```
import matplotlib.pyplot as plt
plt.hist(movies['avg_rating'])
plt.title('Average rating of movies (1-5)')
```

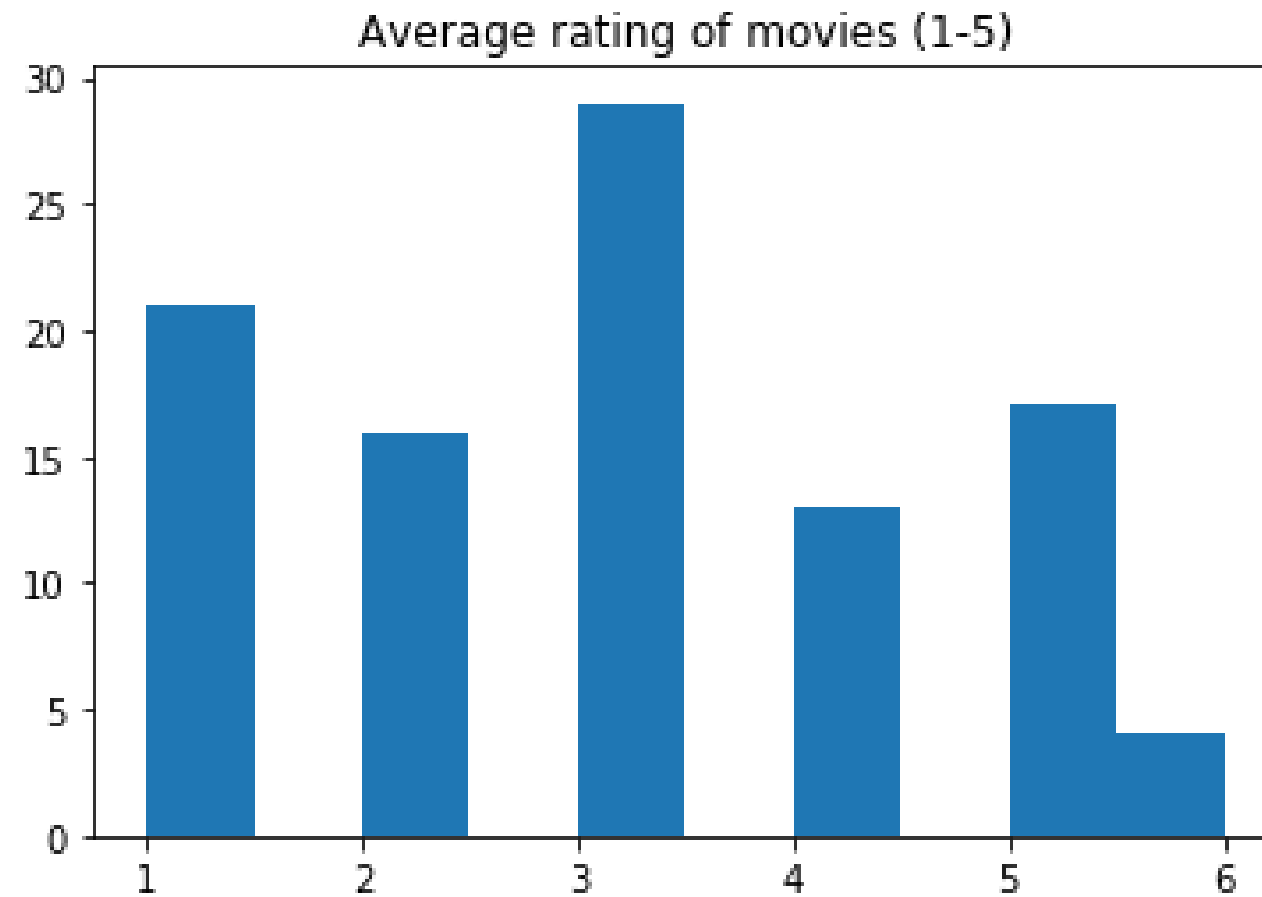

# Motivation

Can future sign-ups exist?

```
# Import date time
import datetime as dt
today_date = dt.date.today()
user_signups[user_signups['subscription_date'] > dt.date.today()]
```

	subscription_date	user_name	...	Country
0	01/05/2021	Marah	...	Nauru
1	09/08/2020	Joshua	...	Austria
2	04/01/2020	Heidi	...	Guinea
3	11/10/2020	Rina	...	Turkmenistan
4	11/07/2020	Christine	...	Marshall Islands
5	07/07/2020	Ayanna	...	Gabon

# How to deal with out of range data?

- Dropping data
- Setting custom minimums and maximums
- Treat as missing and impute
- Setting custom value depending on business assumptions

# Movie example

```
import pandas as pd
# Output Movies with rating > 5
movies[movies['avg_rating'] > 5]
```

```
      movie_name  avg_rating
23  A Beautiful Mind         6
65   La Vita e Bella         6
77           Amelie         6
```

```
# Drop values using filtering
movies = movies[movies['avg_rating'] <= 5]

# Drop values using .drop()
movies.drop(movies[movies['avg_rating'] > 5].index, inplace = True)

# Assert results
assert movies['avg_rating'].max() <= 5
```

# Movie example

```
# Convert avg_rating > 5 to 5
movies.loc[movies['avg_rating'] > 5, 'avg_rating'] = 5
```

```
# Assert statement
assert movies['avg_rating'].max() <= 5
```

*Remember, no output means it passed*

# Date range example

```
import datetime as dt
import pandas as pd
# Output data types
user_signups.dtypes
```

```
subscription_date    object
user_name            object
Country             object
dtype: object
```

```
# Convert to DateTime
user_signups['subscription_date'] = pd.to_datetime(user_signups['subscription_date'])
```

```
# Assert that conversion happened
assert user_signups['subscription_date'].dtype == 'datetime64[ns]'
```



# Date range example

```
today_date = dt.date.today()
```

## Drop the data

```
# Drop values using filtering
user_signups = user_signups[user_signups['subscription_date'] < today_date]

# Drop values using .drop()
user_signups.drop(user_signups[user_signups['subscription_date'] > today_date].index, inplace = True)
```

## Hardcode dates with upper limit

```
# Drop values using filtering
user_signups.loc[user_signups['subscription_date'] > today_date, 'subscription_date'] = today_date

# Assert is true
assert data.subscription_date.max().date() <= today_date
```

# Let's practice!

DATA CLEANING IN PYTHON

# Uniqueness constraints

DATA CLEANING IN PYTHON



**Adel Nehme**

Content Developer @ DataCamp

# What are duplicate values?

All columns have the same values

first_name	last_name	address	height	weight
Justin	Saddlemyer	Boulevard du Jardin Botanique 3, Bruxelles	193 cm	87 kg
Justin	Saddlemyer	Boulevard du Jardin Botanique 3, Bruxelles	193 cm	87 kg

# What are duplicate values?

Most columns have the same values

first_name	last_name	address	height	weight
Justin	Saddlemyer	Boulevard du Jardin Botanique 3, Bruxelles	193 cm	87 kg
Justin	Saddlemyer	Boulevard du Jardin Botanique 3, Bruxelles	<b>194 cm</b>	87 kg

# Why do they happen?



**Data Entry &  
Human Error**

# Why do they happen?



**Data Entry &  
Human Error**




**Bugs and design  
errors**

# Why do they happen?



Data Entry &  
Human Error

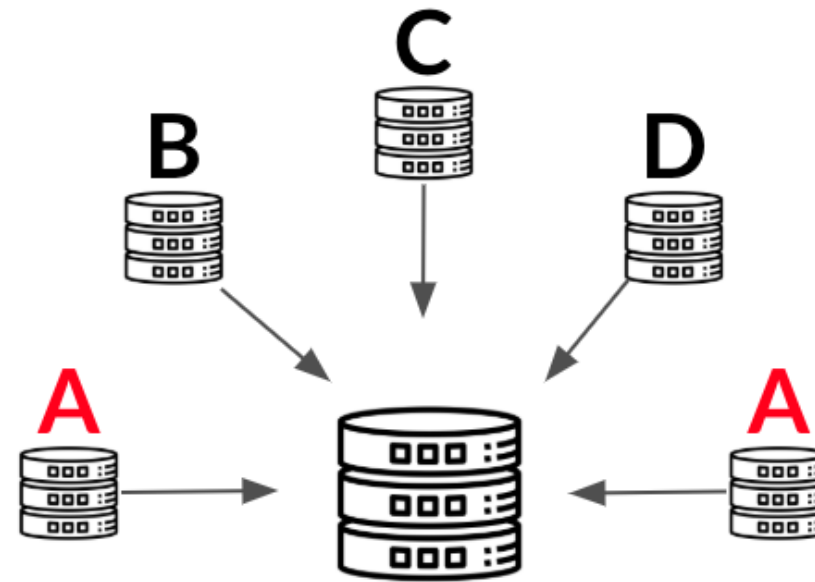

Join or merge  
Errors



Bugs and design  
errors



# How to find duplicate values?

```
# Print the header  
height_weight.head()
```

```
first_name last_name address height weight  
0      Lane      Reese      534-1559 Nam St.      181      64  
1      Ivor      Pierce      102-3364 Non Road      168      66  
2      Roary      Gibson      P.O. Box 344, 7785 Nisi Ave      191      99  
3      Shannon      Little      691-2550 Consectetuer Street      185      65  
4      Abdul      Fry      4565 Risus St.      169      65
```

# How to find duplicate values?

```
# Get duplicates across all columns
duplicates = height_weight.duplicated()
print(duplicates)
```

```
1      False
...      ....
22     True
23     False
...      ...
```

# How to find duplicate values?

```
# Get duplicate rows
duplicates = height_weight.duplicated()
height_weight[duplicates]
```

	first_name	last_name	address	height	weight
100	Mary	Colon	4674 Ut Rd.	179	75
101	Ivor	Pierce	102-3364 Non Road	168	88
102	Cole	Palmer	8366 At, Street	178	91
103	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	196	83

# How to find duplicate rows?

The `.duplicated()` method

`subset` : List of column names to check for duplication.

`keep` : Whether to keep `first` ( `'first'` ), `last` ( `'last'` ) or `all` ( `False` ) duplicate values.

```
# Column names to check for duplication
column_names = ['first_name', 'last_name', 'address']
duplicates = height_weight.duplicated(subset = column_names, keep = False)
```

# How to find duplicate rows?

```
# Output duplicate values
height_weight[duplicates]
```

	first_name	last_name	address	height	weight
1	Ivor	Pierce	102-3364 Non Road	168	66
22	Cole	Palmer	8366 At, Street	178	91
28	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	195	83
37	Mary	Colon	4674 Ut Rd.	179	75
100	Mary	Colon	4674 Ut Rd.	179	75
101	Ivor	Pierce	102-3364 Non Road	168	88
102	Cole	Palmer	8366 At, Street	178	91
103	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	196	83

# How to find duplicate rows?

```
# Output duplicate values
height_weight[duplicates].sort_values(by = 'first_name')
```

	first_name	last_name	address	height	weight
22	Cole	Palmer	8366 At, Street	178	91
102	Cole	Palmer	8366 At, Street	178	91
28	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	195	83
103	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	196	83
1	Ivor	Pierce	102-3364 Non Road	168	66
101	Ivor	Pierce	102-3364 Non Road	168	88
37	Mary	Colon	4674 Ut Rd.	179	75
100	Mary	Colon	4674 Ut Rd.	179	75

# How to find duplicate rows?

```
# Output duplicate values
height_weight[duplicates].sort_values(by = 'first_name')
```

	first_name	last_name	address	height	weight
22	Cole	Palmer	8366 At, Street	178	91
102	Cole	Palmer	8366 At, Street	178	91
28	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	195	83
103	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	196	83
1	Ivor	Pierce	102-3364 Non Road	168	66
101	Ivor	Pierce	102-3364 Non Road	168	88
37	Mary	Colon	4674 Ut Rd.	179	75
100	Mary	Colon	4674 Ut Rd.	179	75

# How to find duplicate rows?

```
# Output duplicate values
height_weight[duplicates].sort_values(by = 'first_name')
```

	first_name	last_name	address	height	weight
22	Cole	Palmer	8366 At, Street	178	91
102	Cole	Palmer	8366 At, Street	178	91
28	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	195	83
103	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	196	83
1	Ivor	Pierce	102-3364 Non Road	168	66
101	Ivor	Pierce	102-3364 Non Road	168	88
37	Mary	Colon	4674 Ut Rd.	179	75
100	Mary	Colon	4674 Ut Rd.	179	75



# How to treat duplicate values?

```
# Output duplicate values
height_weight[duplicates].sort_values(by = 'first_name')
```

	first_name	last_name	address	height	weight
22	Cole	Palmer	8366 At, Street	178	91
102	Cole	Palmer	8366 At, Street	178	91
28	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	195	83
103	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	196	83
1	Ivor	Pierce	102-3364 Non Road	168	66
101	Ivor	Pierce	102-3364 Non Road	168	88
37	Mary	Colon	4674 Ut Rd.	179	75
100	Mary	Colon	4674 Ut Rd.	179	75

# How to treat duplicate values?

The `.drop_duplicates()` method

`subset` : List of column names to check for duplication.

`keep` : Whether to keep `first` ( `'first'` ), `last` ( `'last'` ) or `all` ( `False` ) duplicate values.

`inplace` : Drop duplicated rows directly inside DataFrame without creating new object ( `True` ).

```
# Drop duplicates
height_weight.drop_duplicates(inplace = True)
```

# How to treat duplicate values?

```
# Output duplicate values
column_names = ['first_name', 'last_name', 'address']
duplicates = height_weight.duplicated(subset = column_names, keep = False)
height_weight[duplicates].sort_values(by = 'first_name')
```

	first_name	last_name	address	height	weight
28	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	195	83
103	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	196	83
1	Ivor	Pierce	102-3364 Non Road	168	66
101	Ivor	Pierce	102-3364 Non Road	168	88

# How to treat duplicate values?

```
# Output duplicate values
column_names = ['first_name', 'last_name', 'address']
duplicates = height_weight.duplicated(subset = column_names, keep = False)
height_weight[duplicates].sort_values(by = 'first_name')
```

	first_name	last_name	address	height	weight
28	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	195	83
103	Desirae	Shannon	P.O. Box 643, 5251 Consectetuer, Rd.	196	83
1	Ivor	Pierce	102-3364 Non Road	168	66
101	Ivor	Pierce	102-3364 Non Road	168	88

# How to treat duplicate values?

The `.groupby()` and `.agg()` methods

```
# Group by column names and produce statistical summaries
summaries = {'height': 'max', 'weight': 'mean'}
height_weight = height_weight.groupby(by = column_name).agg(summaries).reset_index()

# Make sure aggregation is done
duplicates = height_weight.duplicated(subset = column_names, keep = False)
height_weight[duplicates].sort_values(by = 'first_name')
```

```
first_name    last_name    address    height    weight
```

# Let's practice!

DATA CLEANING IN PYTHON