

You can view your projects by running `gcloud projects list`.

```
ssarankumar1121@cloudshell:~/linux_practice$
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

```
> bash
```

+ ✓

1

۲۲


```
Swap:          0          0          0
ssarankumar1121@cloudshell:~/linux_practice$ top
top - 01:13:27 up  2:15,  0 user,  load average: 0.03, 0.06, 0.07
Tasks:  34 total,   1 running,  33 sleeping,   0 stopped,   0 zombie
%Cpu(s):  1.9 us,  1.1 sy,   0.0 ni, 96.8 id,   0.0 wa,   0.0 hi,   0.2 si,   0.0 st
MiB Mem :  7947.4 total,  4489.9 free,  2180.6 used,  1518.7 buff/cache
MiB Swap:   0.0 total,   0.0 free,   0.0 used.  5766.8 avail Mem
```

PID	USER	PR	NI	VIRT	RES	SHR	S	%CPU	%MEM	TIME+	COMMAND
1505	ssarank+	20	0	1137168	74672	48520	S	1.3	0.9	0:02.21	node
740	ssarank+	20	0	11.3g	148896	51092	S	1.0	1.8	0:04.68	node
414	root	20	0	1234268	13112	8280	S	0.3	0.2	0:00.51	editor-proxy
1	root	20	0	4324	3436	3152	S	0.0	0.0	0:00.07	bash
9	syslog	20	0	222140	3788	2440	S	0.0	0.0	0:00.02	rsyslogd
25	root	20	0	38768	28288	11180	S	0.0	0.3	0:00.59	python
26	root	20	0	6196	2732	2492	S	0.0	0.0	0:00.00	logger
67	root	10	-10	12024	4084	2972	S	0.0	0.1	0:00.00	sshd
334	root	20	0	2087444	84284	61084	S	0.0	1.0	0:00.43	dockerd
415	root	20	0	16328	6372	5452	S	0.0	0.1	0:00.01	sudo
421	root	20	0	1226100	2696	1976	S	0.0	0.0	0:00.00	tmux-agent
448	root	20	0	1793224	45644	31744	S	0.0	0.6	0:01.22	containerd
648	root	20	0	2696	1592	1496	S	0.0	0.0	0:00.00	sleep
650	root	10	-10	13996	9828	8452	S	0.0	0.1	0:00.03	sshd
652	root	10	-10	13996	9796	8420	S	0.0	0.1	0:00.02	sshd
663	ssarank+	10	-10	14384	6440	4752	S	0.0	0.1	0:00.00	sshd
664	ssarank+	10	-10	14256	6380	4720	S	0.0	0.1	0:00.01	sshd
665	ssarank+	10	-10	7340	3768	3516	S	0.0	0.0	0:00.00	bash
668	ssarank+	10	-10	7604	4324	3712	S	0.0	0.1	0:00.00	bash
671	ssarank+	10	-10	7340	3708	3460	S	0.0	0.0	0:00.00	bash
672	ssarank+	10	-10	7340	3604	3344	S	0.0	0.0	0:00.00	start-shell.sh
673	ssarank+	10	-10	6880	3340	3036	S	0.0	0.0	0:00.00	tmux
675	ssarank+	10	-10	7016	2556	1992	S	0.0	0.0	0:00.00	tmux
676	ssarank+	10	-10	8796	5988	4120	S	0.0	0.1	0:00.05	bash
715	root	20	0	9196	4124	3744	S	0.0	0.1	0:00.00	runuser
716	ssarank+	20	0	4324	3184	2920	S	0.0	0.0	0:00.00	sh
1192	ssarank+	20	0	1048516	61332	47448	S	0.0	0.8	0:00.28	node
1461	ssarank+	20	0	42.4g	705652	62100	S	0.0	8.7	0:32.02	node
1498	ssarank+	20	0	1017672	64404	46284	S	0.0	0.8	0:00.27	node
1882	ssarank+	20	0	1878044	73120	51624	S	0.0	0.9	0:00.61	cloudcode cli

File

Edit

Selection

View

Go

Run

Terminal

Help

←

→

Q Search

⌵

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

htop

+

⌵

🗑

⋮

⌵

×

0[|||||

1[|||||

Mem[|||||

Swp[|||||

5.5%] Tasks: 34, 103 thr, 0 kthr; 1 running

5.5%] Load average: 0.01 0.05 0.07

1.89G/7.76G Uptime: 02:15:44

0K/0K]

[Main]

[I/O]

PID	USER	PRI	NI	VIRT	RES	SHR	S	CPU%	MEM%	TIME+	Command
740	ssarankuma	20	0	11.3G	146M	51092	S	1.5	1.8	0:03.48	/google/devshell/editor/code-oss-for-cloud-shell/node /google/devshell/editor/code-oss-for-cloud-shell/out/server-main.js --host=0.0.0
1505	ssarankuma	20	0	1110M	75476	48520	S	0.7	0.9	0:02.09	/google/devshell/editor/code-oss-for-cloud-shell/node /google/devshell/editor/code-oss-for-cloud-shell/out/bootstrap-fork --type=ptyHo
2703	ssarankuma	20	0	8768	5108	3672	R	0.7	0.1	0:00.16	htop
414	root	20	0	1205M	13112	8280	S	0.4	0.2	0:00.25	/google/devshell/editor/proxy/editor-proxy -static-content-dir=/google/devshell/editor/code-oss-for-cloud-shell/static-content -etag-f
747	ssarankuma	20	0	11.3G	146M	51092	S	0.4	1.8	0:00.34	/google/devshell/editor/code-oss-for-cloud-shell/node /google/devshell/editor/code-oss-for-cloud-shell/out/server-main.js --host=0.0.0
1461	ssarankuma	20	0	42.3G	689M	62100	S	0.4	8.7	0:20.70	/google/devshell/editor/code-oss-for-cloud-shell/node --dns-result-order=ipv4first /google/devshell/editor/code-oss-for-cloud-shell/ou
1	root	20	0	4324	3436	3152	S	0.0	0.0	0:00.05	/bin/bash /google/scripts/onrun.sh sleep infinity
9	syslog	20	0	216M	3788	2440	S	0.0	0.0	0:00.00	/usr/sbin/rsyslogd
10	syslog	20	0	216M	3788	2440	S	0.0	0.0	0:00.00	/usr/sbin/rsyslogd
11	syslog	20	0	216M	3788	2440	S	0.0	0.0	0:00.00	/usr/sbin/rsyslogd
12	syslog	20	0	216M	3788	2440	S	0.0	0.0	0:00.00	/usr/sbin/rsyslogd
25	root	20	0	38768	28288	11180	S	0.0	0.3	0:00.59	/usr/bin/python /usr/bin/supervisord -n -c /google/devshell/supervisord.conf --pidfile=/var/run/supervisor.pid --logfile=/var/log/supe
26	root	20	0	6196	2732	2492	S	0.0	0.0	0:00.00	logger -t supervisord
67	root	10	-10	12024	4084	2972	S	0.0	0.1	0:00.00	sshd: /usr/sbin/sshd -p 22 -o AuthorizedKeysFile=/etc/ssh/keys/authorized_keys [listener] 0 of 10-60 startups
334	root	20	0	2038M	84284	61084	S	0.0	1.0	0:00.19	/usr/bin/dockerd -p /var/run/docker.pid --mtu=1460 --registry-mirror=https://asia-mirror.gcr.io
391	root	20	0	2038M	84284	61084	S	0.0	1.0	0:00.04	/usr/bin/dockerd -p /var/run/docker.pid --mtu=1460 --registry-mirror=https://asia-mirror.gcr.io
392	root	20	0	2038M	84284	61084	S	0.0	1.0	0:00.01	/usr/bin/dockerd -p /var/run/docker.pid --mtu=1460 --registry-mirror=https://asia-mirror.gcr.io
393	root	20	0	2038M	84284	61084	S	0.0	1.0	0:00.03	/usr/bin/dockerd -p /var/run/docker.pid --mtu=1460 --registry-mirror=https://asia-mirror.gcr.io
394	root	20	0	2038M	84284	61084	S	0.0	1.0	0:00.00	/usr/bin/dockerd -p /var/run/docker.pid --mtu=1460 --registry-mirror=https://asia-mirror.gcr.io
415	root	20	0	16328	6372	5452	S	0.0	0.1	0:00.01	sudo /google/devshell/tmux-agent
416	root	20	0	1205M	13112	8280	S	0.0	0.2	0:00.11	/google/devshell/editor/proxy/editor-proxy -static-content-dir=/google/devshell/editor/code-oss-for-cloud-shell/static-content -etag-f
417	root	20	0	1205M	13112	8280	S	0.0	0.2	0:00.12	/google/devshell/editor/proxy/editor-proxy -static-content-dir=/google/devshell/editor/code-oss-for-cloud-shell/static-content -etag-f
418	root	20	0	1205M	13112	8280	S	0.0	0.2	0:00.00	/google/devshell/editor/proxy/editor-proxy -static-content-dir=/google/devshell/editor/code-oss-for-cloud-shell/static-content -etag-f
421	root	20	0	1197M	2696	1976	S	0.0	0.0	0:00.00	/google/devshell/tmux-agent
428	root	20	0	1197M	2696	1976	S	0.0	0.0	0:00.00	/google/devshell/tmux-agent
429	root	20	0	1197M	2696	1976	S	0.0	0.0	0:00.00	/google/devshell/tmux-agent
430	root	20	0	1197M	2696	1976	S	0.0	0.0	0:00.00	/google/devshell/tmux-agent
437	root	20	0	1205M	13112	8280	S	0.0	0.2	0:00.08	/google/devshell/editor/proxy/editor-proxy -static-content-dir=/google/devshell/editor/code-oss-for-cloud-shell/static-content -etag-f
444	root	20	0	2038M	84284	61084	S	0.0	1.0	0:00.00	/usr/bin/dockerd -p /var/run/docker.pid --mtu=1460 --registry-mirror=https://asia-mirror.gcr.io
448	root	20	0	1751M	45644	31744	S	0.0	0.6	0:00.05	containerd --config /var/run/docker/containerd/containerd.toml

F1Help

F2Setup

F3Search

F4Filter

F5Tree

F6SortBy

F7Nice

F8Nice

F9Kill

F10Quit

1898 ssarank+ 20 0 31.4g 217052 60636 S 0.0 2.7 0:09.05 node

ssarankumar1121@cloudshell:~/linux_practice\$ htop

ssarankumar1121@cloudshell:~/linux_practice\$ lsb_release

No LSB modules are available.

ssarankumar1121@cloudshell:~/linux_practice\$ lsb_release

No LSB modules are available.

ssarankumar1121@cloudshell:~/linux_practice\$ lsb_release -a

No LSB modules are available.

Distributor ID: Ubuntu

Description: Ubuntu 24.04.4 LTS

Release: 24.04

Codename: noble

ssarankumar1121@cloudshell:~/linux_practice\$ arch

x86_64

```
ssarankumar1121@cloudshell:~/linux_practice$ ls
```

```
docs file1.txt file2.txt sample.txt testdir
```

```
ssarankumar1121@cloudshell:~/linux_practice$ ls -l
```

```
total 20
```

```
drwxr-xr-x 2 ssarankumar1121 ssarankumar1121 4096 May 15 01:12 docs
```

```
-rw-r--r-- 1 ssarankumar1121 ssarankumar1121  21 May 15 01:12 file1.txt
```

```
-rw-r--r-- 1 ssarankumar1121 ssarankumar1121  13 May 15 01:12 file2.txt
```

```
-rw-r--r-- 1 ssarankumar1121 ssarankumar1121  15 May 15 01:18 sample.txt
```

```
drwxr-xr-x 2 ssarankumar1121 ssarankumar1121 4096 May 15 01:12 testdir
```

```
ssarankumar1121@cloudshell:~/linux_practice$ cd testdir
```

```
ssarankumar1121@cloudshell:~/linux_practice/testdir$ pwd
```

```
/home/ssarankumar1121/linux_practice/testdir
```

```
ssarankumar1121@cloudshell:~/linux_practice/testdir$ mkdir newfolder1
```

```
ssarankumar1121@cloudshell:~/linux_practice/testdir$ rmdir newfolder2
```

```
rmdir: failed to remove 'newfolder2': No such file or directory
```

```
ssarankumar1121@cloudshell:~/linux_practice/testdir$ ls
```

```
newfolder1
```

```
ssarankumar1121@cloudshell:~/linux_practice/testdir$ cd linux_practice
```

```
bash: cd: linux_practice: No such file or directory
```

```
○ ssarankumar1121@cloudshell:~/linux_practice/testdir$ █
```



```
ssarankumar1121@cloudshell:~/linux_practice$ cd chapter2dir
pwd
/home/ssarankumar1121/linux_practice/chapter2dir
ssarankumar1121@cloudshell:~/linux_practice/chapter2dir$ mkdir newdir
ssarankumar1121@cloudshell:~/linux_practice/chapter2dir$ ls
newdir
ssarankumar1121@cloudshell:~/linux_practice/chapter2dir$ rmdir newdir
ssarankumar1121@cloudshell:~/linux_practice/chapter2dir$ ls
ssarankumar1121@cloudshell:~/linux_practice/chapter2dir$ touch newfile.txt
ssarankumar1121@cloudshell:~/linux_practice/chapter2dir$ ls
newfile.txt
ssarankumar1121@cloudshell:~/linux_practice/chapter2dir$ rm newfile.txt
ssarankumar1121@cloudshell:~/linux_practice/chapter2dir$ ls
ssarankumar1121@cloudshell:~/linux_practice/chapter2dir$ cp sample.txt copy.txt
cp: cannot stat 'sample.txt': No such file or directory
ssarankumar1121@cloudshell:~/linux_practice/chapter2dir$ cd ..
ssarankumar1121@cloudshell:~/linux_practice$ echo "Linux Practice" > sample.txt
ssarankumar1121@cloudshell:~/linux_practice$ ls
chapter2dir docs file1.txt file2.txt sample.txt
ssarankumar1121@cloudshell:~/linux_practice$ cp sample.txt copy.txt
ssarankumar1121@cloudshell:~/linux_practice$ ls
chapter2dir copy.txt docs file1.txt file2.txt sample.txt
ssarankumar1121@cloudshell:~/linux_practice$ mv copy.txt moved.txt
ssarankumar1121@cloudshell:~/linux_practice$ ls
chapter2dir docs file1.txt file2.txt moved.txt sample.txt
ssarankumar1121@cloudshell:~/linux_practice$ ln -s sample.txt link.txt
ssarankumar1121@cloudshell:~/linux_practice$ ls -l
total 24
drwxr-xr-x 2 ssarankumar1121 ssarankumar1121 4096 May 15 01:27 chapter2dir
drwxr-xr-x 2 ssarankumar1121 ssarankumar1121 4096 May 15 01:12 docs
-rw-r--r-- 1 ssarankumar1121 ssarankumar1121 21 May 15 01:12 file1.txt
-rw-r--r-- 1 ssarankumar1121 ssarankumar1121 13 May 15 01:12 file2.txt
lrwxrwxrwx 1 ssarankumar1121 ssarankumar1121 10 May 15 01:29 link.txt -> sample.txt
-rw-r--r-- 1 ssarankumar1121 ssarankumar1121 15 May 15 01:28 moved.txt
-rw-r--r-- 1 ssarankumar1121 ssarankumar1121 15 May 15 01:28 sample.txt
ssarankumar1121@cloudshell:~/linux_practice$
```

```
ssarankumar1121@cloudshell:~/linux_practice$ echo "Linux line 1" > chapter3.txt
echo "Linux line 2" >> chapter3.txt
echo "Linux line 3" >> chapter3.txt
echo "Linux line 4" >> chapter3.txt
echo "Linux line 5" >> chapter3.txt
ssarankumar1121@cloudshell:~/linux_practice$ ls
chapter2dir chapter3.txt docs file1.txt file2.txt link.txt moved.txt sample.txt
ssarankumar1121@cloudshell:~/linux_practice$ cat chapter3.txt
Linux line 1
Linux line 2
Linux line 3
Linux line 4
Linux line 5
ssarankumar1121@cloudshell:~/linux_practice$ more chapter3.txt
Linux line 1
Linux line 2
Linux line 3
Linux line 4
Linux line 5
ssarankumar1121@cloudshell:~/linux_practice$ less chapter3.txt
ssarankumar1121@cloudshell:~/linux_practice$ tail chapter3.txt
Linux line 1
Linux line 2
Linux line 3
Linux line 4
Linux line 5
ssarankumar1121@cloudshell:~/linux_practice$ head chapter3.txt
Linux line 1
Linux line 2
Linux line 3
Linux line 4
Linux line 5
ssarankumar1121@cloudshell:~/linux_practice$ nano chapter3.txt
○ ssarankumar1121@cloudshell:~/linux_practice$
```



Search



PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

nano



GNU nano 7.2

chapter3.txt

Linux line 1

Linux line 2

Linux line 3

Linux line 4

Linux line 5

Help
 Exit

Write Out
 Read File

Where Is
 Replace

Cut
 Paste

Execute
 Justify

Location
 Go To Line




```
ssarankumar1121@cloudshell:~/linux_practice$ nano chapter3.txt
ssarankumar1121@cloudshell:~/linux_practice$ nano chapter3.txt
ssarankumar1121@cloudshell:~/linux_practice$ vim chapter3.txt
ssarankumar1121@cloudshell:~/linux_practice$ awk '{print $1}' chapter3.txt
```

Linux

Linux

Linux

Linux

Linux

```
ssarankumar1121@cloudshell:~/linux_practice$ sed 's/Linux/Ubuntu/' chapter3.txt
```

Ubuntu line 1

Ubuntu line 2

Ubuntu line 3

Ubuntu line 4

Ubuntu line 5

```
ssarankumar1121@cloudshell:~/linux_practice$
```





Search



PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

bash



```
ssarankumar1121@cloudshell:~/linux_practice$ touch secure.txt
ssarankumar1121@cloudshell:~/linux_practice$ chmod 777 secure.txt
ls -l secure.txt
-rwxrwxrwx 1 ssarankumar1121 ssarankumar1121 0 May 15 01:37 secure.txt
ssarankumar1121@cloudshell:~/linux_practice$ chown --help
Usage: chown [OPTION]... [OWNER]][:[GROUP]] FILE...
       or: chown [OPTION]... --reference=RFILE FILE...
Change the owner and/or group of each FILE to OWNER and/or GROUP.
With --reference, change the owner and group of each FILE to those of RFILE.

  -c, --changes          like verbose but report only when a change is made
  -f, --silent, --quiet  suppress most error messages
  -v, --verbose          output a diagnostic for every file processed
                        --dereference    affect the referent of each symbolic link (this is
                                        the default), rather than the symbolic link itself
  -h, --no-dereference   affect symbolic links instead of any referenced file
                        (useful only on systems that can change the
                        ownership of a symlink)
  --from=CURRENT_OWNER:CURRENT_GROUP
                        change the owner and/or group of each file only if
                        its current owner and/or group match those specified
                        here. Either may be omitted, in which case a match
                        is not required for the omitted attribute
  --no-preserve-root     do not treat '/' specially (the default)
  --preserve-root        fail to operate recursively on '/'
  --reference=RFILE      use RFILE's owner and group rather than specifying
                        OWNER:GROUP values. RFILE is always dereferenced.
  -R, --recursive        operate on files and directories recursively

The following options modify how a hierarchy is traversed when the -R
option is also specified. If more than one is specified, only the final
one takes effect.

  -H          if a command line argument is a symbolic link
              to a directory, traverse it
  -L          traverse every symbolic link to a directory
              encountered
  -P          do not traverse any symbolic links (default)
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

bash + ▾ || 🗑️ ... | ⚡ ✕

or available locally via: info '(coreutils) chown invocation'

ssarankumar1121@cloudshell:~/linux_practice\$ chgrp --help

Usage: chgrp [OPTION]... GROUP FILE...

or: chgrp [OPTION]... --reference=RFILE FILE...


Change the group of each FILE to GROUP.

With --reference, change the group of each FILE to that of RFILE.

-c, --changes	like verbose but report only when a change is made
-f, --silent, --quiet	suppress most error messages
-v, --verbose	output a diagnostic for every file processed
--dereference	affect the referent of each symbolic link (this is the default), rather than the symbolic link itself
-h, --no-dereference	affect symbolic links instead of any referenced file (useful only on systems that can change the ownership of a symlink)
--no-preserve-root	do not treat '/' specially (the default)
--preserve-root	fail to operate recursively on '/'
--reference=RFILE	use RFILE's group rather than specifying a GROUP. RFILE is always dereferenced if a symbolic link.
-R, --recursive	operate on files and directories recursively

The following options modify how a hierarchy is traversed when the -R option is also specified. If more than one is specified, only the final one takes effect.

-H	if a command line argument is a symbolic link to a directory, traverse it
-L	traverse every symbolic link to a directory encountered
-P	do not traverse any symbolic links (default)
--help	display this help and exit
--version	output version information and exit

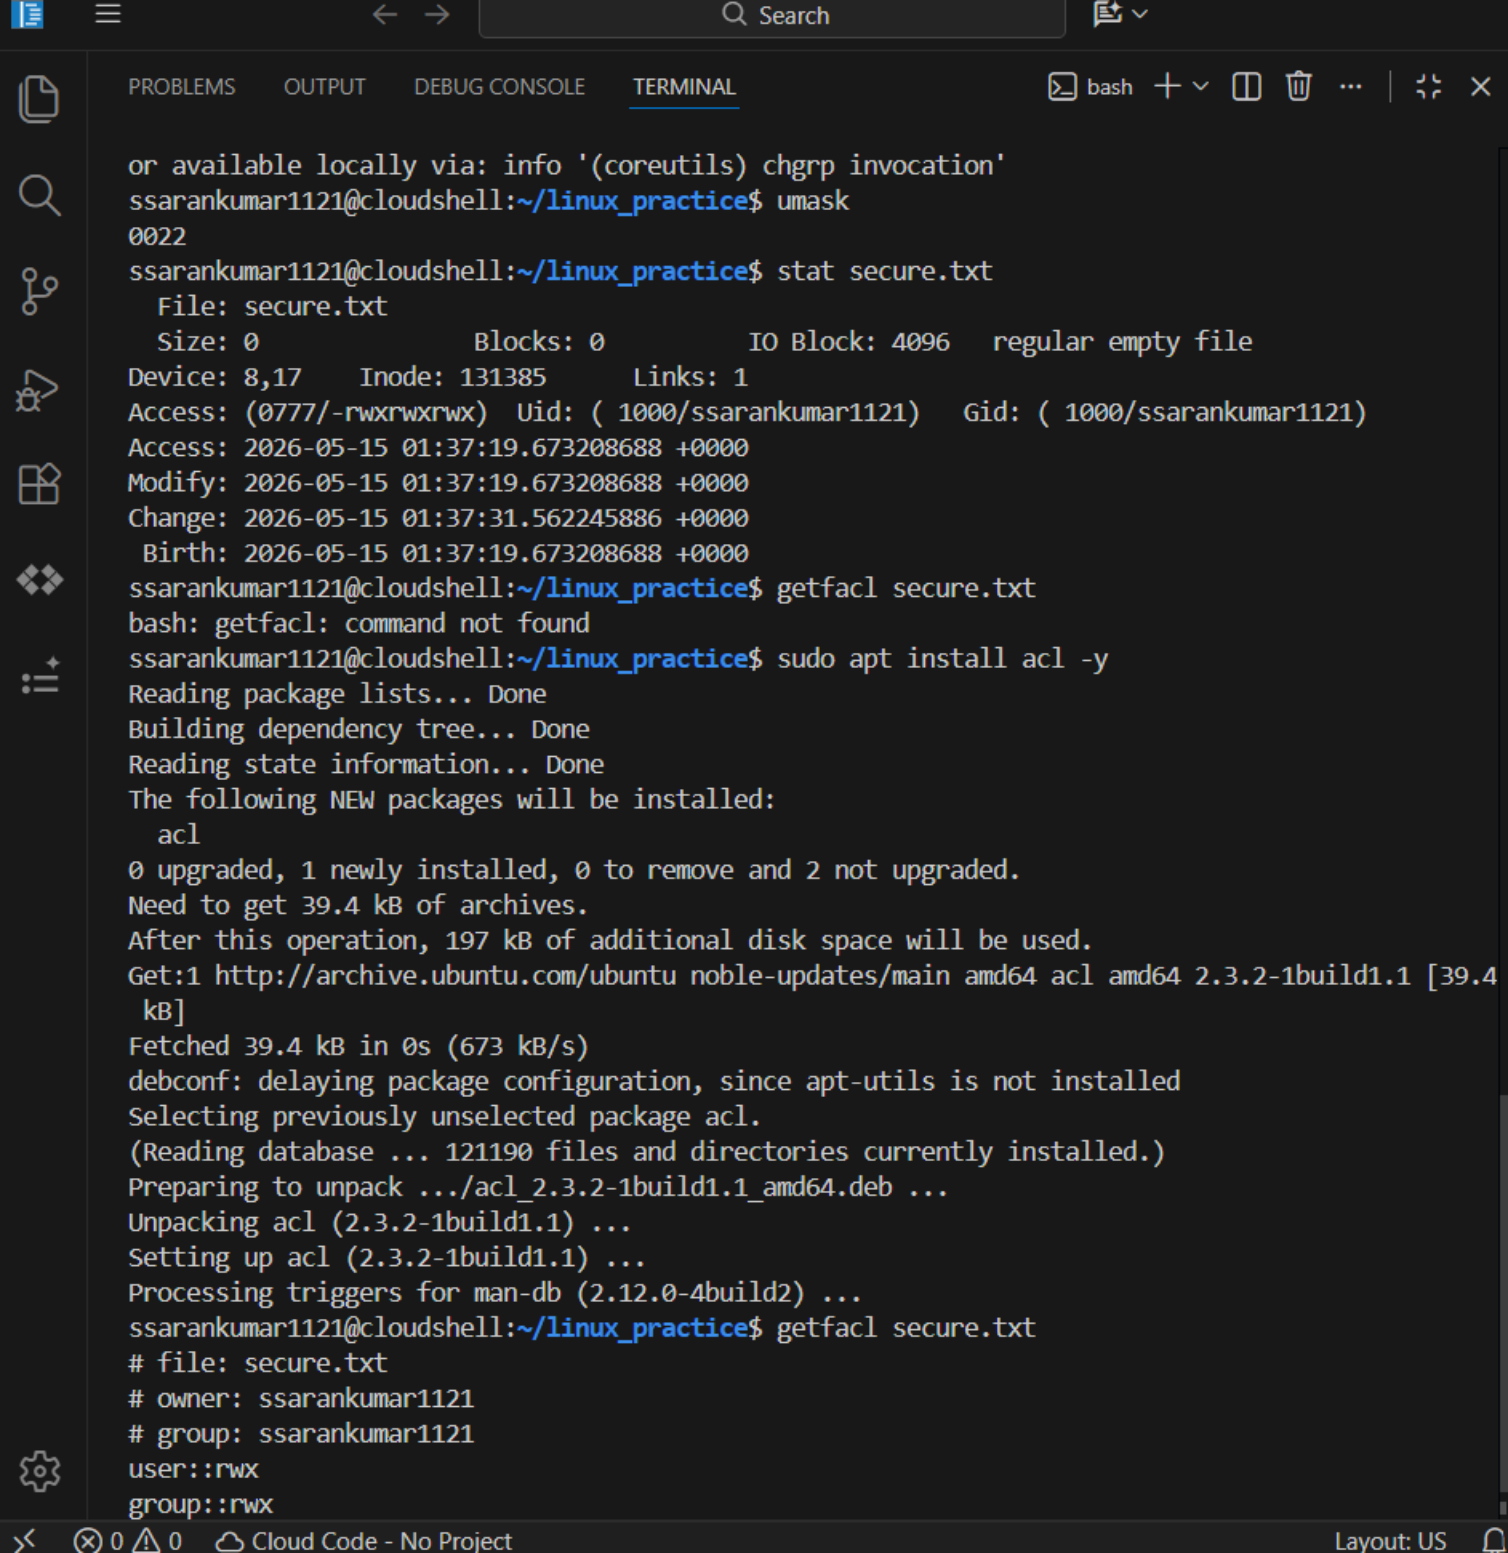

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

bash + v [icon] [icon] ... | [icon] [icon] X

```
or available locally via: info '(coreutils) chgrp invocation'
ssarankumar1121@cloudshell:~/linux_practice$ umask
0022
ssarankumar1121@cloudshell:~/linux_practice$ stat secure.txt
  File: secure.txt
  Size: 0          Blocks: 0          IO Block: 4096   regular empty file
Device: 8,17   Inode: 131385    Links: 1
Access: (0777/-rwxrwxrwx)  Uid: ( 1000/ssarankumar1121)   Gid: ( 1000/ssarankumar1121)
Access: 2026-05-15 01:37:19.673208688 +0000
Modify: 2026-05-15 01:37:19.673208688 +0000
Change: 2026-05-15 01:37:31.562245886 +0000
 Birth: 2026-05-15 01:37:19.673208688 +0000
ssarankumar1121@cloudshell:~/linux_practice$ getfacl secure.txt
bash: getfacl: command not found
ssarankumar1121@cloudshell:~/linux_practice$ sudo apt install acl -y
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following NEW packages will be installed:
  acl
0 upgraded, 1 newly installed, 0 to remove and 2 not upgraded.
Need to get 39.4 kB of archives.
After this operation, 197 kB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 acl amd64 2.3.2-1build1.1 [39.4
kB]
Fetched 39.4 kB in 0s (673 kB/s)
debconf: delaying package configuration, since apt-utils is not installed
Selecting previously unselected package acl.
(Reading database ... 121190 files and directories currently installed.)
Preparing to unpack .../acl_2.3.2-1build1.1_amd64.deb ...
Unpacking acl (2.3.2-1build1.1) ...
Setting up acl (2.3.2-1build1.1) ...
Processing triggers for man-db (2.12.0-4build2) ...
ssarankumar1121@cloudshell:~/linux_practice$ getfacl secure.txt
# file: secure.txt
# owner: ssarankumar1121
# group: ssarankumar1121
user::rwx
group::rwx
```



Search



PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

bash



```
ssarankumar1121@cloudshell:~/linux_practice$ lsattr secure.txt
```

```
-----e----- secure.txt
```

```
ssarankumar1121@cloudshell:~/linux_practice$ chatter --help
```

```
Usage: chatter [-RVvf] [--+=aAcCdDeijPsStTuFx] [-p project] [-v version] files...
```

```
ssarankumar1121@cloudshell:~/linux_practice$ usermod --help
```

```
Usage: usermod [options] LOGIN
```

Options:

- a, --append append the user to the supplemental GROUPS mentioned by the -G option without removing the user from other groups
- b, --badname allow bad names
- c, --comment COMMENT new value of the GECOS field
- d, --home HOME_DIR new home directory for the user account
- e, --expiredate EXPIRE_DATE set account expiration date to EXPIRE_DATE
- f, --inactive INACTIVE set password inactive after expiration to INACTIVE
- g, --gid GROUP force use GROUP as new primary group
- G, --groups GROUPS new list of supplementary GROUPS
- h, --help display this help message and exit
- l, --login NEW_LOGIN new value of the login name
- L, --lock lock the user account
- m, --move-home move contents of the home directory to the new location (use only with -d)
- o, --non-unique allow using duplicate (non-unique) UID
- p, --password PASSWORD use encrypted password for the new password
- P, --prefix PREFIX_DIR prefix directory where are located the /etc/* files
- r, --remove remove the user from only the supplemental GROUPS mentioned by the -G option without removing the user from other groups
- R, --root CHROOT_DIR directory to chroot into
- s, --shell SHELL new login shell for the user account
- u, --uid UID new UID for the user account
- U, --unlock unlock the user account
- v, --add-subuids FIRST-LAST add range of subordinate uids
- V, --del-subuids FIRST-LAST remove range of subordinate uids
- w, --add-subgids FIRST-LAST add range of subordinate gids
- W, --del-subgids FIRST-LAST remove range of subordinate gids
- Z, --selinux-user SEUSER new SELinux user mapping for the user account



```
ssarankumar1121@cloudshell:~/linux_practice$ ifconfig
docker0: flags=4096<UP,BROADCAST,MULTICAST> mtu 1460
    inet 172.17.0.1 netmask 255.255.0.0 broadcast 172.17.255.255
    ether 42:52:0c:52:d7:21 txqueuelen 0 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

```
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1460
    inet 10.88.0.3 netmask 255.255.0.0 broadcast 10.88.255.255
    ether 5e:3f:b5:2a:48:39 txqueuelen 1000 (Ethernet)
    RX packets 34854 bytes 11294987 (11.2 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 27291 bytes 30477277 (30.4 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

```
lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    loop txqueuelen 1000 (Local Loopback)
    RX packets 49165 bytes 57926635 (57.9 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 49165 bytes 57926635 (57.9 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

```
ssarankumar1121@cloudshell:~/linux_practice$ ip addr
```

```
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
2: eth0@if7: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1460 qdisc noqueue state UP group default qlen 1000
    link/ether 5e:3f:b5:2a:48:39 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 10.88.0.3/16 brd 10.88.255.255 scope global eth0
        valid_lft forever preferred_lft forever
3: docker0: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1460 qdisc noqueue state DOWN group default
    link/ether 42:52:0c:52:d7:21 brd ff:ff:ff:ff:ff:ff
    inet 172.17.0.1/16 brd 172.17.255.255 scope global docker0
```

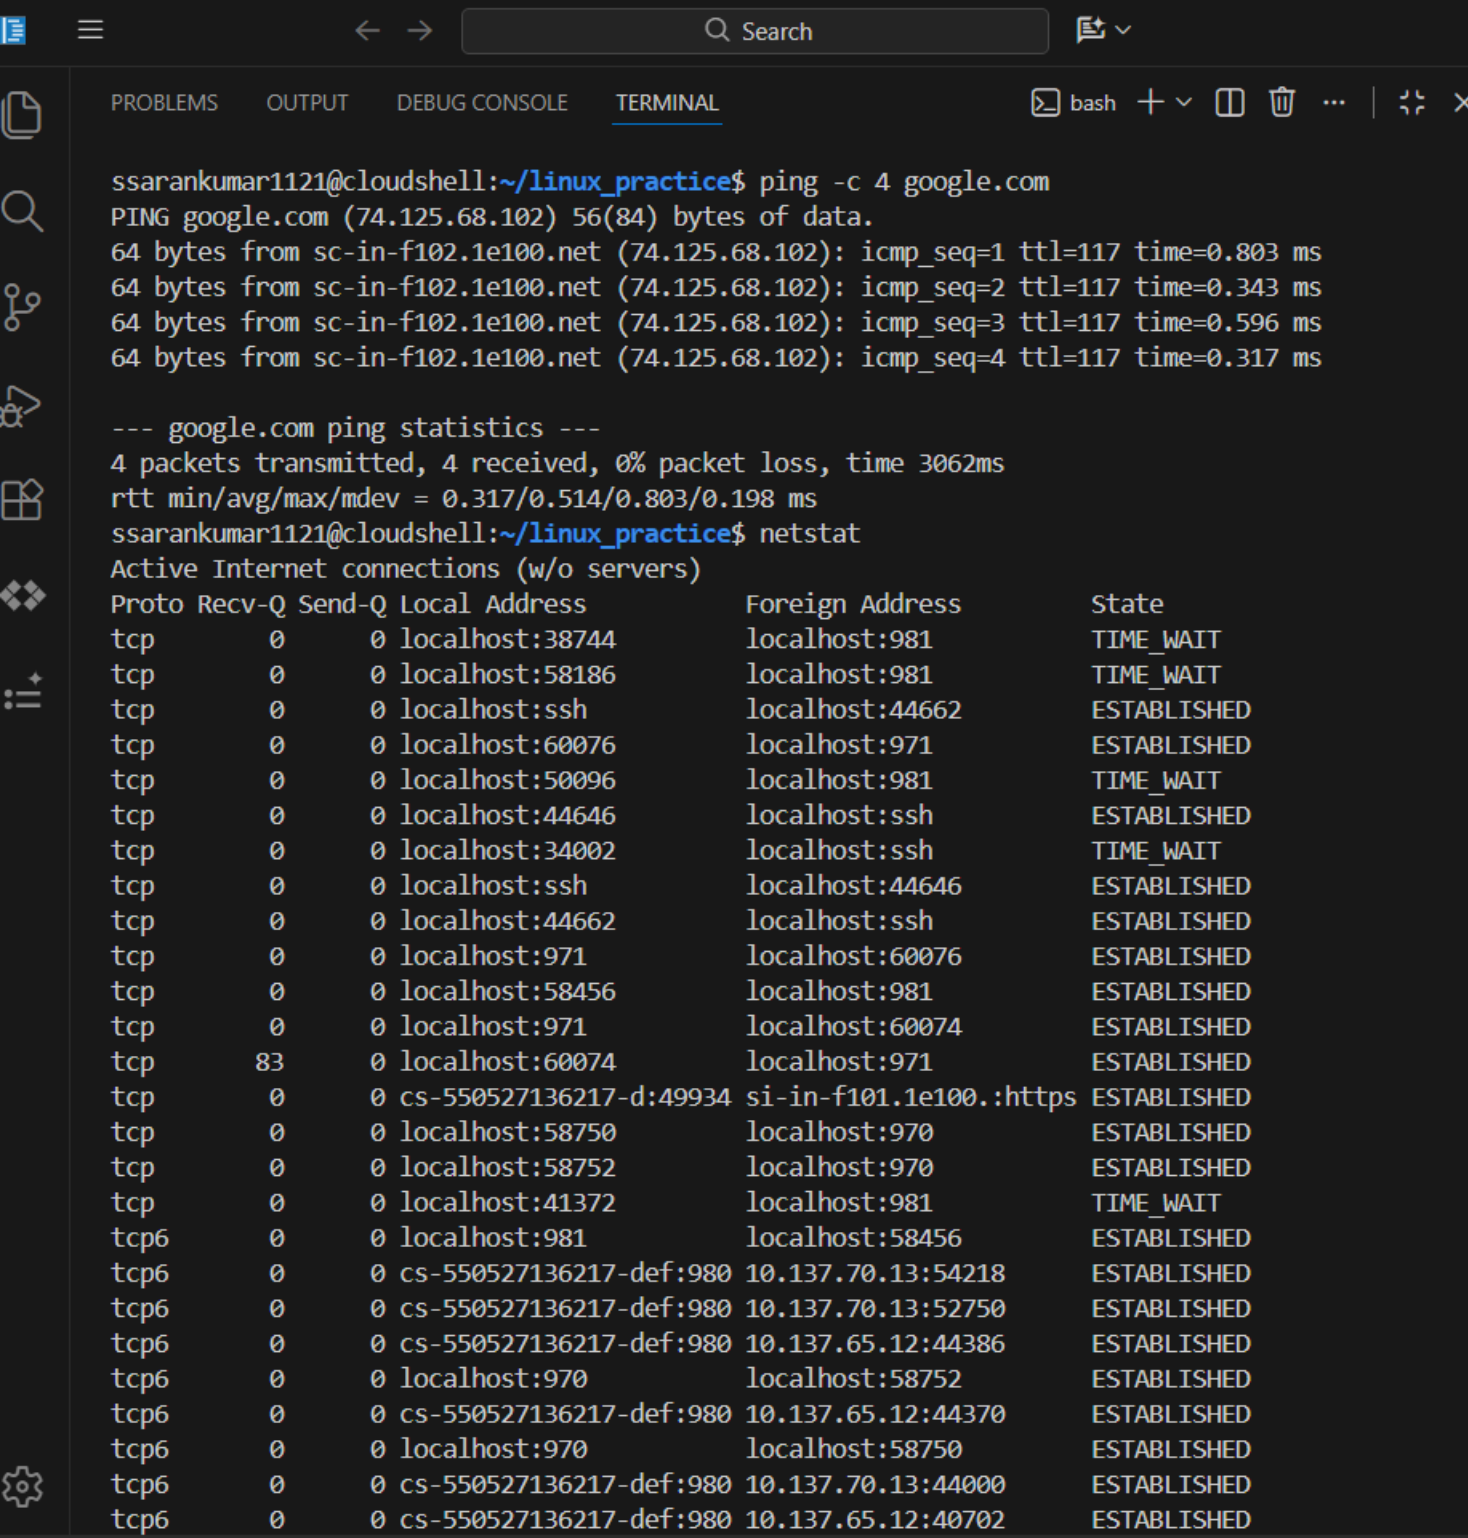

```
ssarankumar1121@cloudshell:~/linux_practice$ ping -c 4 google.com
PING google.com (74.125.68.102) 56(84) bytes of data:
64 bytes from sc-in-f102.1e100.net (74.125.68.102): icmp_seq=1 ttl=117 time=0.803 ms
64 bytes from sc-in-f102.1e100.net (74.125.68.102): icmp_seq=2 ttl=117 time=0.343 ms
64 bytes from sc-in-f102.1e100.net (74.125.68.102): icmp_seq=3 ttl=117 time=0.596 ms
64 bytes from sc-in-f102.1e100.net (74.125.68.102): icmp_seq=4 ttl=117 time=0.317 ms
```

```
--- google.com ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3062ms
rtt min/avg/max/mdev = 0.317/0.514/0.803/0.198 ms
ssarankumar1121@cloudshell:~/linux_practice$ netstat
```

Active Internet connections (w/o servers)

Proto	Recv-Q	Send-Q	Local Address	Foreign Address	State
tcp	0	0	localhost:38744	localhost:981	TIME_WAIT
tcp	0	0	localhost:58186	localhost:981	TIME_WAIT
tcp	0	0	localhost:ssh	localhost:44662	ESTABLISHED
tcp	0	0	localhost:60076	localhost:971	ESTABLISHED
tcp	0	0	localhost:50096	localhost:981	TIME_WAIT
tcp	0	0	localhost:44646	localhost:ssh	ESTABLISHED
tcp	0	0	localhost:34002	localhost:ssh	TIME_WAIT
tcp	0	0	localhost:ssh	localhost:44646	ESTABLISHED
tcp	0	0	localhost:44662	localhost:ssh	ESTABLISHED
tcp	0	0	localhost:971	localhost:60076	ESTABLISHED
tcp	0	0	localhost:58456	localhost:981	ESTABLISHED
tcp	0	0	localhost:971	localhost:60074	ESTABLISHED
tcp	83	0	localhost:60074	localhost:971	ESTABLISHED
tcp	0	0	cs-550527136217-d:49934	si-in-f101.1e100.:https	ESTABLISHED
tcp	0	0	localhost:58750	localhost:970	ESTABLISHED
tcp	0	0	localhost:58752	localhost:970	ESTABLISHED
tcp	0	0	localhost:41372	localhost:981	TIME_WAIT
tcp6	0	0	localhost:981	localhost:58456	ESTABLISHED
tcp6	0	0	cs-550527136217-def:980	10.137.70.13:54218	ESTABLISHED
tcp6	0	0	cs-550527136217-def:980	10.137.70.13:52750	ESTABLISHED
tcp6	0	0	cs-550527136217-def:980	10.137.65.12:44386	ESTABLISHED
tcp6	0	0	localhost:970	localhost:58752	ESTABLISHED
tcp6	0	0	cs-550527136217-def:980	10.137.65.12:44370	ESTABLISHED
tcp6	0	0	localhost:970	localhost:58750	ESTABLISHED
tcp6	0	0	cs-550527136217-def:980	10.137.70.13:44000	ESTABLISHED
tcp6	0	0	cs-550527136217-def:980	10.137.65.12:40702	ESTABLISHED

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL


```
unix 3      [ ]      STREAM    CONNECTED    32093
unix 2      [ ]      DGRAM     CONNECTED    27422
ssarankumar1121@cloudshell:~/linux_practice$ ss
Netid      State      Recv-Q     Send-Q               Peer    Address:Port               Process
u_str      ESTAB      0           0                               *      32096
u_str      ESTAB      0           0                               *      32097
u_str      ESTAB      0           0                               *      27560
u_str      ESTAB      0           0                               *      28305
u_str      ESTAB      0           0                               *      29656
u_str      ESTAB      0           0                               *      29657
u_str      ESTAB      0           0                               *      30854
u_str      ESTAB      0           0                               *      30853
u_str      ESTAB      0           0                               *      32065
u_str      ESTAB      0           0                               *      32064
u_str      ESTAB      0           0                               *      31224
u_str      ESTAB      0           0                               *      31225
u_str      ESTAB      0           0                               *      29655
u_str      ESTAB      0           0                               *      29654
u_dgr      ESTAB      0           0                               *      28865
u_str      ESTAB      0           0                               *      26973
u_str      ESTAB      0           0                               *      32060
u_str      ESTAB      0           0                               *      32061
u_str      ESTAB      0           0                               *      29716
u_str      ESTAB      0           0                               *      29717
u_str      ESTAB      0           0                               *      32097
u_str      ESTAB      0           0                               *      32096
u_str      ESTAB      0           0                               /var/run/docker/containerd/containerd.sock 27558
u_str      ESTAB      0           0                               *      28301
u_str      ESTAB      0           0                               *      28871
u_str      ESTAB      0           0                               *      28870
u_str      ESTAB      0           0                               *      32061
u_str      ESTAB      0           0                               *      32060
u_str      ESTAB      0           0                               *      28835
u_str      ESTAB      0           0                               *      0
u_str      ESTAB      0           0                               *      29306
u_str      ESTAB      0           0                               *      29305
u_str      ESTAB      0           0                               *      32064
u_str      ESTAB      0           0                               *      32065
```



PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

bash + ▾ □ 🗑️ ⋮ | 🔍 ✕

```
(Reading database ... 121200 files and directories currently installed.)
Preparing to unpack .../traceroute_1%3a2.1.5-1_amd64.deb ...
Unpacking traceroute (1:2.1.5-1) ...
Setting up traceroute (1:2.1.5-1) ...
update-alternatives: using /usr/bin/traceroute.db to provide /usr/bin/traceroute (traceroute) i
n auto mode
update-alternatives: warning: skip creation of /usr/share/man/man1/traceroute.1.gz because asso
ciated file /usr/share/man/man1/traceroute.db.1.gz (of link group traceroute) doesn't exist
update-alternatives: using /usr/bin/traceroute6.db to provide /usr/bin/traceroute6 (traceroute6
) in auto mode
update-alternatives: warning: skip creation of /usr/share/man/man1/traceroute6.1.gz because ass
ociated file /usr/share/man/man1/traceroute6.db.1.gz (of link group traceroute6) doesn't exist
update-alternatives: using /usr/bin/lft.db to provide /usr/bin/lft (lft) in auto mode
update-alternatives: warning: skip creation of /usr/share/man/man1/lft.1.gz because associated
file /usr/share/man/man1/lft.db.1.gz (of link group lft) doesn't exist
update-alternatives: using /usr/bin/traceproto.db to provide /usr/bin/traceproto (traceproto) i
n auto mode
update-alternatives: warning: skip creation of /usr/share/man/man1/traceproto.1.gz because asso
ciated file /usr/share/man/man1/traceproto.db.1.gz (of link group traceproto) doesn't exist
update-alternatives: using /usr/sbin/tcptraceroute.db to provide /usr/sbin/tcptraceroute (tcptr
aceroute) in auto mode
update-alternatives: warning: skip creation of /usr/share/man/man8/tcptraceroute.8.gz because a
ssociated file /usr/share/man/man8/tcptraceroute.db.8.gz (of link group tcptraceroute) doesn't
exist
Processing triggers for man-db (2.12.0-4build2) ...
ssarankumar1121@cloudshell:~/linux_practice$ traceroute google.com
traceroute to google.com (172.253.118.138), 30 hops max, 60 byte packets
 1  10.88.0.1 (10.88.0.1)  0.061 ms  0.015 ms  0.013 ms
 2  * * *
 3  * * *
 4  * * *
 5  * * *
 6  * * *
 7  * * *
 8  * * *
 9  * * *
10  * * *
11  * * sl-in-f138.1e100.net (172.253.118.138)  0.519 ms
ssarankumar1121@cloudshell:~/linux_practice$
```

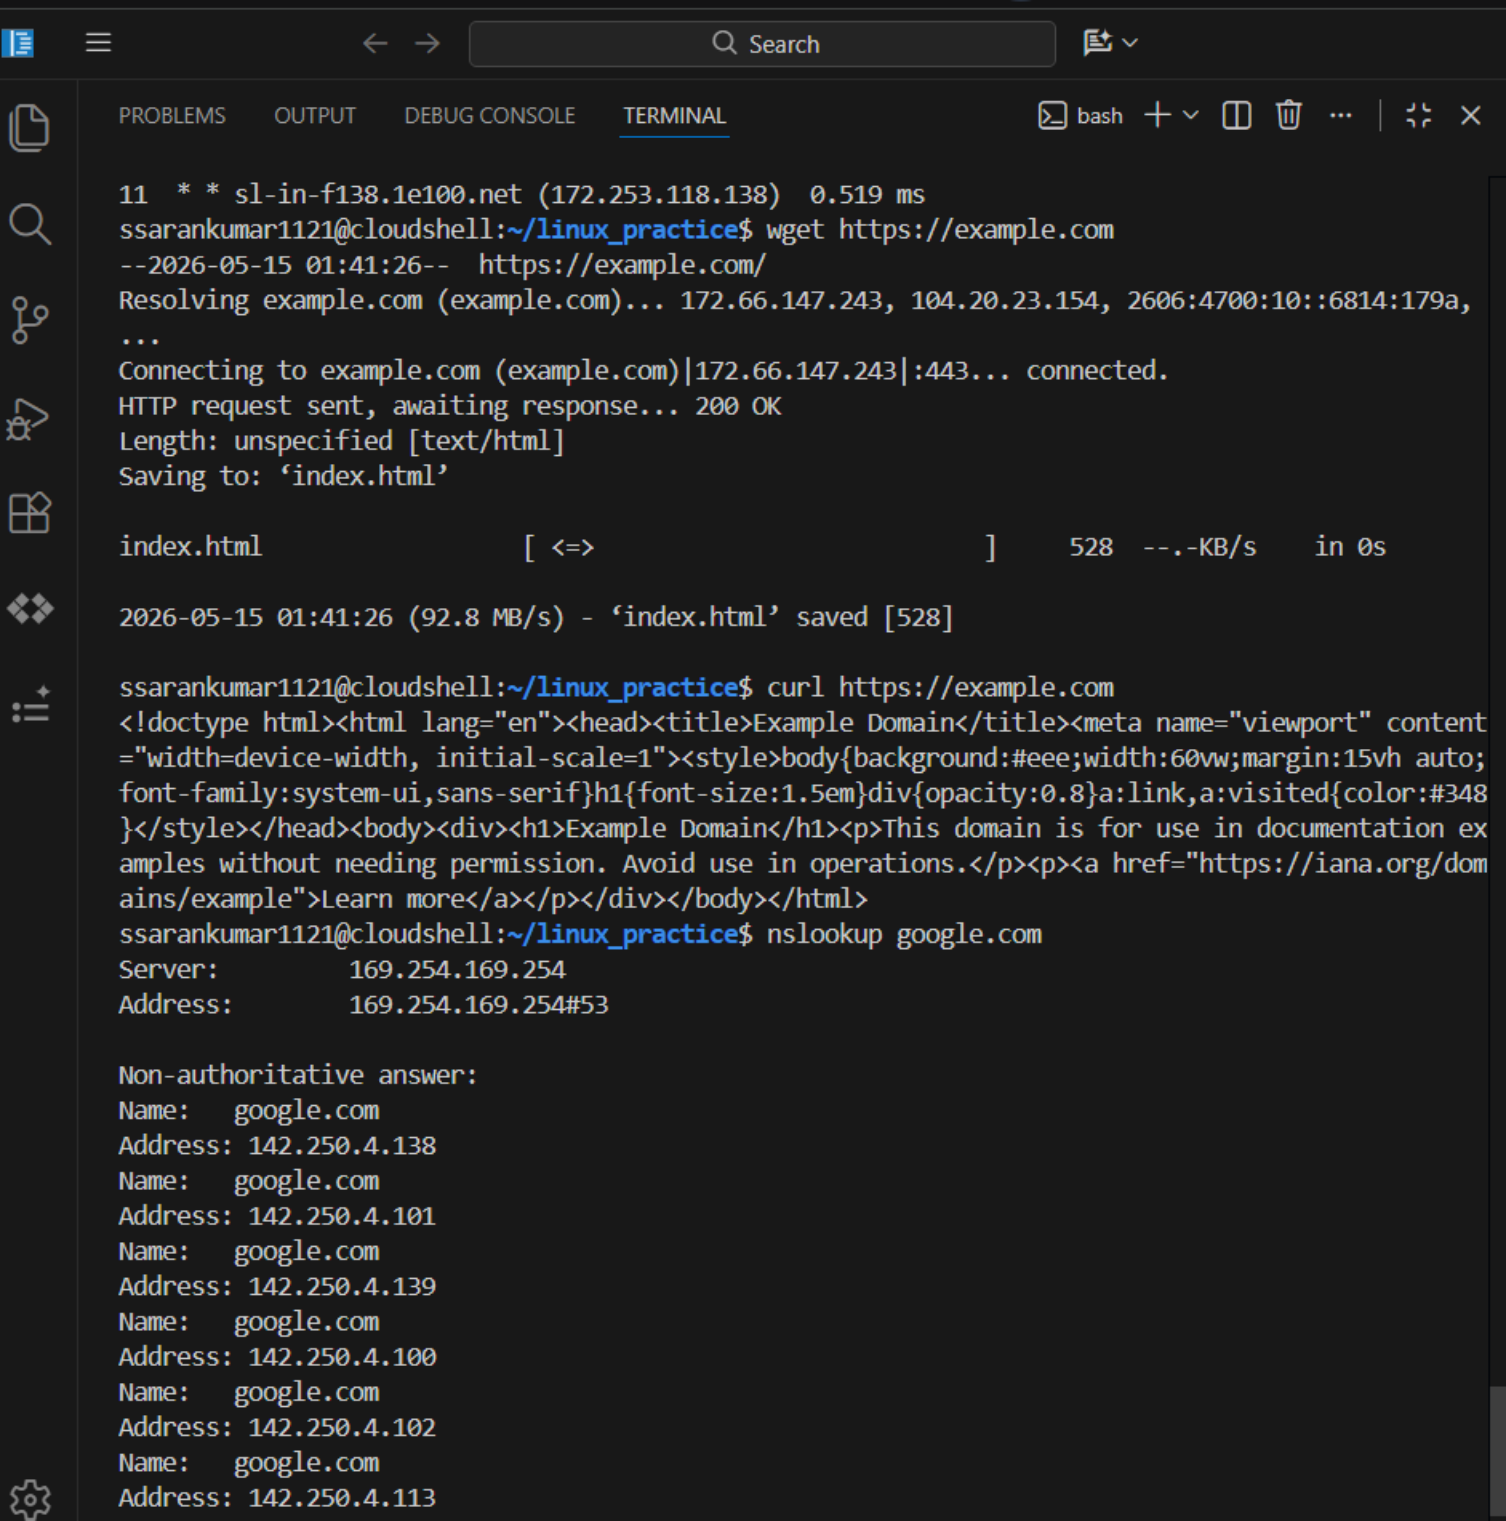

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

bash + v [] ... | ✂ ✕

```
11 * * sl-in-f138.1e100.net (172.253.118.138) 0.519 ms
ssarankumar1121@cloudshell:~/linux_practice$ wget https://example.com
--2026-05-15 01:41:26-- https://example.com/
Resolving example.com (example.com)... 172.66.147.243, 104.20.23.154, 2606:4700:10::6814:179a,
...
Connecting to example.com (example.com)|172.66.147.243|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: unspecified [text/html]
Saving to: 'index.html'
```

```
index.html          [ <=> ]      528  --.-KB/s   in 0s
```

```
2026-05-15 01:41:26 (92.8 MB/s) - 'index.html' saved [528]
```

```
ssarankumar1121@cloudshell:~/linux_practice$ curl https://example.com
<!doctype html><html lang="en"><head><title>Example Domain</title><meta name="viewport" content
="width=device-width, initial-scale=1"><style>body{background:#eee;width:60vw;margin:15vh auto;
font-family:system-ui,sans-serif}h1{font-size:1.5em}div{opacity:0.8}a:link,a:visited{color:#348
}</style></head><body><div><h1>Example Domain</h1><p>This domain is for use in documentation ex
amples without needing permission. Avoid use in operations.</p><p><a href="https://iana.org/dom
ains/example">Learn more</a></p></div></body></html>
ssarankumar1121@cloudshell:~/linux_practice$ nslookup google.com
Server:      169.254.169.254
Address:     169.254.169.254#53
```


```
Non-authoritative answer:
```

```
Name:   google.com
Address: 142.250.4.138
Name:   google.com
Address: 142.250.4.101
Name:   google.com
Address: 142.250.4.139
Name:   google.com
Address: 142.250.4.100
Name:   google.com
Address: 142.250.4.102
Name:   google.com
Address: 142.250.4.113
```



Address: 2404:6800:4003:c11::8b

```
ssarankumar1121@cloudshell:~/linux_practice$
```





PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

bash



ssarankumar1121@cloudshell:~/linux_practices\$

ssarankumar1121@cloudshell:~/linux_practices\$ sleep 300 &
[1] 5222

ssarankumar1121@cloudshell:~/linux_practices\$ ps

PID	TTY	TIME	CMD
1978	pts/4	00:00:00	bash
5222	pts/4	00:00:00	sleep
5238	pts/4	00:00:00	ps

ssarankumar1121@cloudshell:~/linux_practices\$ pgrep sleep
648
5222

ssarankumar1121@cloudshell:~/linux_practices\$ pgrep sleep
648
5222

ssarankumar1121@cloudshell:~/linux_practices\$ sleep 300



PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

bash



```
ssarankumar1121@cloudshell:~/linux_practice$ ps
```

PID	TTY	TIME	CMD
1978	pts/4	00:00:00	bash
5222	pts/4	00:00:00	sleep
5238	pts/4	00:00:00	ps

```
ssarankumar1121@cloudshell:~/linux_practice$ pgrep sleep
```

```
648
```

```
5222
```

```
ssarankumar1121@cloudshell:~/linux_practice$ pgrep sleep
```

```
648
```

```
5222
```

```
ssarankumar1121@cloudshell:~/linux_practice$ sleep 300
```

```
^Z
```

```
[2]+  Stopped                  sleep 300
```

```
ssarankumar1121@cloudshell:~/linux_practice$ bg
```

```
[2]+ sleep 300 &
```

```
ssarankumar1121@cloudshell:~/linux_practice$ fg
```

```
sleep 300
```

```
^C
```

```
ssarankumar1121@cloudshell:~/linux_practice$ sleep 300 &
```

```
[2] 5448
```

```
ssarankumar1121@cloudshell:~/linux_practice$ jobs
```

```
[1]-  Running                  sleep 300 &
```

```
[2]+  Running                  sleep 300 &
```

```
ssarankumar1121@cloudshell:~/linux_practice$ nice -n 10 sleep 300 &
```

```
[3] 5481
```

```
ssarankumar1121@cloudshell:~/linux_practice$ pgrep sleep
```

```
648
```

```
5222
```

```
5448
```

```
5481
```

```
ssarankumar1121@cloudshell:~/linux_practice$ renice 5 PID
```

```
renice: bad process ID value: PID
```

```
ssarankumar1121@cloudshell:~/linux_practice$ pkill sleep
```

```
pkill: killing pid 648 failed: Operation not permitted
```

```
[1]  Terminated              sleep 300
```

```
[2]-  Terminated              sleep 300
```

```
[3]+  Terminated              nice -n 10 sleep 300
```

```
ssarankumar1121@cloudshell:~/linux_practice$ pgrep sleep
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

bash + - [Window icon] [Close icon] ... | [Fullscreen icon] [Close icon]

```
ssarankumar1121@cloudshell:~/linux_practice$ df -h
Filesystem                Size      Used Avail Use% Mounted on
overlay                  95G        73G   22G   78% /
tmpfs                     64M         0    64M    0% /dev
/dev/sda1                 95G        73G   22G   78% /root
/dev/disk/by-id/google-home-part1  4.8G    151M    4.4G    4% /home
/dev/root                 2.0G    1.3G    715M   64% /usr/lib/modules
shm                       64M         0    64M    0% /dev/shm
ssarankumar1121@cloudshell:~/linux_practice$ du -sh ~/linux_practice
36K      /home/ssarankumar1121/linux_practice
ssarankumar1121@cloudshell:~/linux_practice$ fdisk --help
bash: fdisk: command not found
ssarankumar1121@cloudshell:~/linux_practice$ mkfs --help

Usage:
mkfs [options] [-t <type>] [fs-options] <device> [<size>]

Make a Linux filesystem.

Options:
-t, --type=<type>    filesystem type; when unspecified, ext2 is used
fs-options           parameters for the real filesystem builder
<device>            path to the device to be used
<size>              number of blocks to be used on the device
-V, --verbose        explain what is being done;
                     specifying -V more than once will cause a dry-run
-h, --help           display this help
-V, --version        display version

For more details see mkfs(8).
ssarankumar1121@cloudshell:~/linux_practice$ umount --help

Usage:
umount [-hv]
umount -a [options]
umount [options] <source> | <directory>

Unmount filesystems.
```

0 0 Cloud Code - No Project

Layout: US

ssarankumar1121@cloudshell:~/linux_practice\$ blkid

ssarankumar1121@cloudshell:~/linux_practice\$ lsblk

NAME	MAJ:MIN	RM	SIZE	RO	TYPE	MOUNTPOINTS
------	---------	----	------	----	------	-------------

sda	8:0	0	100G	0	disk	
-----	-----	---	------	---	------	--

└sda1	8:1	0	95.8G	0	part	/run/google/devshell /var/lib/docker /etc/ssh/keys /var/config/tmux /etc/resolv.conf /etc/hostname /etc/hosts /root
-------	-----	---	-------	---	------	--

└sda2	8:2	0	16M	0	part	
-------	-----	---	-----	---	------	--

└sda3	8:3	0	2G	0	part	
-------	-----	---	----	---	------	--

└sda4	8:4	0	16M	0	part	
-------	-----	---	-----	---	------	--

└sda5	8:5	0	2G	0	part	
-------	-----	---	----	---	------	--

└sda6	8:6	0	512B	0	part	
-------	-----	---	------	---	------	--

└sda7	8:7	0	512B	0	part	
-------	-----	---	------	---	------	--

└sda8	8:8	0	16M	0	part	
-------	-----	---	-----	---	------	--

└sda9	8:9	0	512B	0	part	
-------	-----	---	------	---	------	--

└sda10	8:10	0	512B	0	part	
--------	------	---	------	---	------	--

└sda11	8:11	0	8M	0	part	
--------	------	---	----	---	------	--

└sda12	8:12	0	32M	0	part	
--------	------	---	-----	---	------	--

sdb	8:16	0	5G	0	disk	
-----	------	---	----	---	------	--

└sdb1	8:17	0	5G	0	part	/home
-------	------	---	----	---	------	-------

ssarankumar1121@cloudshell:~/linux_practice\$ parted --help

bash: parted: command not found

ssarankumar1121@cloudshell:~/linux_practice\$ sudo apt install parted -y

Reading package lists... Done

Building dependency tree... Done

Reading state information... Done

The following additional packages will be installed:

dmidecode libparted2t64

Suggested packages:

libparted-dev libparted-i18n parted-doc

The following NEW packages will be installed:

dmidecode libparted2t64 parted

0 upgraded, 3 newly installed, 0 to remove and 2 not upgraded.

Need to get 268 kB of archives.

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

bash

+

⌵

🗑

⋮

🔍

✕

Processing triggers for man-db (2.12.0-4build2) ...

ssarankumar1121@cloudshell:~/linux_practice\$ parted --help

Usage: parted [OPTION]... [DEVICE [COMMAND [PARAMETERS]...]...]...

Apply COMMANDS with PARAMETERS to DEVICE. If no COMMAND(s) are given, run in interactive mode.

OPTIONS:

-h, --help

displays this help message

-l, --list

lists partition layout on all block devices

-m, --machine

displays machine parseable output

-j, --json

displays JSON output

-s, --script

never prompts for user intervention

-f, --fix

in script mode, fix instead of abort when asked

-v, --version

displays the version

-a, --align=[none|cyl|min|opt]

alignment for new partitions

COMMANDS:

align-check TYPE N

alignment

check partition N for TYPE(min|opt)

help [COMMAND]

COMMAND

print general help, or help on

mklabel,mktable LABEL-TYPE

table)

create a new disklabel (partition

mkpart PART-TYPE [FS-TYPE] START END

name NUMBER NAME

make a partition

print [devices|free|list,all]

available devices, or free space, or all found partitions

display the partition table, or

quit

exit program

rescue START END

and END

rescue a lost partition near START

resizepart NUMBER END

resize partition NUMBER

rm NUMBER

delete partition NUMBER

select DEVICE

choose the device to edit

disk_set FLAG STATE

toggle the state of FLAG on selected

disk_toggle [FLAG]

device

toggle the state of FLAG on selected

set NUMBER FLAG STATE

toggle the state of FLAG on partition

toggle [NUMBER [FLAG]]

NUMBER

toggle the state of FLAG on partition

0

0

Cloud Code - No Project

Layout: US



Search



PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

top



ssarankumar1121@cloudshell:~/linux_practice\$ top

top - 01:49:09 up 2:50, 0 user, load average: 0.03, 0.03, 0.00

Tasks: 34 total, 1 running, 33 sleeping, 0 stopped, 0 zombie

%Cpu(s): 5.0 us, 0.0 sy, 0.0 ni, 95.0 id, 0.0 wa, 0.0 hi, 0.0 si, 0.0 st

MiB Mem : 7947.4 total, 4305.2 free, 2193.5 used, 1696.7 buff/cache

MiB Swap: 0.0 total, 0.0 free, 0.0 used. 5753.9 avail Mem

PID	USER	PR	NI	VIRT	RES	SHR	S	%CPU	%MEM	TIME+	COMMAND
740	ssarank+	20	0	11.3g	151040	51212	S	9.1	1.9	0:09.32	node
1	root	20	0	4324	3436	3152	S	0.0	0.0	0:00.07	bash
9	syslog	20	0	222140	3792	2440	S	0.0	0.0	0:00.04	rsyslogd
25	root	20	0	38768	28288	11180	S	0.0	0.3	0:00.91	python
26	root	20	0	6196	2732	2492	S	0.0	0.0	0:00.00	logger
67	root	10	-10	12024	4084	2972	S	0.0	0.1	0:00.03	sshd
334	root	20	0	2087444	84280	61100	S	0.0	1.0	0:00.73	dockerd
414	root	20	0	1234268	13144	8280	S	0.0	0.2	0:02.29	editor-proxy
415	root	20	0	16328	6372	5452	S	0.0	0.1	0:00.01	sudo
421	root	20	0	1226100	2696	1976	S	0.0	0.0	0:00.00	tmux-agent
448	root	20	0	1793224	45456	31744	S	0.0	0.6	0:03.82	containerd
648	root	20	0	2696	1592	1496	S	0.0	0.0	0:00.00	sleep
650	root	10	-10	13996	9828	8452	S	0.0	0.1	0:00.03	sshd
652	root	10	-10	13996	9796	8420	S	0.0	0.1	0:00.02	sshd
663	ssarank+	10	-10	14384	6440	4752	S	0.0	0.1	0:00.00	sshd
664	ssarank+	10	-10	14256	6380	4720	S	0.0	0.1	0:00.01	sshd
665	ssarank+	10	-10	7340	3768	3516	S	0.0	0.0	0:00.00	bash
668	ssarank+	10	-10	7604	4324	3712	S	0.0	0.1	0:00.00	bash
671	ssarank+	10	-10	7340	3708	3460	S	0.0	0.0	0:00.00	bash
672	ssarank+	10	-10	7340	3604	3344	S	0.0	0.0	0:00.00	start-shell.sh
673	ssarank+	10	-10	6880	3340	3036	S	0.0	0.0	0:00.00	tmux
675	ssarank+	10	-10	7016	2556	1992	S	0.0	0.0	0:00.02	tmux
676	ssarank+	10	-10	8796	5988	4120	S	0.0	0.1	0:00.05	bash
715	root	20	0	9196	4124	3744	S	0.0	0.1	0:00.00	runuser
716	ssarank+	20	0	4324	3184	2920	S	0.0	0.0	0:00.00	sh
1192	ssarank+	20	0	1048516	61532	47448	S	0.0	0.8	0:00.46	node
1461	ssarank+	20	0	42.4g	705880	62100	S	0.0	8.7	0:35.20	node
1498	ssarank+	20	0	1017672	64520	46284	S	0.0	0.8	0:00.38	node
1505	ssarank+	20	0	1144592	84860	48580	S	0.0	1.0	0:08.83	node
1882	ssarank+	20	0	1878044	73056	51624	S	0.0	0.9	0:00.98	cloudcode_cli
1889	ssarank+	20	0	1853860	617080	49028	S	0.0	7.6	0:09.24	node

0[|
1[|
Mem[|||||||||
Swp[|

3.9%] Tasks: 36, 103 thr, 0 kthr; 2 running
4.0%] Load average: 0.02 0.03 0.00
1.90G/7.76G] Uptime: 02:51:10
0K/0K]

[Main] [I/O]

PID	USER	PRI	NI	VIRT	RES	SHR	S	CPU%	MEM%	TIME+	Command
416	root	20	0	1205M	13144	8280	S	0.7	0.2	0:00.51	/google/devshell/editor
475	root	20	0	1751M	45456	31744	S	0.7	0.6	0:00.79	containerd --config /va
740	ssarankuma	20	0	11.3G	147M	51212	S	0.7	1.9	0:07.32	/google/devshell/editor
750	ssarankuma	20	0	11.3G	147M	51212	S	0.7	1.9	0:00.41	/google/devshell/editor
1505	ssarankuma	20	0	1117M	84876	48580	S	0.7	1.0	0:07.85	/google/devshell/editor
5996	ssarankuma	20	0	8372	4676	3676	R	0.7	0.1	0:00.03	htop
1	root	20	0	4324	3436	3152	S	0.0	0.0	0:00.06	/bin/bash /google/scrip
9	syslog	20	0	216M	3792	2440	S	0.0	0.0	0:00.00	/usr/sbin/rsyslogd
10	syslog	20	0	216M	3792	2440	S	0.0	0.0	0:00.01	/usr/sbin/rsyslogd
11	syslog	20	0	216M	3792	2440	S	0.0	0.0	0:00.00	/usr/sbin/rsyslogd
12	syslog	20	0	216M	3792	2440	S	0.0	0.0	0:00.00	/usr/sbin/rsyslogd
25	root	20	0	38768	28288	11180	S	0.0	0.3	0:00.92	/usr/bin/python /usr/bi
26	root	20	0	6196	2732	2492	S	0.0	0.0	0:00.00	logger -t supervisord
67	root	10	-10	12024	4084	2972	S	0.0	0.1	0:00.03	sshd: /usr/sbin/sshd -p
334	root	20	0	2038M	84280	61100	S	0.0	1.0	0:00.19	/usr/bin/dockerd -p /va
391	root	20	0	2038M	84280	61100	S	0.0	1.0	0:00.09	/usr/bin/dockerd -p /va
392	root	20	0	2038M	84280	61100	S	0.0	1.0	0:00.01	/usr/bin/dockerd -p /va
393	root	20	0	2038M	84280	61100	S	0.0	1.0	0:00.10	/usr/bin/dockerd -p /va
394	root	20	0	2038M	84280	61100	S	0.0	1.0	0:00.00	/usr/bin/dockerd -p /va
414	root	20	0	1205M	13144	8280	S	0.0	0.2	0:00.66	/google/devshell/editor
415	root	20	0	16328	6372	5452	S	0.0	0.1	0:00.01	sudo /google/devshell/t
417	root	20	0	1205M	13144	8280	S	0.0	0.2	0:00.59	/google/devshell/editor
418	root	20	0	1205M	13144	8280	S	0.0	0.2	0:00.00	/google/devshell/editor
421	root	20	0	1197M	2696	1976	S	0.0	0.0	0:00.00	/google/devshell/tmux-a
428	root	20	0	1197M	2696	1976	S	0.0	0.0	0:00.00	/google/devshell/tmux-a
429	root	20	0	1197M	2696	1976	S	0.0	0.0	0:00.00	/google/devshell/tmux-a
430	root	20	0	1197M	2696	1976	S	0.0	0.0	0:00.00	/google/devshell/tmux-a
437	root	20	0	1205M	13144	8280	S	0.0	0.2	0:00.43	/google/devshell/editor
444	root	20	0	2038M	84280	61100	S	0.0	1.0	0:00.00	/usr/bin/dockerd -p /va
448	root	20	0	1751M	45456	31744	S	0.0	0.6	0:00.05	containerd --config /va

F1Help F2Setup F3Search F4Filter F5Tree F6SortBy F7Nice F8Nice + F9Kill F10Quit



 sudo     ... |  

Reading state information... Done



Search



bash



PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

```
ssarankumar1121@cloudshell:~/linux_practice$ useradd --help
```


```
Usage: useradd [options] LOGIN
```

```
useradd -D
```

```
useradd -D [options]
```

Options:

--badname	do not check for bad names
-b, --base-dir BASE_DIR	base directory for the home directory of the new account
--btrfs-subvolume-home	use BTRFS subvolume for home directory
-c, --comment COMMENT	GECOS field of the new account
-d, --home-dir HOME_DIR	home directory of the new account
-D, --defaults	print or change default useradd configuration
-e, --expiredate EXPIRE_DATE	expiration date of the new account
-f, --inactive INACTIVE	password inactivity period of the new account
-F, --add-subids-for-system	add entries to sub[uid]id even when adding a system user
-g, --gid GROUP	name or ID of the primary group of the new account
-G, --groups GROUPS	list of supplementary groups of the new account
-h, --help	display this help message and exit
-k, --skel SKEL_DIR	use this alternative skeleton directory
-K, --key KEY=VALUE	override /etc/login.defs defaults
-l, --no-log-init	do not add the user to the lastlog and faillog databases
-m, --create-home	create the user's home directory
-M, --no-create-home	do not create the user's home directory
-N, --no-user-group	do not create a group with the same name as the user
-o, --non-unique	allow to create users with duplicate (non-unique) UID
-p, --password PASSWORD	encrypted password of the new account
-r, --system	create a system account
-R, --root CHROOT_DIR	directory to chroot into
-P, --prefix PREFIX_DIR	prefix directory where are located the /etc/* files
-s, --shell SHELL	login shell of the new account
-u, --uid UID	user ID of the new account
-U, --user-group	create a group with the same name as the user
-Z, --selinux-user SEUSER	use a specific SEUSER for the SELinux user mapping

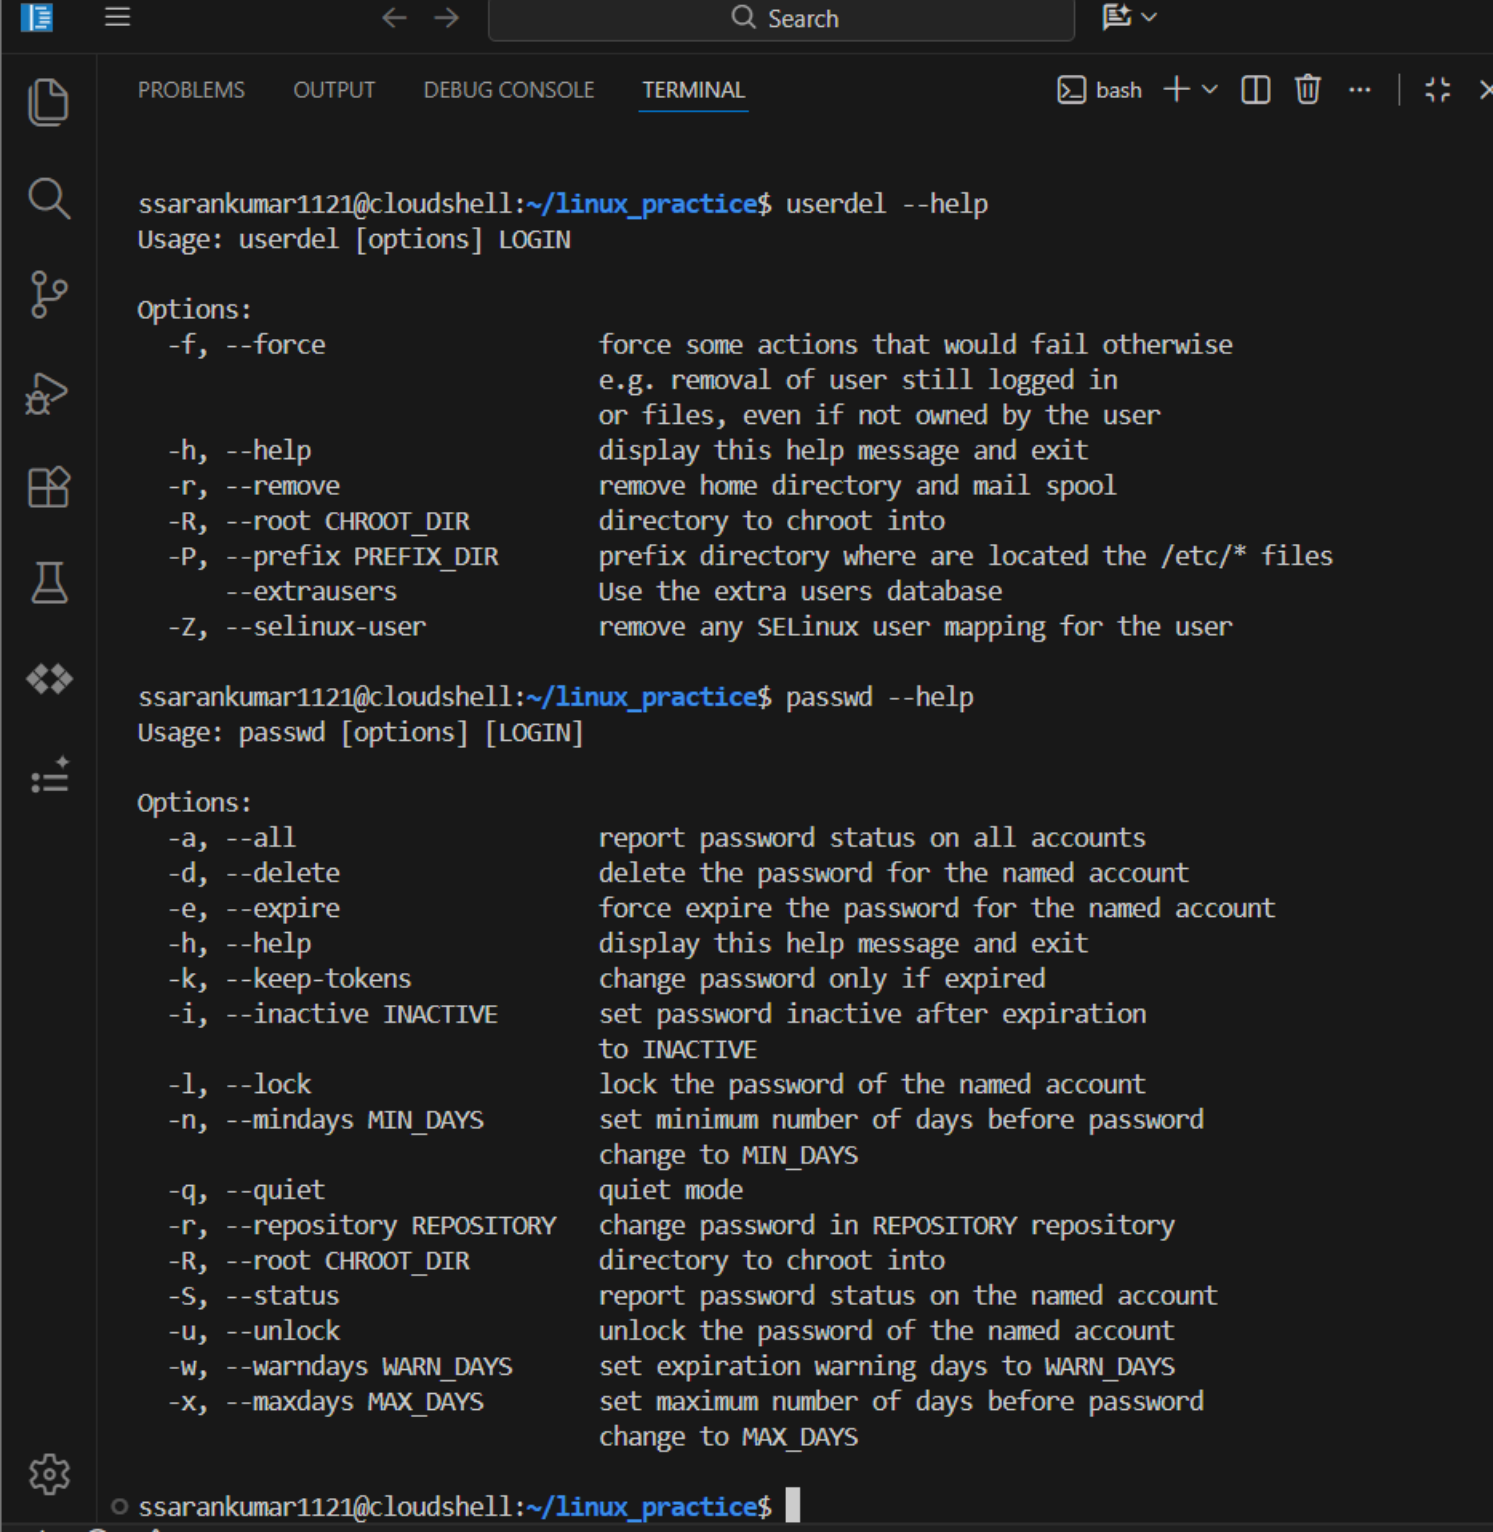

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

bash + v [icon] [icon] ... [icon] [icon]

```
ssarankumar1121@cloudshell:~/linux_practice$ userdel --help
Usage: userdel [options] LOGIN
```

Options:

-f, --force	force some actions that would fail otherwise e.g. removal of user still logged in or files, even if not owned by the user
-h, --help	display this help message and exit
-r, --remove	remove home directory and mail spool
-R, --root CHROOT_DIR	directory to chroot into
-P, --prefix PREFIX_DIR	prefix directory where are located the /etc/* files
--extrausers	Use the extra users database
-Z, --selinux-user	remove any SELinux user mapping for the user

```
ssarankumar1121@cloudshell:~/linux_practice$ passwd --help
Usage: passwd [options] [LOGIN]
```

Options:

-a, --all	report password status on all accounts
-d, --delete	delete the password for the named account
-e, --expire	force expire the password for the named account
-h, --help	display this help message and exit
-k, --keep-tokens	change password only if expired
-i, --inactive INACTIVE	set password inactive after expiration to INACTIVE
-l, --lock	lock the password of the named account
-n, --mindays MIN_DAYS	set minimum number of days before password change to MIN_DAYS
-q, --quiet	quiet mode
-r, --repository REPOSITORY	change password in REPOSITORY repository
-R, --root CHROOT_DIR	directory to chroot into
-S, --status	report password status on the named account
-u, --unlock	unlock the password of the named account
-w, --warndays WARN_DAYS	set expiration warning days to WARN_DAYS
-x, --maxdays MAX_DAYS	set maximum number of days before password change to MAX_DAYS

```
ssarankumar1121@cloudshell:~/linux_practice$
```



PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

bash



change to MAX_DAYS

ssarankumar1121@cloudshell:~/linux_practice\$ su --help

Usage:

su [options] [-] [<user> [<argument>...]]

Change the effective user ID and group ID to that of <user>.

A mere - implies -l. If <user> is not given, root is assumed.

Options:

-m, -p, --preserve-environment do not reset environment variables

-w, --whitelist-environment <list> don't reset specified variables

-g, --group <group> specify the primary group

-G, --supp-group <group> specify a supplemental group

-, -l, --login make the shell a login shell

-c, --command <command> pass a single command to the shell with -c

--session-command <command> pass a single command to the shell with -c
and do not create a new session

-f, --fast pass -f to the shell (for csh or tcsh)

-s, --shell <shell> run <shell> if /etc/shells allows it

-P, --pty create a new pseudo-terminal

-h, --help display this help

-V, --version display version

For more details see su(1).

ssarankumar1121@cloudshell:~/linux_practice\$ groups

ssarankumar1121 adm sudo docker

ssarankumar1121@cloudshell:~/linux_practice\$ whoami


ssarankumar1121


ssarankumar1121@cloudshell:~/linux_practice\$

ssarankumar1121@cloudshell:~/linux_practice\$ id

uid=1000(ssarankumar1121) gid=1000(ssarankumar1121) groups=1000(ssarankumar1121),4(adm),27(sudo),996(docker)

ssarankumar1121@cloudshell:~/linux_practice\$

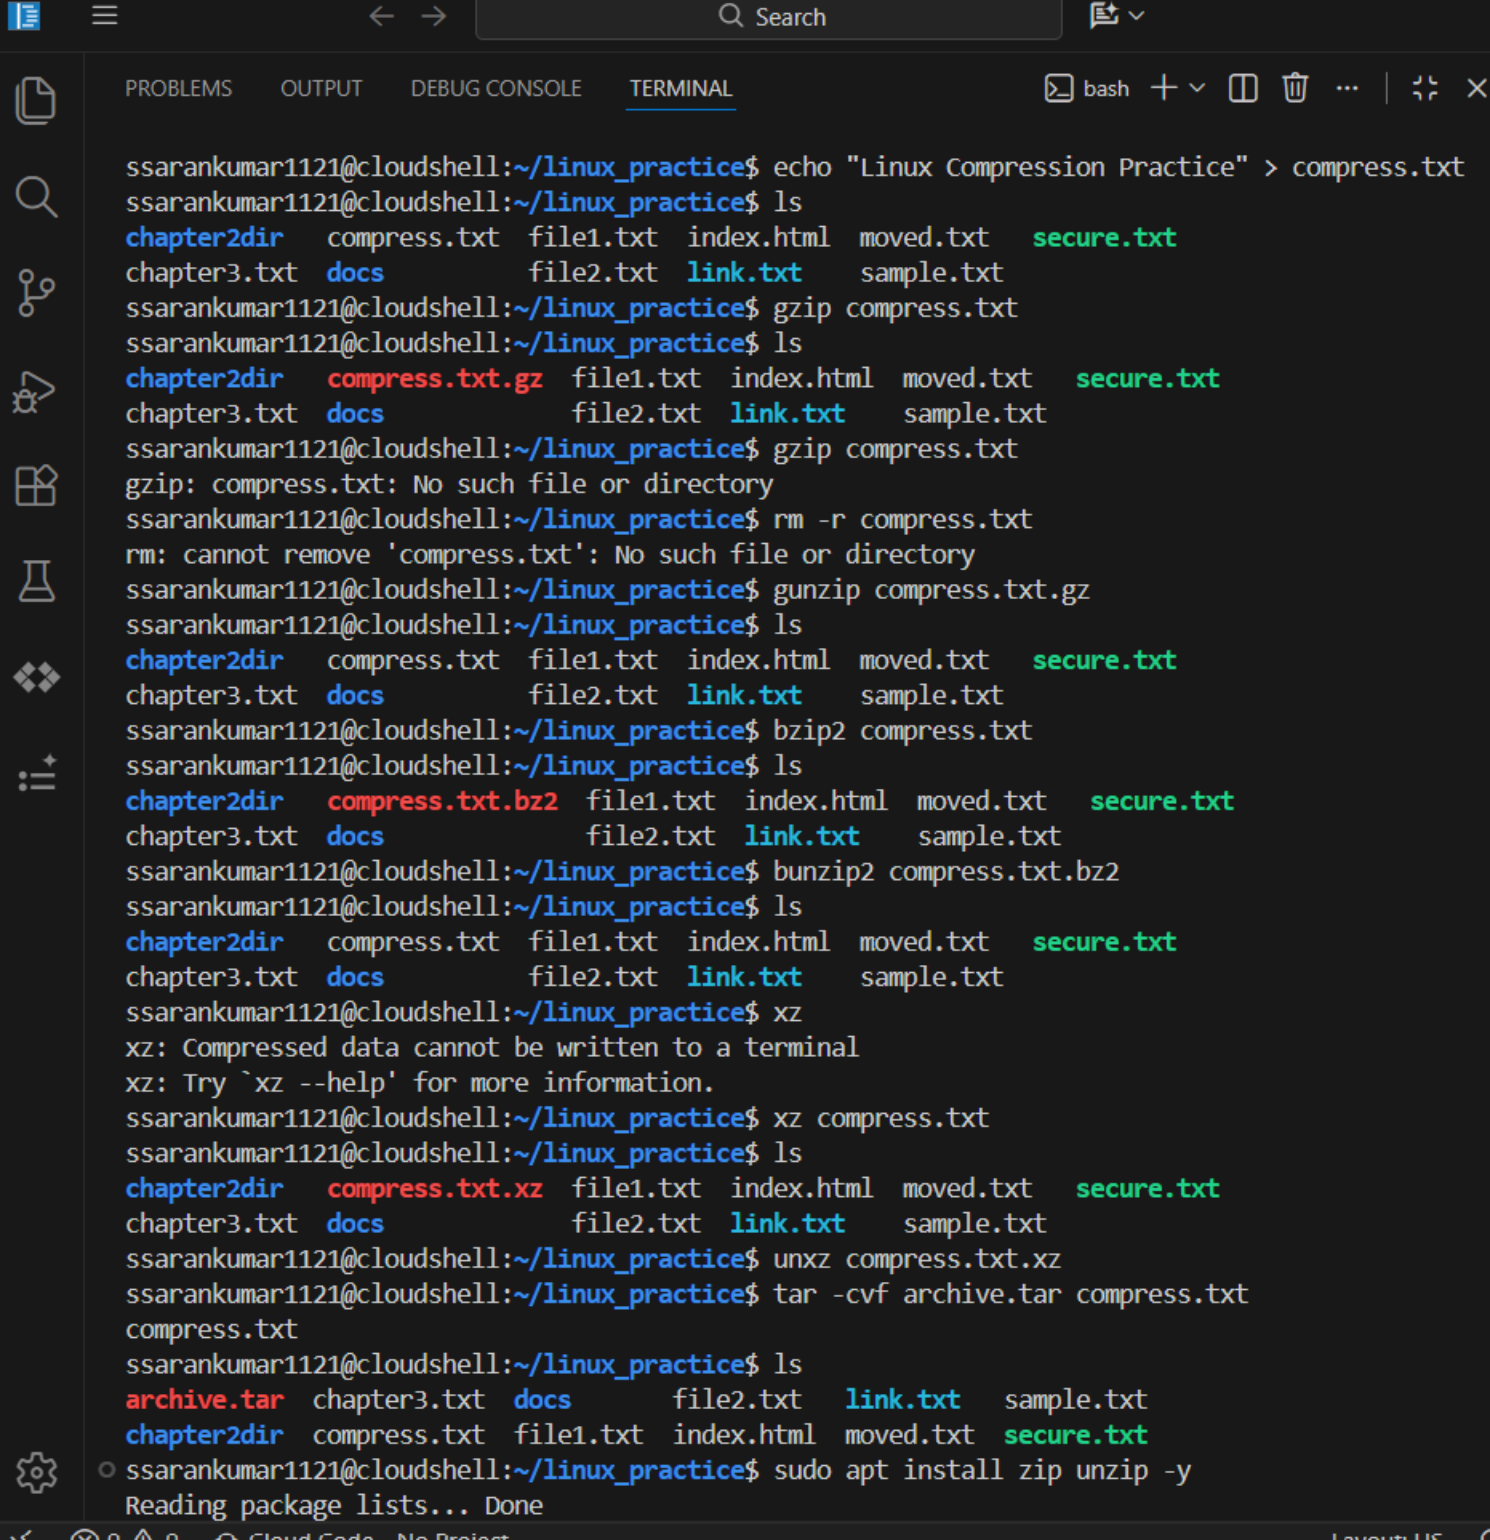

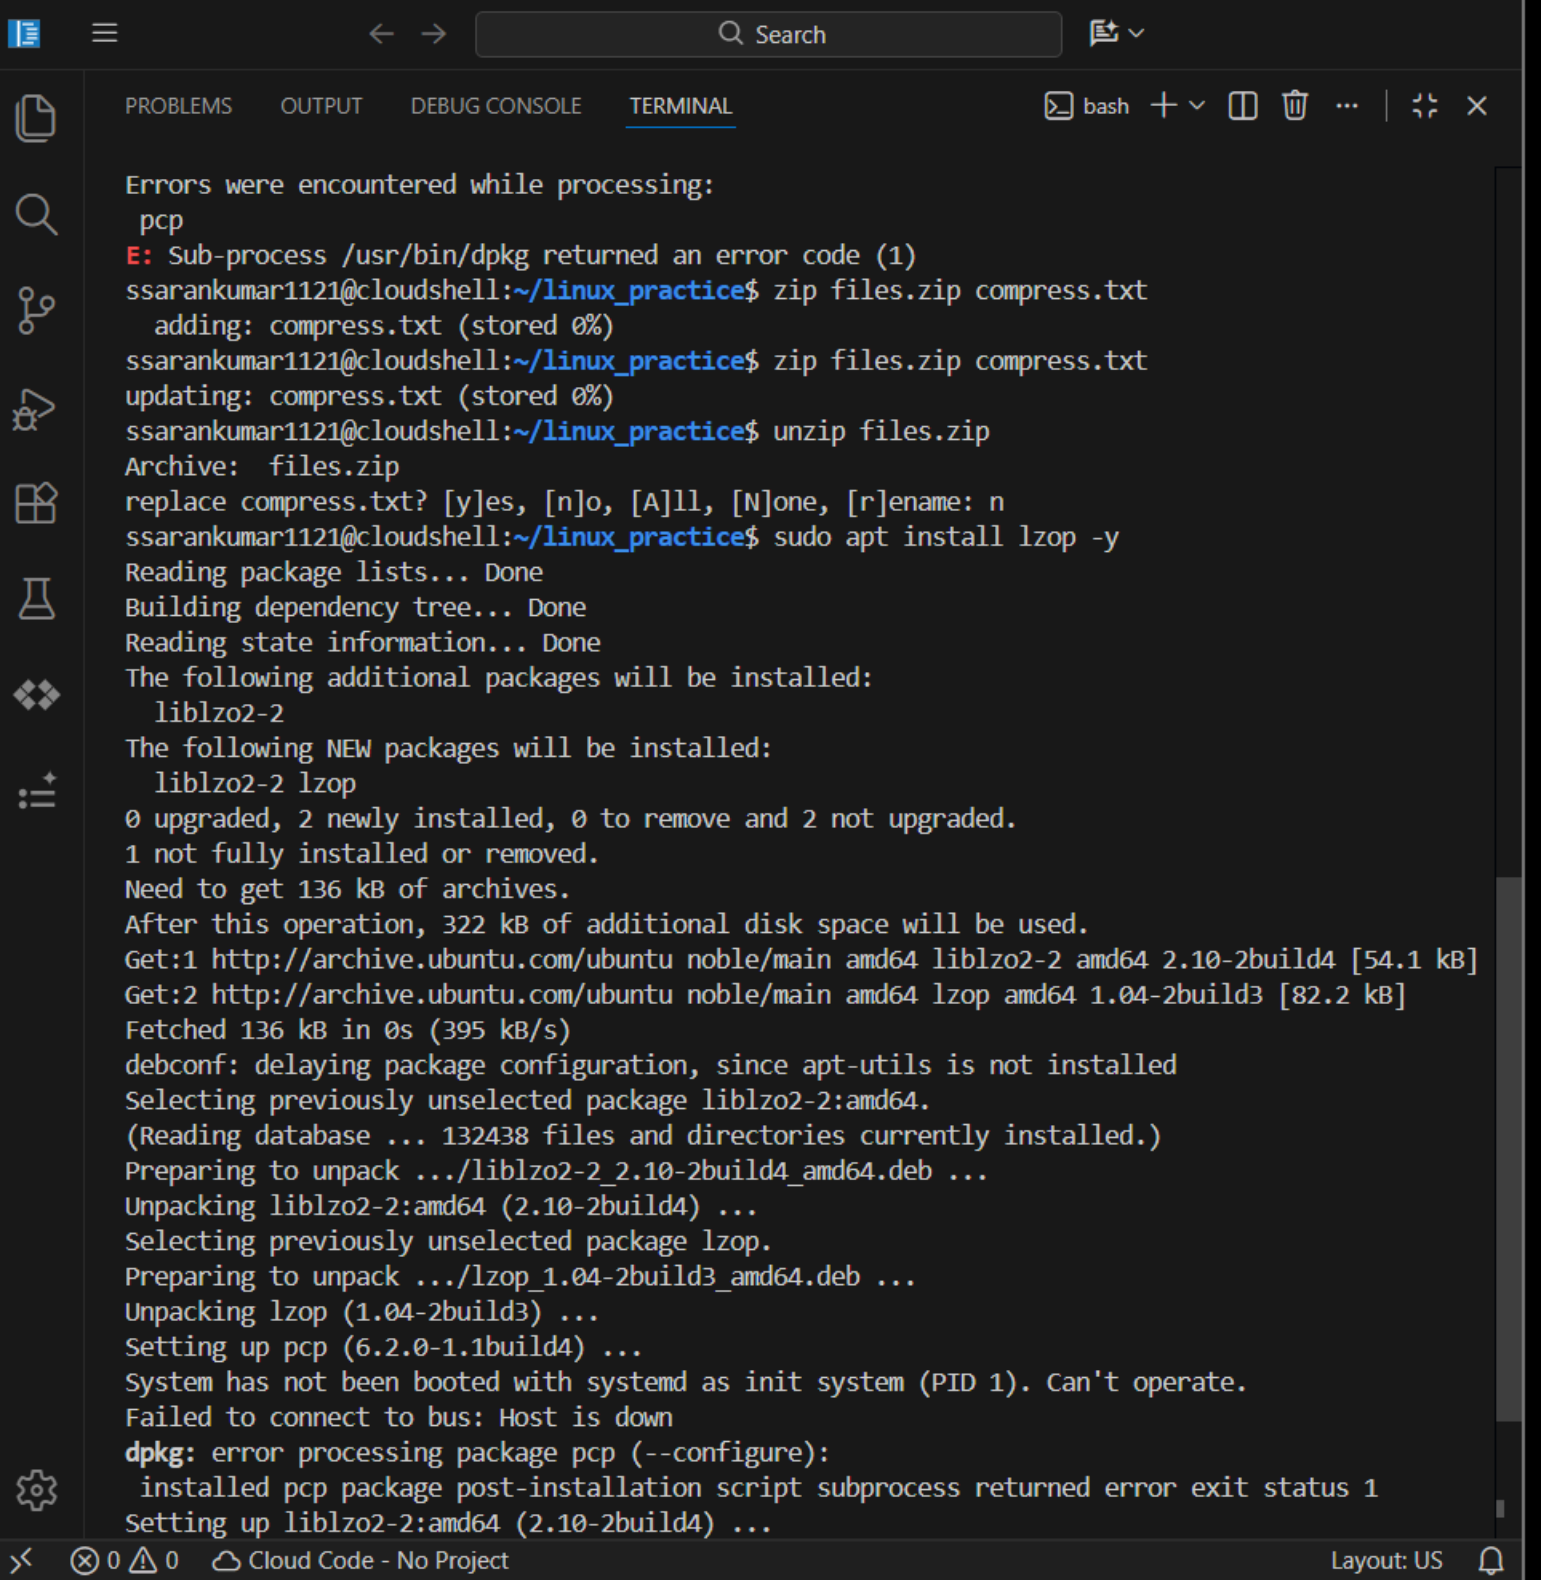

Errors were encountered while processing:

pcp

E: Sub-process /usr/bin/dpkg returned an error code (1)

ssarankumar1121@cloudshell:~/linux_practice\$ zip files.zip compress.txt

adding: compress.txt (stored 0%)

ssarankumar1121@cloudshell:~/linux_practice\$ zip files.zip compress.txt

updating: compress.txt (stored 0%)

ssarankumar1121@cloudshell:~/linux_practice\$ unzip files.zip

Archive: files.zip

replace compress.txt? [y]es, [n]o, [A]ll, [N]one, [r]ename: n

ssarankumar1121@cloudshell:~/linux_practice\$ sudo apt install lzop -y

Reading package lists... Done

Building dependency tree... Done

Reading state information... Done

The following additional packages will be installed:

liblz2-2

The following NEW packages will be installed:

liblz2-2 lzop

0 upgraded, 2 newly installed, 0 to remove and 2 not upgraded.

1 not fully installed or removed.

Need to get 136 kB of archives.

After this operation, 322 kB of additional disk space will be used.

Get:1 http://archive.ubuntu.com/ubuntu noble/main amd64 liblz2-2 amd64 2.10-2build4 [54.1 kB]

Get:2 http://archive.ubuntu.com/ubuntu noble/main amd64 lzop amd64 1.04-2build3 [82.2 kB]

Fetched 136 kB in 0s (395 kB/s)

debconf: delaying package configuration, since apt-utils is not installed

Selecting previously unselected package liblz2-2:amd64.

(Reading database ... 132438 files and directories currently installed.)

Preparing to unpack .../liblz2-2_2.10-2build4_amd64.deb ...

Unpacking liblz2-2:amd64 (2.10-2build4) ...

Selecting previously unselected package lzop.

Preparing to unpack .../lzop_1.04-2build3_amd64.deb ...

Unpacking lzop (1.04-2build3) ...

Setting up pcsp (6.2.0-1.1build4) ...

System has not been booted with systemd as init system (PID 1). Can't operate.

Failed to connect to bus: Host is down

dpkg: error processing package pcsp (--configure):

installed pcsp package post-installation script subprocess returned error exit status 1

Setting up liblz2-2:amd64 (2.10-2build4) ...

pcp

E: Sub-process /usr/bin/dpkg returned an error code (1)

ssarankumar1121@cloudshell:~/linux_practice\$ lzop compress.txt

ssarankumar1121@cloudshell:~/linux_practice\$ compress.txt

bash: compress.txt: command not found

ssarankumar1121@cloudshell:~/linux_practice\$ lzop compress.txt

lzop: compress.txt.lzo: already exists; not overwritten

ssarankumar1121@cloudshell:~/linux_practice\$