



eCourts API Specifications

Version 1.0

For High Courts

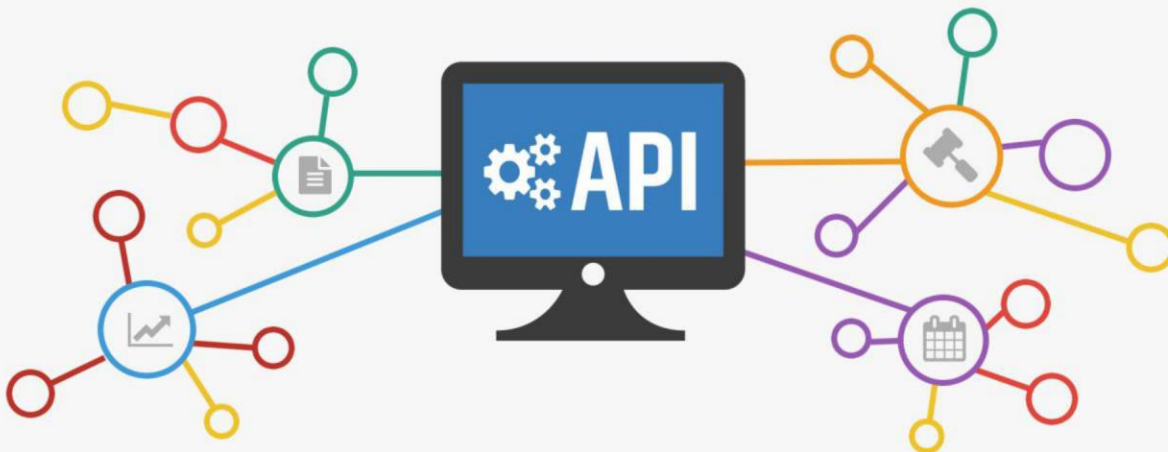


Table of Contents

1	INTRODUCTION	4
2	PURPOSE AND INTENDED AUDIENCE	4
3	ON-BOARDING PROCESS	4
4	LIST OF ECOURT APIS.....	5
	<i>URL Structure</i>	<i>8</i>
	<i>Service Request API</i>	<i>9</i>
5	OVERVIEW API.....	10
5.1	OVERVIEW API	10
6	CASE SEARCH APIS.....	12
6.1	SEARCH BY CNR API	12
6.2	SHOW BUSINESS API	19
6.3	SHOW ORDERS API	21
6.4	SEARCH BY CNR (CURRENT CASE STATUS) API	23
6.5	SEARCH BY CASE NUMBER API	28
6.6	SEARCH BY FILING NUMBER API	30
6.7	SEARCH BY PARTY NAME API	31
6.8	SEARCH BY ADVOCATE NAME API	33
6.9	SEARCH BY ADVOCATE BAR REGISTRATION NUMBER API	35
6.10	SEARCH BY ACT API	37
7	CAUSELIST API	39
7.1	CAUSELIST BENCH API	39
7.2	CAUSELIST API	41
7.3	SHOW CAUSELIST API	43
8	CAVEAT SEARCH APIS	46
8.1	SEARCH BY CAVEATOR/CAVEATEE NAME	46
8.2	CAVEAT HISTORY API	49
9	ESTABLISHMENT APIS.....	53
9.1	HIGH COURT STATE MASTER API	53
9.2	DISTRICT MASTER API	55
9.3	BENCH API	57
10	MASTER APIS	60
10.1	ACTS MASTER API	60
10.2	CASE TYPE MASTER API	62
11	ANNEXURE-A: ENCRYPTION-DECRYPTION-HASH VALUE	65
11.1	HASH VALUE CREATION AND IMPLEMENTATION	65
11.2	ENCRYPTION METHOD FOR REQUEST STRING	65
11.3	FOR SENDING REQUEST TO OPEN API	66
11.4	DECRYPTION METHOD FOR RESPONSE STRING	66
11.5	RESPONSE TOKEN VERIFICATION	67
12	ANNEXURE-B: RESPONSE	68
13	API CONSUMPTION USING POSTMAN.....	69
13.1	GETTING ACCESS TOKEN	69

13.2	API CONSUMPTION	71
14	API CONSUMPTION USING SAMPLE APPLICATION	73
15	ANNEXURE-C: HTTP STATUS CODE	76

1 Introduction

1. **Introduction:** eCourts project is implemented in more than 3000 Sub-ordinate court complexes and all High Courts of the country. The project is aimed at providing services to Advocates, Individual Litigants, Institutional Litigants (Government, Semi Government Organizations, Banks, Prosecution etc) through various service delivery channels like web sites, mobile app, SMS and automated eMail. Such facilities are provided on occurrence of every event in the respective case.
 2. **Need of Institutional Litigants:** Currently mobile app is available for Advocates or Institutional Litigants who are interested to save and track multiple cases of their interest. The facility in the form of “My Cases” helps the user to create portfolio of the cases of interest and further get automatic alerts on change of Next Date or Status of case. However this facility is available to the individual user on personal mobile. Tracking such cases at central level is demanded by various institutional litigants. Such mechanism may be provided through Open APIs.
 3. **Open API for Institutional litigants:** Open API provided by eCourts shall help institutional litigants to consume eCourts data and use it efficiently into the software developed by respective Institutions to manage their own litigation.
-

2 Purpose and Intended Audience

This document aims to explain the operational procedure on how to use API based interface for accessing the Case data. Also it explains the features and sample method of using this system.

3 On-Boarding Process

Access to open API is restricted and will be through process prescribed by e-Committee. Please refer document **Subscriber creation for eCourts domain on National API Exchange Platform**. In this document steps are provided to create new **Subscriber** login on **NAPIX** platform. On approval by e-Committee or CPC of the respective High Court following information will be securely shared with the department.

- Authentication Key (For Encryption/Decryption of Data)
Using the subscriber user Name and Authentication Key, subscriber can access the data using **NAPIX** platform.

4 List of eCourt APIs

Sr. No	API Name	API Web Service Name	Description
Overview API			
1	Overview	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-Overview/v1.0	API provides details about current eCourts API specification including version, contact information, license information, URI scheme, etc.
Case Search API			
1	Search by CNR Number	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CNRSearch/v1.0	API provides complete history of the case including, case details, party names, current status, daily proceedings, orders, judgments, IA details and process issued information based on CNR number of the case.
2	Show Business	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-ShowBusiness/v1.0	API provides details of business transacted on a particular date based on CNR number and date for which business is needed.
3	Show Order	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-Order/v1.0	API provides facility to view Order or Judgment delivered on a particular date based on CNR number and order date .
4	Current Status	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CurrentStatus/v1.0	API provides only the current status like next date, stage or decision date of the case based on CNR number . Instead of getting the complete history of case which is more elaborate, this API provides the current status of the case in short. This API provides facility to request single CNR or comma separated multiple CNRs in single request.
5	Search by Case Number	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CaseNumber/v1.0	API provides list of cases from a High court establishment matching the Case Registration Number. Input for this API is the Establishment Code, Case Registration Number, Case Registration Year , and other details.
6	Search by Filing Number	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-FilingNumber/v1.0	API provides list of cases from a High court establishment matching the Case Filing Number. Input for this API is the Establishment Code, Case Filing Number, Case Filing Year and other details.
7	Search by Party Name	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-PartyName/v1.0	API provides list of cases from a High court establishment matching

		PartyName/v1.0	name of the party. Input for this API is Establishment Code, Litigants Name, Case Registration Year, Status of the Case (Pending or Disposed) and other details. The litigants name may be petitioner's name or respondent's name or an extra party name. The search string for litigant name may consist of full name of the party or even few characters (minimum 3) for searching.
8	Search by Advocate Name	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-AdvocateName/v1.0	API provides list of cases from a High court establishment matching name of the Advocate. Input for this API is Establishment Code, Advocate's Name, Case Registration Year, Status of the Case (Pending or Disposed) and other details. The Advocate's name may be petitioner's advocate name or respondent's advocate name or an extra party advocate name. The search string for advocate name may consist of full name of the Advocate or even few characters (minimum 3) for searching.
9	Search by Advocate Bar Regn. Number	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-AdvocateBarRegistration/v1.0	API provides list of cases from a High court establishment for a given Advocate Registration number. Input for this API is Establishment Code, Advocate's Bar Registration Year, Case Registration Year, Status of the Case (Pending or Disposed) and other details. The Advocate may be petitioner's advocate or respondent's advocate or an extra party advocate.
10	Search by Act	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-Act/v1.0	API provides list of cases from a High court establishment matching the Act. Input for this API is Establishment Code, National Act Code, Case Registration Year, Status of the Case (Pending or Disposed) and other details.

Causelist API

1	Causelist Bench	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CauselistBench/v1.0	API provides list of benches based on causelist date. Input for this API is Establishment Code, Causelist Date and other details.
2	Cause List	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-Causelist/v1.0	API provides cases listed (CauseList) on a particular date. Input for this API is Establishment Code, Cause List Date, Bench id and other details. The format of Cause List may vary from State to State. Sequence of cases is provided in the API, however it is advisable to cross check the cause list vis-à-vis as available on

			the hcservices.ecourts.gov.in portal or mobile app for better understanding and accuracy and refer the cause list available on the portal.
3	Show CauseList	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-ShowCauselist/v1.0	API provides facility to view CauseList delivered on a particular date based on Establishment Code, Bench ID, CauseList ID and CauseList date .

Caveat Search API

1	Search by Caveat Anywhere	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CaveatName/v1.0	API provides list of caveats from a High court establishment matching name of the party. Input for this API is Establishment Code, Party Name, Search Type and other details. Search type provides facility to search the name string anywhere or starting with the input characters.
2	Caveat History	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CaveatHistory/v1.0	API provides complete history of the caveat from a High court establishment matching the Caveat Code. Input for this API is Establishment Code, Caveat Code and other details. Every Caveat has a unique 15 digit Caveat Code within the establishment.

Establishment API

1	State	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-StateMaster/v1.0	API provides list of the states and relevant state codes used in the eCourts project for further accessing relevant APIs. This API doesn't require any input string and can just be connected using dept_id , token,request_str,version to get the list of the states.
2	District	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-DistrictMaster/v1.0	API provides list of the Districts and relevant District codes pertaining to the given state used in the eCourts project for further accessing relevant APIs. Input for this API is State Code and other details.
3	Bench Master	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-BenchMaster/v1.0	API provides list of all benches of High Court.

Master API

1	Act	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-ActMaster/v1.0	Every Act has unique National Act Code. API provides list of the Acts and relevant National Act Codes used in the eCourts project for further accessing relevant APIs. This API doesn't require any input string and can just be connected using dept_id , token,request_str,version to get the list of all the Acts with the respective National Act codes.
2	Case Type	https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CaseTypeMaster/v1.0	API provides list of the Case Types (referred as type_name) and relevant Case Type Codes (referred as case_type) used in the establishment for further accessing relevant APIs. Input for this API is Establishment Code and other details. Type Name and Case Type retrieved using this API can be used to access the case data using various Case Search APIs like Search by Case Registration Number, Filing Number etc.

URL Structure

APIs can be accessed using following URL structure


```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-apiname/v1.0
/api_filename?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

Following Four parameters to be passed for every API

Sr.No.	Element	Description
1	request_str	Request String variable shall contain key – value pair of variables used as input to respective API. Single string request_str variable is to be created by joining all input key-value pair of variables separated by pipe (). String value is encrypted using the Authentication Key and algorithm provided in Annexure A. Authentication Key is provided by e-Committee or respective High Court. Example: request_str= encrypted(cino="value" business_date="value")
2	dept_id	Department ID same as Subscriber User name, passed through the variable dept_id .
3	request_token	Hash value of the Request String (request_str) is to be created using mechanism provided in Annexure 'A'.
4	version	It contains value of the API version.

Service Request API

To access the service requests like search by CNR, Search by party name etc. The user application should have the valid authentication token. With the authentication token he has to send the request for the services with the relevant parameters to get the response or result.

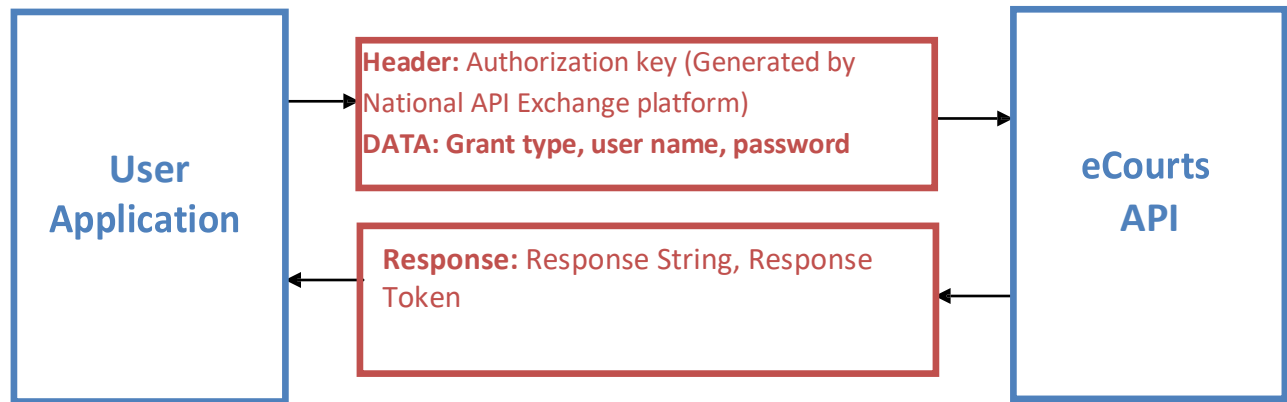

5 Overview API

5.1 Overview API

API provides details about current eCourts API specification including version, contact information, license information, URI scheme, etc.

5.1.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
Overview/v1.0/overview?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

5.1.2 HTTP Method *GET*

5.1.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	dept_id	M	N	dept_id same as Subscriber User name
2	request_str	M	Y	Doesn't require any input string (eg. request_str="")
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0" .

5.1.4 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

5.1.5 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
overview	This document describe a RESTful API for eCourt Projects	Overview
version	v1.0	API Version
contact	eCommittee Supreme Court of India, E-mail-	Contact Information
	ecommittee@aij.gov.in	
license	Apache 2.0	License Information
uri_scheme	HTTPS	URI scheme
consumes	application/json	
produces	application/json	

5.1.6 Sample Response

```
{
  "overview": "This document describe a RESTful API for eCourt
Projects",
  "version": "v1.0",
  "contact": "eCommittee Supreme Court of India, E-mail-
ecommittee@aij.gov.in",
  "license": "Apache 2.0",
  "uri_scheme": "HTTPS",
  "consumes": "application/json",
  "produces": "application/json"
}
```

5.1.7 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department id is invalid.
629	UNEXPECTED_ERROR	Service unresponsive.

6 Case Search APIs

6.1 Search by CNR API

API provides complete history of the case including, case details, party names, current status, daily proceedings, orders, judgments, IA details and process issued information based on **CNR number** of the case.

6.1.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
CNRSearch/v1.0/cnrFullCaseDetails?  
dept_id=dept_id&request_str=request_str&request_token=request_token&v  
ersion=version
```

6.1.2 HTTP Method *GET*

6.1.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key-value pair of cino .
2	dept_id	M	N	dept_id same as Subscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. " v1.0 ".

6.1.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such **request_str=encrypted (cino="value")**

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	cino	M	16 characters alphanumeric CNR.

6.1.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.

2. **response_token:** Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version:** Contains version of API.

6.1.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
date_of_filing	2019-01-02	Filing date of case
cino	JKHC020000132019	16 digit unique CNR number of case
dt_regis	2019-01-03	Registration date of case
type_name_reg	PIL	Registration Case type name
type_name_fil	PIL	Filing Case Type name
case_type_id	153	Case Type code
fil_no	11	Filing number of case
fil_year	2019	Filing year of case
reg_no	1	Registration number of case
reg_year	2019	Registration year of case
date_first_list	2019-02-07	First hearing date
date_next_list	2019-07-09	Next hearing date
pend_disp	D	Character value 'P' or 'D'. P for pending cases and D for disposed cases
date_of_decision	2019-07-09	Date of decision (When case is disposed). If the case is pending Null value will be returned.
disposal_type	Disposed Off	Disposal type
disp_nature	Allowed	Reason of disposal. If the case is pending Null value will be returned.
bench_type	2	Bench type
causelist_type	Advance	CauseList Type name
bench_name	Division Bench	Bench Name
Judicial_branch	PUBLIC INTEREST LITIGATION (WPIL)	Judicial Branch
coram	HON'BLE MR. JUSTICE DHIRAJ SINGH THAKUR , HON'BLE MRS. JUSTICE SINDHU SHARMA	
short_order	DATE FIXED	
bench_id	1620	Bench id
court_est_name	JAMMU AND KASHMIR	Court establishment
est_code	JKHC02	Court establishment code
purpose_name	FOR ADMISSION	Purpose or current stage of the case
state_name	JAMMUKASHMIR	State Name

dist_name	SRINAGAR	District Name
pet_name	COURT ON ITS OWN MOTION	Main petitioner's name. In some sensitive cases or disputes of private nature value will be shared as xxxxxx.
pet_adv	NEMO	Main petitioner's advocate name
pet_legal_heir	N	'Y' means petitioner has legal heir
res_name	STATE AND ORS.	Main respondent's name. In some sensitive cases or disputes of private nature value will be shared as xxxxxx.
res_adv	Adv. Gopalkar R.C.	Main respondent's advocate name
res_legal_heir	N	Y means respondent has legal heir
fir_no	67	FIR number
police_station		Police station
fir_year	2009	FIR year
lower_court_name	DJ, MAHARAJGANJ	Lower court designation
lower_court_caseno	Criminal Appeal - 0000066 - 2017	Lower court case number
lower_court_dec_dt	2017-12-06	Lower court decision date
trial_lower_court_name	DJ , JAUNPUR	Trial Court designation
trial_lower_court_caseno	Motor Vehicle Act - 0000271 - 2016	Trial Court Case Number
trial_lower_court_dec_dt	2017-10-18	Trial Court decision date
date_last_list	2019-05-01	Last Proceeding Date
main_matter_cino	JKHC020065332017	Main case CNR, If case is an application.
main_matter	Case Number - CDLSW/114/2017	
date_filing_disp		
reason_for_rej		
pet_extra_party		Nested response for more than one petitioner.
party_no1	Aalka Ramdas Gore	1 st extra petitioner name if any
party_no2	Ramdas Ashruba Gore	2 nd extra petitioner name if any
res_extra_party		Nested response for more than one respondent.
party_no1	Ramesh Ramdas Gore	1 st extra respondent name if any
party_no2	Senior Divisional Manager, ICICI_Lombard General Insurance Co. Ltd.	2 nd extra respondent name if any
act		Nested response for more than one acts.
act1		1 st Act and Section details
actname	WPIL	1 st Act name
section	1A	Sections mentioned in 1 st Act.

historyofcasehearing		Nested response for more than one court proceedings.
sr_no1		1 st Proceeding details
judge_name		Judge name
business_date		Business date. (Business details for this date can be accessed by using Show Business API)
hearing_date	2019-02-07	Next hearing date
purpose_of_listing	FOR ADMISSION	Purpose or stage of listing
causelist_type		
sr_no2		2 nd Proceeding details
judge_name	HON'BLE THE CHIEF JUSTICE , HON'BLE MR. JUSTICE TASHI RABSTAN	Judge designation
business_date	2019-02-08	Business date
hearing_date	2019-03-06	Next hearing date
purpose_of_listing	FOR ADMISSION	Purpose or stage of listing
causelist_type	Regular	
interimorder		Nested response for Interim Orders
sr_no1		1 st order details
order_no	1	Order number
order_date	2019-02-08	Order date
order_details	COPY OF ORDERS	Order details
sr_no2		2 nd order details
order_no	2	Order number
order_date	2019-03-06	Order date
order_details	COPY OF ORDERS	Order details
finalorder		Nested response for Final Order
sr_no1		1 st order details
order_no	1	Order number
order_date	2019-05-01	Order date
order_details	COPY OF ORDERS	Order details
iafiling		Nested response for Interlocutory Applications
sr_no1		1 st IA details
ia_number	IA/1/2018	IA (interlocutory application) number
ia_pet_name	JAMMU AND KASHMIR GRAMEEN BANK ARUN KUMAR SHARMA AND ORS.	Party name
ia_pend_disp	P	Character value 'P' or 'D'. P for pending IAs and D for disposed IAs
date_of_filing	2018-12-20	Filing date of IA

link_cases		Nested response for linked/connected cases .
sr_no1		1 st linked case
filing_number	LPA/9461/2018	Linked case filing number
case_number	LPA/221/2018	Linked case registration number
sr_no2		2 nd linked case
filing_number	LPA/3704/2018	Linked case filing number
case_number	LPA/43/2018	Linked case registration number
objections		
objection1	All Objections are Complied	Objection
scrutiny_date	2019-01-03	Scrutiny Date
objections_compliance_by_date		Objections Compliance Date
obj_receipt_date	2019-04-11	Objection Receipt Date
category_details		
category	DB LPA(SW) (200)	Category
sub_category	MATTERS RELATING TO MINOR PENALTIES. (2)	Sub Category

6.1.7 Sample Response

```
{
  "date_of_filing": "2019-01-02",
  "cino": "JKHC020000132019",
  "dt_regis": "2019-01-03",
  "type_name_fil": "PIL",
  "type_name_reg": "PIL",
  "case_type_id": 153,
  "fil_no": "11",
  "fil_year": "2019",
  "reg_no": "1",
  "reg_year": "2019",
  "date_first_list": "2019-02-07",
  "date_next_list": "2019-07-09",
  "pend_disp": "D",
  "date_of_decision": "2019-07-09",
  "disposal_type": "Disposed Off",
  "bench_type": 2,
  "causelist_type": "Advance",
  "bench_name": "Division Bench",
  "judicial_branch": "PUBLIC INTEREST LITIGATION (WPPIL)",
  "coram": "HON'BLE MR. JUSTICE ALI MOHAMMAD MAGREY , HON'BLE MRS. JUSTICE SINDHU SHARMA",
  "short_order": "DATE FIXED",
  "bench_id": "1620",
  "court_est_name": "JAMMU AND KASHMIR",
  "est_code": "JKHC02",
  "state_name": "JAMMUKASHMIR",
  "dist_name": "SRINAGAR",
  "purpose_name": "FOR ADMISSION (After Notice)",
  "pet_name": "COURT ON ITS OWN MOTION",
  "pet_adv": "NEMO",
}
```



```

"pet_legal_heir": "N",
"res_name": "STATE AND ORS.",
"res_adv": "",
"res_legal_heir": "N",
"main_matter": "",
"fir_no": "",
"police_station": null,
"fir_year": "",
"lower_court_name": "",
"lower_court_caseno": "",
"lower_court_dec_dt": "",
"trial_lower_court_name": "",
"trial_lower_court_caseno": "",
"trial_lower_court_dec_dt": "",
"date_last_list": "2019-07-09",
"main_matter_cino": "",
"date_filing_disp": "",
"reason_for_rej": "",
"acts": {
  "act1": {
    "actname": "WPPIL",
    "section": "1A"
  }
},
"pet_extra_party": [],
"res_extra_party": [],
"historyofcasehearing": {
  "sr_no1": {
    "judge_name": "",
    "business_date": "",
    "hearing_date": "2019-02-07",
    "purpose_of_listing": "FOR ADMISSION (After Notice)"
  },
  "sr_no2": {
    "judge_name": "HON'BLE THE CHIEF JUSTICE , HON'BLE MR. JUSTICE TASHI
RABSTAN",
    "business_date": "2019-02-08",
    "hearing_date": "2019-03-06",
    "purpose_of_listing": "FOR ADMISSION (After Notice)",
    "causelist_type": "Advance"
  },
  "sr_no3": {
    "judge_name": "HON'BLE THE CHIEF JUSTICE , HON'BLE MR. JUSTICE TASHI
RABSTAN",
    "business_date": "2019-03-06",
    "hearing_date": "2019-04-10",
    "purpose_of_listing": "FOR ADMISSION (After Notice)",
    "causelist_type": "Advance"
  },
  "sr_no4": {
    "judge_name": "HON'BLE MR. JUSTICE DHIRAJ SINGH THAKUR , HON'BLE
MRS. JUSTICE SINDHU SHARMA",
    "business_date": "2019-04-10",
    "hearing_date": "2019-05-01",
    "purpose_of_listing": "FOR ADMISSION (After Notice)",
    "causelist_type": "Advance"
  },
  "sr_no5": {
    "judge_name": "HON'BLE MR. JUSTICE DHIRAJ SINGH THAKUR , HON'BLE

```

```

MRS. JUSTICE SINDHU SHARMA",
    "business_date": "2019-05-01",
    "hearing_date": "2019-07-09",
    "purpose_of_listing": "FOR ADMISSION (After Notice)",
    "causelist_type": "Advance"
  },
  "sr_no6": {
    "judge_name": "HON'BLE MR. JUSTICE ALI MOHAMMAD MAGREY , HON'BLE
MRS. JUSTICE SINDHU SHARMA",
    "business_date": "2019-07-09",
    "hearing_date": "",
    "purpose_of_listing": "Disposed",
    "causelist_type": ""
  }
},
"interimorder": {
  "sr_no1": {
    "order_no": "1",
    "order_date": "2019-02-08",
    "order_details": "COPY OF ORDERS"
  },
  "sr_no2": {
    "order_no": "2",
    "order_date": "2019-03-06",
    "order_details": "COPY OF ORDERS"
  },
  "sr_no3": {
    "order_no": "3",
    "order_date": "2019-04-10",
    "order_details": "COPY OF ORDERS"
  },
  "sr_no4": {
    "order_no": "4",
    "order_date": "2019-05-01",
    "order_details": "COPY OF ORDERS"
  }
},
"finalorder": null,
"iafiling": null,
"link_cases": null,
"objections": {
  "objection1": "All Objections are Complied",
  "scrutiny_date": "2019-01-03",
  "objections_compliance_by_date": null,
  "obj_reciept_date": null
},
"category_details": {
  "category": "DB PUBLIC INTEREST LITIGATION - PIL ( 210 )"
}
}

```

6.1.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
600	INVALID_CNR	The CNR is invalid. The CNR is not in the prescribed format.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
629	UNEXPECTED_ERROR	Service unresponsive
628	RECORD_NOT_FOUND	Record is not available.
632	INVALID_VERSION	Invalid version of API

6.2 Show Business API

API provides details of business transacted on a particular date based on **CNR number** and **date** for which business is needed. Business date is the date of court proceedings which may be available from the Case History.

6.2.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
ShowBusiness/v1.0/business?dept_id=dept_id&request_str=request_s  
tr&request_token=request_token&version=version
```

6.2.2 HTTP Method **GET**

6.2.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of cino and business_date .
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0"

6.2.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(cino="value"|business_date="value")

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	cino	M	16 characters alphanumeric CNR.
2	business_date	M	Business date in yyyy-mm-dd format.

6.2.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

6.2.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
desgname	Justice	Designation of the Judge
case_number	LPA/0000057/2018	Case Number
business_date	2018-05-31	Business Date
business	Issue Notice	Business happened in the respective case.
short_order_det		Short order details

6.2.7 Sample Response

```
{
  "desgname": "Justice",
  "case_number": "AR/0000123/2019",
  "business_date": "2020-01-15",
  "business": "Issue Notice",
  "short_order_det": ""
}
```

6.2.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
600	INVALID_CNR	The CNR is invalid. The CNR is not in the prescribed format.
601	INVALID_DATE	Date of business is not in correct format or not valid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.3 Show Orders API

API provides facility to view Order or Judgment delivered on a particular date based on **CNR number** and **order date**. Order date is the date of Order or Judgment delivered in the case which may be available from the Case History.

6.3.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-Order/v1.0/order?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

6.3.2 HTTP Method *GET*

6.3.3 Request Parameters

Sr. No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of cino,order_no, order_date in (yyyy-mm-dd) format.
2	dept_id	M	N	dept_id same as Scubscriber User name

3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0".

6.3.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(cino="value"|order_no="value"|order_date="value")

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	cino	M	16 characters alphanumeric CNR.
2	order_no	M	Order Number
3	order_date	M	Order date in yyyy-mm-dd format.

6.3.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

6.3.6 Response

Sample Response	Description
.pdf file will be shared	.pdf file for the Order or Judgment will be provided in response.

6.3.7 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
600	INVALID_CNR	The CNR is invalid. The CNR is not in the prescribed format.
602	INVALID_ORDER_NO	The order number is invalid.
601	INVALID_DATE	Date of order is not in correct format or not valid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.4 Search by CNR (Current Case Status) API

API provides only the current status like next date, stage or decision date of the case based on **CNR number**. Instead of getting the complete history of case which is more elaborate, this API provides the current status of the case in short. This API is used to update the current status of the case and may be used in batch processing mode periodically. Single CNR or Multiple CNRs can be sent as request parameter to get the current status of the Case(s).

6.4.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CurrentStatus/v1.0/currentStatus/
```

6.4.2 HTTP Method *POST*

6.4.3 Post Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of cin o.
2	dept_id	M	N	dept_id same as Subscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

6.4.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such **request_str=encrypted(cino="value")**

Ex: request_str=encrypted(cino=JKHC020000012018) --- If single CNR is sent.

request_str=encrypted(cino=JKHC020000012018, JKHC020000212018) --- If multiple CNRs are sent.

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	cino	M	16 characters alphanumeric CNR. More than one CNR can be passed as comma separated. (Maximum 500 CNRs can be sent at a time)

6.4.5 Response

JSON response contains following parameters.

1. **response_str:** This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token:** Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version:** Contains version of API.

6.4.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
case1		Nested response for Cases
date_of_filing	2018-05-28	Filing date of case
cino	JKHC020045882018	16 digit unique CNR number of case
dt_regis	2019-05-28	Registration date of case
type_name	LPA	Case type
fil_no	3951	Filing number of case
fil_year	2018	Filing year of case
reg_no	57	Registration number of case
reg_year	2018	Registration year of case
date_first_list	2018-05-30	First hearing date
date_next_list	2018-07-18	Next hearing date
pend_disp	P	P=Pending case D=Disposed case
date_of_decision		Date of decision (When case is disposed). If the case is pending Null value will be returned.

disp_nature		Reason of disposal. If the case is pending Null value will be returned.
bench_id	1304	Bench ID
purpose_name	FOR ADMISSION	Purpose or current stage of the case
pet_name	GHARU RAM AND ORS.	Main petitioner's name. In some sensitive cases or disputes of private nature value will be shared as xxxxxx.
res_name	STATE TH.HOUSING AND URBAN DEVELOPMENT DEPTT.AND ORS.	Main respondent's name. In some sensitive cases or disputes of private nature value will be shared as xxxxxx.
date_last_list	2018-05-31	Last Proceeding Date
causelist_type	Regular	CauseList Type
bench_name	Division Bench	Bench Name
judicial_branch	LETTERS PATENT APPEAL (LPA)	Judicial Branch
coram	HON'BLE MR. JUSTICE TASHI RABSTAN , HON'BLE MR. JUSTICE SANJAY KUMAR GUPTA	
short_order	DATE FIXED	Short Order
cases2		
date_of_filing	2018-01-11	Filing date of case
cino	UPHC010045882018	16 digit unique CNR number of case
dt_regis	2018-01-11	Registration date of case
type_name	A482	Case type
fil_no	875	Filing number of case
fil_year	2018	Filing year of case
reg_no	875	Registration number of case
reg_year	2018	Registration year of case
date_first_list	2018-01-15	First hearing date
date_next_list	2018-01-15	Next hearing date
pend_disp	P	P=Pending case D=Disposed case
date_of_decision		Date of decision (When case is disposed). If the case is pending Null value will be returned.
disp_nature	Dismiss	Reason of disposal. If the case is pending Null value will be returned.
bench_id	1007	Bench ID
purpose_name	FOR ADMISSION	Purpose or current stage of the case

pet_name	ASHOK NAGAR	Main petitioner's name. In some sensitive cases or disputes of private nature value will be shared as xxxxxx.
res_name	STATE OF U.P. AND ANOTHER	Main respondent's name. In some sensitive cases or disputes of private nature value will be shared as xxxxxx.
date_last_list		Last Proceeding Date
causelist_type	Regular	CauseList Type
bench_name	Single Bench	Bench Name
judicial_branch	Criminal Misc.	Judicial Branch
coram	RAJUL BHARGAVA	
short_order		Short Order

6.4.7 Sample Response

```
{
  "cases1": {
    "date_of_filing": "2018-05-28",
    "cino": "JKHC020045882018",
    "dt_regis": "2018-05-28",
    "type_name": "LPA",
    "fil_no": "3951",
    "fil_year": "2018",
    "reg_no": "57",
    "reg_year": "2018",
    "date_first_list": "2018-05-30",
    "date_next_list": "2020-09-23",
    "pend_disp": "P",
    "date_of_decision": "",
    "goshwara_no": "0",
    "disp_nature": null,
    "bench_id": "1640",
    "purpose_name": "FOR ADMISSION (After Notice)",
    "pet_name": "GHARU RAM AND ORS.",
    "res_name": "STATE TH.HOUSING AND URBAN DEVELOPMENT DEPTT.AND ORS.",
    "date_last_list": "2020-08-28",
    "causelist_type": "After Notice",
    "bench_name": "Division Bench",
    "judicial_branch": "LETTERS PATENT APPEAL ( LPA )",
    "coram": "HON'BLE MR. JUSTICE RAJESH BINDAL , HON'BLE MR. JUSTICE JAVED IQBAL WANI",
    "short_order": "DATE FIXED"
  },
  "cases2": {
```

```

    "date_of_filing": "2018-01-11",
    "cino": "UPHC010045882018",
    "dt_regis": "2018-01-11",
    "type_name": "A482",
    "fil_no": "875",
    "fil_year": "2018",
    "reg_no": "875",
    "reg_year": "2018",
    "date_first_list": "2018-01-15",
    "date_next_list": "2018-01-15",
    "pend_disp": "P",
    "date_of_decision": "",
    "goshwara_no": "0",
    "disp_nature": "Dismiss",
    "bench_id": "1007",
    "purpose_name": "FOR ADMISSION (After Notice)",
    "pet_name": "ASHOK NAGAR",
    "res_name": "STATE OF U.P. AND ANOTHER",
    "date_last_list": "",
    "bench_name": "Single Bench",
    "judicial_branch": "Criminal Misc.",
    "coram": "RAJUL BHARGAVA",
    "short_order": null
  }
}

```

6.4.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
600	INVALID_CNR	The CNR is invalid. The CNR is not in the prescribed format.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
629	UNEXPECTED_ERROR	Service unresponsive
628	RECORD_NOT_FOUND	Record is not available.
632	INVALID_VERSION	Invalid version of API

6.5 Search by Case Number API

API provides list of cases from a High court establishment matching the Case Registration Number. Input for this API is the **Establishment Code, Case Registration Number, Case Registration Year**, and other details. Case Registration number consists of Case Type/Registration Number/Registration Year. Registration Number input is optional, and if not provided, will give list of all cases of the given case type and registration year.

6.5.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CaseNumber/v1.0/caseNumber?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

6.5.2 HTTP Method: **GET**

6.5.3 Request Parameters

Sr. No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,case_type,reg_no,reg_year
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0" .

6.5.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code='value' | case_type='value' | reg_no='value' | reg_year='value')

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) received using Court Complex API.
2	case_type	M	Integer value (ex. 15) of the Case Type. This value case_type can be obtained using Case Type Master API.
3	reg_no	O	Integer value with max length 7 digits (ex. 234) i.e. Registration number of case. If Case Number is not provided, all the cases registered for the given Case type in the given registration year will be shown.
4	reg_year	M	4 digit integer value (ex 2019). i.e. Registration Year of the case.

6.5.5 Response

As shown in Annexure “B”

6.5.6 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
604	INVALID_CASE_TYPE	The Case type is invalid.
605	INVALID_REG_NO	The Case registration number is invalid.
606	INVALID_REG_YEAR	The Case registration year is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.6 Search by Filing Number API

API provides list of cases from a High court establishment matching the Case Filing Number. Input for this API is the **Establishment Code, Case Filing Number, Case Filing Year** and other details.

6.6.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
FilingNumber/v1.0/filingNumber?dept_id=dept_id&request_str=reque  
st_str&request_token=request_token&version=version
```

6.6.2 HTTP Method *GET*

6.6.3 Request Parameters

Sr. No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,case_type,fil_no,fil_year .
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

6.6.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code='value' | case_type='value' | fil_no='value' | fil_year='value')

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	case_type	M	Integer value (ex. 15) of the Case Type. This value case_type can be obtained using Case Type Master API.
3	fil_no	M	Integer value with max length 7 digits (ex. 234) i.e. filing number of case

4	fil_year	M	4 digit integer value (ex 2019). i.e. filing Year of the case.
---	----------	---	--

6.6.5 Response

As shown in Annexure “B”

6.6.6 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
604	INVALID_CASE_TYPE	The Case type is invalid.
607	INVALID_FIL_NO	The Case registration number is invalid.
608	INVALID_FIL_YEAR	The Case registration year is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.7 Search by Party Name API

API provides list of cases from a High court establishment matching name of the party. Input for this API is **Establishment Code, Litigants Name, Case Registration Year, Status of the Case (Pending or Disposed)** and other details. The litigants name may be petitioner’s name or respondent’s name or an extra party name. The search string for litigant name may consist of full name of the party or even few characters (minimum 3) for searching.

6.7.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-PartyName/v1.0/partyName?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

6.7.2 HTTP Method *GET*

6.7.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,pend_disp,litigant_name,reg_year .
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

6.7.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str=

encrypted(est_code='value'|pend_disp='value'|litigant_name='value'|reg_year='value')

Sr. No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	pend_disp	M	Character value ‘P’ or ‘D’. P for pending cases and D for disposed cases
3	litigant_name	M	Character string with maximum length 99. Minimum length of 3 characters is mandatory.
4	reg_year	M	4 digit integer value (ex 2019)i.e. Registration Year of the case.

6.7.5 Response

As shown in Annexure “B”

6.7.6 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
609	INVALID_PEND_DISP	The pending or disposal (i.e. P or D) value is invalid.
610	INVALID_LITIGANT_NAME	The litigant's name is invalid.
606	INVALID_REG_YEAR	The Case registration year is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.8 Search by Advocate Name API

API provides list of cases from a High court establishment matching name of the Advocate. Input for this API is **Establishment Code, Advocate's Name, Case Registration Year, Status of the Case (Pending or Disposed)** and other details. The Advocate's name may be petitioner's advocate name or respondent's advocate name or an extra party advocate name. The search string for advocate name may consist of full name of the Advocate or even few characters (minimum 3) for searching.

6.8.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-AdvocateName/v1.0/advocateName?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

6.8.2 HTTP Method *GET*

6.8.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,pend_disp,advocate_name,reg_year.

2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0".

6.8.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str=

encrypted(est_code='value' | pend_disp='value' | advocate_name='value' | reg_year='value')

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	pend_disp	M	Character value 'P' or 'D'. P for pending cases and D for disposed cases
3	advocate_name	M	Character string with maximum length 99. Minimum length of 3 characters is mandatory.
4	reg_year	M	4 digit integer value (ex 2019). i.e. Registration Year of the case.

6.8.5 Response

As shown in Annexure "B"

6.8.6 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
609	INVALID_PEND_DISP	The pending or disposal (i.e. P or D) value is invalid.

614	INVALID_ADVOCATE_NAME	The litigant's name is invalid.
606	INVALID_REG_YEAR	The Case registration year is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.9 Search by Advocate Bar Registration Number API

API provides list of cases from a High court establishment for a given Advocate Registration number. Input for this API is **Establishment Code, Advocate's Bar Registration Year, Case Registration Year, Status of the Case (Pending or Disposed)** and other details. The Advocate may be petitioner's advocate or respondent's advocate or an extra party advocate. The search string for advocate bar registration number shall be input in the format state characters-bar registration number-registration year.

6.9.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-
AdvocateBarRegistration/v1.0/advocateBarRegn?dept_id=dept_id&request_
str=request_str&request_token=request_token&version=version
```

6.9.2 HTTP Method *GET*

6.9.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,pend_disp,advocate_bar_regn_no,reg_year.
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, which is v1.0.

6.9.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code='value' | pend_disp='value' | advocate_bar_regn_no='value' | reg_year='value')

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	pend_disp	M	Character value 'P' or 'D'. P for pending cases and D for disposed cases
3	advocate_bar_regn_no	M	Character string with maximum length 13.
4	reg_year	M	4 digit integer value (ex 2019). i.e. Registration Year of the case.

6.9.5 Response

As shown in Annexure “B”

6.9.6 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
609	INVALID_PEND_DISP	The pending or disposal (i.e. P or D) value is invalid.
615	INVALID_ADVOCATE_BAR_REGN_NO	The Advocate's Bar Registration Number is invalid.
606	INVALID_REG_YEAR	The Case registration year is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.10 Search by Act API

API provides list of cases from a High court establishment matching the Act. Input for this API is **Establishment Code, National Act Code, Case Registration Year, Status of the Case (Pending or Disposed)** and other details.

6.10.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-Act/v1.0/act?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

6.10.2 HTTP Method *GET*

6.10.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,pend_disp,national_act_code,reg_year.
2	dept_id	M	N	dept_id same as Subscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

6.10.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str=

encrypted(est_code='value'|pend_disp='value'|national_act_code='value'|reg_year='value')

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	pend_disp	M	Character value ‘P’ or ‘D’. P for pending cases and D for disposed cases

3	national_act_code	M	e-Committee has provided 14 digits National Act Codes for Acts. Same may be used (eg. 18600450099001 is the national act code for Indian Penal Code) . This code can be obtained using Act Master API.
4	reg_year	M	4 digit integer value (ex 2019). i.e. Registration Year of the case.

6.10.5 Response

As shown in Annexure “B”

6.10.6 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
609	INVALID_PEND_DISP	The pending or disposal (i.e. P or D) value is invalid.
617	INVALID_NATIONAL_ACT_CODE	The National Act Code is invalid.
606	INVALID_REG_YEAR	The Case registration year is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

7 CauseList API

7.1 Causelist Bench API

API provides list of benches based on causelist date. Input for this API is **Establishment Code**, **Causelist Date** and other details.

7.1.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
CauselistBench/v1.0/causelistBench?dept_id=dept_i  
d&request_str=request_str&request_token=request_token&version=version
```

7.1.2 HTTP Method *GET*

7.1.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code, causelist_date
2	dept_id	M	N	Alpha numeric string shared by e-Committee.
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

7.1.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code="value" | causelist_date="value")

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) received using Court Complex API.
2	causelist_date	M	Cause list date in yyyy-mm-dd format.

7.1.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

7.1.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
case1		
bench_id	4812	Bench id
judge_name	HONBLE THE CHIEF JUSTICE	Judge Name
srno2		
bench_id	4813	Bench id
judge_name	HONBLE THE CHIEF JUSTICE, HON'BLE MR. JUSTICE S. TALAPATRA	Judge Name

7.1.7 Sample Response

```
{
  "case1":{
    "bench_id":4812,
    "judge_name":"HONBLE THE CHIEF JUSTICE"
  },
  "case2":{
    "bench_id":4813,
    "judge_name":"HONBLE THE CHIEF JUSTICE, HON'BLE MR. JUSTICE S.
TALAPATRA"
  }
}
```


7.1.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
616	INVALID_CAUSELIST_DATE	Causelist date is not in correct format or not valid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

7.2 CauseList API

API provides cases listed (CauseList) on a particular date. Input for this API is **Establishment Code** , **Bench ID** and **Cause List Date** and other details. The format of Cause List may vary from State to State. Sequence of cases is provided in the API, however it is advisable to cross check the cause list vis-à-vis as available on the hcservices.ecourts.gov.in portal or mobile app for better understanding and accuracy and refer the cause list available on the portal.

7.2.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
Causelist/v1.0/causelist_details?dept_id=dept_i  
d&request_str=request_str&request_token=request_token&version=version
```

7.2.2 HTTP Method **GET**

7.2.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code, causelist_date, bench_id
2	dept_id	M	N	Alpha numeric string shared by e-Committee.
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0".

7.2.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code="value" | causelist_date="value" | bench_id="value")

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) received using Court Complex API.
2	causelist_date	M	Cause list date in yyyy-mm-dd format.
3	bench_id	M	4 digit bench ID

7.2.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

7.2.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
case1		
bench	HONBLE THE CHIEF JUSTICE	Bench
bench_id	4812	Bench ID
causelist_id	1001	CauseList ID
cause_list_type	DAILY MAIN CAUSE LIST	CauseList Type Name

7.2.7 Sample Response

```
{
  "case1":{
    "bench":"HONBLE THE CHIEF JUSTICE",
    "bench_id":4812,
    "causelist_id":1001,
    "cause_list_type":"DAILY MAIN CAUSE LIST "
  }
}
```

7.2.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
616	INVALID_CAUSELIST_DATE	Causelist date is not in correct format or not valid.
633	INVALID_BENCH_ID	The Bench id is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

7.3 Show CauseList API

API provides facility to view CauseList delivered on a particular date based on **Establishment Code**, **Bench ID**, **CauseList ID** and **CauseList date**.

7.3.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
ShowCauselist/v1.0/causelistdisplay?dept_id=dept_id&request_str=r  
equest_str&request_token=request_token&version=version
```

7.3.2 HTTP Method **GET**

7.3.3 Request Parameters

Sr. No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code, bench_id, causelist_id, causelist_date in (yyyy-mm-dd) format.
2	dept_id	M	N	Alpha numeric string shared by e-Committee.
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

7.3.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code ="value" | bench_id="value" | causelist_id ="value" | causelist_date ="value")

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric establishment code
2	bench_id	M	4 digit bench ID
3	causelist_id	M	4 digit CauseList ID
4	causelist_date	M	CauseList date in yyyy-mm-dd format.

7.3.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details

are shown in the Response JSON table along with the elements, sample and description.

2. **response_token:** Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version:** Contains version of API.

7.3.6 Response

Sample Response	Description
.pdf file will be shared	.pdf file for the CauseList will be provided in response.

7.3.7 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
633	INVALID_BENCH_ID	Bench Id is invalid.
634	INVALID_CAUSELIST_ID	CauseList ID is invalid.
616	INVALID_CAUSELIST_DATE	Causelist date is not in correct format or not valid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

8 Caveat Search APIs

8.1 Search by Caveator/Caveatee Name

API provides list of Caveats from a High court establishment matching name of the party. Input for this API is **Establishment Code, Party Name, Search type** and other details. Search type parameter provides facility to search the name string anywhere (A) or starting with (S) with the input characters. The list also includes matched case numbers along with the Caveats.

8.1.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
CaveatName/v1.0/anywhere?dept_id=dept_id&request_str=request  
_str&request_token=request_token&version=version
```

8.1.2 HTTP Method *GET*

8.1.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,caveat_party_name,search_type
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

8.1.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code='value' | caveat_party_name='value' | search_type)

Sr. No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	caveat_party_name	M	Character string with maximum length 99. Minimum length of 3 characters is mandatory.
3	search_type	M	Single character to define type of search. 'A' anywhere, 'S' starting with

8.1.5 Response

JSON response contains following parameters.

- 1. response_str:** This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
- 2. response_token:** Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
- 3. version:** Contains version of API.

8.1.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
Caveat		Nested response for caveats matching the name
caveat1		1 st Caveat
caveat_no	1	Caveat Registration Number
caveat_year	2019	Caveat Registration Year
matched_case_no	M.C.A./16/2019	Mached Case Number
caveat_filing_date	01-01-2019	Filing Date
caveator_caveatee_details	Asaram Laxman Kamthe Vs Anna Laxman Kamthe	Caveator OR Caveatee Name
caveat_code	100000000012019	Caveat number

8.1.7 Sample Response

```
{
  "caveat": {
    "caveat1": {
      "caveat_no": "251",
      "caveat_year": "2018",
      "matched_case_no": "",
      "caveat_filing_date": "2018-11-13",
      "caveator_caveatee_details": "Ramesh Krishnaji Kulkarni VS
Bhalchandra Kushnaji Kulkarni",
      "caveat_code": "100000002512018"
    },
    "caveat2": {
      "caveat_no": "303",
      "caveat_year": "2018",
      "matched_case_no": "",
      "caveat_filing_date": "2018-12-18",
      "caveator_caveatee_details": "Ramu Ambadas Nagre VS Uttam
Kondiba Sonwane",
      "caveat_code": "100000003032018"
    }
  }
}
```

8.1.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
619	INVALID_CAVEAT_PARTY_NAME	The Caveator's or Caveatee's name is invalid.
620	INVALID_SEARCH_TYPE	Search value provided is invalid
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

8.2 Caveat History API

API provides complete history of the caveat from a High court establishment matching the Caveat Code. Input for this API is **Establishment Code**, **Caveat Code** and other details. Every Caveat has a unique 15 digit Caveat Code within the establishment. This unique code can be retrieved by accessing Caveat using Caveat Search by party name or Caveat Registration Number API.

8.2.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
CaveatHistory/v1.0/caveatDetails?dept_id=dept_id&request_str=re  
quest_str&request_token=request_token&version=version
```

8.2.2 HTTP Method *GET*

8.2.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,caveat_code
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

8.2.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code='value' | caveat_code='value')

Sr. No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	caveat_code	M	15 digits Caveat Code.

8.2.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

8.2.6 Response JSON (after decrypting response_str)

Json key	value	Description
caveat_details		
caveat_no	0000143	Caveat Number
caveat_year	2019	Caveat Registration Year
cnr_no	JKHC01-C00143-2019	Matched Case CNR
subject		
caveat_filing_date	2019-01-24	
time_of_filing	16:26:56	Caveat Number
matched_case_no	M.C.A./36/2019	Matched Case Number
caveator_details		
caveator_name	RAMEES WANI	Caveator Name
caveator_add	Aurangabad	Caveator Address
caveatee_details		
caveatee_name	PUBLIC AT LARGE	Caveatee Name
caveatee_add	Aurangabad	Caveatee Address
extra_party_caveator		
extra_party_caveator1		
extra_caveator_name	Lekhita Gopal Purushottam	Extra Party Caveator Name
extra_caveator_add	Akola	Extra Party Caveator Address
extra_party_caveatee		
extra_party_caveatee1		
extra_caveatee_name	Ashok Krushnaji Kulkarni	Extra Party Caveatee Name
extra_caveatee_add	Aurangabad	Extra Party Caveatee Address

8.2.7 Sample Response

```
{
  "caveat_details": {
    "caveat_no": "0000143",
    "caveat_year": "2019",
    "cnr_no": "JKHC01-C00143-2019",
    "subject": "",
    "caveat_filing_date": "2019-01-24",
    "time_of_filing": "16:26:56"
  },
  "caveator_details": {
    "caveator_name": "RAMEES WANI",
    "caveator_add": ""
  },
  "caveatee_details": {
    "caveatee_name": "PUBLIC AT LARGE",
    "caveatee_add": ""
  },
  "extra_party_caveator": {
    "extra_party_caveator1": {
      "extra_caveator_name": "Rajesh Ramesh Kulkarni",
      "extra_caveator_add": "Aurangabad."
    },
    "extra_party_caveator2": {
      "extra_caveator_name": "Jotsana Jaybant
      Devdhar", "extra_caveator_add": "Aurangabad."
    }
  },
  "extra_party_caveatee": {
    "extra_party_caveatee1": {
      "extra_caveatee_name": "Ashok Krushnaji
      Kulkarni", "extra_caveatee_add": "Aurangabad."
    },
    "extra_party_caveatee2": {
      "extra_caveatee_name": "Vijay Krishnaji
      Kulkarni", "extra_caveatee_add": "Aurangabad."
    }
  }
}
```

8.2.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
623	INVALID_CAVEAT_CODE	15 digits Caveat Code.
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department id is invalid.
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive.
632	INVALID_VERSION	Invalid version of API

9 Establishment APIs

9.1 High Court State Master API

API provides list of High Courts and states relevant **state codes** used in the eCourts project for further accessing relevant APIs. This API doesn't require any input string and can just be connected using dept_id,request_str,token & version to get the list of the states.

9.1.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
StateMaster/v1.0/state?dept_id=dept_id&request_token=request_t  
oken&version=version
```

9.1.2 HTTP Method *GET*

9.1.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	dept_id	M	N	dept_id same as Scubscriber User name
2	request_str	M	Y	Doesn't require any input string (eg. request_str="")
2	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
3	version	M	N	It contains value of the API version, e.g. "v1.0".

9.1.4 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

9.1.5 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
state		Nested response for states
state1		1 st state
state_code	9	State Code
state_name	Allahabad High Court	Name of High Court
state2		2 nd State
state_code	19	State Code
state_name	Calcutta High Court	Name of High Court

9.1.6 Sample Response

```
{
  "state": {
    "state14": {
      "state_code": 9,
      "state_name": "Allahabad High Court"
    },
    "state17": {
      "state_code": 19,
      "state_name": "Calcutta High Court"
    }
  }
}
```

9.1.7 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department id is invalid.
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive.
632	INVALID_VERSION	Invalid version of API

9.2 District Master API

API provides list of the Districts and relevant **District codes** pertaining to the given state used in the eCourts project for further accessing relevant APIs. Input for this API is **State Code** and other details.

9.2.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-DistrictMaster/v1.0/district?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

9.2.2 HTTP Method *GET*

9.2.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of state_code
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

9.2.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(state_code='value')

Sr. No.	Element	Mandatory (M) / Optional (O)	Description
1	state_code	M	2 digit state code retrieved from State Master.

9.2.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

9.2.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
district		Nested response for Districts within the state
district1		1 st district
dist_code	2	District Code
dist_name	ANANTNAG	District Name
district2		2 nd district
dist_code	4	District Code
dist_name	BADGAM	District Name

9.2.7 Sample Response

```
{
  "district1": {
    "dist_code": 2,
    "dist_name": "ANANTNAG"
  },
  "district2": {
    "dist_code": 4,
    "dist_name": "BADGAM"
  }
}
```

9.2.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
624	INVALID_STATE_CODE	The state code is invalid.
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department ID is invalid.
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Internal server error or service unresponsive.
632	INVALID_VERSION	Invalid version of API

9.3 Bench API

API provides list of the Benches and relevant High Establishment codes. Input for this API is State Code and other details. Establishment Code retrieved using this API can be used to access the case data using various Case Search APIs.

9.3.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
BenchMaster/v1.0/bench?dept_id=dept_id&request_str=request_str  
&request_token=request_token&version=version
```

9.3.2 HTTP Method *GET*

9.3.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of state_code
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

9.3.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(state_code='value')

Sr. No.	Element	Mandatory (M) / Optional (O)	Description
1	state_code	M	2 digit state code retrieved from State Master.

9.3.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.

2. **response_token:** Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version:** Contains version of API.

9.3.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
benches		
sr_no1		
bench_id	1	Bench ID
bench_name	Jammu Wing	Bench Name of High Court
est_code	JKHC02	Establishment Code
sr_no2		
bench_id	2	Bench ID
bench_name	Srinagar Wing	Bench Name of High Court
est_code	JKHC01	Establishment Code

9.3.7 Sample Response

```
{
  "benches": {
    "sr_no1": {
      "bench_id": 1,
      "bench_name": "Jammu Wing",
      "est_code": "JKHC02"
    },
    "sr_no2": {
      "bench_id": 1,
      "bench_name": "Srinagar Wing",
      "est_code": "JKHC01"
    }
  }
}
```

9.3.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
633	INVALID_BENCH_ID	The Bench id is invalid.
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department id is invalid.
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Internal server error or service unresponsive.
632	INVALID_VERSION	Invalid version of API

10 Master APIs

10.1 Acts Master API

For every Act, a unique **National Act Code**. API provides list of the Acts and relevant National Act Codes used in the eCourts project for further accessing relevant APIs. This API doesn't require any input string and can just be connected using dept_id,request_str,token & version to get the list of all the Acts with the respective National Act codes.

10.1.1 URL Structure

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-ActMaster/v1.0/act?dept_id=dept_id&request_token=request_token&version=version
```

10.1.2 HTTP Method *GET*

10.1.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	dept_id	M	N	dept_id same as Subscriber User name
2	request_str	M	Y	Doesn't require any input string (eg. request_str="")
2	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
3	version	M	N	It contains value of the API version, e.g. "v1.0" .

10.1.4 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

10.1.5 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
act1		1 st act
national_act_code	18600450099001	National Act Code
actname	INDIAN PENAL CODE	Act
act2		2nd act
national_act_code	19590540099001	National Act Code
actname	ARMS ACT	Act

10.1.6 Sample Response

```
{
  "act1":{
    "national_act_code":"18360100000000",
    "actname":"Bengal Indigo Contracts Act"
  },
  "act2":{
    "national_act_code":"18360200000000",
    "actname":"Bengal Districts Act"
  },
  "act3":{
    "national_act_code":"18370400000000",
    "actname":"Madras Public Property Malversation Act"
  }
}
```

10.1.7 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department id is invalid.
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive.
632	INVALID_VERSION	Invalid version of API

10.2 Case Type Master API

API provides list of the Case Types (referred as **type_name**) and relevant Case Type Codes (referred as **case_type**) used in the establishment for further accessing relevant APIs. Input for this API is **Establishment Code** and other details. Type Name and Case Type retrieved using this API can be used to access the case data using various Case Search APIs like Search by Case Registration Number, Filing Number etc.

10.2.1 URL STRUCTURE

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CaseTypeMaster/v1.0/caseType?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

10.2.2 HTTP Method *GET*

10.2.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code
2	dept_id	M	N	dept_id same as Subscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0" .

10.2.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such
request_str= encrypted(est_code='value')

Sr. No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API

10.2.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

10.2.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
casetype1		1 st case type
case_type	158	Case Type Code
type_name	491: CRIMINAL	Case Type Name
casetype2		2nd case type
case_type	144	Case Type Code
type_name	491_A : 491_A CRIMINAL PROCEDURE CODE	Case Type Name
Casetype3		2nd case type
case_type	157	Case Type Code
type_name	561 : CRIMINAL	Case Type Name

10.2.7 Sample Response

```
{
  "casetype1": {
    "case_type": "158",
    "type_name": "491 : CRIMINAL"
  },
  "casetype2": {
    "case_type": "144",
    "type_name": "491_A : 491_A CRIMINAL PROCEDURE CODE"
  },
  "casetype3": {
    "case_type": "157",
    "type_name": "561 : CRIMINAL"
  }
}
```

10.2.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department id is invalid.
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive.
632	INVALID_VERSION	Invalid version of API

11 Annexure-A: Encryption-Decryption-Hash Value

11.1 Hash value creation and implementation

Hash value is prepared by using **hash_hmac** function in PHP. **sha256** algorithm along with requested string and **15081947** key is used for generating Hash. Hash value is generated by concatenating sequence of Key-Value pairs of parameters separated by pipe (|) and then generating hash of this concatenated string by using **hash_mac** function.

Ex: `$input_str="Key1=Value1|Key2=Value2|Key3=Value3|Key4=Value4";`

e.g. input_str="cino=JKHC020045882018|business_date=2019-07-29". In the example concatenated string may be stored in variable `input_str`.

```
$input_str="cino=JKHC020045882018|business_date=2019-07-29";  
  
$request_token = hash_hmac('sha256', $input_str, "15081947");
```

Generated hash value is passed as **request_token** to the API.

URL of the API will be

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
ShowBusiness/v1.0/business?dept_id=dept_id&request_str=request_str&re  
quest_token=request_token&version=version
```

11.2 Encryption method for request string

The request string is encrypted by using **openssl_encrypt** function. 'AES-128-CBC' is used.

\$authentication_key="xxxxxx"; // Authentication key provided by e-committee

\$iv="abcdef987654"; // Fixed initialization vector

Request string is formed by concatenating sequence of Key-Value pairs of parameters

`$input_str="Key1=Value1|Key2=Value2|Key3=Value3|Key4=Value4";`

e.g. input_str="cino=JKHC020045882018|business_date=2019-07-29"

In the example concatenated string may be stored in variable `input_str`.

```
$encrypt=openssl_encrypt($input_str, 'AES-128-CBC', $ authentication_key, 'OPENSSL_RAW_DATA', $iv);  
  
$request_str = base64_encode($encrypt);
```

11.3 For sending request to open API

\$dept_id="XXXXXX"; // Department id same as Subscriber user name

\$request_token is the hash value as mentioned in section **11.1**

\$request_string is a encrypted string as mentioned in section **11.2**

```
https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-  
ShowBusiness/v1.0/business?dept_id=$dept_id&request_str=$request_str  
ing&request_token=$request_token&version=version
```

11.4 Decryption method for response string

The response string, response_str (variable), received from the respective API, is decrypted by using **openssl_decrypt** function at the client end. 'AES-128-CBC' is used.

\$authentication_key="xxxxxx"; // Authentication key provided by e-committee

\$iv="abcdef987654"; // Fixed initialization vector

```
$payload=base64_decode($response_str);  
  
$decrypt=openssl_decrypt($payload, 'AES-128-CBC', $authentication_key, 'OPENSSL_RAW_DATA', $iv);
```

\$decrypt variable contains decrypted response of the respective API in JSON format.

11.5 Response token verification

The decrypted response string (eg \$decrypt), as detailed in section 11.4 is passed to the **hash_hmac** function to generate the hash value. Hash value is prepared by using **hash_hmac** function in PHP. **sha256** algorithm along with requested string and **15081947** key is used for generating Hash.

```
$decrypt= "{
  "desgname": "Justice",
  "case_number":
  "LPA/0000057/2018",
  "business_date":
  "2019-07-29",
  "business": "",
  "short_order_det": ""
}";

$response_hash_value = hash_hmac('sha256',$decrypt,"15081947");
```

The generated hash value of response (e.g. **response_hash_value**) may be compared with **response_token** received in the response.

12 Annexure-B: Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

12.1.1 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
establishment_name	Jammu Wing	Court Establishment Name
casenos		Nested response for more than one cases.
case1		1 st Case details
cino	JKHC020106422017	CNR Number of the case
type_name	LPASW	Case Type of the Case
reg_no	1	Registration Number
reg_year	2018	Registration Year
pet_name	J.K.B.O.S.E.TH.ITS CHAIRMAN	Petitioner Name
res_name	ASHOK KUMAR GANDOTRA AND ORS	Respondent Name

12.1.2 Sample Response

```
{
  "establishment_name": "Jammu Wing",
  "casenos": {
    "case1": {
      "cino": "JKHC020106422017",
      "type_name": "LPASW",
      "reg_no": "1",
      "reg_year": "2018",
      "pet_name": "J.K.B.O.S.E.TH.ITS CHAIRMAN",
      "res_name": "ASHOK KUMAR GANDOTRA AND ORS"
    }
  }
}
```


13 API Consumption using Postman

POSTMAN is a tool to test API functionality. It offers a simple user interface for constructing requests and reading responses so that the API can be tested without writing code.

Follow the steps given below to test the API-

1. Getting Access Token
 - a. Enter the URL - Method 'POST' or 'GET'
 - b. Enter the parameters – Grant Type, User Name, Password and Scope
 - c. Enter the headers
 - d. Send; User will receive **Access Token** as response.
2. API Consumption
 - a. Enter the URL – Method 'POST' or 'GET'
 - b. Enter request Parameters – dept ID, Request string, Request Token and Version
 - c. Enter Header
 - d. Send; User will receive response string, response token and version as test output

13.1 Getting Access Token

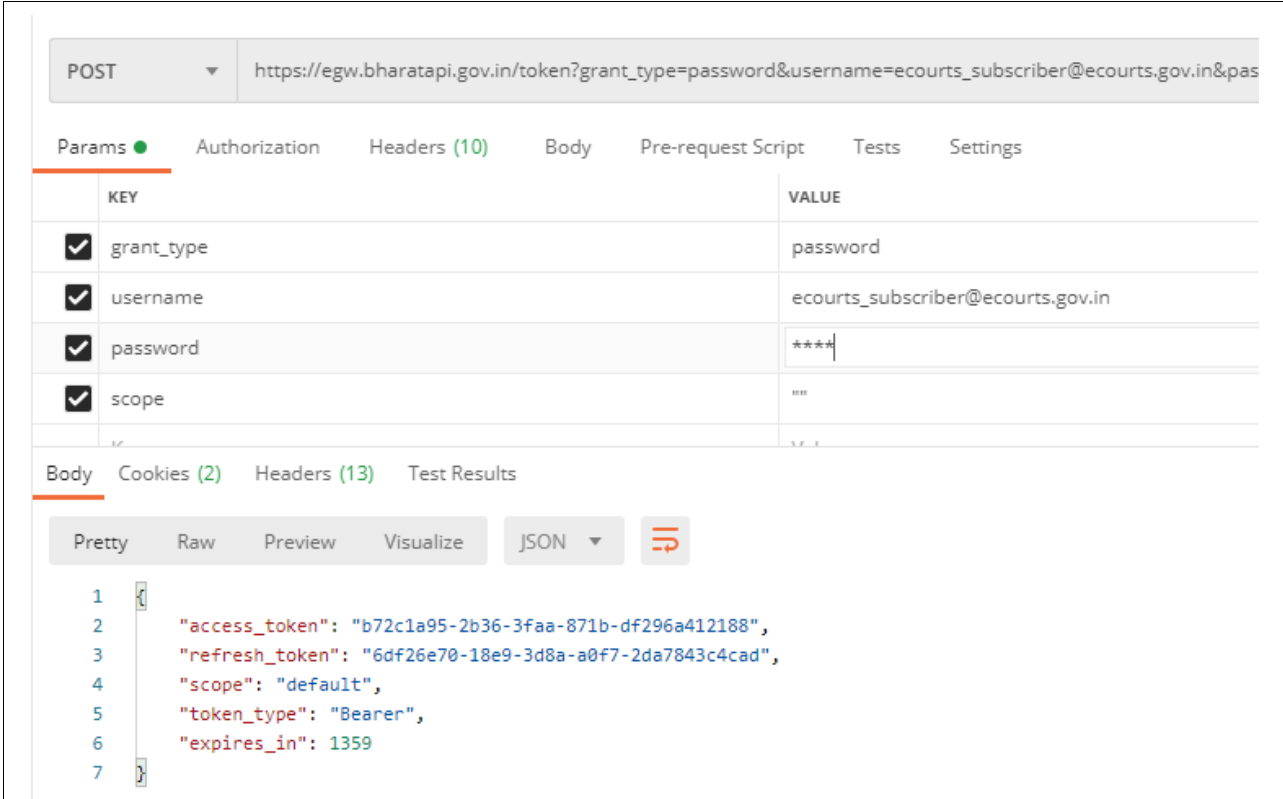

The screenshot displays the Postman interface for a POST request. The URL bar shows the endpoint: `https://egw.bharatapi.gov.in/token?grant_type=password&username=ecourts_subscriber@ecourts.gov.in&pas`. The 'Params' tab is active, showing a table of request parameters:

KEY	VALUE
☒ grant_type	password
☒ username	ecourts_subscriber@ecourts.gov.in
☒ password	****
☒ scope	""

Below the parameters table, the 'Body' tab is selected, showing the response in JSON format:

```
1 {
2   "access_token": "b72c1a95-2b36-3faa-871b-df296a412188",
3   "refresh_token": "6df26e70-18e9-3d8a-a0f7-2da7843c4cad",
4   "scope": "default",
5   "token_type": "Bearer",
6   "expires_in": 1359
7 }
```

POST https://egw.bharatapi.gov.in/token?grant_type=password&username=ecourts_subscriber@ecourts.gov.in

Params ● Authorization **Headers (10)** Body Pre-request Script Tests Settings

☐	User-Agent ⓘ	PostmanRuntime/7.26.5
☐	Accept ⓘ	*/*
☐	Accept-Encoding ⓘ	gzip, deflate, br
☐	Connection ⓘ	keep-alive
☒	Authorization	Basic dTVqWE1tNEZ3a0JFQ3Fqem5PWHVD
☒	Content-Type	application/x-www-form-urlencoded
	Key	Value

Body Cookies (2) Headers (12) Test Results

Pretty Raw Preview Visualize JSON

```

1 {
2   "access_token": "b72c1a95-2b36-3faa-871b-df296a412188",
3   "refresh_token": "6df26e70-18e9-3d8a-a0f7-2da7843c4cad",
4   "scope": "default",
5   "token_type": "Bearer",
6   "expires_in": 1001

```

Request Parameter :

1. grant_type=password
2. [username=abc@ecourts.gov.in](#) //subscriberusername@domainname
3. password=**** // subscriber login password
4. scope=""

Hearders:

1. Authorization=****

Getting Response :

1 access_token="b72c1a95-2b36-3faa-871b-df296a412188" // this access token pass to heander for each api consumption.

13.2 API Consumption

GET https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CNRSearch/v1.0/cnrFullCaseDetails?dept_id=****&request_str=amfrc7Jlf8zRgYWU

Params ● Authorization Headers (8) Body Pre-request Script Tests Settings

☒	dept_id	****
☒	request_str	amfrc7Jlf8zRgYWUAWN%2BndrAhPFNOlXpU6gbEI4%2BQaU%3D
☒	request_token	f61f52970ea4cfcb7e06a18e111a915e9d977a4f6101538f99e63ccde834...
☒	version	v1.0
	Key	Value

Body Cookies (2) Headers (15) Test Results

Pretty Raw Preview Visualize HTML

```
1 [{"response_str": "bhDpRej41\\QoS8rzNHmWQPxYHLcgqu5F9Z1YuseUn035ZwyJ88KhPGffT0ev020eaUJZwCh15+WLkHqZGdTOEGXyk\\G1WMRH6pPcDvdxKJrj6OcuV4GZgRFBcQVjxSbfbFeqSRBVzL4t4mnYz+gWE1FIj9HzegPo49fRNzkXyOuvZJuUOQgGnA0gNJ3r6mz8rzAnDsKD87rKZNnvxw+4HA0qoAwNhsV7CXtq7QHPBrKOYdKxvwsjnQcyK0VSWTyhPT2bg1FAzUjncKUJ2GsaqZsgaboavV8FNbox05TbHI4bwFRJsbRHRKCYD\\88BvM5Le1b1G2DXiH4YHMz0UqcqoMeyEjKoKw+aeK1mmPue105TkphTf7sgFZ\\iBBA\\D0w8g1RVKOTV6aBU14+R3kInTrR9hokttD5KtE7wT1Xvoa42cPXi4SLv4LfB3tpJizKB0J8UGBwMmrEMjQIPKoLh8j71qtMeoioA+Gha4VeNAX7AV1PZAT0qV9gWb4GyX4MVHSG3AD1tgG9yvvP267gmPctC0C48CiQd1mc1S2R38q3yBtDgCkH8SMug8Tc1+v+fbFRsfFMh0AeV1DmLcZUsdu6m2XjC3FhjFfEac3qcX0e1fuxE5bevfcDdLg865LLBIabXXRyCP4VLRsyKdyaAhuIMdVSZzT1J\\3Rz\\Mrrv7Uy1JtUxyZoh\\9HriW5Jc97IKVcSkIdg\\RgtjLAgejXhg+BXVGZUbbqRffxu1b9+vEDc7jRo5hwKvSY20WlMquKJ\\KB\\WzxjHaVhMAFb2MbMwuLjQha\\fJc1C8Ebg6RnaJAHiq+dzYPTzFcVwWtiPE7LHnd\\BQ6pG6XaqIs910ThJ0SRbpxBCdskMpJo5ZJI8SQ+6bA2md15u1mV0aDnr605cwcsBTtHXCgqgPOoNe1moMHD+TM6sVU2fLosn1\\H
```

GET https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CNRSearch/v1.0/cnrFullCaseDetails?dept_id=****&request_str=amf

Params ● Authorization Headers (8) Body Pre-request Script Tests Settings

☐	Accept	*/*
☐	Accept-Encoding	gzip, deflate, br
☐	Connection	keep-alive
☒	Authorization	Bearer 438c1a01-e0e6-3567-9ff8-e98d1700752e
	Key	Value

Body Cookies (2) Headers (15) Test Results

Pretty Raw Preview Visualize HTML

```
1 [{"response_str": "bhDpRej41\\QoS8rzNHmWQPxYHLcgqu5F9Z1YuseUn035ZwyJ88KhPGffT0ev020eaUJZwCh15+WLkHqZGdTOEGXyk\\G1WMRH6OcuV4GZgRFBcQVjxSbfbFeqSRBVzL4t4mnYz+gWE1FIj9HzegPo49fRNzkXyOuvZJuUOQgGnA0gNJ3r6mz8rzAnDsKD87rKZNnvxw+4HA0qoAwNhsV7CXtq7QHPBrKOYdKxvwsjnQcyK0VSWTyhPT2bg1FAzUjncKUJ2GsaqZsgaboavV8FNbox05TbHI4bwFRJsbRHRKCYD\\88BvM5Le1b1G2DXiH4YHMz0UqcqoMeyEjKoKw+aeK1mmPue105TkphTf7sgFZ\\iBBA\\D0w8g1RVKOTV6aBU14+R3kInTrR9hokttD5KtE7wT1Xvoa42cPXi4SLv4L8UGBwMmrEMjQIPKoLh8j71qtMeoioA+Gha4VeNAX7AV1PZAT0qV9gWb4GyX4MVHSG3AD1tgG9yvvP267gmPctC0C48CiQd1mc1S2R38q3yBtDgCkH8SMug8Tc1+v+fbFRsfFMh0AeV1DmLcZUsdu6m2XjC3FhjFfEac3qcX0e1fuxE5bevfcDdLg865LLBIabXXRyCP4VLRsyKdyaAhuIMdVSZzT1J\\3Rz\\Mrrv7Uy1JtUxyZoh\\9HriW5Jc97IKVcSkIdg\\RgtjLAgejXhg+BXVGZUbbqRffxu1b9+vEDc7jRo5hwKvSY20WlMquKJ\\KB\\WzxjHaVhMAFb2MbMwuLjQha\\fJc1C8Ebg6RnaJAHiq+dzYPTzFcVwWtiPE7LHnd\\BQ6pG6XaqIs910ThJ0SRbpxBCdskMpJo5ZJI8SQ+6bA2md15u1mV0aDnr605cwcsBTtHXCgqgPOoNe1moMHD+TM6sVU2fLosn1\\H
```

Request parameters:

1. **dept_id** =***** //subscriber user name same as dept_id
2. **request_str** ="zBQOVk9fwPdbGTagmARvcUNpMLGoBJOxXZb0DD1LV4U%3D" //request_str is a encrypted string as mentioned in section 11.2
3. **request_token** ="4bdd85be82d967bf46bc6c533a07bd26272fd849619f327645c9d46bcfd4f20e" // request_token is the hash value as mentioned in section 11.1
4. **version** ="v1.0"

Headers:

1. **Authorization=**"Bearer b72c1a95-2b36-3faa-871b-df296a412188" // This access token used further for validating subscriber user on NAPIX Platform

Response parameters :

1. **response_str** : This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

14 API Consumption using Sample Application

Note:

- Authorization Key is generated for particular subscriber-application. Authorization key will be different for every application.
- API Consumer program should pass this authorization key in header.
- In response, API consumer program will receive access token from **NAPIX** Platform.
- While consuming API, authorization key needs to pass in header for getting access token. Access Token will validate subscriber at NAPIX platform and then subscriber can consume API through program

Sample PHP code:

```
<?php

/*Note :
Enter text as password for 'grant_type'
Enter your NAPIX Subscriber user id for 'username@domainname'
Enter NAPIX subscriber password for 'password' fields.
*/

$grant_type="password";
$username="username@domainname";
$password="*****";
$scope = "";
$authorization="xxxxxxxxxx";

/*Note: Authorization Key is for particular subscriber- application. API Consumer program should
pass this authorization key in header.
Then in response, API consumer program will receive access token.
*/

$url = "https://egw.bharatapi.gov.in/token"; // bharatapi token generation URL

$credentials = array();
$credentials['grant_type'] = $grant_type;
$credentials['username'] = $username;
$credentials['password'] = $password;
$credentials['scope'] = $scope;
$credentials['authorization'] = $authorization;
$credentials['url'] = $url;

function get_token(array $credentials){
```

```

$grant_type=$credentials['grant_type'];
$username=$credentials['username'];
$password=$credentials['password'];
$scope = $credentials['scope'];
$authorization=$credentials['authorization'];
$url = $credentials['url'];

$post_fields =
"grant_type=".$grant_type."&username=".$username."&password=".$password."&scope=".$scope;

$curl = curl_init();

curl_setopt_array($curl, array(
    CURLOPT_URL => $url,
    CURLOPT_RETURNTRANSFER => true,
    CURLOPT_ENCODING => "",
    CURLOPT_MAXREDIRS => 10,
    CURLOPT_TIMEOUT => 0,
    CURLOPT_SSL_VERIFYHOST => false,
    CURLOPT_SSL_VERIFYPEER => false,
    CURLOPT_FOLLOWLOCATION => true,
    CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
    CURLOPT_CUSTOMREQUEST => "POST",
    CURLOPT_POSTFIELDS => $post_fields,
    CURLOPT_HTTPHEADER => array(
        "Authorization: Basic ".$authorization,
        "Content-Type: application/x-www-form-urlencoded"
    ),
));
$response = curl_exec($curl);
curl_close($curl);
return $response;
}

$result = get_token($credentials);
$result1=json_decode($result,true);
$access_token = $result1['access_token'];

/*In access_token variable access token response will be received. This access token is used further
for validating subscriber user on NAPIX Platform.
*/

$key='';
$dept_id='****'; // NAPIX Subscriber user name as dept_id
$version='v1.0';
$request_str="est_code='JKHC01'";

```

```

$request_token = hash_hmac('sha256', $request_str, "15081947");

function encrypt($input_str) {

    $authentication_key="*****"; // authentication_key given by ecomittee
    $iv="abcdef987654";
    $encrypt=openssl_encrypt($input_str, 'AES-128-CBC', $authentication_key, 1, $iv);
    $request_str = base64_encode($encrypt);
    return $request_str;
}
$request_str=encrypt($request_str);
$request_str=urlencode($request_str);

$header=array();
$header[]='Authorization: Bearer '.$access_token;

$url = "https://egw.bharatapi.gov.in/t/ecourts.gov.in/HighCourt-CaseTypeMaster/v1.0
/caseType?dept_id=".$dept_id."&request_str=".$request_str."&request_token=".$request_token."&
version=".$version;

$ch = curl_init();
    curl_setopt($ch, CURLOPT_SSL_VERIFYHOST, 0);
    curl_setopt($ch, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($ch, CURLOPT_URL, $url);
    curl_setopt($ch, CURLOPT_HTTPHEADER,$header);
    curl_setopt($ch, CURLOPT_RETURNTRANSFER, true);
    $result = curl_exec($ch);    //Returned Result from your API
    //echo $result;

if (curl_errno($ch)) {
    print curl_error($ch);
}
curl_close($ch);
$result1=json_decode($result,true);
if(isset($result1['response_str']))
{
    echo $result;
}

elseif(isset($result1['status']))
{
    echo $result1;
}

?>

```

15 Annexure-C: HTTP Status Code

The following table lists the possible Common error/status codes:

Status Code	Status	Status Description
200	OK	Everything is normal
400	BAD_REQUEST	Server didn't understand the URL you gave it
403	FORBIDDEN	Server refuses to give you a file, authentication won't help
404	NOT_FOUND	A file doesn't exist at that address
500	INTERNAL_SERVER_ERROR	Something on the server didn't work right
504	SERVICE_UNAVAILABLE	Too busy to respond to a client
631	API_ACCESS_NOT_ALLOWED	API Access is not allowed