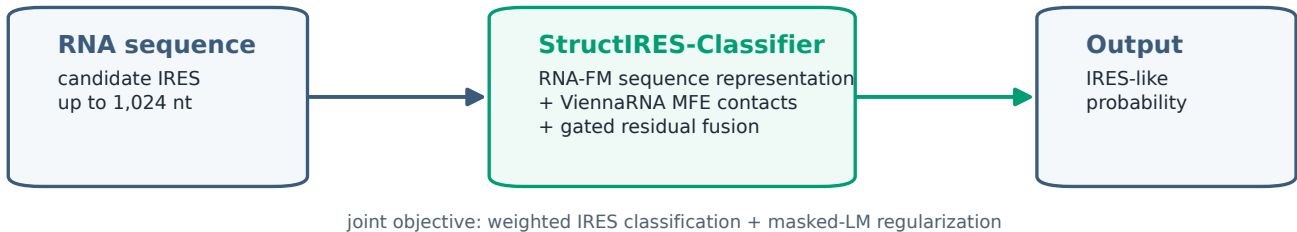


A


Recognize IRES-like sequences with structure-aware fusion

Classifier training uses native source-train records only; structural contacts are label-free.

**B**

Optimize local IRES variants under matched structural constraints

All methods select from the same length-preserving, fixed-budget candidate pool.

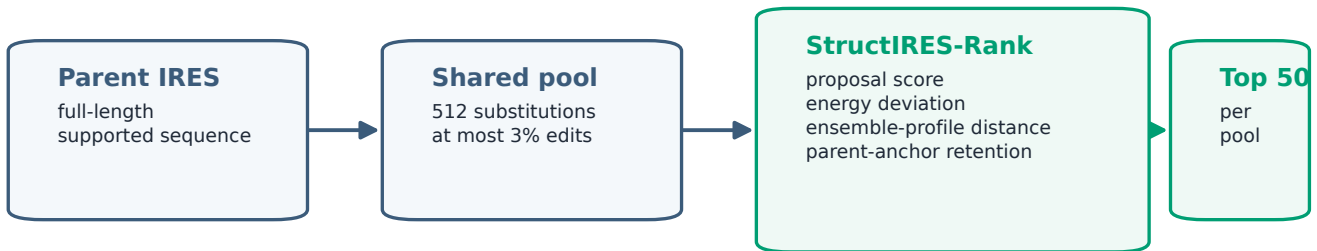


Score-only and each ablation have identical parents, pools, edit budget and retained-set size.

C

Report structural preservation and assay-qualified external evidence

Direct-RNA observations are held out from candidate selection and do not establish new-candidate activity.

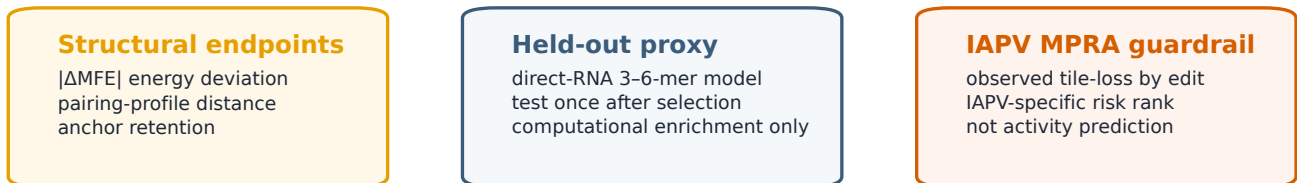

Claim boundary: predicted structural preservation and in-silico candidate enrichment; experimental validation remains future work.