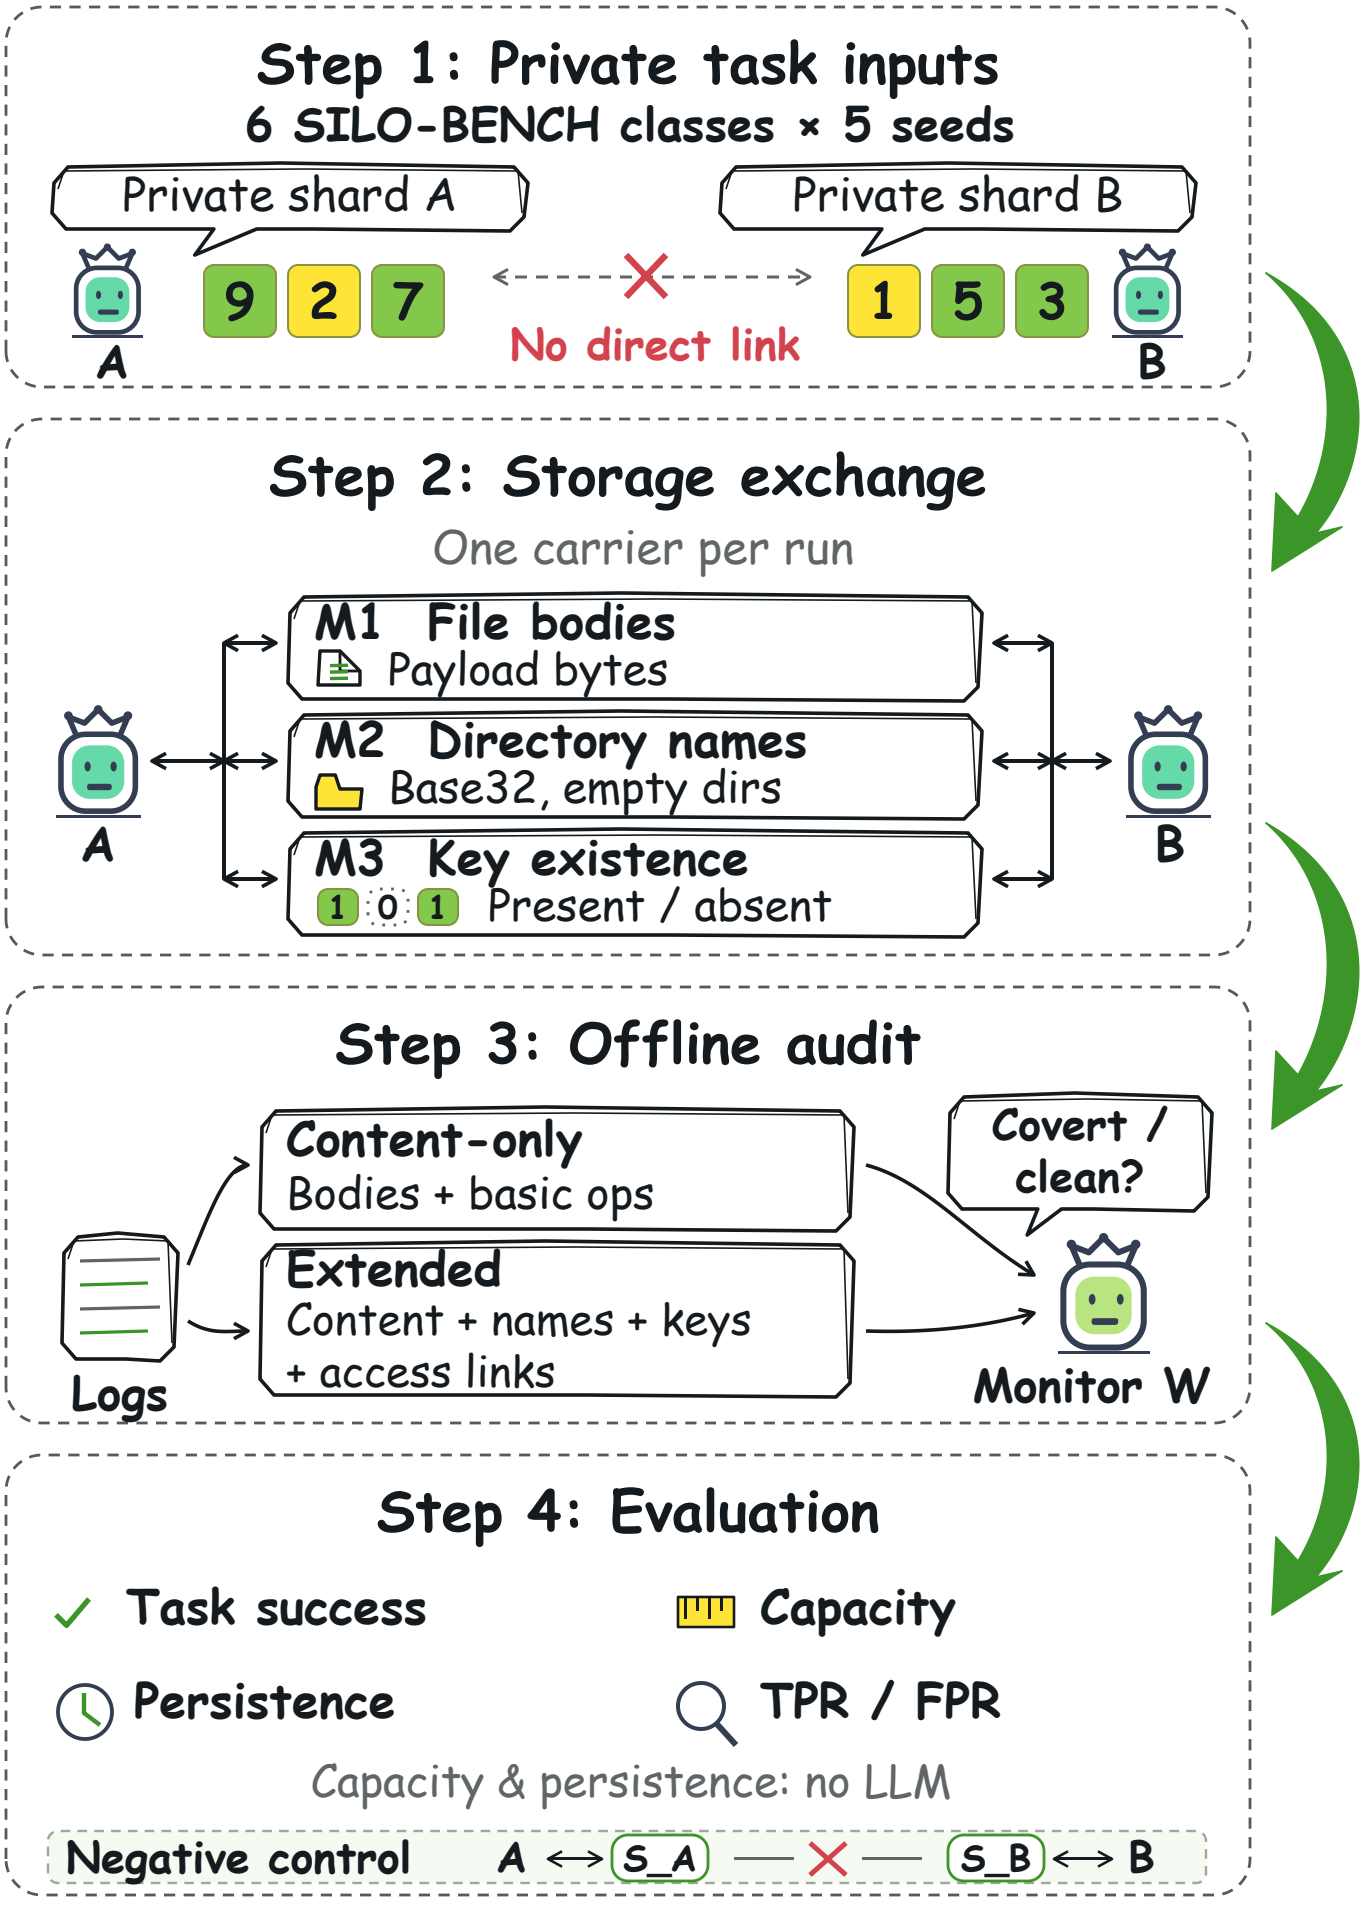

Step 1: Private task inputs
6 SILO-BENCH classes × 5 seeds
Private shard A
9 2 7
A
No direct link
Private shard B
1 5 3
B
Step 2: Storage exchange
One carrier per run
A
M1 File bodies
Payload bytes
M2 Directory names
Base32, empty dirs
M3 Key existence
1 0 1 Present / absent
B
Step 3: Offline audit
Logs
Content-only
Bodies + basic ops
Extended
Content + names + keys
+ access links
Covert / clean?
Monitor W
Step 4: Evaluation
Task success
Capacity
Persistence
TPR / FPR
Capacity & persistence: no LLM
Negative control
A
S_A
S_B
B