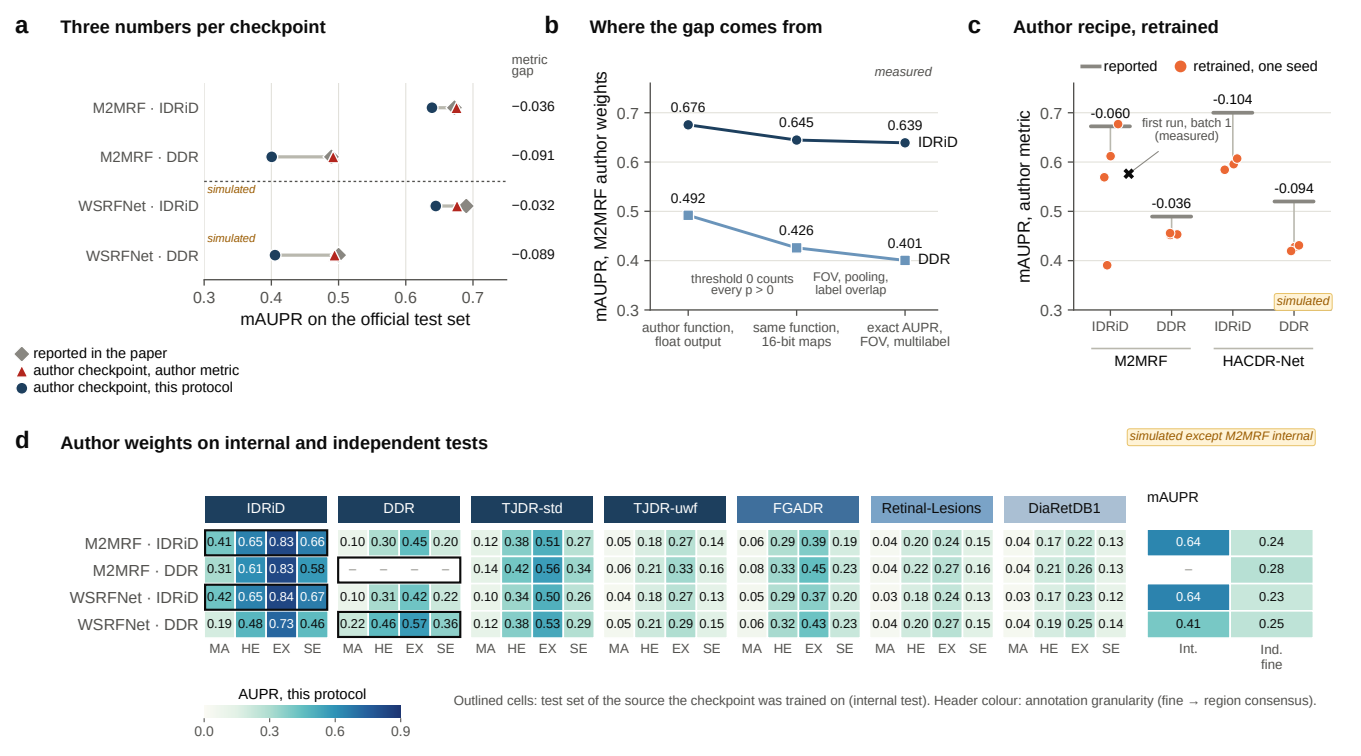
a
Three numbers per checkpoint
metric gap
M2MRF · IDRiD
M2MRF · DDR
simulated
WSRFNet · IDRiD
simulated
WSRFNet · DDR
−0.036
−0.091
−0.032
−0.089
0.3
0.4
0.5
0.6
0.7
mAUPR on the official test set
reported in the paper
author checkpoint, author metric
author checkpoint, this protocol
b
Where the gap comes from
measured
mAUPR, M2MRF author weights
0.7
0.6
0.5
0.4
0.3
0.676
0.645
0.639
IDRiD
0.492
0.426
0.401
DDR
threshold 0 counts every p > 0
FOV, pooling, label overlap
author function, float output
same function, 16-bit maps
exact AUPR, FOV, multilabel
c
Author recipe, retrained
reported
retrained, one seed
mAUPR, author metric
-0.060
first run, batch 1 (measured)
-0.104
-0.036
-0.094
simulated
IDRiD
DDR
IDRiD
DDR
M2MRF
HACDR-Net
d
Author weights on internal and independent tests
simulated except M2MRF internal
IDRiD
DDR
TJDR-std
TJDR-uwf
FGADR
Retinal-Lesions
DiaRetDB1
mAUPR
M2MRF · IDRiD 0.41 0.65 0.83 0.66 | 0.10 0.30 0.45 0.20 | 0.12 0.38 0.51 0.27 | 0.05 0.18 0.27 0.14 | 0.06 0.29 0.39 0.19 | 0.04 0.20 0.24 0.15 | 0.04 0.17 0.22 0.13 | 0.64 0.24
M2MRF · DDR 0.31 0.61 0.83 0.58 | – – – – | 0.14 0.42 0.56 0.34 | 0.06 0.21 0.33 0.16 | 0.08 0.33 0.45 0.23 | 0.04 0.22 0.27 0.16 | 0.04 0.21 0.26 0.13 | – 0.28
WSRFNet · IDRiD 0.42 0.65 0.84 0.67 | 0.10 0.31 0.42 0.22 | 0.10 0.34 0.50 0.26 | 0.04 0.18 0.27 0.13 | 0.05 0.29 0.37 0.20 | 0.03 0.18 0.24 0.13 | 0.03 0.17 0.23 0.12 | 0.64 0.23
WSRFNet · DDR 0.19 0.48 0.73 0.46 | 0.22 0.46 0.57 0.36 | 0.12 0.38 0.53 0.29 | 0.05 0.21 0.29 0.15 | 0.06 0.32 0.43 0.23 | 0.04 0.20 0.27 0.15 | 0.04 0.19 0.25 0.14 | 0.41 0.25
MA HE EX SE
Int.
Ind. fine
AUPR, this protocol
0.0
0.3
0.6
0.9
Outlined cells: test set of the source the checkpoint was trained on (internal test). Header colour: annotation granularity (fine → region consensus).