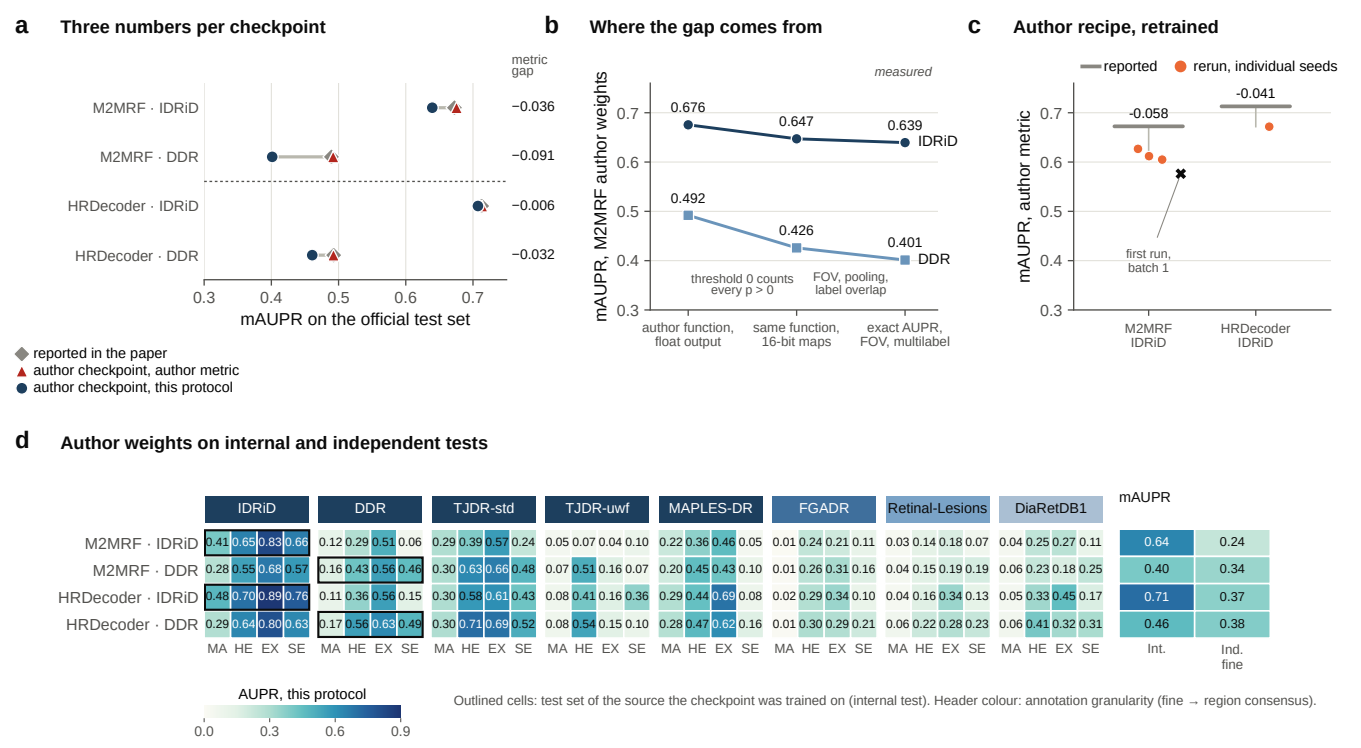
a
Three numbers per checkpoint
metric gap
M2MRF · IDRiD
M2MRF · DDR
HRDecoder · IDRiD
HRDecoder · DDR
−0.036
−0.091
−0.006
−0.032
0.3
0.4
0.5
0.6
0.7
mAUPR on the official test set
reported in the paper
author checkpoint, author metric
author checkpoint, this protocol
b
Where the gap comes from
measured
mAUPR, M2MRF author weights
0.676
0.647
0.639
IDRiD
0.492
0.426
0.401
DDR
threshold 0 counts every p > 0
FOV, pooling, label overlap
author function, float output
same function, 16-bit maps
exact AUPR, FOV, multilabel
c
Author recipe, retrained
reported
rerun, individual seeds
mAUPR, author metric
-0.058
-0.041
first run, batch 1
M2MRF IDRiD
HRDecoder IDRiD
d
Author weights on internal and independent tests
IDRiD
DDR
TJDR-std
TJDR-uwf
MAPLES-DR
FGADR
Retinal-Lesions
DiaRetDB1
mAUPR
M2MRF · IDRiD
M2MRF · DDR
HRDecoder · IDRiD
HRDecoder · DDR
MA HE EX SE
Int.
Ind. fine
AUPR, this protocol
0.0 0.3 0.6 0.9
Outlined cells: test set of the source the checkpoint was trained on (internal test). Header colour: annotation granularity (fine → region consensus).