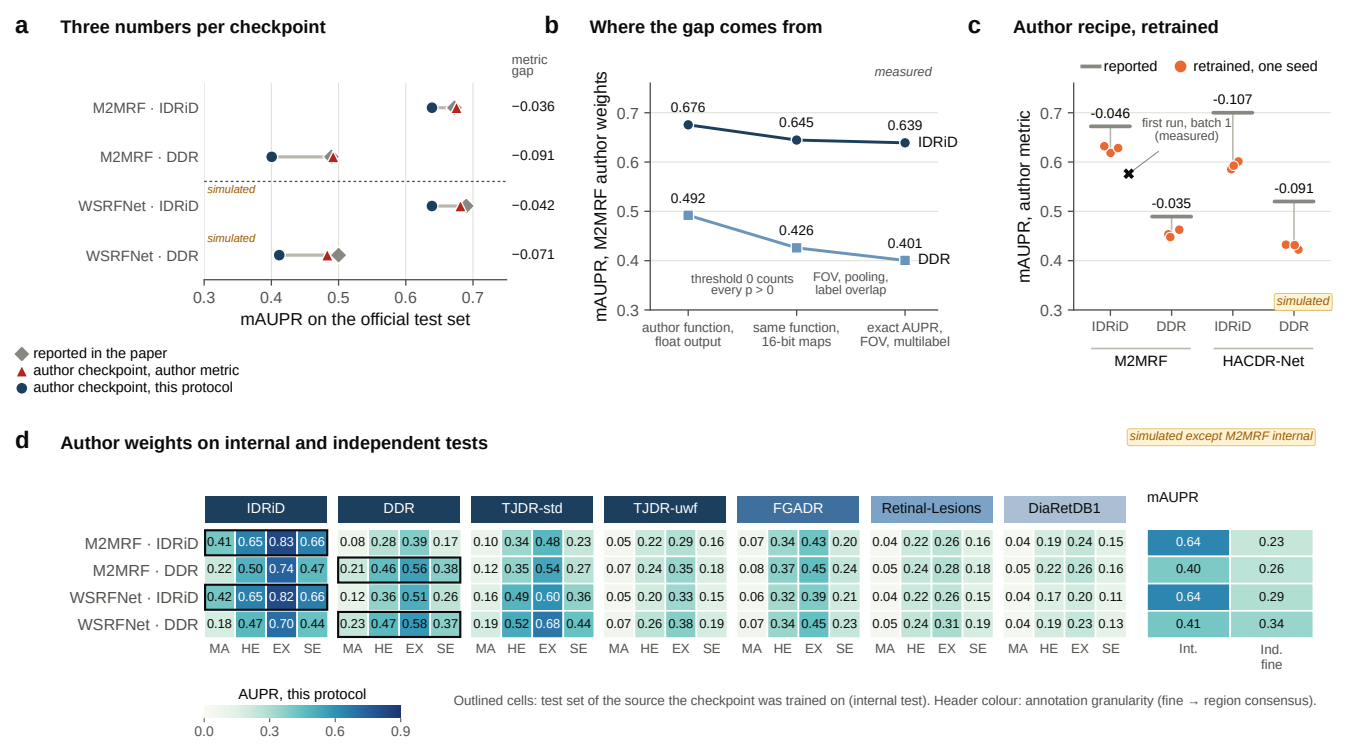
a
Three numbers per checkpoint
metric gap
M2MRF · IDRiD
M2MRF · DDR
simulated
WSRFNet · IDRiD
simulated
WSRFNet · DDR
−0.036
−0.091
−0.042
−0.071
0.3
0.4
0.5
0.6
0.7
mAUPR on the official test set
reported in the paper
author checkpoint, author metric
author checkpoint, this protocol
b
Where the gap comes from
measured
mAUPR, M2MRF author weights
0.7
0.6
0.5
0.4
0.3
0.676
0.645
0.639
IDRiD
0.492
0.426
0.401
DDR
threshold 0 counts every p > 0
FOV, pooling, label overlap
author function, float output
same function, 16-bit maps
exact AUPR, FOV, multilabel
c
Author recipe, retrained
reported
retrained, one seed
mAUPR, author metric
-0.046
first run, batch 1 (measured)
-0.107
-0.035
-0.091
simulated
IDRiD
DDR
IDRiD
DDR
M2MRF
HACDR-Net
d
Author weights on internal and independent tests
simulated except M2MRF internal
IDRiD
DDR
TJDR-std
TJDR-uwf
FGADR
Retinal-Lesions
DiaRetDB1
mAUPR
M2MRF · IDRiD 0.41 0.65 0.83 0.66 | 0.08 0.28 0.39 0.17 | 0.10 0.34 0.48 0.23 | 0.05 0.22 0.29 0.16 | 0.07 0.34 0.43 0.20 | 0.04 0.22 0.26 0.16 | 0.04 0.19 0.24 0.15 | 0.64 0.23
M2MRF · DDR 0.22 0.50 0.74 0.47 | 0.21 0.46 0.56 0.38 | 0.12 0.35 0.54 0.27 | 0.07 0.24 0.35 0.18 | 0.08 0.37 0.45 0.24 | 0.05 0.24 0.28 0.18 | 0.05 0.22 0.26 0.16 | 0.40 0.26
WSRFNet · IDRiD 0.42 0.65 0.82 0.66 | 0.12 0.36 0.51 0.26 | 0.16 0.49 0.60 0.36 | 0.05 0.20 0.33 0.15 | 0.06 0.32 0.39 0.21 | 0.04 0.22 0.26 0.15 | 0.04 0.17 0.20 0.11 | 0.64 0.29
WSRFNet · DDR 0.18 0.47 0.70 0.44 | 0.23 0.47 0.58 0.37 | 0.19 0.52 0.68 0.44 | 0.07 0.26 0.38 0.19 | 0.07 0.34 0.45 0.23 | 0.05 0.24 0.31 0.19 | 0.04 0.19 0.23 0.13 | 0.41 0.34
MA HE EX SE
Int.
Ind. fine
AUPR, this protocol
0.0 0.3 0.6 0.9
Outlined cells: test set of the source the checkpoint was trained on (internal test). Header colour: annotation granularity (fine → region consensus).