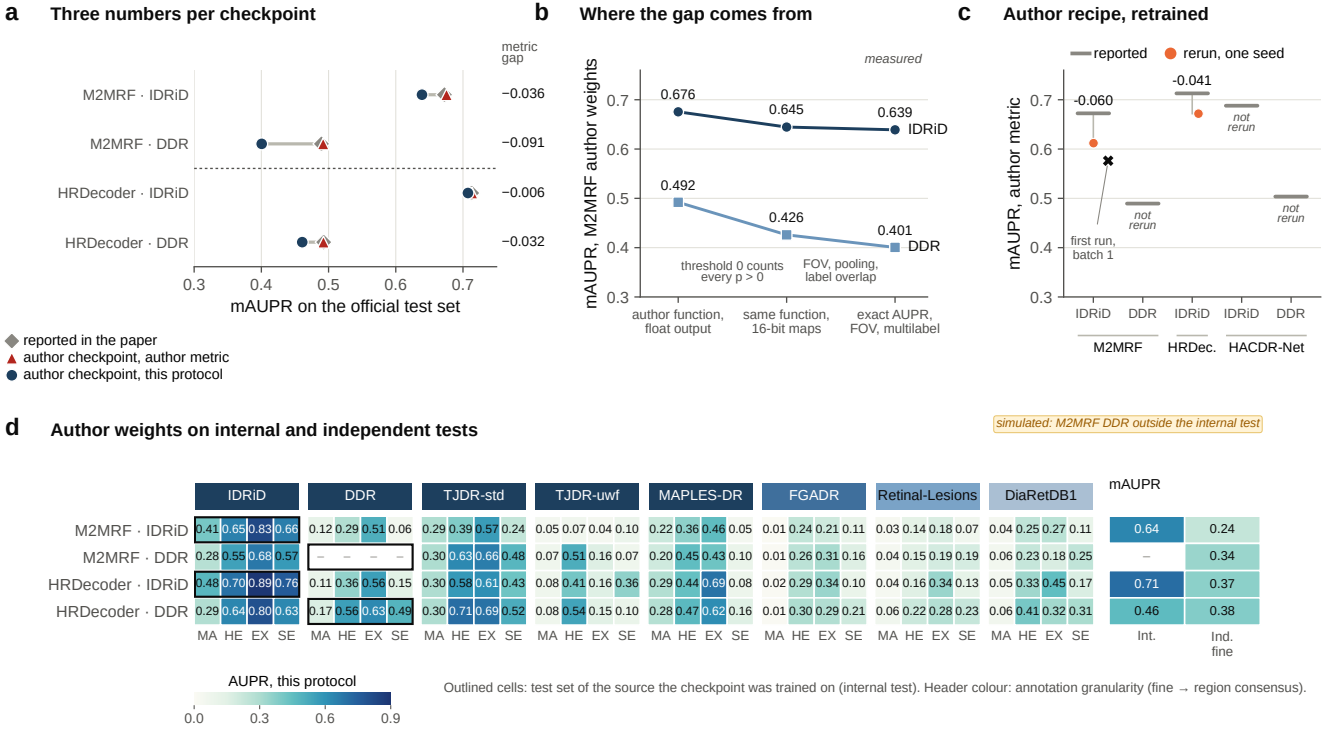
a
Three numbers per checkpoint
metric gap
M2MRF · IDRiD
M2MRF · DDR
HRDecoder · IDRiD
HRDecoder · DDR
−0.036
−0.091
−0.006
−0.032
0.3
0.4
0.5
0.6
0.7
mAUPR on the official test set
reported in the paper
author checkpoint, author metric
author checkpoint, this protocol
b
Where the gap comes from
measured
mAUPR, M2MRF author weights
0.676
0.645
0.639
IDRiD
0.492
0.426
0.401
DDR
threshold 0 counts every p > 0
FOV, pooling, label overlap
author function, float output
same function, 16-bit maps
exact AUPR, FOV, multilabel
c
Author recipe, retrained
reported
rerun, one seed
mAUPR, author metric
-0.060
-0.041
not rerun
not rerun
not rerun
first run, batch 1
IDRiD
DDR
IDRiD
IDRiD
DDR
M2MRF
HRDec.
HACDR-Net
d
Author weights on internal and independent tests
simulated: M2MRF DDR outside the internal test
IDRiD
DDR
TJDR-std
TJDR-uwf
MAPLES-DR
FGADR
Retinal-Lesions
DiaRetDB1
mAUPR
M2MRF · IDRiD 0.41 0.65 0.83 0.66 | 0.12 0.29 0.51 0.06 | 0.29 0.39 0.57 0.24 | 0.05 0.07 0.04 0.10 | 0.22 0.36 0.46 0.05 | 0.01 0.24 0.21 0.11 | 0.03 0.14 0.18 0.07 | 0.04 0.25 0.27 0.11 | 0.64 | 0.24
M2MRF · DDR 0.28 0.55 0.68 0.57 | – – – – | 0.30 0.63 0.66 0.48 | 0.07 0.51 0.16 0.07 | 0.20 0.45 0.43 0.10 | 0.01 0.26 0.31 0.16 | 0.04 0.15 0.19 0.19 | 0.06 0.23 0.18 0.25 | – | 0.34
HRDecoder · IDRiD 0.48 0.70 0.89 0.76 | 0.11 0.36 0.56 0.15 | 0.30 0.58 0.61 0.43 | 0.08 0.41 0.16 0.36 | 0.29 0.44 0.69 0.08 | 0.02 0.29 0.34 0.10 | 0.04 0.16 0.34 0.13 | 0.05 0.33 0.45 0.17 | 0.71 | 0.37
HRDecoder · DDR 0.29 0.64 0.80 0.63 | 0.17 0.56 0.63 0.49 | 0.30 0.71 0.69 0.52 | 0.08 0.54 0.15 0.10 | 0.28 0.47 0.62 0.16 | 0.01 0.30 0.29 0.21 | 0.06 0.22 0.28 0.23 | 0.06 0.41 0.32 0.31 | 0.46 | 0.38
MA HE EX SE
Int.
Ind. fine
AUPR, this protocol
0.0 0.3 0.6 0.9
Outlined cells: test set of the source the checkpoint was trained on (internal test). Header colour: annotation granularity (fine → region consensus).