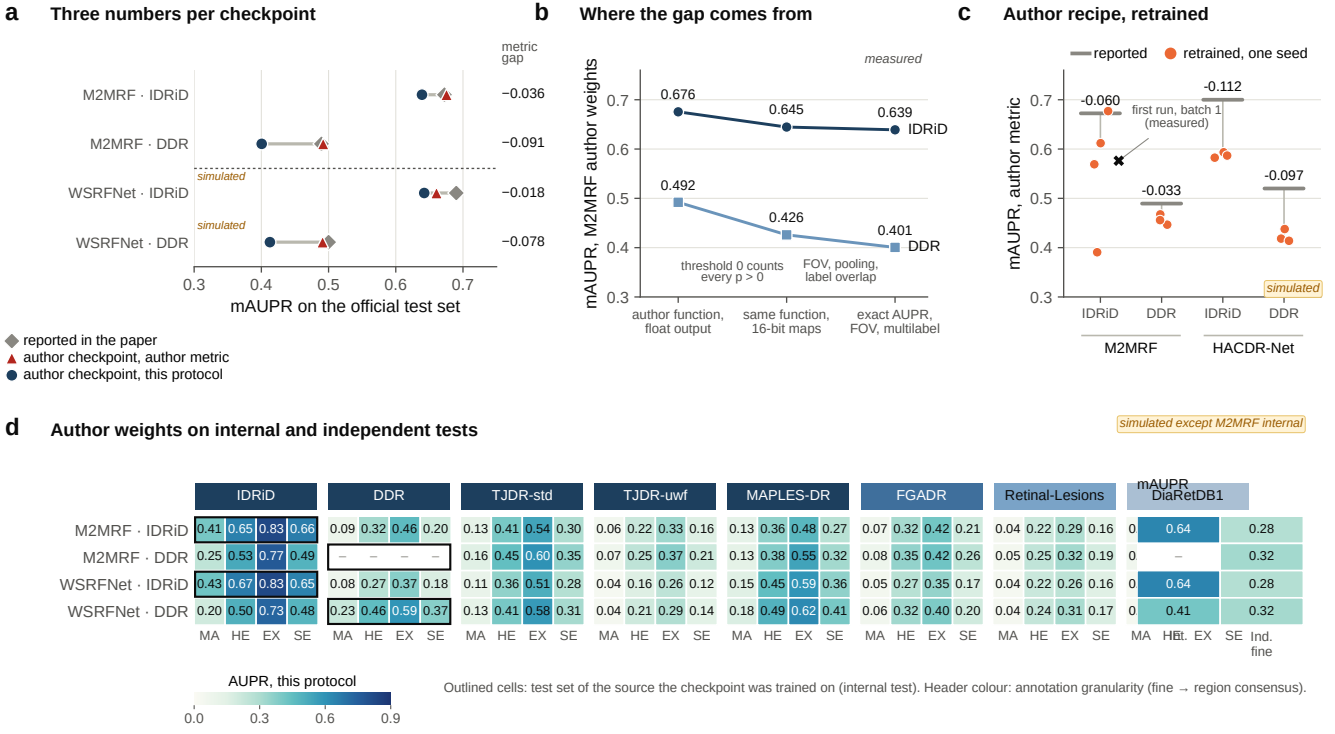
a
Three numbers per checkpoint
metric gap
M2MRF · IDRiD
M2MRF · DDR
WSRFNet · IDRiD
WSRFNet · DDR
simulated
simulated
−0.036
−0.091
−0.018
−0.078
0.3
0.4
0.5
0.6
0.7
mAUPR on the official test set
reported in the paper
author checkpoint, author metric
author checkpoint, this protocol
b
Where the gap comes from
measured
mAUPR, M2MRF author weights
0.676
0.645
0.639
IDRiD
0.492
0.426
0.401
DDR
threshold 0 counts every p > 0
FOV, pooling, label overlap
author function, float output
same function, 16-bit maps
exact AUPR, FOV, multilabel
c
Author recipe, retrained
reported
retrained, one seed
mAUPR, author metric
-0.060
-0.112
-0.033
-0.097
first run, batch 1 (measured)
simulated
IDRiD
DDR
IDRiD
DDR
M2MRF
HACDR-Net
d
Author weights on internal and independent tests
simulated except M2MRF internal
IDRiD
DDR
TJDR-std
TJDR-uwf
MAPLES-DR
FGADR
Retinal-Lesions
mAUPR
DiaRetDB1
M2MRF · IDRiD 0.41 0.65 0.83 0.66 | 0.09 0.32 0.46 0.20 | 0.13 0.41 0.54 0.30 | 0.06 0.22 0.33 0.16 | 0.13 0.36 0.48 0.27 | 0.07 0.32 0.42 0.21 | 0.04 0.22 0.29 0.16 | 0 0.64 0.28
M2MRF · DDR 0.25 0.53 0.77 0.49 | – – – – | 0.16 0.45 0.60 0.35 | 0.07 0.25 0.37 0.21 | 0.13 0.38 0.55 0.32 | 0.08 0.35 0.42 0.26 | 0.05 0.25 0.32 0.19 | 0 – 0.32
WSRFNet · IDRiD 0.43 0.67 0.83 0.65 | 0.08 0.27 0.37 0.18 | 0.11 0.36 0.51 0.28 | 0.04 0.16 0.26 0.12 | 0.15 0.45 0.59 0.36 | 0.05 0.27 0.35 0.17 | 0.04 0.22 0.26 0.16 | 0 0.64 0.28
WSRFNet · DDR 0.20 0.50 0.73 0.48 | 0.23 0.46 0.59 0.37 | 0.13 0.41 0.58 0.31 | 0.04 0.21 0.29 0.14 | 0.18 0.49 0.62 0.41 | 0.06 0.32 0.40 0.20 | 0.04 0.24 0.31 0.17 | 0 0.41 0.32
MA HE EX SE
Ind. fine
AUPR, this protocol
0.0 0.3 0.6 0.9
Outlined cells: test set of the source the checkpoint was trained on (internal test). Header colour: annotation granularity (fine → region consensus).