JANET'S QUALITY CATERING

Database Flow

Structure of the janets_catering database and how data moves through it, generated from the live database.

System	Catering management system (PHP and MariaDB)
Database version	2.8.0 (janets_catering)
Date	November 7, 2026
Intended readers	Project reviewers, database administrators and future developers

Contents

1. Database overview
2. Tables
3. Keys and relationships
4. Entity relationship diagram
5. Normalization overview
6. Data flows: accounts, bookings, payments, clients, inclusions, surveys, photos, dashboard, reports, archive and deletion
7. Constraints and validation rules
8. Data dictionary

1. Database overview

The system stores everything in one MariaDB 10.4 database named `janets_catering`, using the InnoDB engine and the utf8mb4 character set. It has 32 tables, 30 foreign keys, 6 check constraints and 50 triggers. This document was generated from the database's own catalogue on November 7, 2026.

> Tables are created and upgraded by `includes/activity_logger.php` and `includes/schema_v25.php` and `includes/schema_v26.php` and `includes/schema_v27.php` and `includes/schema_v28.php`. The same structure is available as `database/janets_catering_schema.sql`, and the latest update as `database/migration_v2_8_receipt_review.sql`.

2. Tables

Table	Purpose	Columns	Rows now
activity_logs	Automatic record of each change and sign-in: who, when, old and new values. Write-once.	27	182
activity_log_audit	Append-only history of archive and restore actions on log entries. Cannot be edited or deleted.	11	0
backdrops	Event backdrop options by event type.	8	14
backup_history	History of backup, verification and restore operations. Protected from changes.	12	25
booking_attachments	Contracts, signatures and other documents for a booking.	9	0
booking_inclusions	What a booking included when saved. Later catalogue changes do not touch it.	7	147
booking_items	Food items and bundles selected for a booking, with quantity and copied names and prices.	10	17
booking_payments	One row per payment, with its receipt, review status, reviewer and review time. Verified requires a receipt, enforced by a check constraint.	17	4
bundle_inclusions	One row per inclusion of a bundle or add-on, optionally linked to a food item.	5	94
clients	One record per client, with a client code. Bookings connect to it.	11	3
client_surveys	Client ratings by criterion, overall rating, recommendation, comment and optional photo.	18	1
database_backups	Details of each database backup file.	19	19
email_verifications	Hashes of emailed verification link tokens and codes, with expiry and attempts.	9	5
event_bookings	Event bookings: client, event, venue, backdrop, package, totals, status, preparation and archive details.	49	7
event_types	Event types offered in the booking form.	6	12
foodstocks	Not used by any page since the module was removed. Kept until the optional clean-up script is run.	12	14
foodstocks_categories	Not used by any page since the module was removed. Kept until the optional clean-up script is run.	4	7
menu_bundles	Bundles, add-ons and services with prices. The old description column is kept until the optional clean-up.	11	25
menu_items	Individual food items with upgrade prices and optional photos.	10	50
menu_packages	Catering packages with price per guest. The old description and event_type columns are kept until the optional clean-up.	13	8
notifications	Alerts for each Admin and Owner, created from Activity Log events.	12	310
package_event_types	Which event types each package is offered for. No rows means all.	2	0
package_inclusions	One row per inclusion of a package, optionally linked to a food item.	5	110

Table	Purpose	Columns	Rows now
`payment_receipt_history`	Every receipt that a replacement superseded, with the review it had and who replaced it.	11	0
`psgc_barangays`	Philippine barangay reference list.	4	42,011
`psgc_municipalities`	Philippine city and municipality reference list.	4	1,656
`psgc_provinces`	Philippine province reference list.	4	115
`psgc_regions`	Philippine region reference list.	3	18
`reports`	Business reports with type, status, author and archive details.	16	3
`system_settings`	Key and value settings: backups, schema version, last clean-up run.	4	14
`terms_acceptances`	Each account's acceptance of each version of the Terms and Conditions, with first and latest time.	7	4
`users`	Accounts for the Owner, Admins and Supervisors: credentials, personal details, role, status and archive details.	25	7

3. Keys and relationships

Primary keys

Table	Primary key
activity_logs	id
activity_log_audit	id
backdrops	id
backup_history	id
booking_attachments	attachment_id
booking_inclusions	booking_inclusion_id
booking_items	id
booking_payments	payment_id
bundle_inclusions	inclusion_id
clients	client_id
client_surveys	survey_id
database_backups	id
email_verifications	id
event_bookings	booking_id
event_types	event_type_id
foodstocks	item_id
foodstocks_categories	category_id
menu_bundles	bundle_id
menu_items	item_id
menu_packages	package_id
notifications	id
package_event_types	package_id, event_type_id
package_inclusions	inclusion_id
payment_receipt_history	history_id
psgc_barangays	id
psgc_municipalities	id
psgc_provinces	id
psgc_regions	id
reports	id
system_settings	setting_key
terms_acceptances	id

Table	Primary key
users	id

Foreign keys

Table and column	Refers to	When the parent is deleted
activity_logs.user_id	users.id	SET NULL: The link is cleared and this row stays
activity_log_audit.log_id	activity_logs.id	RESTRICT: The parent cannot be deleted while this row exists
backup_history.backup_id	database_backups.id	SET NULL: The link is cleared and this row stays
booking_attachments.booking_id	event_bookings.booking_id	CASCADE: This row is deleted too
booking_attachments.uploaded_by	users.id	SET NULL: The link is cleared and this row stays
booking_inclusions.booking_id	event_bookings.booking_id	CASCADE: This row is deleted too
booking_items.booking_id	event_bookings.booking_id	CASCADE: This row is deleted too
booking_payments.booking_id	event_bookings.booking_id	CASCADE: This row is deleted too
booking_payments.recorded_by	users.id	SET NULL: The link is cleared and this row stays
booking_payments.reviewed_by	users.id	SET NULL: The link is cleared and this row stays
bundle_inclusions.bundle_id	menu_bundles.bundle_id	CASCADE: This row is deleted too
bundle_inclusions.item_id	menu_items.item_id	SET NULL: The link is cleared and this row stays
clients.created_by	users.id	SET NULL: The link is cleared and this row stays
client_surveys.booking_id	event_bookings.booking_id	SET NULL: The link is cleared and this row stays
client_surveys.created_by	users.id	SET NULL: The link is cleared and this row stays
email_verifications.user_id	users.id	CASCADE: This row is deleted too
event_bookings.client_id	clients.client_id	SET NULL: The link is cleared and this row stays
event_bookings.event_type_id	event_types.event_type_id	SET NULL: The link is cleared and this row stays
event_bookings.package_id	menu_packages.package_id	SET NULL: The link is cleared and this row stays
foodstocks.category_id	foodstocks_categories.category_id	CASCADE: This row is deleted too
notifications.user_id	users.id	CASCADE: This row is deleted too
package_event_types.event_type_id	event_types.event_type_id	CASCADE: This row is deleted too
package_event_types.package_id	menu_packages.package_id	CASCADE: This row is deleted too

Table and column	Refers to	When the parent is deleted
`package_inclusions.item_id`	`menu_items.item_id`	SET NULL: The link is cleared and this row stays
`package_inclusions.package_id`	`menu_packages.package_id`	CASCADE: This row is deleted too
`payment_receipt_history.payment_id`	`booking_payments.payment_id`	CASCADE: This row is deleted too
`payment_receipt_history.replaced_by`	`users.id`	SET NULL: The link is cleared and this row stays
`payment_receipt_history.reviewed_by`	`users.id`	SET NULL: The link is cleared and this row stays
`reports.user_id`	`users.id`	SET NULL: The link is cleared and this row stays
`terms_acceptances.user_id`	`users.id`	CASCADE: This row is deleted too

Links kept by the application, without a foreign key

These columns hold an id but the database does not enforce the link.

Column	Holds	Note
`event_bookings.created_by, archived_by, restored_by, completed_by`	A user id	Accounts are never deleted row by row, so these ids stay meaningful
`booking_inclusions.source_id`	A package or bundle id	Deliberately no foreign key: a booking keeps its inclusions after the package is deleted
`event_bookings.backdrop_id`	A backdrop number	Wizard backdrops come from image folders, so this is not always a backdrops row
`users.archived_by, credentials_deleted_by`	A user id	Set by the archive actions
`reports.archived_by, responded_by`	A user id	Set by the application
`booking_items.ref_id`	A menu item or bundle id	`ref_type` says which table. Names and prices are copied, so old bookings stay correct if the menu changes
`users.region_code, province_code, city_code, barangay_code`	PSGC location codes	Filled from the address selector

4. Entity relationship diagram

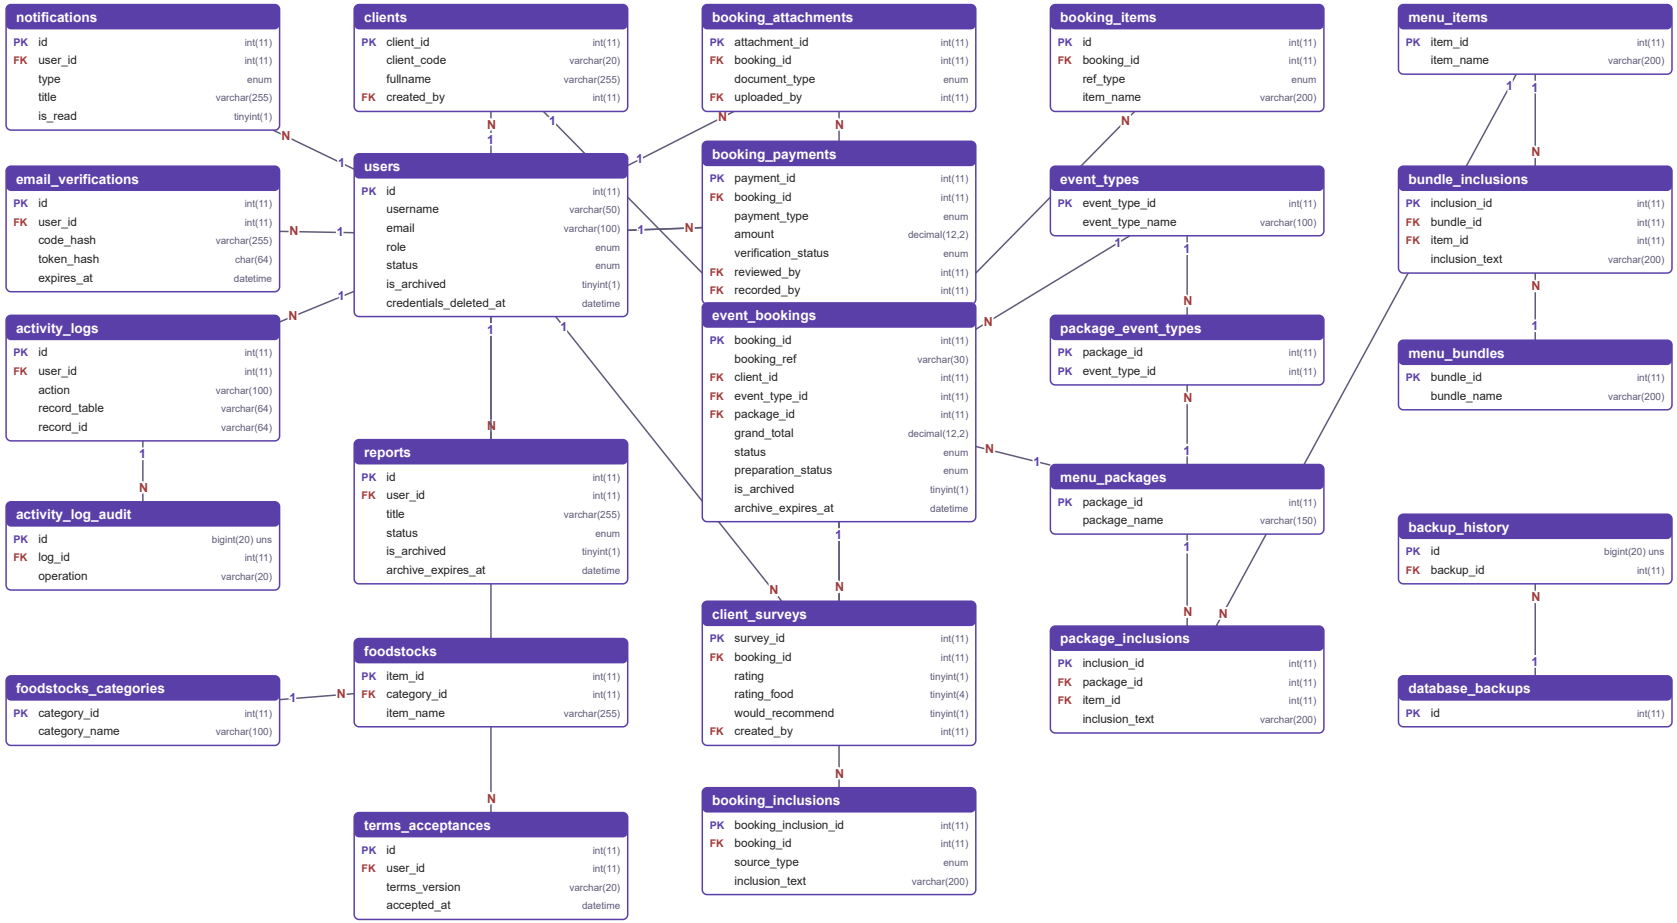


Figure 1. Entity relationship diagram, generated from the live foreign keys

Lines show every foreign key in the database: 1 is the parent and N the child. PK and FK columns are shown with a few key columns; section 8 lists them all. Tables with no foreign keys, not drawn: `backdrops`, `payment_receipt_history`, `psgc_barangays`, `psgc_municipalities`, `psgc_provinces`, `psgc_regions`, `system_settings`. MISSING: 3

5. Normalization overview

The structure follows third normal form for catalogue and transaction data: each table describes one kind of thing, repeating values sit in their own rows, and non-key columns depend on the key. Version 2.5.0 made these changes.

Rule	Before	Now
1NF: one value per column	Inclusions in one paragraph in menu_packages and menu_bundles	package_inclusions and bundle_inclusions: one row each
1NF: no comma lists	menu_packages.event_type could hold a list	package_event_types junction table
3NF: one fact in one place	Event types typed into a hard-coded list	event_types table, linked by event_type_id
3NF: no stored totals of totals	Not applicable: payments did not exist	Total paid, balance and payment status are calculated from booking_payments, never stored
Clients as their own entity	Client details only on each booking	clients table, linked by client_id

Data repeated on purpose

These copies preserve history, so that a past booking still shows what was agreed. They are not updated when the source changes.

Where	What is repeated	Why
`event_bookings`	Client name and contact; package name and price; backdrop; event type name	A booking must keep what was agreed
`booking_items`	Item name and prices	Same reason
`booking_inclusions`	Inclusion text	Same reason
`client_surveys`	Client name, event name and date	The survey stays readable after its booking is deleted
`users.address`	Text built from the street and location names	Quick display. The codes remain separate
`activity_logs`	Username, role and values at the time	A log must show the facts as they were

Old structures kept for now

The migration copied data and removed nothing. `menu_packages.description`, `menu_packages.event_type`, `menu_bundles.description`, `foodstocks` and `foodstocks_categories` are no longer used. `database/optional_cleanup_after_v2_5.sql` removes them once the results have been checked.

6. Data flows

6.1 Account data flow

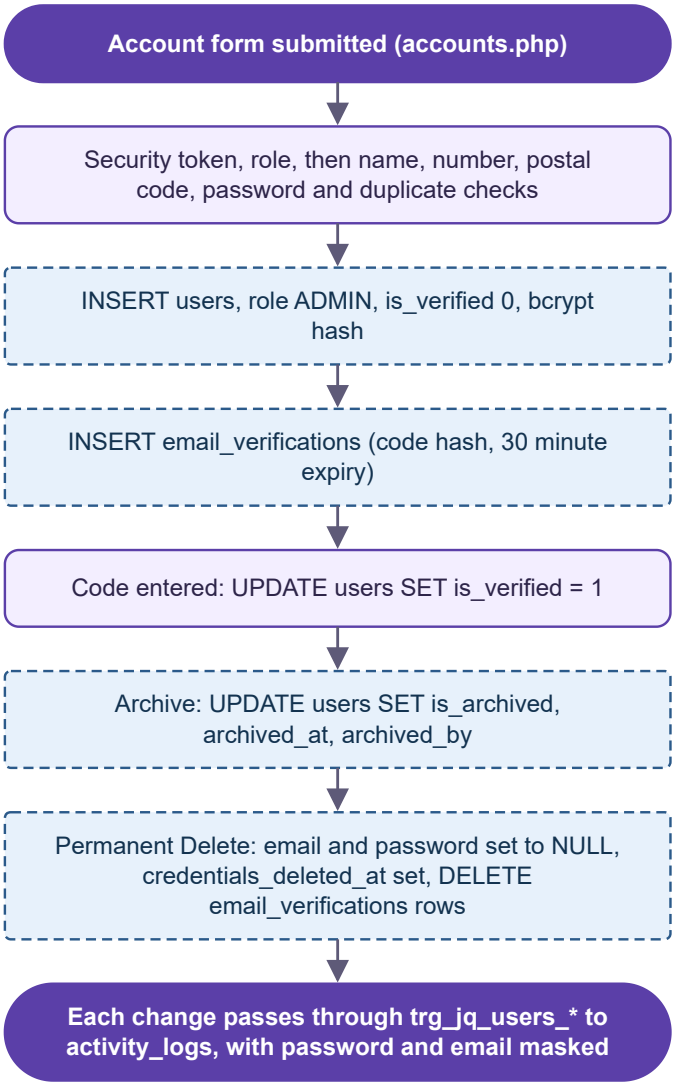


Figure 2. Account data

6.2 Event booking data flow

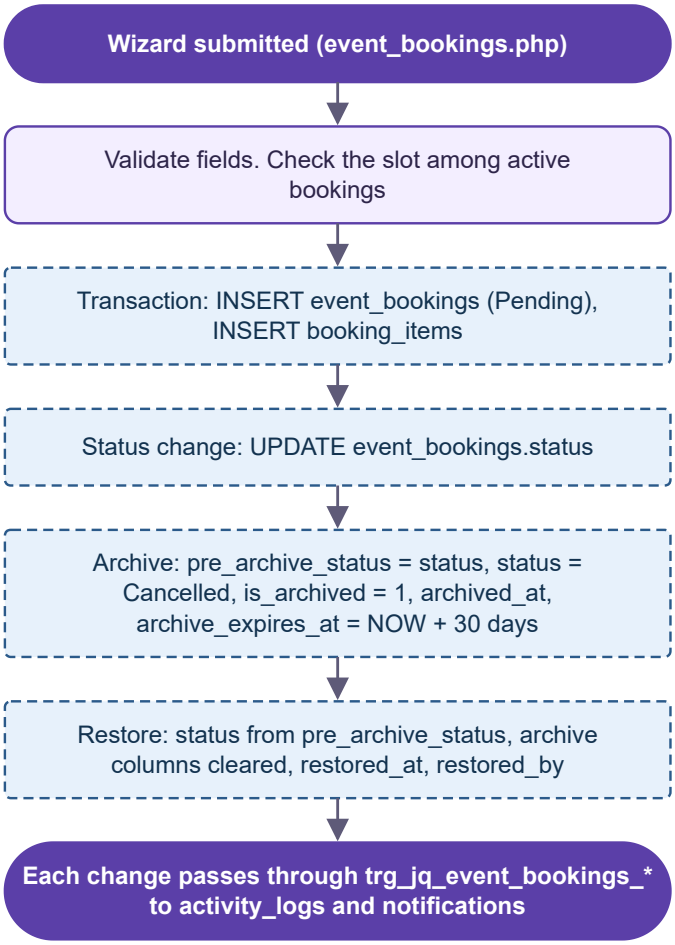


Figure 3. Booking data

Payment data flow

Step	What happens	Tables and files
1	Validate the form and any receipt	PHP temporary upload
2	Transaction: lock the booking, read the amount paid, refuse anything over the balance	`event_bookings`, `booking_payments`
3	Save the transaction and the receipt path	`booking_payments`, `uploads/private/{booking}/`
4	Totals, balance and status are calculated when read	`booking_payments`
5	Each change is logged	`activity_logs`

Client data flow

Step	What happens	Tables and files
1	Completed button: lock the booking	`event_bookings`
2	Use the chosen client, or match on the same name with the same phone or email, or create one	`clients`
3	Set status, completion date and client link	`event_bookings`

Step	What happens	Tables and files
4	Read details and all connected bookings	`clients`, `event_bookings`

Inclusion data flow

Step	What happens	Tables and files
1	Food Menus: one inclusion per line, saved in one transaction	`package_inclusions`, `bundle_inclusions`
2	Each line links to a food item when exactly one name matches	`menu_items`
3	Booking saved: inclusions copied	`booking_inclusions`
4	Details, SOA and Supervisor Dashboard read the copy	`booking_inclusions`

6.3 Client survey data flow

Step	What happens	Tables and files
1	Read eligible bookings: Completed, or Approved with the date reached; not archived; no survey	`event_bookings` left-joined to `client_surveys`
2	Client link token is checked against the booking id and reference	`event_bookings`
3	INSERT answers, copying client name, event name and date	`client_surveys`
4	Unique key on booking_id refuses a second survey	`uq_survey_booking`
5	Optional staff photo is validated and saved	`uploads/surveys/`, `client_surveys.photo_path`
6	Read averages and recommendation rate for display	`client_surveys`

6.4 Profile photo data flow

Step	What happens	Tables and files
1	File checked in the browser, then by size, real content and matching extension on the server	PHP temporary upload
2	Moved to a random file name	`uploads/profile/profile_{id}_{time}_{random}.ext`
3	Path saved	`users.profile_photo`
4	Old file deleted only after the database points at the new one	`uploads/profile/`
5	Path read for the header, profile and accounts list	`users`

The database stores only the path. The picture stays in the folder, where scripts cannot run.

6.5 Dashboard data flow

Step	What happens	Tables and files
1	Count by status where is_archived = 0	`event_bookings`
2	Sum revenue and upcoming revenue for Pending and Approved	`event_bookings`
3	Read the 5 newest bookings that are not archived	`event_bookings`
4	Group by package and by month	`event_bookings`

Step	What happens	Tables and files
5	Count catalogue	`menu_packages`, `menu_items`
6	Send as JSON every 15 seconds. Nothing is written	`ajax/dashboard_bookings.php`

6.6 Reports data flow

Step	What happens	Tables and files
1	INSERT with author id and username	`reports`
2	UPDATE title, content, type and status, active reports only	`reports`
3	Archive: is_archived, archived_at, archived_by, archive_expires_at	`reports`
4	Restore: archive columns cleared	`reports`
5	View, print and PDF read the row in the page. PDF is built in the browser and is not stored	`reports`
6	Each change is logged	`trg_jq_reports_*`, `activity_logs`, `notifications`

6.7 Archive and permanent deletion data flow

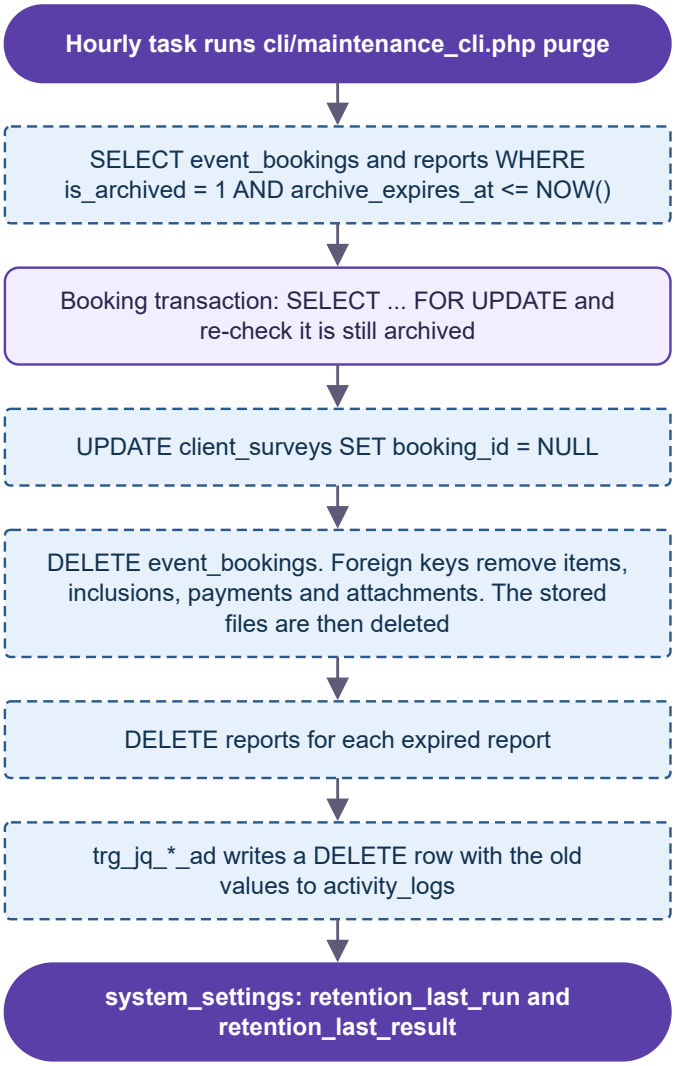


Figure 4. Permanent deletion

> A deleted booking leaves no orphan rows. Its old values stay in `activity_logs`, and in any backup taken earlier. See System_Limitations.pdf.

7. Constraints and validation rules

Unique keys

Table	Key	Columns
bundle_inclusions	uq_bundle_inclusion	bundle_id, inclusion_text
clients	uq_client_code	client_code
clients	uq_client_identity	fullname, contact
client_surveys	uq_survey_booking	booking_id
database_backups	uq_backup_filename	filename
email_verifications	uq_ev_token	token_hash
event_bookings	booking_ref	booking_ref
event_types	uq_event_type_name	event_type_name
foodstocks_categories	category_name	category_name
menu_bundles	uq_bundle_name	bundle_name
menu_items	uq_item_name	item_name
menu_packages	uq_package_name	package_name
notifications	uq_notification_event	user_id, activity_log_id
package_inclusions	uq_package_inclusion	package_id, inclusion_text
psgc_barangays	barangay_code	barangay_code
psgc_municipalities	municipality_code	municipality_code
psgc_provinces	province_code	province_code
psgc_regions	region_code	region_code
terms_acceptances	uq_terms_user_version	user_id, terms_version
users	uq_users_contact	contact_number
users	uq_users_email	email
users	username	username

Check constraints

Table	Constraint	Rule in the database
booking_payments	chk_payment_amount	`amount` > 0
booking_payments	chk_payment_verified_receipt	`verification_status` <> 'Verified' or `receipt_path` is not null
client_surveys	chk_survey_criteria	coalesce(`rating_food`,1) between 1 and 5 and coalesce(`rating_service`,1) between 1 and 5 and coalesce(`rating_timeliness`,1) between 1 and 5 and coalesce(`rating_presentation`,1) between 1 and 5 and coalesce(`rating_value`,1) between 1 and 5
event_bookings	chk_booking_postal	`postal_code` is null or `postal_code` regexp '^[0-9]{4}$'

Table	Constraint	Rule in the database
`users`	`chk_users_postal`	`` `postal_code` is null or `postal_code` regexp '^[0-9]{4}$' ``
`users`	`chk_users_role`	`` `role` in ('ADMIN','OWNER','SUPERVISOR') ``

Triggers

50 triggers. Each audited table has insert, update and delete triggers that write to `activity_logs`. Others protect the log tables from edits and deletion.

Table	Triggers
`activity_logs`	4
`activity_log_audit`	2
`backdrops`	3
`backup_history`	2
`booking_attachments`	3
`booking_payments`	3
`clients`	3
`client_surveys`	3
`event_bookings`	3
`event_types`	3
`foodstocks`	3
`foodstocks_categories`	3
`menu_bundles`	3
`menu_items`	3
`menu_packages`	3
`reports`	3
`users`	3

Rules enforced by the application

Field	Rule	Where
Names: users, bookings, survey client names	The letters A to Z and single spaces only	`jq_name_error()`, `field-rules.js`
Contact numbers: users, bookings	+63, then 10 digits starting with 9. Stored as +639XXXXXXXXX. Unique for users	`jq_normalize_phone()`, `uq_users_contact`
Postal code: users, bookings	Required, exactly 4 digits. Older rows may be empty until next edited	`jq_postal_error()`, check constraints
Email: users	Valid Gmail, unique, and Gmail dots and +tags count as one mailbox	`jq_email_error()`, `jq_email_taken()`, `uq_users_email`
Password	16 to 72 characters, bcrypt hash	`jq_password_error()`

Field	Rule	Where
Booking status	Pending, Approved, Cancelled, Disabled or Completed	ENUM column and allow-list
Payment amount	Above zero, within the remaining balance, two decimals at most	`jq_record_payment()`, `chk_payment_amount`
Receipts and attachments	At most 10 MB; PDF, JPG, PNG, WebP, DOC or DOCX; content and extension agree	`jq_store_private_file()`
Report status and type	Allowed values only	ENUM columns and allow-lists
Survey ratings	1 to 5	`survey_read_criteria()`, `chk_survey_criteria`
Profile photo	At most 10 MB; JPG, JPEG, PNG or WebP; content and extension agree	`jq_image_upload_extension()`

8. Data dictionary

Every column in every table. PK is primary key, FK is foreign key, UQ is unique, IX is indexed.

activity_logs

Automatic record of each change and sign-in: who, when, old and new values. Write-once.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
user_id	int(11)	Yes	FK	
username	varchar(100)	Yes	IX	
user_role	varchar(20)	Yes		
action	varchar(100)	No	IX	
module	varchar(100)	Yes	IX	
record_table	varchar(64)	Yes	IX	
record_id	varchar(64)	Yes		
record_label	varchar(255)	Yes		
description	text	Yes		
old_values	longtext	Yes		
new_values	longtext	Yes		
ip_address	varchar(45)	Yes		
user_agent	varchar(255)	Yes		
page	varchar(100)	Yes		
source	varchar(20)	No		'system'
notes	text	Yes		
is_archived	tinyint(1)	No	IX	0
archived_at	datetime(3)	Yes		
archived_by	int(11)	Yes		
restored_at	datetime(3)	Yes		
restored_by	int(11)	Yes		
edited_at	datetime(3)	Yes		
edited_by	int(11)	Yes		
edit_count	int(11)	No		0
created_at	timestamp(3)	No	IX	current_timestamp(3)
updated_at	timestamp	Yes		

activity_log_audit

Append-only history of archive and restore actions on log entries. Cannot be edited or deleted.

Column	Type	Null	Key	Default
id	bigint(20) unsigned	No	PK	
log_id	int(11)	No	FK	
operation	varchar(20)	No	IX	
old_snapshot	longtext	Yes		
new_snapshot	longtext	Yes		
reason	varchar(500)	Yes		

Column	Type	Null	Key	Default
performed_by	int(11)	Yes		
performed_by_username	varchar(100)	Yes		
performed_by_role	varchar(20)	Yes		
ip_address	varchar(45)	Yes		
created_at	timestamp(3)	No	IX	current_timestamp(3)

backdrops

Event backdrop options by event type.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
backdrop_name	varchar(255)	No		
event_type	varchar(100)	Yes	IX	
image_path	varchar(500)	Yes		
description	text	Yes		
is_active	tinyint(1)	Yes	IX	1
created_at	timestamp	No		current_timestamp()
updated_at	timestamp	No		current_timestamp()

backup_history

History of backup, verification and restore operations. Protected from changes.

Column	Type	Null	Key	Default
id	bigint(20) unsigned	No	PK	
backup_id	int(11)	Yes	FK	
filename	varchar(255)	Yes		
action	varchar(30)	No	IX	
status	varchar(20)	No		'success'
details	text	Yes		
duration_ms	int(11)	Yes		
performed_by	int(11)	Yes		
performed_by_username	varchar(100)	Yes		
performed_by_role	varchar(20)	Yes		
ip_address	varchar(45)	Yes		
created_at	timestamp(3)	No	IX	current_timestamp(3)

booking_attachments

Contracts, signatures and other documents for a booking.

Column	Type	Null	Key	Default
attachment_id	int(11)	No	PK	
booking_id	int(11)	No	FK	
document_type	enum('Signed Contract','Client Signature','Approval Document','Confirmation Document','Other')	No		'Other'
original_name	varchar(255)	No		
stored_path	varchar(255)	No		
mime_type	varchar(100)	No		

Column	Type	Null	Key	Default
file_size	int(11)	No		
uploaded_by	int(11)	Yes	FK	
created_at	timestamp	No		current_timestamp()

booking_inclusions

What a booking included when saved. Later catalogue changes do not touch it.

Column	Type	Null	Key	Default
booking_inclusion_id	int(11)	No	PK	
booking_id	int(11)	No	FK	
source_type	enum('package','bundle')	No		
source_id	int(11)	Yes		
source_name	varchar(200)	No		
inclusion_text	varchar(200)	No		
sort_order	int(11)	No		0

booking_items

Food items and bundles selected for a booking, with quantity and copied names and prices.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
booking_id	int(11)	No	FK	
ref_type	enum('item','bundle')	No		'item'
ref_id	int(11)	No		
item_name	varchar(200)	No		
unit_price	decimal(10,2)	Yes		0.00
price_mode	enum('flat','per_guest')	Yes		'per_guest'
quantity	int(11)	No		1
line_total	decimal(12,2)	Yes		0.00
created_at	timestamp	No		current_timestamp()

booking_payments

One row per payment, with its receipt, review status, reviewer and review time. Verified requires a receipt, enforced by a check constraint.

Column	Type	Null	Key	Default
payment_id	int(11)	No	PK	
booking_id	int(11)	No	FK	
payment_type	enum('Downpayment','Additional Payment')	No		
amount	decimal(12,2)	No		
payment_date	date	No		
payment_method	enum('Cash','GCash','Bank Transfer','Check','Credit or Debit Card','Other')	No		
reference_no	varchar(100)	Yes		
notes	varchar(255)	Yes		
receipt_path	varchar(255)	Yes		
receipt_name	varchar(255)	Yes		

Column	Type	Null	Key	Default
receipt_mime	varchar(100)	Yes		
verification_status	enum('Awaiting Receipt','Receipt Submitted','Pending Verification','Verified','Rejected')	No		'Awaiting Receipt'
reviewed_by	int(11)	Yes	FK	
reviewed_at	datetime	Yes		
review_notes	varchar(255)	Yes		
recorded_by	int(11)	Yes	FK	
created_at	timestamp	No		current_timestamp()

bundle_inclusions

One row per inclusion of a bundle or add-on, optionally linked to a food item.

Column	Type	Null	Key	Default
inclusion_id	int(11)	No	PK	
bundle_id	int(11)	No	FK	
item_id	int(11)	Yes	FK	
inclusion_text	varchar(200)	No		
sort_order	int(11)	No		0

clients

One record per client, with a client code. Bookings connect to it.

Column	Type	Null	Key	Default
client_id	int(11)	No	PK	
client_code	varchar(20)	Yes	UQ	
fullname	varchar(255)	No	IX	
email	varchar(100)	Yes	IX	
contact	varchar(20)	Yes	IX	
postal_code	varchar(4)	Yes		
address	text	Yes		
notes	text	Yes		
created_by	int(11)	Yes	FK	
created_at	timestamp	No		current_timestamp()
updated_at	timestamp	No		current_timestamp()

client_surveys

Client ratings by criterion, overall rating, recommendation, comment and optional photo.

Column	Type	Null	Key	Default
survey_id	int(11)	No	PK	
booking_id	int(11)	Yes	FK UQ	
client_name	varchar(255)	No		
event_name	varchar(255)	Yes		
event_date	date	Yes		
rating	tinyint(1)	No	IX	5
rating_food	tinyint(4)	Yes		
rating_service	tinyint(4)	Yes		

Column	Type	Null	Key	Default
rating_timeliness	tinyint(4)	Yes		
rating_presentation	tinyint(4)	Yes		
rating_value	tinyint(4)	Yes		
would_recommend	tinyint(1)	Yes		
feedback	text	Yes		
photo_path	varchar(500)	Yes		
is_featured	tinyint(1)	Yes	IX	0
created_by	int(11)	Yes	FK	
created_at	timestamp	No	IX	current_timestamp()
updated_at	timestamp	No		current_timestamp()

database_backups

Details of each database backup file.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
filename	varchar(255)	No	UQ	
backup_type	varchar(20)	No	IX	'manual'
file_size	bigint(20) unsigned	No		0
checksum_sha256	char(64)	Yes		
table_count	int(11)	No		0
row_count	bigint(20)	No		0
db_name	varchar(64)	Yes		
server_version	varchar(100)	Yes		
secondary_copy	tinyint(1)	No		0
secondary_path	varchar(500)	Yes		
status	varchar(20)	No		'available'
verify_status	varchar(20)	Yes		
last_verified_at	datetime	Yes		
notes	varchar(500)	Yes		
created_by	int(11)	Yes		
created_by_username	varchar(100)	Yes		
created_at	timestamp(3)	No	IX	current_timestamp(3)
updated_at	timestamp	Yes		

email_verifications

Hashes of emailed verification link tokens and codes, with expiry and attempts.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
user_id	int(11)	No	FK	
email	varchar(100)	No		
code_hash	varchar(255)	No		
token_hash	char(64)	Yes	UQ	
attempts	int(11)	No		0

Column	Type	Null	Key	Default
expires_at	datetime	No		
used_at	datetime	Yes		
created_at	timestamp	No		current_timestamp()

event_bookings

Event bookings: client, event, venue, backdrop, package, totals, status, preparation and archive details.

Column	Type	Null	Key	Default
booking_id	int(11)	No	PK	
booking_ref	varchar(30)	No	UQ	
client_id	int(11)	Yes	FK	
event_name	varchar(255)	No		
event_type	varchar(100)	Yes		'Gala Dinner'
event_type_id	int(11)	Yes	FK	
event_date	date	No	IX	
event_time	time	Yes		'12:00:00'
fullname	varchar(255)	No		
email	varchar(100)	Yes		
contact	varchar(20)	Yes		
region	varchar(150)	Yes		
province	varchar(150)	Yes		
city	varchar(150)	Yes		
barangay	varchar(150)	Yes		
postal_code	varchar(4)	Yes		
backdrop_id	int(11)	Yes		
backdrop_name	varchar(255)	Yes		
backdrop_path	varchar(255)	Yes		
event_theme	varchar(100)	Yes		
event_color	varchar(7)	Yes		
venue_address	text	Yes		
headcount	int(11)	No		100
package_id	int(11)	Yes	FK	
package_name	varchar(150)	Yes		
package_price	decimal(10,2)	Yes		0.00
base_total	decimal(12,2)	Yes		0.00
menu_upgrade_total	decimal(12,2)	Yes		0.00
addon_total	decimal(12,2)	Yes		0.00
subtotal	decimal(12,2)	Yes		0.00
service_tax_rate	decimal(5,2)	Yes		12.00
service_tax	decimal(12,2)	Yes		0.00
grand_total	decimal(12,2)	Yes		0.00
notes	text	Yes		
status	enum('Pending','Approved','Cancelled','Disabled','Completed')	Yes	IX	'Pending'
preparation_status	enum('Pending Preparation','Preparing','Ready for Event','Completed')	No		'Pending Preparation'

Column	Type	Null	Key	Default
preparation_notes	text	Yes		
completed_at	datetime	Yes		
completed_by	int(11)	Yes		
created_by	int(11)	Yes		
created_at	timestamp	No		current_timestamp()
updated_at	timestamp	No		current_timestamp()
is_archived	tinyint(1)	No	IX	0
archived_at	datetime	Yes		
archive_expires_at	datetime	Yes		
pre_archive_status	varchar(20)	Yes		
archived_by	int(11)	Yes		
restored_at	datetime	Yes		
restored_by	int(11)	Yes		

event_types

Event types offered in the booking form.

Column	Type	Null	Key	Default
event_type_id	int(11)	No	PK	
event_type_name	varchar(100)	No	UQ	
is_active	tinyint(1)	No		1
sort_order	int(11)	No		0
created_at	timestamp	No		current_timestamp()
updated_at	timestamp	No		current_timestamp()

foodstocks

Not used by any page since the module was removed. Kept until the optional clean-up script is run.

Column	Type	Null	Key	Default
item_id	int(11)	No	PK	
category_id	int(11)	No	FK	
item_name	varchar(255)	No		
quantity	decimal(10,2)	Yes		0.00
unit	varchar(50)	Yes		'kg'
unit_price	decimal(10,2)	Yes		0.00
reorder_level	int(11)	Yes		10
expiry_date	date	Yes		
is_active	tinyint(1)	Yes		1
notes	text	Yes		
created_at	timestamp	No		current_timestamp()
updated_at	timestamp	No		current_timestamp()

foodstocks_categories

Not used by any page since the module was removed. Kept until the optional clean-up script is run.

Column	Type	Null	Key	Default
category_id	int(11)	No	PK	
category_name	varchar(100)	No	UQ	
description	varchar(255)	Yes		
created_at	timestamp	No		current_timestamp()

menu_bundles

Bundles, add-ons and services with prices. The old description column is kept until the optional clean-up.

Column	Type	Null	Key	Default
bundle_id	int(11)	No	PK	
bundle_name	varchar(200)	No	UQ	
description	text	Yes		
bundle_type	enum('Food Bundle','Add-on','Service')	Yes		'Food Bundle'
price	decimal(10,2)	No		0.00
price_mode	enum('flat','per_guest')	Yes		'flat'
order_note	varchar(150)	Yes		
photo_path	varchar(500)	Yes		
is_active	tinyint(1)	Yes		1
created_at	timestamp	No		current_timestamp()
updated_at	timestamp	No		current_timestamp()

menu_items

Individual food items with upgrade prices and optional photos.

Column	Type	Null	Key	Default
item_id	int(11)	No	PK	
item_name	varchar(200)	No	UQ	
course	enum('Appetizers','Main Courses','Desserts','Beverages','Sides')	No		'Main Courses'
description	varchar(255)	Yes		
availability_note	varchar(150)	Yes		
upgrade_price	decimal(10,2)	Yes		0.00
photo_path	varchar(500)	Yes		
is_active	tinyint(1)	Yes		1
created_at	timestamp	No		current_timestamp()
updated_at	timestamp	No		current_timestamp()

menu_packages

Catering packages with price per guest. The old description and event_type columns are kept until the optional clean-up.

Column	Type	Null	Key	Default
package_id	int(11)	No	PK	
package_name	varchar(150)	No	UQ	
tier	varchar(50)	Yes		'Standard'
price_per_guest	decimal(10,2)	No		0.00
pricing_note	varchar(150)	Yes		
description	text	Yes		

Column	Type	Null	Key	Default
icon	varchar(50)	Yes		'bx-restaurant'
event_type	varchar(100)	Yes	IX	
photo_path	varchar(500)	Yes		
sort_order	int(11)	Yes		0
is_active	tinyint(1)	Yes		1
created_at	timestamp	No		current_timestamp()
updated_at	timestamp	No		current_timestamp()

notifications

Alerts for each Admin and Owner, created from Activity Log events.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
user_id	int(11)	No	FK	
type	enum('report','event','inventory','system','feedback')	No	IX	'system'
title	varchar(255)	No		
message	text	No		
reference_id	int(11)	Yes		
reference_type	varchar(50)	Yes		
actor_user_id	int(11)	Yes		
actor_username	varchar(100)	Yes		
activity_log_id	int(11)	Yes		
is_read	tinyint(1)	Yes	IX	0
created_at	timestamp	No		current_timestamp()

package_event_types

Which event types each package is offered for. No rows means all.

Column	Type	Null	Key	Default
package_id	int(11)	No	PK FK	
event_type_id	int(11)	No	PK FK	

package_inclusions

One row per inclusion of a package, optionally linked to a food item.

Column	Type	Null	Key	Default
inclusion_id	int(11)	No	PK	
package_id	int(11)	No	FK	
item_id	int(11)	Yes	FK	
inclusion_text	varchar(200)	No		
sort_order	int(11)	No		0

payment_receipt_history

Every receipt that a replacement superseded, with the review it had and who replaced it.

Column	Type	Null	Key	Default
history_id	int(11)	No	PK	
payment_id	int(11)	No	FK	

Column	Type	Null	Key	Default
receipt_path	varchar(255)	No		
receipt_name	varchar(255)	Yes		
receipt_mime	varchar(100)	Yes		
verification_status	varchar(30)	No		
reviewed_by	int(11)	Yes	FK	
reviewed_at	datetime	Yes		
review_notes	varchar(255)	Yes		
replaced_by	int(11)	Yes	FK	
replaced_at	datetime	No		

psgc_barangays

Philippine barangay reference list.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
barangay_code	varchar(15)	No	UQ	
barangay_name	varchar(150)	No		
municipality_code	varchar(10)	No	IX	

psgc_municipalities

Philippine city and municipality reference list.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
municipality_code	varchar(10)	No	UQ	
municipality_name	varchar(150)	No		
province_code	varchar(10)	No	IX	

psgc_provinces

Philippine province reference list.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
province_code	varchar(10)	No	UQ	
province_name	varchar(150)	No		
region_code	varchar(5)	No	IX	

psgc_regions

Philippine region reference list.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
region_code	varchar(5)	No	UQ	
region_name	varchar(150)	No		

reports

Business reports with type, status, author and archive details.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
user_id	int(11)	Yes	FK	
title	varchar(255)	No		
content	text	Yes		
report_type	enum('inventory','feedback','complaint','suggestion','inquiry','general')	Yes		'general'
created_by	varchar(100)	Yes		
status	enum('Generated','Draft','Pending','Reviewed','Resolved')	Yes	IX	'Generated'
admin_response	text	Yes		
responded_by	int(11)	Yes		
responded_at	datetime	Yes		
created_at	timestamp	No		current_timestamp()
updated_at	timestamp	No		current_timestamp()
is_archived	tinyint(1)	No	IX	0
archived_at	datetime	Yes		
archived_by	int(11)	Yes		
archive_expires_at	datetime	Yes		

system_settings

Key and value settings: backups, schema version, last clean-up run.

Column	Type	Null	Key	Default
setting_key	varchar(100)	No	PK	
setting_value	text	Yes		
updated_by	int(11)	Yes		
updated_at	timestamp	No		current_timestamp()

terms_acceptances

Each account's acceptance of each version of the Terms and Conditions, with first and latest time.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
user_id	int(11)	No	FK	
terms_version	varchar(20)	No		
accepted_at	datetime	No		
last_accepted_at	datetime	No		
ip_address	varchar(45)	Yes		
user_agent	varchar(255)	Yes		

users

Accounts for the Owner, Admins and Supervisors: credentials, personal details, role, status and archive details.

Column	Type	Null	Key	Default
id	int(11)	No	PK	
username	varchar(50)	No	UQ	
password	varchar(255)	Yes		
email	varchar(100)	Yes	UQ	

Column	Type	Null	Key	Default
first_name	varchar(100)	Yes		
last_name	varchar(100)	Yes		
contact_number	varchar(20)	Yes	UQ	
profile_photo	varchar(255)	Yes		
role	enum('ADMIN','OWNER','SUPERVISOR')	No	IX	'ADMIN'
region_code	varchar(5)	Yes	IX	
province_code	varchar(10)	Yes	IX	
city_code	varchar(10)	Yes		
barangay_code	varchar(10)	Yes		
street_address	text	Yes		
postal_code	varchar(4)	Yes		
address	text	Yes		
is_verified	tinyint(1)	Yes		0
status	enum('active','inactive','pending')	Yes		'active'
created_at	timestamp	No		current_timestamp()
updated_at	timestamp	No		current_timestamp()
is_archived	tinyint(1)	No	IX	0
archived_at	datetime	Yes		
archived_by	int(11)	Yes		
credentials_deleted_at	datetime	Yes		
credentials_deleted_by	int(11)	Yes		