Project Development Phase – Phase 6

Project Documentation / FSD

Implement Client Script & UI Policy (Incident)

Date	1 October 2026
Team ID	SWTID-2026-9874
Project Title	Implement Client Script & UI Policy (Incident)
Platform	ServiceNow Incident Management
Version	1.0

Template Adaptation Note

The supplied Phase 6 documentation format is written for a MERN application and contains sections for React, Node.js/Express, MongoDB, npm commands and backend APIs. This project is not a MERN application; it is a ServiceNow Incident configuration project. Therefore, the same documentation structure is retained, but each technology-specific section is completed with the actual ServiceNow architecture and configuration. MERN-specific technologies are not claimed where they are not used.

1. Introduction

This document provides the functional and technical documentation for the ServiceNow Incident configuration project. It describes the project purpose, architecture, setup/configuration, components, operation, testing, evidence, known issues and future enhancements.

Project Title: Implement Client Script & UI Policy (Incident)

Team Members: To be filled with the official team-member names and roles. The supplied project documents identify Team ID SWTID-2026-8255 but do not provide a complete team-member list.

Project Platform: ServiceNow Incident Management

2. Project Overview

Purpose: Improve Incident data integrity by moving important validation and field-control rules from manual checking into the ServiceNow Incident interface. The solution helps Service Desk and IT Support users create complete and consistent Incident records.

Problem addressed: Incident records can contain incomplete, inconsistent or incorrect information when users rely only on manual checking. High Impact Incidents require consistent handling and validation.

Key Features:

- High Impact UI Policy on the Incident table.
- Assignment Group becomes mandatory when Impact is High. • Urgency becomes read-only under the High Impact condition.
- onChange Client Script automatically sets Urgency to High when Impact becomes High.
- onSubmit Client Script prevents a High Impact Incident from being saved when Assigned To is empty.
- Reverse-if-false behavior restores applicable field behavior when Impact is no longer High.
- onCellEdit Client Script blocks direct State changes from the Incident list.
- State changes remain possible through the Incident form.

3. Architecture

Architecture Overview: The ServiceNow web interface is the client access point. A Service Desk Agent interacts with the Incident form or Incident list. ServiceNow UI Policies and Client Scripts execute on the relevant client-side events. Valid Incident data is stored in the ServiceNow Incident table/platform data store.

Layer	Technology / Component	Responsibility
User Interface	ServiceNow Incident Form and Incident List	Collect Incident input and provide list/form
		operations.
UI Control	ServiceNow UI Policy + UI Policy Actions	Apply mandatory and read-only behavior based on Impact.

Client Logic	ServiceNow Client Scripts / JavaScript	Handle onChange, onSubmit and onCellEdit behavior.
Business Validation	Configured Incident rules	Prevent invalid High Impact submission and restricted list edits.
Data Store	ServiceNow Incident table / platform storage	Store Impact, Urgency, Assignment Group, Assigned To, State and other Incident data.

Architecture flow: Service Desk Agent → Web Browser → ServiceNow Incident Form/List → UI Policies & Client Scripts → Validation → Incident Record/Data Store

External APIs: None required for the current project scope.

Machine Learning: Not applicable. No ML/AI model is used.

4. Setup / Configuration Instructions

The project is configured inside a ServiceNow instance rather than installed as a local MERN application. A ServiceNow instance with appropriate configuration access is required.

Prerequisites:

- Access to a ServiceNow development instance.
- Administrative or configuration permissions sufficient to create UI Policies and Client Scripts.
- Access to the Incident table and Incident form/list.
- A browser for accessing the ServiceNow instance.

Configuration Summary:

- Create a UI Policy named “High Impact Control” on the Incident table.
- Set the UI Policy condition to Impact is 1 – High.
- Configure Assignment Group as mandatory.
- Configure Urgency as read-only.
- Enable Reverse if false.
- Create an onChange Client Script to set Urgency to High when Impact changes to High.
- Create an onSubmit Client Script to prevent High Impact submission when Assigned To is empty.
- Create an onCellEdit Client Script on State to prevent direct list editing.

5. Folder Structure / Configuration Structure

A conventional client/server source-code folder structure is not used because this project is implemented inside the ServiceNow platform. The logical configuration structure is:

ServiceNow Configuration Area	Project Components
Incident Table	Incident records and fields
System UI → UI Policies	High Impact Control UI Policy
UI Policy Actions	Assignment Group mandatory; Urgency read-only
Client Scripts – onChange	Automatic Urgency = High behavior
Client Scripts – onSubmit	Assigned To validation for High Impact
Client Scripts – onCellEdit	State list-edit restriction

6. Running / Using the Application

There are no npm start commands because the project is not a MERN application. The solution is used directly through the ServiceNow web interface.

- Log in to the authorized ServiceNow instance.
- Open Incident → Create New to create an Incident.
- Set Impact to High to trigger the configured High Impact behavior.
- Provide required Incident information and submit the record.
- Open Incident → All to view Incident records.
- Use the Incident form for permitted State updates.

7. API Documentation

No custom REST API, Node.js backend API or third-party API is exposed by this project. The solution uses native ServiceNow platform functionality, UI Policies and Client Scripts. Therefore, an API endpoint table is not applicable to the current project scope.


8. Authentication and Authorization

Access to the project is through authenticated ServiceNow users. ServiceNow platform authentication and role-based access controls govern access to the Incident application and configuration areas. Credentials are not stored in this document. The project does not implement a separate JWT/session authentication server.

9. User Interface


The main user interface is the ServiceNow Incident form and Incident list. The following evidence images are from the actual testing performed for this project.

High Impact / Mandatory Enforcement

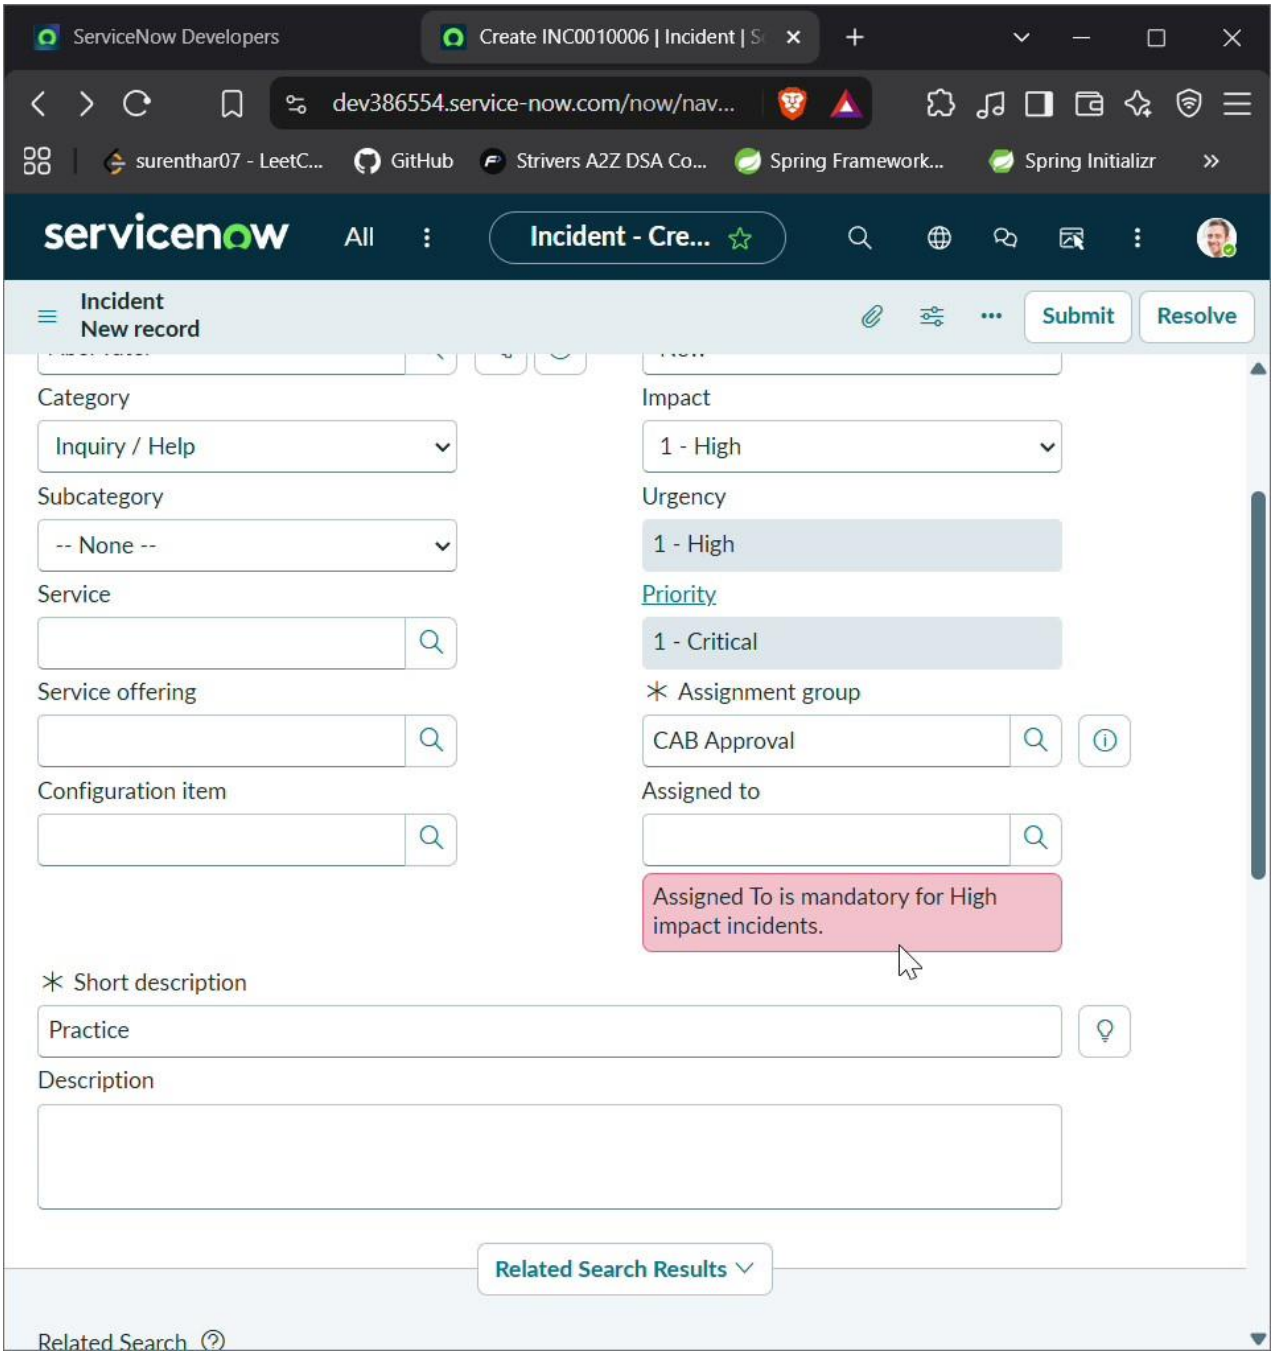

Evidence: UAT01.png


Successful High Impact Save

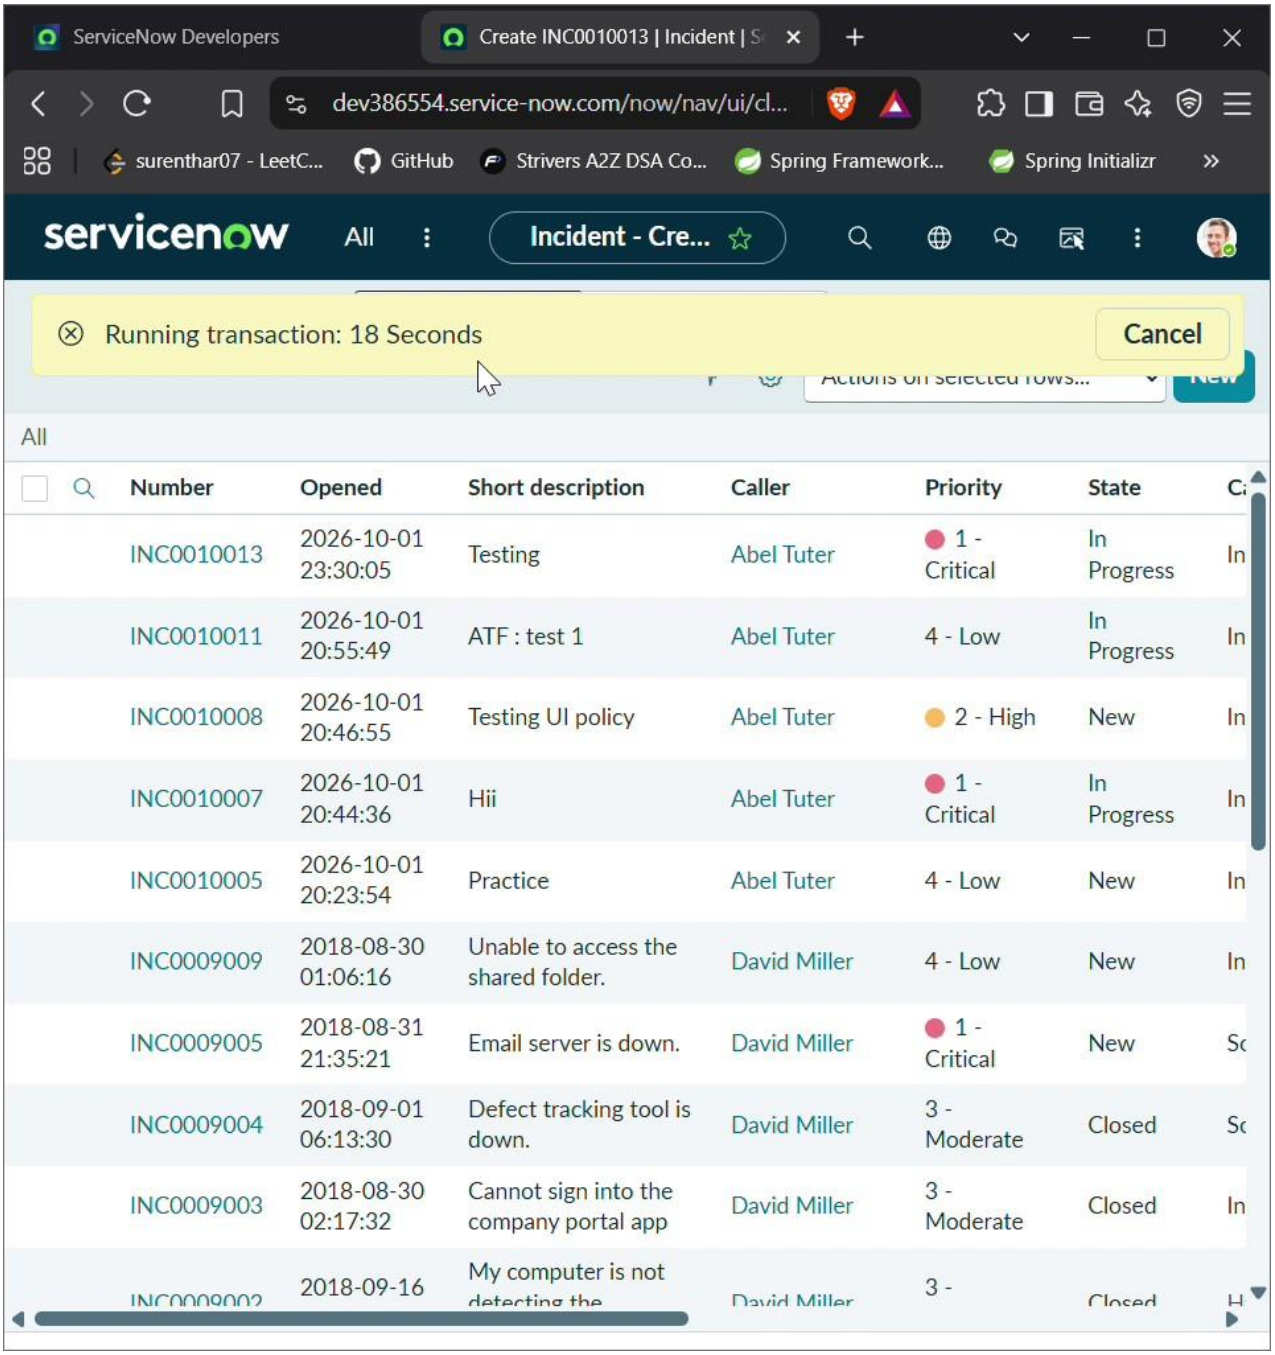

Number	Opened	Short description	Caller	Priority	State	C
INC0010013	2026-10-01 23:30:05	Testing	Abel Tuter	1 - Critical	In Progress	In
INC0010011	2026-10-01 20:55:49	ATF : test 1	Abel Tuter	4 - Low	In Progress	In
INC0010008	2026-10-01 20:46:55	Testing UI policy	Abel Tuter	2 - High	New	In
INC0010007	2026-10-01 20:44:36	Hii	Abel Tuter	1 - Critical	In Progress	In
INC0010005	2026-10-01 20:23:54	Practice	Abel Tuter	4 - Low	New	In
INC0009009	2018-08-30 01:06:16	Unable to access the shared folder.	David Miller	4 - Low	New	In
INC0009005	2018-08-31 21:35:21	Email server is down.	David Miller	1 - Critical	New	Sc
INC0009004	2018-09-01 06:13:30	Defect tracking tool is down.	David Miller	3 - Moderate	Closed	Sc
INC0009003	2018-08-30 02:17:32	Cannot sign into the company portal app	David Miller	3 - Moderate	Closed	In
INC0009002	2018-09-16	My computer is not detecting the	David Miller	3 -	Closed	H


Evidence: UAT02.png

Reverse Condition

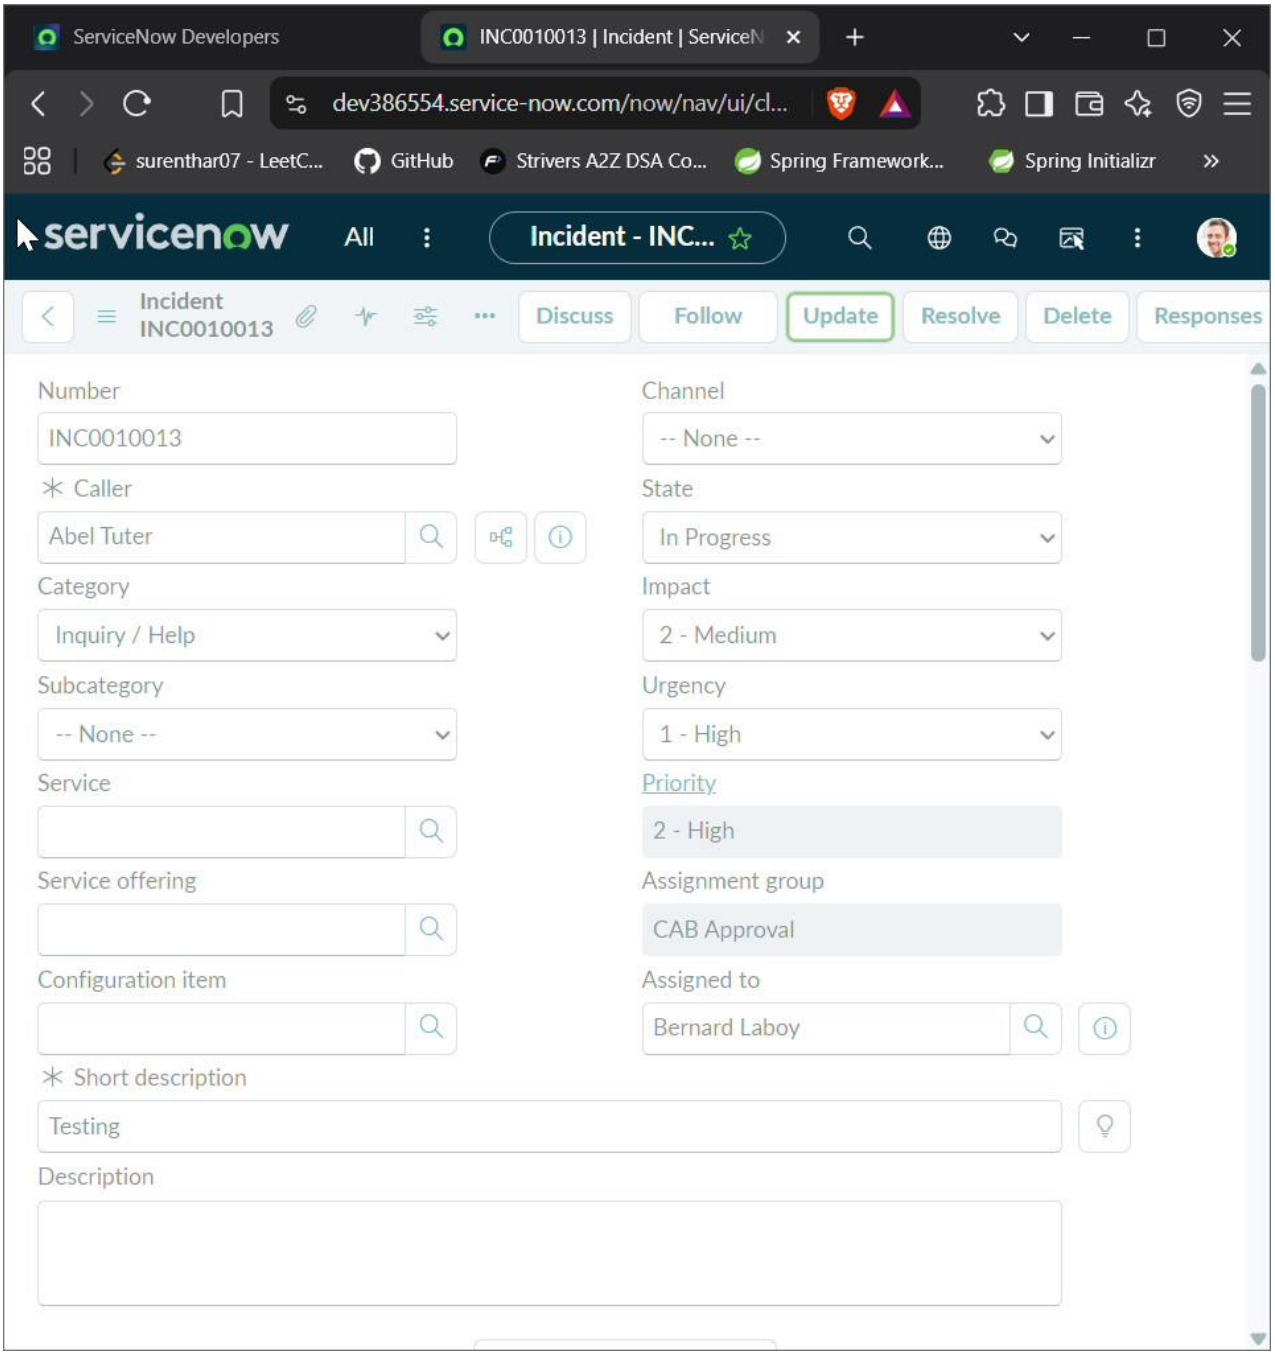


Evidence: UAT03.png

State List Edit Restriction

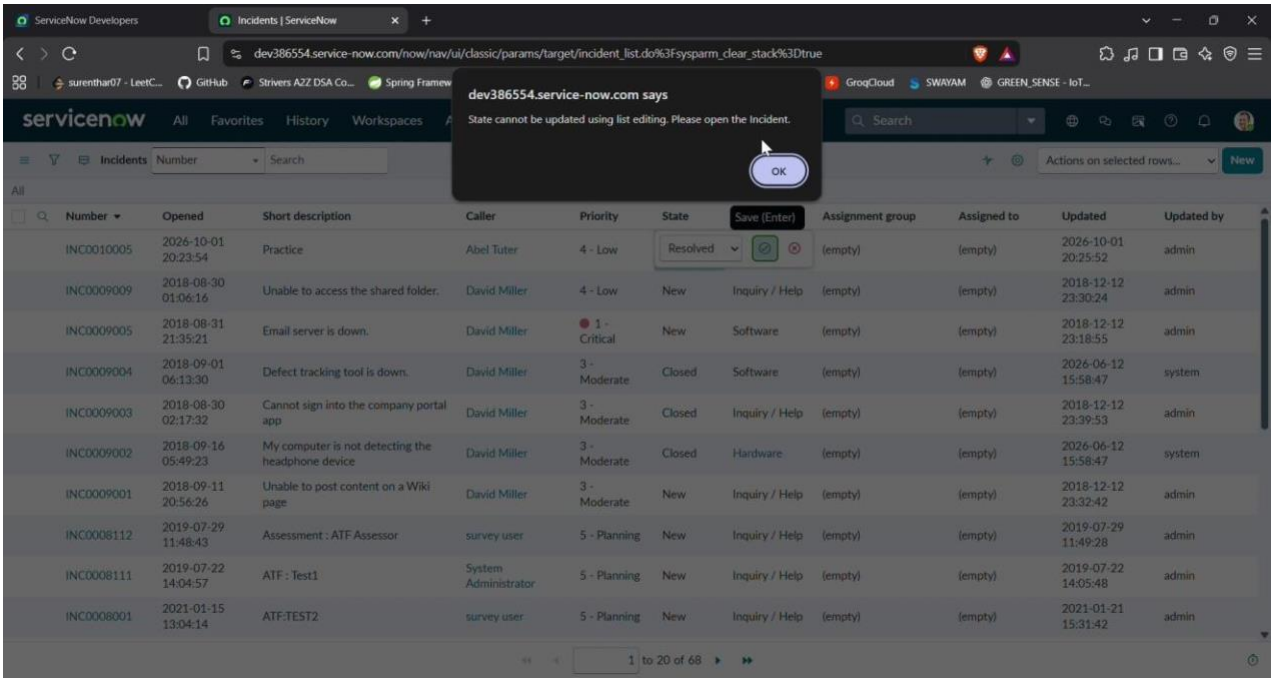

Evidence: UAT04_alert.png

Form-Based State Update

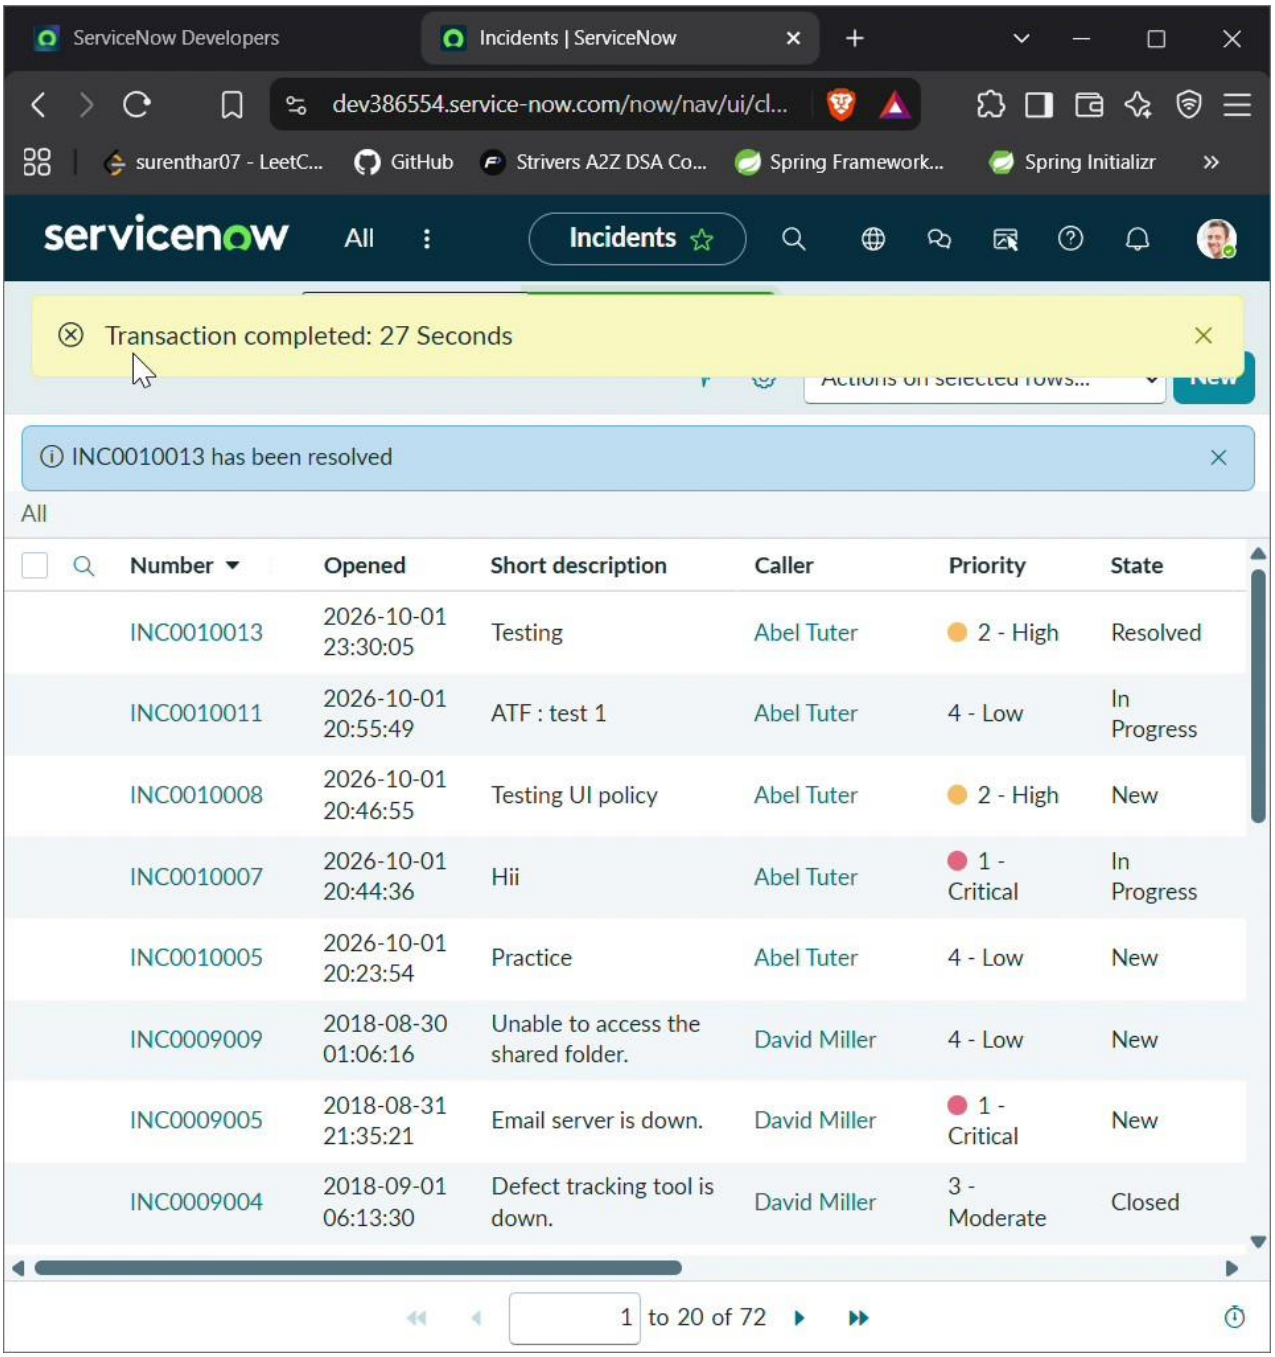

Evidence: UAT05_final.png

10. Testing

Testing was performed through functional and user-acceptance scenarios on the ServiceNow Incident configuration. Five UAT scenarios were executed and passed.

Test Case	Scenario	Result	Evidence
TC-001	High Impact + Assigned To empty → submission blocked	PASS	UAT01
TC-002	High Impact + Assigned To provided → save succeeds	PASS	UAT02
TC-003	Impact High → Medium reverses UI Policy behavior	PASS	UAT03
TC-004	Direct State list editing blocked	PASS	UAT04
TC-005	State update through Incident form succeeds	PASS	UAT05

Testing summary: 5 UAT cases executed, 5 passed, 0 failed, 0 blocked. No unresolved defect was identified in the documented UAT scenarios.

11. Screenshots / Demo

The project demonstration can be presented using the actual ServiceNow execution recordings and the evidence screenshots embedded in Section 9. The complete demonstration should show: High Impact behavior, blocked submission without Assigned To, successful save with Assigned To, reverse condition, blocked State list edit, and successful State form update.

- Demo 1: Set Impact = High and show UI Policy/automatic Urgency behavior.
- Demo 2: Leave Assigned To empty and show submission validation.
- Demo 3: Provide Assigned To and show successful Incident creation.
- Demo 4: Change Impact High → Medium and show reverse behavior.
- Demo 5: Attempt State list editing and show the restriction.
- Demo 6: Change State through the Incident form and show successful update.

12. Known Issues

- The project depends on the ServiceNow instance being available and the configured UI Policies/Client Scripts remaining active.
- Client-side controls are intended for the specified Incident interactions; platform/server-side access controls remain part of ServiceNow.
- No external API or separate application server is included in the current scope.
- The project documentation does not include ServiceNow credentials or private instance URLs.

13. Future Enhancements

- Add additional UI Policies for other Incident priority/impact combinations.
- Add more validation rules for mandatory Incident fields based on business requirements.
- Extend Client Scripts or workflows for additional Incident lifecycle states.
- Add automated test coverage for a larger set of Incident scenarios.
- Add reporting/dashboard components to monitor Incident data-quality improvements.
- Integrate notification or workflow automation where required by the organization.
- Extend the configuration to additional ServiceNow task tables if similar data-integrity rules are needed.

14. Conclusion

The Implement Client Script & UI Policy (Incident) project demonstrates how native ServiceNow UI Policies and Client Scripts can enforce consistent Incident data entry. The completed implementation covers conditional field control, automatic Urgency handling, submission-time validation, reverse behavior, list-edit restriction and permitted form-based State updates. The five documented UAT scenarios passed, providing evidence that the tested configuration behaves according to the defined acceptance criteria.

End of Phase 6 Project Documentation