

The $\text{\textcolor{blue}{S}\textcolor{red}{T}\textcolor{blue}{E}\textcolor{red}{X}3}$ Package Collection*

Michael Kohlhase, Dennis Müller
FAU Erlangen-Nürnberg
<http://kwarc.info/>

2023-04-06

Contents

1	Introduction & Setup	7
1.1	What is $\text{\textcolor{blue}{S}\textcolor{red}{T}\textcolor{blue}{E}\textcolor{red}{X}}$?	7
1.2	The $\text{\textcolor{teal}{S}\textcolor{blue}{T}\textcolor{red}{E}\textcolor{blue}{X}}$ package	8
1.3	What is MMT?	8
1.4	Math archives and the MathHub Directory	8
1.5	Setting Up the $\text{\textcolor{blue}{S}\textcolor{red}{T}\textcolor{blue}{E}\textcolor{red}{X}}$ IDE	9
I	Tutorial	11
2	The Basics	12
2.1	Text symbols	15
2.1.1	Using Modules & Search in the IDE	15
2.2	Symbol References	18
2.3	Modules and Simple Symbol Declarations	21
2.4	Documenting Symbols	24
2.5	Sectioning and Reusing Document Fragments	26
2.6	Building and Exporting HTML	28
3	Mathematical Concepts	31
3.1	Simple Symbol Declarations	31
3.1.1	Semantic Macros and Notations	31
3.1.2	Types and Variables	34
3.1.3	Flexary Macros and Argument Modes	39
3.1.4	Precedences	41
3.1.5	Implicit Arguments	41
3.1.6	Finishing Equality	43
3.1.7	Variable Sequences	43
3.2	Statements	44
3.2.1	Definitions	44
	Semantic Macros in Text Mode	46

*Version 3.3.0 (last revised 2023-04-06)

Definientia	47
Using Symbols Without Semantic Macros and Exporting Code in Modules	48
3.2.2 Assertions	49
3.2.3 Proofs	52
3.3 Mathematical Structures	52
3.3.1 Declaring and Using Structures	52
Instantiating Structures	53
3.3.2 Extending Structures and Axioms	55
Conservative Extensions	55
3.3.3 Nesting Structures and \this	57
3.4 Complex Inheritance and Theory Morphisms	59
3.4.1 Glueing Structures Together	61
3.4.2 Realizations	63
4 Extensions for Education	65
4.1 Slides and Course Notes	65
4.2 Problems and Exercises	65
4.2.1 Simple Problems	66
4.2.2 Multiple Choice Blocks	67
4.2.3 Filling-In Concrete Solutions	68
4.3 Including Problems	69
4.4 Testing and Spacing	69
4.5 Homework Assignments and Exams	70
II User Manual	71
5 Basics	72
5.1 Package and Class Options	72
5.2 Math Archives and the MathHub Directory	73
5.2.1 The Structure of Math Archives	74
5.2.2 MANIFEST.MF-Files	74
5.3 The lib-Directory	75
5.4 Basic Macros	76
6 Document Features	77
6.1 Document Fragments	77
6.2 Using and Referencing Document Fragments	78
6.3 Cross-Document References	78

7 Modules and Symbols	81
7.1 Modules	81
7.1.1 Signature Modules, Languages, and Multilinguality	82
7.2 Symbol Declarations	82
7.2.1 Returns	83
7.3 Referencing Symbols	83
7.4 Notations and Semantic Macros	85
7.4.1 Precedences and Bracketing	86
7.4.2 Notations for Argument Sequences	87
7.4.3 Semantic Macros	87
7.5 Simple Inheritance	88
7.6 Variables and Sequences	90
7.7 Structures	91
7.7.1 Semantic Macros for Structures	91
8 Statements	94
8.1 More on Definitions	95
8.2 More on Assertions	96
9 Customizing Typesetting	97
9.1 Highlighting Symbol References	97
9.2 Styling Environments and Macros	98
9.3 Custom CSS for Environments	99
10 Additional Packages	100
10.1 NotesSlides Manual	100
10.1.1 Introduction	100
10.1.2 Package Options	100
10.1.3 Notes and Slides	101
10.1.4 Customizing Header and Footer Lines	102
10.1.5 Frame Images	102
10.1.6 Ending Documents Prematurely	103
10.1.7 Global Document Variables	103
10.1.8 Excursions	104
10.2 Problem Manual	105
10.2.1 Introduction	105
10.2.2 Problems and Solutions	105
10.2.3 Markup for Added-Value Services	106
Multiple Choice Blocks	107
Filling-In Concrete Solutions	108
10.2.4 Including Problems	110
10.2.5 Testing and Spacing	110
10.3 HWExam Manual	110
10.3.1 Introduction	110
10.3.2 Package Options	111
10.3.3 Assignments	111
10.3.4 Including Assignments	111
10.3.5 Typesetting Exams	111
10.4 Tikzinput Manual	112

III Documentation	114
11 S^TE_X Developer Manual	115
11.1 Documents	116
11.2 Modules	116
11.3 Symbols	118
11.4 Notations	120
11.5 Structural Features	123
11.6 Imports and Morphisms	125
11.7 Expressions and Semantic Macros	126
11.8 Optional (Key-Value) Argument Handling	127
11.9 Stylistable Commands and Environments	128
11.10 Math Archives	129
11.11 SMS-Mode	130
11.11.1 Second Pass	130
11.11.2 First Pass	131
11.12 Strings, File Paths, URIs	131
11.12.1 File Paths	132
File Path Constants and Variables	133
11.12.2 URIs	133
URI Constants and Variables	134
11.13 Language Handling	134
11.14 Inserting Annotations	135
11.14.1 Backend macros	135
11.15 Persisting Content from Math Archives in sms-Files	136
11.16 Utility Methods	136
11.16.1 Group-like Behaviours	137
12 Additional Packages	139
12.1 NotesSlides Documentation	139
12.2 Problem Documentation	139
12.3 HWExam Documentation	139
12.4 Tikzinput Documentation	139
IV Implementation	140
13 The S^TE_X Implementation	141
13.1 Setting up	141
13.2 Utilities	142
13.2.1 Calling kpsewhich and Environment Variables	142
13.2.2 Logging	143
13.2.3 Languages	144
13.2.4 Group-like Behaviours	146
13.2.5 HTML Annotations	147
13.2.6 Auxiliary Methods	149
13.2.7 Persistence	155
13.2.8 Files, Paths and URIs	156
13.2.9 File Hooks	164
13.3 Math Archives	165

13.4	Documents	169
13.4.1	Title	169
13.4.2	Sectioning	170
13.4.3	References	174
13.4.4	Inputs	181
13.5	SMS Mode	187
13.6	Modules	190
13.6.1	The smodule-environment	190
13.6.2	Structural Features	201
13.7	Inheritance	207
13.7.1	\importmodule/\usemodule	207
13.7.2	Theory Morphisms	212
13.8	Symbols	218
13.8.1	Declarations	218
13.8.2	Notations	227
a/B-mode argument handling		239
13.8.3	Variables	240
13.8.4	Sequences	244
13.8.5	Expressions	248
Invoking Semantic Macros		249
Argument Handling and Annotating		256
Term HTML Annotations		260
Automated Bracketing		262
Symname and Variants		264
Highlighting		266
13.9	Mathematical Structures	267
13.10	Statements	281
13.11	Proofs	287
13.12	Metatheory	295
13.13	MMT Interfaces	296
14	Additional Packages	300
14.1	Implementation: The notesslides Package	300
14.1.1	Class and Package Options	300
14.1.2	Notes and Slides	304
14.1.3	Environment and Macro Patches	307
14.1.4	Styling Across Notes/Slides	309
14.1.5	Beamer Compatibility	309
14.1.6	TODO Excursions	310
14.2	Implementation: The problem Package	311
14.2.1	Package Options	311
14.2.2	Problems and Solutions	312
14.3	Implementation: The hwexam Package	321
14.3.1	Package Options	321
14.3.2	Assignments	322
14.3.3	Leftovers	325
14.4	Tikzinput Implementation	326



`sTeX` is – by now – relatively stable and ready to use for the general public. However, it is also actively being developed further and subject to ongoing research. Some of the features described in here might not fully work as expected, some are still experimental, there might occasionally be cryptic error messages, and in general bugs are expected.

We welcome all kinds of issues you might encounter at <https://github.com/slatex/sTeX>.

If you have questions or problems with `sTeX`, you can talk to us directly at <https://matrix.to/#/#stex:fau.de>.

Chapter 1

Introduction & Setup

1.1 What is $\text{\textcolor{blue}{S}\textcolor{teal}{T}\textcolor{blue}{E}\textcolor{red}{X}}$?

$\text{\textcolor{blue}{S}\textcolor{teal}{T}\textcolor{blue}{E}\textcolor{red}{X}}$ is a system for generating human-oriented documents in either [PDF](#) or [HTML](#) format, augmented with computer-actionable semantic information (conceptually) based on the [OMDoc](#) format and ontology.

At its core is the [\$\text{\textcolor{teal}{S}\textcolor{blue}{T}\textcolor{teal}{E}\textcolor{blue}{X}}\$ package](#) for [\LaTeX](#), that allows for semantically marking up document fragments; in particular concepts, [formulae](#) and [mathematical](#) statements (such as definitions, theorems and proofs). Running `pdflatex` over $\text{\textcolor{blue}{S}\textcolor{teal}{T}\textcolor{blue}{E}\textcolor{red}{X}}$ -annotated documents formats them into normal-looking [PDF](#).

But $\text{\textcolor{blue}{S}\textcolor{teal}{T}\textcolor{blue}{E}\textcolor{red}{X}}$ also comes with a conversion pipeline into semantically annotated [HTML](#), which can host semantic added-value services that make the documents *active* (i.e. interactive and user-adaptive) – essentially turning [\LaTeX](#) into a document format for (mathematical) knowledge management (MKM).

The $\text{\textcolor{blue}{S}\textcolor{teal}{T}\textcolor{blue}{E}\textcolor{red}{X}}$ system consists of the following components:

- The [\$\text{\textcolor{teal}{S}\textcolor{blue}{T}\textcolor{teal}{E}\textcolor{blue}{X}}\$ package](#),
- the [RusTeX](#) system for converting [\LaTeX](#) documents to (semantically enriched) [HTML](#),
- the [MMT](#) system for advanced knowledge management service and semantically informed backend for hosting the [HTML](#) with integrated added-value services,
- a collection of [math archives](#) of $\text{\textcolor{blue}{S}\textcolor{teal}{T}\textcolor{blue}{E}\textcolor{red}{X}}$ document fragments and [symbols](#) for reuse, available of [mathhub.info](#), and
- the [\text{\textcolor{blue}{S}\textcolor{teal}{T}\textcolor{blue}{E}\textcolor{red}{X}} IDE](#): A [VS Code](#) extension that, besides the usual [IDE](#) functionalities like syntax highlighting, integrates [RusTeX](#) and [MMT](#) and allows for accessing the public [math archives](#) on [mathhub.info](#) to make the entire toolchain easily accessible to authors.

If [PDF](#) is all you are interested in, the [\$\text{\textcolor{teal}{S}\textcolor{blue}{T}\textcolor{teal}{E}\textcolor{blue}{X}}\$ package](#) is all you *need*. Either way, however, we recommend using the [\text{\textcolor{blue}{S}\textcolor{teal}{T}\textcolor{blue}{E}\textcolor{red}{X}} IDE](#) – it very much helps with semantically annotating your [\LaTeX](#) documents.

1.2 The **STEX** package

The **STEX** package extends **LATEX** with:

- A mechanism to declare **symbols** – concepts, functions, relations, variables, etc., which can be used and referenced in text or via **semantic macros** in mathematical formulae,
- a **module system** based on logical identifiers – **modules** bundle declarations, definitions, theorems, document snippets, and **symbols** for reuse, and
- an analogous organizational structure for developing documents modularly from individual fragments and sections.

The **STEX** package has been designed to have minimal impact on other **packages** and **document classes**, or the actual document layout – formatting of semantic **environments**, **symbol** references and **semantic macros** can be fully customized.

1.3 What is **MMT**?

MMT is a **software system** and **Scala** API for generic knowledge management services. It is based on a version of the **OMDOC** ontology and **document format** (**MMT/OMDoc**).

Among the services **MMT** provides are compiling, building, converting and managing libraries, a built-in web-server for browsing content, various algorithms for generic computation, checking and translating expressions, and querying.

1.4 Math archives and the MathHub Directory

To make the most of **STEX**, it is strongly encouraged to follow a workflow of small document fragments and **modules** to maximize reuse.

One considerable weakness of **LATEX** is the way source files are referenced: they need to be either in a **texmf** directory, or else be referenced via file paths relative to the main **.tex**-file being compiled. This is highly inconvenient if we want to collaboratively develop many highly interrelated document fragments.

STEX therefore adds an organizational layer on top of **LATEX**'s: **math archives** stored in a fixed **MathHub** directory anywhere on your hard drive. Referencing source files and **modules** is then done relative to the containing **math archive**, and is thus *independent* of user's individual setups or the current **.tex**-file.

The drawback of this approach is that **STEX** needs to know the location of your **MathHub** directory. There are multiple ways to achieve that, but the simplest and recommended approach is to set an environment variable: Simply create a new directory **<path>/MathHub** somewhere on your hard drive and set the environment variable **MATHHUB** as the path to this new directory.

Alternatively, you can let the **STEX IDE** do the work for you (see [section 1.5](#)).

For more on **math archives**, see [section 5.2](#).



Figure 1: Installing the [sTeX IDE](#)

1.5 Setting Up the [sTeX IDE](#)

[sTeX](#) is based on [LaTeX](#), and adds additional layers of presentational and functional markup to it. As a consequence the source files of [sTeX](#) documents look quite different from the resulting [XHTML](#) and [PDF](#) documents. Thus the best way of interacting with the [sTeX](#) document collections is via an [integrated development environment \(IDE\)](#). In this tutorial we will use the [sTeX](#) plugin for the [VS Code](#), which you should set up as a first step (this also sets up the necessary auxiliary software).

Setting up [sTeX](#) with the dedicated [IDE](#) is easy:

1. Download and install [VS Code](#) here: <https://code.visualstudio.com/download>
2. Start [VS Code](#) and navigate to the *Extensions*-tab on the left. Here you can search for Extensions in the [VS Code](#) marketplace. Look for the [sTeX](#) extension by [KWARC](#), as in [Figure 1](#) on the left.
3. Having done so, upon opening any folder in [VS Code](#) containing a `.tex`-file the setup window will pop up, as in [Figure 1](#) on the right.

The [IDE](#) will attempt to determine your [Java](#) installation and your [MathHub](#) directory (if set via an environment variable). Alternatively, you can set the latter now.

4. Download the [MMT](#) `.jar`-file at the link provided in the setup and select it. The [IDE](#) should then be able to determine your [MMT](#) version.

And that's it. Click on *Finish* and your setup is finished. The extension will start and download **RuSTEX** and some fundamental **math archives** for you automatically (an internet connection is required when finishing the setup).

Part I

Tutorial

The dynamic [HTML](#) version of this part can be found at

[https://stexmmt.mathhub.info/:
sTeX/fullhtml?archive=sTeX/Documentation&filepath=tutorial.en.xhtml](https://stexmmt.mathhub.info/sTeX/fullhtml?archive=sTeX/Documentation&filepath=tutorial.en.xhtml)

[sTeX](#) is a system for generating human-oriented documents in either [PDF](#) or [HTML](#) format, augmented with computer-actionable semantic information (conceptually) based on the [OMDoc](#) format and ontology.

In this part, we will give a broad but shallow introduction to [sTeX](#), and what you can get out of it. Additionally, this serves as an introduction to the [sTeX IDE](#), and we consequently assume that you have that one set up, as described in [section 1.5](#).

Note that in [PDFs](#), the specific highlighting of semantically annotated text is fully customizable (see [chapter 9](#)). In this document, we use [this highlighting](#) for [notation](#) components, [this highlighting](#) for [symbol](#) references, [this highlighting](#) for (local) [variables](#) and [this highlighting](#) for definienda; i.e. new concepts being introduced.

Chapter 2

The Basics

This document itself uses [sTeX](#) and serves as a direct example for the following. You can download its source files, the generated [PDF](#) files, and the generated [HTML](#) documents directly from within the [IDE](#), by navigating to the [sTeX](#) tab in the menu on the left and finding [sTeX/Documentation](#) in the list of [math archives](#) and clicking the small “Install”-button next to it, see the screenshot on the left of [Figure 2](#).

Once downloading is finished (this may take a while since dependencies are also downloaded), you can then browse the `.tex`-files in [sTeX/Documentation](#) directly from the [math archives](#) panel in the [sTeX](#) tab, as you can see in the right screenshot in [Figure 2](#).

For example, you can now navigate to the file `tutorial/intro.en` to see the sources of this very chapter.

As a first example, consider the following document fragment from [section 1.1](#):

[sTeX](#) is a system for generating human-oriented documents in either [PDF](#) or [HTML](#) format, augmented with computer-actionable semantic information (conceptually) based on the [OMDoc](#) format and ontology.

If you were to look at the generated [HTML](#) from this fragment, you could hover over the highlighted words ([sTeX](#), [PDF](#), [HTML](#), [OMDoc](#)) and get a little popup with their definitions ([Figure 3](#)). Neat, huh?

Here, in the [PDF](#), hovering will only show you a unique identifier ([MMT-URI](#)) for the word, and link to a definition on the web. Still useful, but not quite as neat, of course.

A plain [LaTeX](#)-version of the above document fragment, without any [sTeX](#) markup, could look like this:

Example 1

Input:

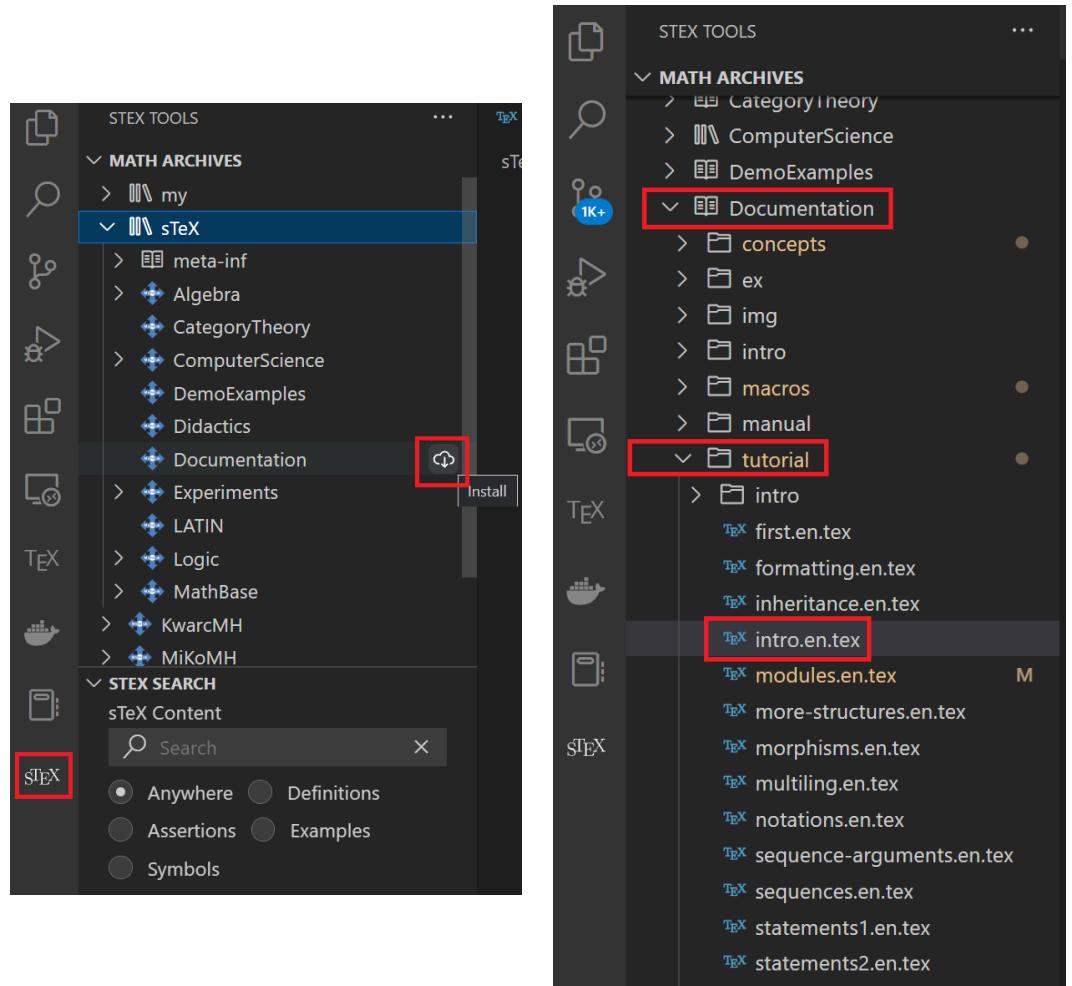


Figure 2: Installing Math Archives

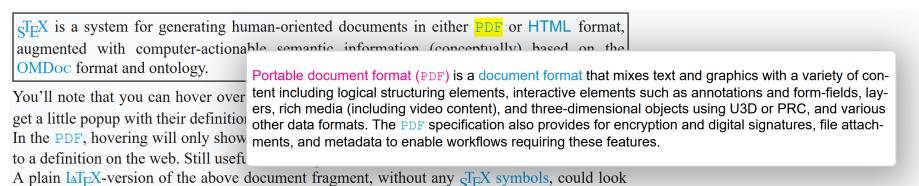


Figure 3: Definition on Hover

```

File [sTeX/Documentation]tutorial/intro/intro1plain.en.tex

1 \documentclass{article}
2 \usepackage{sTeX-logo}
3 \begin{document}
4
5   \sTeX{} is a system for generating human-oriented documents
6   in either \textsf{PDF} or \textsf{HTML} format, augmented
7   with computer-actionable semantic information (conceptually)
8   based on the \textsc{OMDoc} format and ontology.
9
10 \end{document}

```

Output:

sTeX is a system for generating human-oriented documents in either PDF or HTML format, augmented with computer-actionable semantic information (conceptually) based on the OMDoc format and ontology.

(Examples like the one above always show the file the source code is in, so if you have downloaded the sTeX/Documentation [math archive](#) you can toy around with it yourself)

If you save a file in the [IDE](#) (regardless of whether it has unsaved changes), a preview window will pop up, showing you the [HTML](#) generated from the .tex-file; see (Figure 4).

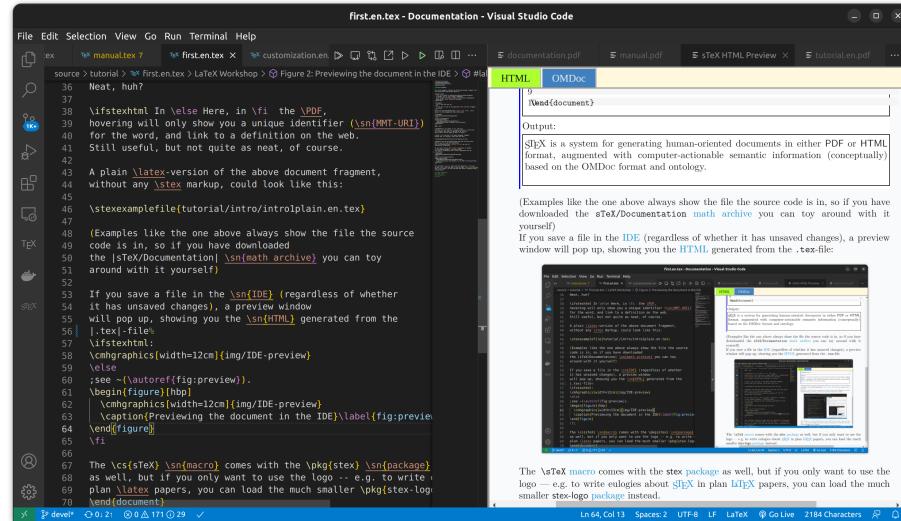


Figure 4: Previewing the document in the IDE

The \sTeX macro comes with the [stex package](#) as well, but if you only want to use the logo – e.g. to write eulogies about sTeX in plain LATEX papers, you can load the much smaller [stex-logo package](#) instead.

2.1 Text symbols

The most central concept behind **s_TeX** is that of a *symbol*:

A **symbol** is a *named* concept that can be defined, documented and referenced. Examples for **symbols** are mathematical constants, functions, theorems, statements, principles – anything that has a (somewhat) precise meaning and can be referenced by name can be a **symbol**.

Before we explain how we can declare new **symbols** and associate them with definitions, **notations** and all that, let's assume an ideal world in which others have done that job already for us – after all, **s_TeX** is all about *reuse*, and naturally, there are **s_TeX symbols** for all of the above already. Let's start with the one for **s_TeX** itself:

2.1.1 Using Modules & Search in the IDE

In the **VS Code IDE**, navigate to the **s_TeX**-tab on the left. In the search panel, select the “**Symbols**” radio button and search for “**s_TeX**”. The second search result should be what we're looking for ([Figure 5](#)).

Search results are grouped into *local* and *remote* results. Local ones are the ones you already have in your local **MathHub** directory; remote ones you can download directly from within the **IDE**.

You can click the preview button to see the generated **HTML** for the document – the resulting window that pops up also has an **OMDoc** tab you can select, which (among other things) shows you the **semantic macros** provided by the respective **module**: In this case, it tells us that there is a **text symbol** named “**s_TeX**” with **semantic macro** `\stex` in the **module** `mod/systems/tex?sTeX` that is in the `\sTeX/ComputerScience/Software` archive. It produces the presentation “**s_TeX**” as we want ([Figure 6](#)).

A **text symbol** is a **symbol** `foo` with an associated **semantic macro** `\foo`. The **macro** `\foo` is allowed in text or math mode and produces a predefined piece of text output annotated with `foo`.

The variant `\fooname` produces the same output without annotation.

If we want to use the **s_TeX symbol** in a document – which we have open in the **IDE** – we simply click on the **use** button, and the **IDE** will automatically insert the line `\usemodule[sTeX/ComputerScience/Software]{mod/systems/tex?sTeX}`, making all **symbols** in that **module** available to use – in particular, we can now use the `\stex` **semantic macro** instead of the plain, non-semantic `\sTeX macro` – that is, of course, after we include the `stex` **package** first.

s_TeX The `\usemodule` macro takes as *optional* argument the name of a **math archive**, and as a regular argument the path to an **s_TeX module** (see [section 7.5](#)).

Analogously, we can also search for the **PDF**, **HTML** and **OMDoc** symbols, all of which are also **text symbols** and have the associated **semantic macros** `\PDF`, `\HTML` and `\omdoc`; the document should thus look like this:

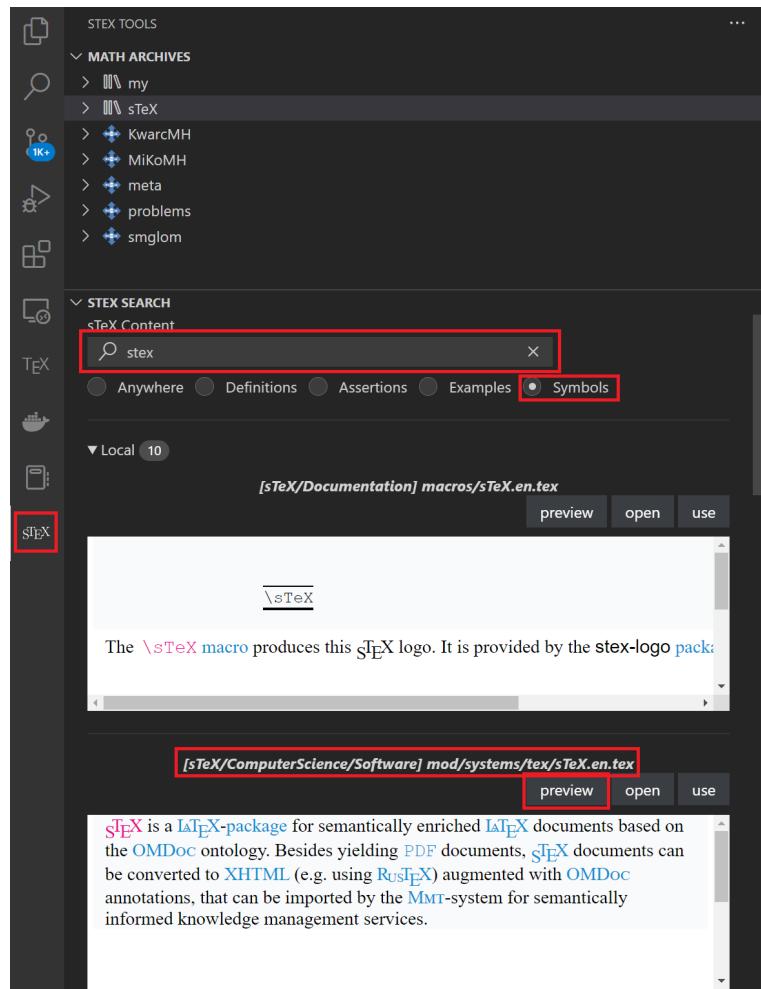


Figure 5: Search in the STeX IDE



Figure 6: OMDoc Preview

Example 2

Input:

```
File [sTeX/Documentation]tutorial/intro/intro1stex.en.tex
1 \documentclass{article}
2 \usepackage{sstex}
3 \begin{document}
4   \usemodule[sTeX/ComputerScience/Software]{mod/systems/tex?sTeX}
5   \usemodule[sTeX/ComputerScience/Software]{mod/formats?PDF}
6   \usemodule[sTeX/ComputerScience/Software]{mod/formats?HTML}
7   \usemodule[sTeX/ComputerScience/Software]{mod/formats?OMDoc}
8
9   \stex is a system for generating human-oriented documents
10  in either \PDF or \HTML format, augmented
11  with computer-actionable semantic information (conceptually)
12  based on the \omdoc format and ontology.
13 \end{document}
```

Output:

STeX is a system for generating human-oriented documents in either **PDF** or **HTML** format, augmented with computer-actionable semantic information (conceptually) based on the **OMDoc** format and ontology.

Now, our generated **HTML** looks a lot more interesting, with highlighting, pop-ups on hover and all that. Notably however, if we compile the file with `pdflatex`, it looks pretty much exactly as before.

That's because we haven't told **STeX** what to do with semantic annotations yet – and by default, it does not do anything fancy, except for wrapping them in an `\emph`. We can customize how we want **STeX** to highlight various semantic text fragments (see [chapter 9](#)). A default highlighting schema is provided in the `sstex-highlighting` package – including that will



Figure 7: Redundant Imports



Figure 8: Includes in the OMDoc Preview

- highlight semantically annotated text in [this color](#),
- show the MMT-URI of the corresponding [symbol](#) in a tooltip on hovering over the text,
- make the text link to the place the [symbol](#) is being defined in the current document (if it is), or, alternatively,
- make it link to an external resource, if one is known. In our case, they link to [stexmmmt.mathhub.info/:sTeX](#), where the [HTML](#) for all the [symbols](#) we use in this document are hosted.

Note that in the [IDE](#), the `\usemodule`-statement for [OMDoc](#) is underlined in blue ([Figure 7](#)) – [VS Code](#) is letting us know, that this `\usemodule` statement is *redundant*. That is because the [sTeX module](#) we imported earlier already imports the [OMDoc module](#); as such we have all [macros](#) therein available already. If we look at the [sTeX module](#) in the [VS Code](#) preview window again, we can see that ([Figure 8](#)).

We can consequently safely delete the `\usemodule` again.

2.2 Symbol References

Let's continue with the next paragraph of [section 1.1](#); for now unannotated:

Example 3

Input:

```

File [sTeX/Documentation]tutorial/intro/intro2plain.en.tex

1 \documentclass{article}
2 \usepackage{sTeX}
3 \begin{document}
4
5 At its core is the \sTeX{} package for \LaTeX{}, that allows for
6 semantically marking up document fragments; in particular
7 concepts, formulae and mathematical statements (such as
8 definitions, theorems and proofs). Running \texttt{pdflatex}
9 over \sTeX-annotated documents formats them into normal-looking
10 \textsf{PDF}.
11
12 \end{document}

```

Output:

At its core is the **sTeX** package for **L^AT_EX**, that allows for semantically marking up document fragments; in particular concepts, formulae and mathematical statements (such as definitions, theorems and proofs). Running **pdflatex** over **sTeX**-annotated documents formats them into normal-looking **PDF**.

We already know how to annotate “**sTeX**” and “**PDF**”; and if we use the search field in the **IDE** again, we can also find a **text symbol** for “**L^AT_EX**”. But if we look at the documentation, we will note that *more* is highlighted:

At its core is the **sTeX** package for **L^AT_EX**, that allows for semantically marking up document fragments; in particular concepts, **formulae** and **mathematical** statements (such as definitions, theorems and proofs). Running **pdflatex** over **sTeX**-annotated documents formats them into normal-looking **PDF**.

The “**package**”-symbol can be found in the **L^AT_EX** module too, and searching for the keywords “**formula**” and “**mathematics**” will yield the symbols “**well-formed formula**” and “**mathematics**”, but they are not **text symbols** and “**mathematics**” and “**package**” do not even have a **semantic macro** – and the one for “**well-formed formula**” would not work outside of math mode.

Text symbols are special in that way – they are intended for **symbols** that have a specific formatting associated (such as **L^AT_EX**, **OMDOC**, or **HTML**, which we prefer to typeset as sans serif). For those settings, it makes sense to associate that formatting with a **semantic macro** that does the typesetting for us.

Symbols without a **text macro** can be referenced with the **\symname** macro: **\symname{package}** prints the *name* of the “**package**”-symbol and annotates it accordingly, without any special formatting – in particular it is compatible with being in **\emph**, **\textbf** and similar **macros**. That takes care of *one* of the missing annotations.

More generally, the **\symref** macro can be used to annotate arbitrary text with a symbol: **\symref{mathematics}{mathematical}** associates the text **mathematical** with the symbol “**mathematics**”; thus, we get “**mathematical**” and similarly “**formulae**”.

sTeX

In general, any **macro** that expects a **symbol** name can be given either

1. the *name* of the **symbol**,

2. the name of its [semantic macro](#),
3. or any suffix of its MMT-URI containing at least the [module](#) name.

The second option is often short – and therefore convenient to write; for example, to achieve “[formulae](#)”, we can also write `\symref{wff}{formulae}`, since `\wff` is the [semantic macro](#) for “[well-formed formula](#)”.

The third option allows for distinguishing between multiple [symbols](#) with the same name – the [IDE](#) can help in the latter case, by underlining ambiguous [symbol](#) references in yellow, and offering the [Quick Fix](#) functionality to let you select and autocomplete the specific [symbol](#) you want to reference.

Since `\symname` and `\symref` are a lot to type for something that should ideally be used as often as possible, the [macros](#) `\sn` and `\sr` exist as well and behave exactly the same way. We also provide some convenience abbreviations for `\sn`; namely `\Sn` (capitalizes the first letter of the [symbol](#) name), `\sns` (adds an “`s`” at the end, for the most common pluralization of a name), and `\Sns` (both).

Using all of the above, our annotated fragment now looks like this:

Example 4

Input:

```
File [sTeX/Documentation]tutorial/intro/intro2stex.en.tex
5 \usemodule[sTeX/ComputerScience/Software]{mod/systems/tex?sTeX}
6 \usemodule[sTeX/Logic/General]{mod/syntax?Formula}
7 \usemodule[sTeX/MathBase/General]{mod?Mathematics}
8 \usemodule[sTeX/ComputerScience/Software]{mod/formats?PDF}
9
10 At its core is the \stex \sn{package} for \LaTeX, that allows for
11 semantically marking up document fragments; in particular
12 concepts, \sr{wff}{formulae} and \sr{mathematics}{mathematical}
13 statements (such as definitions, theorems and proofs). Running
14 \texttt{pdflatex} over \stex-annotated documents formats them
15 into normal-looking \PDF.
```

Output:

At its core is the [sTeX package](#) for [L^AT_EX](#), that allows for semantically marking up document fragments; in particular concepts, [formulae](#) and [mathematical](#) statements (such as definitions, theorems and proofs). Running `pdflatex` over [sTeX](#)-annotated documents formats them into normal-looking [PDF](#).

There’s only one problem: *the document does not compile*, with an error [Undefined control sequence](#). The reason being that *some macro* in the [module](#) `Formula` uses the `\text` [macro](#). We can fix that by using the `amsfonts` [package](#) of course, but this points to a more general problem; namely that [modules](#) can make use of various [L^AT_EX](#) [packages](#) for typesetting [symbols](#).

Good practice suggests putting those packages into a *prelude* per [math archive](#), which we can then import from anywhere, using the `\libinput` [macro](#). For more on that, see [section 5.3](#).

For now, suffice it to say that we can import all [packages](#) required for the [module](#) `Formula` from the [math archive](#) `sTeX/Logic/General` by adding the line

```
\libinput[sTeX/Logic/General]{preamble}
```

before the `\begin{document}`.

2.3 Modules and Simple Symbol Declarations

Consider again the first two paragraphs of [section 1.1](#):

[sTeX](#) is a system for generating human-oriented documents in either [PDF](#) or [HTML](#) format, augmented with computer-actionable semantic information (conceptually) based on the [OMDoc](#) format and ontology.

At its core is the [sTeX package](#) for [LaTeX](#), that allows for semantically marking up document fragments; in particular concepts, [formulae](#) and [mathematical](#) statements (such as definitions, theorems and proofs). Running `pdflatex` over [sTeX](#)-annotated documents formats them into normal-looking [PDF](#).

Firstly, note that the first paragraph would be perfectly suitable to serve as a pop-up definition on hover for the [sTeX symbol](#). Secondly, what if all the [symbols](#) used in the above *didn't* already exist?

In this section, we will describe how to make your own [symbols](#) and collect them as reusable fragments in [modules](#) and [math archives](#) from scratch.

We start by creating a new [math archive](#). In the [IDE](#), switch to the [sTeX](#)-tab on the left and click the “New sTeX Archive” button ([Figure 9](#)). You will then be asked for the



Figure 9: New Math Archive in the IDE

name of the [archive](#), a [namespace](#) for its content, and a [url-base](#), where the content is supposedly going to end up online. You can safely keep the defaults for the latter two. In the following, we assume that your archive is named `my/archive`.

The [IDE](#) will then create the following files and directories in your MathHub directory:

```

- my
  - archive
    - lib
      - preamble.tex
    - META-INF
      - MANIFEST.MF
    - source
      - helloworld.tex

```

...and open the file `helloworld.tex` with the content

```

1 \documentclass{sTeX}
2 \libinput{preamble}
3 \begin{document}
4 % A first sTeX document
5 \end{document}

```

You can now reference any newly created content in your new `archive` using for example `\usemodule[my/archive]{...}`.

Let's start with the “`LATEX`” symbol. Rename the file `helloworld.tex` to something more meaningful, for example `latex.en.tex` – the `.en` will be picked up on by `sTeX` to signify that the fragment will be in *english* (see [subsection 7.1.1](#)).

What we want to achieve in this file is the following:

`TeX` is a document typesetting software developed by Donald Knuth, with a focus on mathematical formulae. It is based on a powerful and extensible `macro` expansion engine.

`LATEX` is a (nowadays) default collection of `TeX` `macros` developed by Leslie Lamport. Among other things, `LATEX` introduces `environments`, a distinction between preamble and document content, `packages` to bundle and distribute `macro` definitions, and `document classes`: special `packages` that govern the global layout of a document.

In particular, in the `HTML` the two paragraphs above should be shown when hovering over the `symbols` they define (as indicated by the magenta definiendum highlighting). So we need `symbols` and `semantic macros`, for: `TeX`, `macro`, `LATEX`, `environment`, `package` and `document class`.

`Symbol` declarations are only allowed within `modules`:

`sTeX` A `module` is a *named* block that bundles `symbol` declarations for subsequent reuse.
A `module` is introduced with the `smodule`-environment.

Let's name our `module` `LaTeX`. We then wrap the contents of our document in a `smodule` environment:

```

\begin{document}
\begin{smodule}{LaTeX}
...
\end{smodule}
\end{document}

```

Note, that the `IDE` immediately picks up on this and displays the full `MMT-URI` of our new `module` over the `\begin{smodule}{LaTeX}` ([Figure 10](#)) –

```
http://mathhub.info/my/archive?LaTeX
\begin{smodule}{LaTeX}
```

Figure 10: VS Code Code Lense

From this, we can glimpse that the `namespace` of the `module` is `http://mathhub.info/my/archive/latex`. This implies, that to use the `module` somewhere else, we will have to type `\usemodule[my/archive]{latex?LaTeX}` – the `latex`-part pointing to the `file` and `LaTeX` referring to the actual `module`.

If we rename the file to `LaTeX.en.tex`, we notice that the `namespace` changes to `http://mathhub.info/my/archive`, allowing us to now use it with `\usemodule[my/archive]{LaTeX}` directly. That's because the `module` name `LaTeX` and the file name `LaTeX` match now (see [section 7.5](#), [Figure 11](#)).

```
http://mathhub.info/my/archive?LaTeX
\begin{smodule}{LaTeX}
```

Figure 11: VS Code Code Lense



Note that “`LaTeX`” and “`latex`” only differ in capitalization – if your file system is case-insensitive (as e.g. MacOS’s was until quite recently), this distinction gets murky, but remains very important especially if you want to share your `math archive` with others!

It is therefore *highly recommended* to treat file names as case-sensitive either way.

Within the `module`, we can now declare new `symbols` using the `\symdecl`-macro. We start with those that are not `text symbols`:

```
\symdecl*{macro}
\symdecl*{environment}
\symdecl*{package}
\symdecl*{document class}
```

The `*` after the `\symdecl` indicates, that we do not want a `semantic macro` for the `symbol` – otherwise, it would generate one with the same name as the `symbol` itself and “pollute the `macro` space”, so to speak.

The `symbols` `TeX` and `LTeX`, however, have a definite way of being typeset associated with them, which can be produced using the standard `\TeX` and `\LaTeX macros`. So let's make them `text symbols`, using the `\textsymdecl` macro:

```
\textsymdecl{tex}{\TeX}
\textsymdecl{latex}{\LaTeX}
```

The first argument being the name of the generated `macro` (i.e. `\tex` and `\latex`) and the second one specifying the output to produce.

2.4 Documenting Symbols

We can now use the two new macros, `\symname/\sn`, `\symref/\sr` etc. to mark up the above two paragraphs. But the IDE also makes us aware of the symbols not yet being documented, via squiggly blue lines(Figure 12).



Figure 12: Undocumented Symbols

Among other things, this means that the system does not yet know what to show a reader when hovering over the symbol in the [HTML](#). The IDE also recommends two ways to fix that: The [sdefinition](#) or [sparagraph](#) environments.

Ignoring the former for now, which is more useful for mathematical concepts, we can use the following to mark up the first paragraph:

```
\begin{sparagraph}[style=symdoc,for={tex,macro}]
  \tex is a document typesetting
  software developed by Donald Knuth, with a focus on
  mathematical formulae. It is based on a powerful
  and extensible \sn{macro} expansion engine.
\end{sparagraph}
```

In general, the [sparagraph environment](#) can be used to mark up arbitrary paragraphs semantically, but the `style=symdoc` option tells [STEX](#) to use this paragraph as a documentation for the symbols provided in the `for=` option. And indeed, doing so makes the squiggly blue lines in the IDE under `\textsymdecl{tex}{TeX}` and `\symdecl*{macro}` disappear.

We just used the [semantic macro](#) `\stex` and the `\sn` macro to mark up the fragment – but we can do better. Both concepts are being *introduced* in the above paragraph, and we can let [STEX](#) know that that is the case:

Within an [sparagraph environment](#) with `style=symdoc` (or an [sdefinition environment](#)), we can mark up *definienda*, meaning the terms *being defined*, explicitly. Analogously to `\symname` and `\symref`, we have the macros `\definame` and `\definiendum` for that purpose.

Note that the `\tex` macro induced by the `text` symbol above already marks up the “TeX” it produces, so wrapping it in another `\definiendum` would be redundant. However, every `text` symbol also generates a *second* macro with the suffix `name` that generates a non-marked-up version of the same presentation. In other words, we get the macro `\texname` for free, that produces “TeX” (of course, we could just as well use the `\TeX` macro, but that one you probably know already).

Furthermore, every `\definiendum` or `\definame` automatically adds the symbol being referenced to the internal `for=`-list of the [sparagraph environment](#), obviating the need to list it explicitly.

As such, we can produce a better markup like this:

```
\begin{sparagraph}[style=symdoc]
  \definiendum{tex}{\texname} is a document typesetting
```

```

software developed by Donald Knuth, with a focus on
mathematical formulae. It is based on a powerful
and extensible \definename{macro} expansion engine.
\end{sparagraph}

```

Exercise

In your archive `my/archive`, create additional files that produce the following outputs:

Mathematics.en.tex

To do **mathematics** is to be, at once, touched by fire and bound by reason. This is no contradiction. Logic forms a narrow channel through which intuition flows with vastly augmented force.

– Jordan Ellenberg

PDF.en.tex

Portable Document Format (PDF) is a document format that mixes text and graphics with a variety of content.

HTML.en.tex

The **HyperText Markup Language (HTML)** is a representation format for web-pages.

OMDoc.en.tex

OMDoc is a document format for representing **mathematical** documents with their flexiformal semantics.

such that the following file compiles and shows the above snippets on hover:

sTeX.en.tex

```

1 \documentclass{sTeX}
2 \libinput{preamble}
3 \begin{document}
4 \begin{smodule}{sTeX}
5   \usemodule{OMDoc}
6   \usemodule{PDF}
7   \usemodule{HTML}
8   \textsymdecl{sTeX}{\sTeX}
9   \begin{sparagraph}[style=symdoc]
10     \definiendum{sTeX}{\stexname} is a system for generating
11     documents in either \PDF or \HTML format, augmented with
12     computer-actionable semantic information (conceptually)
13     based on the \OMDoc format and ontology.
14   \end{sparagraph}
15 \end{smodule}
16 \end{document}

```

sTeX is a system for generating documents in either **PDF** or **HTML** format, augmented with computer-actionable semantic information (conceptually) based on the **OMDOC** format and ontology.

The preamble of every file should only be

```
\documentclass{stex}
\libinput{preamble}
```

and the macros `\OMDoc`, `\PDF`, `\HTML` should produce `\textsc{OMDoc}`, `\textsf{PDF}` and `\textsf{HTML}`, respectively (but with semantic annotations of course).

Solution: Can be found in `[sTeX/Documentation]source/tutorial/solution`

2.5 Sectioning and Reusing Document Fragments

We know now how to import and reuse the `symbols` of some `module` (using `\usemodule`). What about the actual document `content`?

Assume we want to write a new article that includes all of the fragments in `my/archive` we made so far, in a file `all.en.tex` in the same `math archive`:

```
1 \documentclass{article}
2 \usepackage{stex}
3 \libinput{preamble}
4 \begin{document}
5   \author{Me}
6   \title{The \texttt{my/archive} Archive}
7   \maketitle
8   \tableofcontents
9 ...
10 \end{document}
```

In there, we want sections as follows:

```
- 1 Preliminaries
  (Mathematics)
  - 1.1 Document Formats
    (PDF)
    (HTML)
    (OMDoc)
- 2 \TeX and Friends
  (LaTeX)
  (sTeX)
```

We could of course do the following:

```
\section{Preliminaries}
\input{Mathematics.en}
\subsection{Document Formats}
\input{PDF.en}
\input{HTML.en}
\input{OMDoc.en}
\section{\TeX and Friends}
\input{LaTeX.en}
\input{sTeX.en}
```

...but this approach has two drawbacks:

Firstly, we need to manually keep track of the section levels, by explicitly writing `\section`, `\subsection` etc. This is fine as long as we are just interested in this particular article. But what if we want to *reuse* the article's content in another document at some point? The section levels might be entirely different then – e.g. we might want the “Preliminaries” section to be a subsection instead.

Secondly, the `\input` macro considers the file name/path provided to be either *absolute* or relative to the *current tex file being compiled* – which means that the `\input{Mathematics.en}` only works for files in the same directory as `Mathematics.en.tex`.

In short: using `\section`, `\chapter` etc. explicitly, and `\input` to reuse fragments, breaks reusability.

Instead of using `\section` and `\subsection`, **STEX** therefore provides the `sfragment` environment.

`\begin{sfragment}{Foo}... \end{sfragment}` inserts a sectioning header depending on the current section level and availability. These are: `\part`, `\chapter`, `\section`, `\subsection`, `\subsubsection`, `\paragraph` and `\ subparagraph`. This allows us to do the following instead:

```
\begin{sfragment}{Preliminaries}
  \input{Mathematics.en}
  \begin{sfragment}{Document Formats}
    \input{PDF.en}
    \input{HTML.en}
    \input{OMDoc.en}
  \end{sfragment}
\end{sfragment}
\begin{sfragment}{\TeX and Friends}
  \input{LaTeX.en}
  \input{sTeX.en}
\end{sfragment}
```

The only problem remaining now is that if we do this, **STEX** will insert a `\part` for the first `sfragment`. If we want the “top-level” sectioning level to be `\section` instead, we can insert a `\setsectionlevel{section}` in the preamble.

As a more reuse-friendly replacement of `\input`, **STEX** provides the `\inputref` macro. Using that has two advantages: Firstly, its argument is relative to some (optionally provided, or the current) `math archive` and is thus independent of the specific location of the file relative to the currently being compiled `.tex`-file. Secondly, when converting to `HTML`, it will *not* “copy” the referenced file’s content in its entirety (as `\input` would), but instead dynamically insert the already existent (if so) `HTML` of the referenced file, avoiding content duplication and having to process the file all over again.

In general `\inputref[some/archive]{file/path}` inputs the file `file/path.tex` in the `archive` `some/archive`. As the `\input`-ed files in the example above are in the same `archive` anyway, we can simply substitute the `\inputs` by `\inputrefs` and call it a day.

Finally, we can make two more minor changes:

1. The *title* of our document is only supposed to be there, if we compile the document directly – if we were to `\inputref` our file into a “driver file” `all.en.tex`, the title and the table of contents should be omitted.

We can achieve this using the `\ifinputref` conditional: by wrapping the header in an `\ifinputref \else... \fi`, it will only be processed if the file is *not* being loaded using `\inputref`. `\ifinputref` is a “classic” **TeX** conditional and is treated as such in both `PDF` and `HTML` compilation. A smarter `macro` to use is `\IfInputref`, which takes two arguments for the *true* and *false* cases, respectively.

Additionally, when compiling to **HTML**, *both* arguments to **\IfInputref** will be processed, and the backend will decide which of the two to present when serving a document.

2. The table of contents should also be omitted in **HTML** mode. To achieve that, we can use the **\ifstexhtml** conditional, which is *true* if the document is being compiled to **HTML**, and *false* if compiled to **PDF**.



Note, that since *both* arguments of **\IfInputref** are processed, they should *not* open **TeX** groups or **environments**!

In summary, we can modify our document to do the following:

```
\IfInputref{}{  
    \author{Me}  
    \title{The \texttt{my/archive} Archive}  
    \maketitle  
    \ifstexhtml \else \tableofcontents \fi  
}
```

The final **all.en.tex** can be found in [**sTeX/Documentation**]tutorial/solution/all.en.tex.

2.6 Building and Exporting **HTML**

So far we know how to write **sTeX** documents, (we assume) how to build **PDF** files from them (via **pdflatex** of course), and on saving documents the **IDE** will preview the generated **HTML**. But if we do that with our new **all.en.tex**, we get presented with **Figure 13**. Where did all of our fragments go?

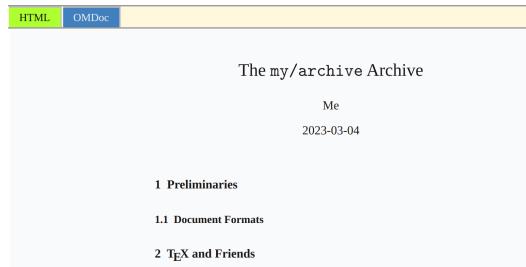


Figure 13: Missing Fragments in the **HTML** Preview

Well, they don't exist yet as **HTML**. The **HTML** Preview window in the **IDE** is really just that: A *preview*. But when using **\inputref**, it has to find the **HTML** of the **\inputref**ed fragment *somewhere*. Meaning: we have to compile all of the fragments we used to **HTML** first. Individually, we can compile the currently open file in **VS Code** using the button in **Figure 14**.

This will do the following:

1. Run **pdflatex** over the file three times.
2. Store the resulting **.pdf** in [**archive**]/export/pdf/<filepath>.pdf.



Figure 14: The Build PDF/XHTML/OMDoc Button

3. Convert the file to [HTML](#) and store it in `[archive]/xhtml/<filepath>.xhtml`.
4. Extract all the semantics and store them as [OMDoc](#) in `[archive]/content/..., [archive]/narration/... and [archive]/relational/....`
5. Construct a search index in `[archive]/export/lucene/....`

Doing all of this for every individual file *in hindsight* would of course be a huge hassle. We can therefore just compile the full [archive](#), folders in an [archive](#), or whole *groups of archives* via right-clicking an element in the **Math Archives** viewer in the **S^TE_X** tab (Figure 15).



Figure 15: Building Archives in the IDE

Once that's done, saving `all.en.tex` again yields the correct [HTML](#) in the preview window.

At this point, it should be noted that you can't actually just open the [HTML](#) files exported to `[archive]/xhtml` in your browser and get all of the expected functionality – that shouldn't be too surprising. Features like the fancy pop-up windows require a semantically informed backend infrastructure, in the form of the [MMT](#) system. However, [MMT](#) *can* dump a standalone version for you. Let's do that now:

With our `all.en.tex` file open and everything built as above, click the **Export Standalone HTML**-button in the **IDE** (see Figure 16).

In the dialog box that opens now, select an **empty** directory and [MMT](#) will dump a standalone version of our `all.en.tex` document there. You will still not be able to



Figure 16: Exporting [HTML](#) in the [IDE](#)

open it in the browser directly, because most browser forbid javascript modules on the `file://` protocol, but opening the file via `http` will yield the desired result, and you can now upload the directory's content to wherever you might want to use it.

If you want to test this, a quick and easy way to do so is to use [VS Code](#): You can install the `Live Server` extension, open the directory and click the `Go Live` button on the lower right of the window, which will start a small web-server in the selected directory and open its `index.html` in the browser for you.

Chapter 3

Mathematical Concepts

So far, we have seen how to declare and reference `symbols` generate `semantic macros` for `text symbols`, collect them in `modules` and document them properly.

But where **sTeX** really shines is when it comes to mathematics and related subject areas: `semantic macros` are significantly more useful when used for generating symbolic `notations` in math mode, and by associating `symbols` with (flexi-)formal semantics, **sTeX** can even *check* that your content is (to some degree) formally correct, or at least well-formed.

Also **sTeX** provides specialized functionality for mathematical `statements`: the text fragments marked as Definition, Theorem, Proof that are iconic to mathematical documents.

The example snippets in this chapter can be found in the [math archive sTeX/MathTutorial](#). If you downloaded the [sTeX/Documentation archive](#) in the **sTeX IDE**, you already have that [archive](#). If not, you can download it from within the **IDE**, as described in [chapter 2](#).

3.1 Simple Symbol Declarations

We will start with `symbols` and `semantic macros` for mathematical concepts and objects and their contribution to mathematical formulae.

3.1.1 Semantic Macros and Notations

Let us start with a very fundamental concept; namely `equality`. As you should by now know, declaring a new `symbol` requires a `module`, so let's open a new one and use `\symdecl`:

```
\begin{smodule}{Equality}
\symdecl{equal}
\end{smodule}
```

As mentioned in [section 2.3](#), the starred variant `\symdecl*` does not create a `semantic macro`, so presumably, the variant without a `*` *does*. And indeed, we now have a macro `\equal`, which however will produce errors if we try to use it. That's because we haven't told **sTeX** what to do with it yet.

A **semantic macro** is a **LATEX**-macro that allows for referencing a **symbol** itself, or – in the case of e.g. a function – the *application* of a **symbol** to (one or multiple) *arguments*; primarily by invoking a **symbol**'s **notation** in *math mode*.

The command `\symdecl{macroname}` declares a new **symbol** with name **macroname** and a **semantic macro** `\macroname`. In the case where we want the name and the **semantic macro** to be distinct, the command `\symdecl{macroname}[name=some name]` declares the name of the **symbol** to be **some name** instead.

The starred variant `\symdecl*{name}` declares the concept with the given name, but does not generate a **semantic macro**.

So let's provide equality with a **notation**. As a first step, we should let **STEX** know that “**equal**” takes two arguments. We might also want to shorten the **semantic macro** to e.g. `\eq`, without changing the name. Hence:

```
\symdecl{eq}[name=equal,args=2]
```

Next, we add an infix notation with the **notation** macro:

```
\notation{eq}{#1 = #2}
```

That seems like a lot to write, so for the very common case where we want to declare a **symbol** with a **semantic macro** and a **notation** all at once, the `\symdef` macro does all three by combining the optional and mandatory argument of `\symdecl` and `\notation`:

```
\symdef{eq}[name=equal,args=2]{#1 = #2}
```

and indeed, we can now use the `\eq` **macro** in math mode to invoke our new **notation**: $\backslash eq{a}{b}$ now yields $a = b$ – notably without any highlighting (and hover interaction in the **HTML**) though. Since our **semantic macro** takes *arguments*, which should be differently highlighted, we need to let our **notation** know which parts of the **notation** are highlightable components.

We can do so with the `\comp` and `\maincomp` macros:

The `\comp`-macro marks components to be highlighted in a **notation** for a **symbol** taking (one or more) arguments.

This is necessary because it is (nearly) impossible for **LATEX** to figure out, which parts of a **notation** to highlight and which not on its own – in particular, the highlighting should stop for the *arguments* of a **semantic macro**.

Additionally, the `\maincomp` macro can be used to mark (at most) one **notation** component to represent the *primary* component of the **notation**.

Notations that do not take arguments, as well as **operator notations**, are automatically wrapped in `\maincomp`.

In our case, this applies only to the “ $=$ ”, symbol, so:

```
\symdef{eq}[name=equal,args=2]{#1 \mathrel{\maincomp{=}} #2}
```



You may be wondering about the role of the `\mathrel` macro in the example above: **TeX** determines spacing/kerning in math mode by assigning a *class* to every character. Both individual characters and whole subexpressions can be assigned one of these classes using dedicated macros. These are:



class	TeX macro	examples
ordinary (default class)	<code>\mathord</code>	$\alpha i \diamond$
large operator	<code>\mathop</code>	$\sum \prod \int$
opening	<code>\mathopen</code>	([{
closing	<code>\mathclose</code>)] }
binary relation	<code>\mathrel</code>	$\leq > =$
binary operator	<code>\mathbin</code>	$+ \cdot \circ$
punctuation	<code>\mathpunct</code>	, ;

TeX “forgets” the class of an expression if it is wrapped in a `\comp` macro. It is therefore a good idea to wrap any occurrence of a `\comp` in the corresponding TeX macro for the desired class (e.g. `\mathrel{\comp{\leq}}`).

Having done so, we can now type `$\leq{a}{b}$` to get $a = b$. Thanks to using `\maincomp`, we now also have an [operator notation](#), which we can invoke using `$\eq!`, yielding $=$.

What if we want to add more [notations](#)? Say we want to be able to invoke [equality](#) to get the variant notation $a \equiv b$ (without changing the intended meaning). If we want to be able to choose one of several [notations](#), we should give the [notation](#) an *identifier*.

Let’s again modify our earlier [notation](#) by adding the identifier `eq` to the optional arguments of `\symdef`, like so:

```
\symdef{eq}[name=equal,args=2,eq]{#1 \mathrel{\maincomp{=}} #2}
```

We can now invoke the specific [notation](#) provided here by writing `$\eq[eq]{a}{b}$` to the same effect. But we can also add more [notations](#) using the `\notation` macro:

```
\notation{eq}[equiv]{#1 \mathrel{\maincomp{\equiv}} #2}
```

which we can now invoke with `$\eq[equiv]{a}{b}$`, yielding $a \equiv b$.

By default, the *first notation* provided for a given [symbol](#) is considered the *default notation*, which is invoked if the [semantic macro](#) is used without an optional argument – hence, `$\eq{a}{b}$` still yields $a = b$.

If we use the starred variant of the `\notation` macro, the [notation](#) is set as the new default. Hence, had we done

```
\notation*[eq][equiv]{#1 \mathrel{\maincomp{\equiv}} #2}
```

then `$\eq{a}{b}$` would now yield $a \equiv b$.

Any already existing notation can be set as default using the `\setnotation` macro; e.g. instead of using `\notation*`, we could also do

```
\notation{eq}[equiv]{#1 \mathrel{\maincomp{\equiv}} #2}
\setnotation{eq}{equiv}
```

Exercise

Implement the [symbol](#) “equal” as above in a new [module](#) “Equality” and add a documentation such that hovering over the [symbol](#) in the [HTML](#) yields the following snippet:

Two objects a, b are considered **equal** (written $a = b$ or $a \equiv b$), if there is no property that distinguishes them.

Solution: Can be found in `[sTeX/MathTutorial]/mod/Equality1.en.tex`

3.1.2 Types and Variables

You might have noticed – after you save the file – that the expressions `$\eq{a}{b}$` and `$\eq[equiv]{a}{b}$` are underlined in yellow in the IDE and have a warning attached to them (Figure 17). If we click on the Invalid Unit link in the error message, we get

```
$\eq{a}{b}$ or $\eq[equiv]{a}{b}$,
\eqab

invalid unit:
http://mathhub.info/sTeX/MathTutorial/mod/Equality1/Equality?en?term 1?definition: Judgment |-- (implicit bind [a:/I/1, b:(/I/2 a)] (apply (apply equal a) b)) :: /omitted_type (Invalid Unit)
```

View Problem (Alt+F8) No quick fixes available

Figure 17: Type Checking Warning

a somewhat cryptic stacktrace-like window (Figure 18). The reason being, that MMT



Figure 18: Type Checking Proof Tree

actually tries to formally verify *everything we write using semantic macros!* It does so, by attempting to infer the *type* of an expression – success implies that the expression is in fact well-typed.

If the former paragraph is difficult to comprehend for you, don't worry – you'll likely pick up on things as we go along. For now, suffice it to say that we can assign “*types*” to *symbols*, and the MMT system is smart enough to use those to check that what we're writing actually “makes sense”; for example, $a + b$ makes perfect sense if $+$ is addition and a and b are numbers, or elements of a vector space, but not if a and b are, say, triangles.

STEX Every *symbol* or *variable* can be assigned a *type*, signifying what “kind of object” the *symbol* represents, or what (primary) set it is contained in.



In order to *formally verify* a mathematical statement, we have to rely on a set of *rules* that determine what is or isn't a valid statement. There are many systems of such rules with very different flavours, called **(logical) foundations**.

The most commonly used **foundation** in (informal) mathematics is *set theory*, in particular *ZFC*; a set of axioms in (usually) *first-order logic*. However, in *computer proof assistants* and similar systems, *type theories* like *higher-order logic* or the *calculus of (inductive) constructions* are more popular, because they lend themselves better to computer implementations.

In as far as possible, we prefer to remain “foundationally agnostic”, or **foundation independent**: Every **foundation** has advantages and disadvantages, and which one is appropriate often depends on the particular setting one is working in. Nevertheless, certain “meta-principles” have proven themselves to be extremely effective in representing and checking mathematical content in software, and while we do not fix a particular **foundation** or specific checking rules, we will make use of those principles in general. These include e.g. the *Curry-Howard Correspondance*, or *Judgments-as-Types paradigm*, and *Higher-Order Abstract Syntax*.



Full formal verification of document content is an extremely lofty goal, and hardly realistic if you're not willing to write your content in pretty specific ways, and informed by a decent amount of background knowledge in formal logic. Moreover, formally verifying content in **STEX** is an ongoing research project, so we will not go into the specifics in detail here.

While full formal verification is out of reach for now, annotating adequate **types** can strike a useful balance between the effort required and the benefit of automated meaning checking afforded by them. In this sense **STEX** is pragmatically similar to programming languages where adding types can raise the quality and correctness assurance in programs.



Keep in mind that getting **Invalid Unit** warnings does not impact at all what your document is going to look like – feel free to ignore them entirely.

Types are particularly useful for *variables*:

A **variable** represents a *generic* or *unspecified* object.
STEX **Variables** can be declared using the `\vardef`-macro, whose syntax is analogous to `\symdef`.
Note that **variables** are local to the current **T_EX**-group (e.g. environment).

Let's leave our equality-**module** aside for now and turn our attention to something simpler: **natural numbers**. Consider the following module:

Example 5

Input:

```
\begin{smodule}{Nat}
  \symdef{Nat}[name=natural numbers]{\mathbb N}
  \begin{sparagraph}[style=symdoc]
    The \defname{Nat} $\defnotation{\Nat}$ are the numbers
    $0,1,2,\dots$.
  \end{sparagraph}
  \symdef{plus}[name=addition,args=2]{#1 \mathbin{\maincomp{+}} #2}
  \begin{sparagraph}[style=symdoc]
    \Defname{addition} $\defnotation{\plus{a}{b}}$ refers to the process of adding two \sn{Nat}.
  \end{sparagraph}
\end{smodule}
```

Output:

The **natural numbers** \mathbb{N} are the numbers 0,1,2,...
Addition $a+b$ refers to the process of adding two **natural numbers**.

(like `\defname` and `\definiendum`, the `\defnotation` macro is only allowed in documenting environments like `sparagraph[style=symdoc]` or `sdefinition`, and highlights the `notation` components marked with `\comp` or `\maincomp` the same way as `\defname` and `\definiendum` do.)

Note, that as the `\Nat` semantic macro does not take any arguments, we do not need to wrap the `notation` in a `\comp` or `\maincomp`.

Note also, that the `\plus{a}{b}` is again underlined in the IDE with an `Invalid Unit` warning.

The above fragment uses two `variables` a and b . In fact, `MMT` will consider them `variables` even though they are not marked up as such – but since they are not marked up, we are missing out on useful functionality.

Let's change that by adding two `variable` definitions¹:

Example 6

Input:

```
\begin{sparagraph}[style=symdoc]
  \vardef{va}[name=a]{a}\vardef{vb}[name=b]{b}
  \Defname{addition} $\defnotation{\plus{\va}{\vb}}$ refers to the process of adding two \sn{Nat}.
\end{sparagraph}
```

Output:

Addition $a+b$ refers to the process of adding two **natural numbers**.

Okay, so now a and b are gray, but besides that, we haven't achieved much yet.
Let's change that by giving the `variables` the `type` \mathbb{N} :

¹Technically, this is called a *variable reservation*, for those in the know.

Example 7

Input:

```
\begin{paragraph}[style=symdoc]
  \vardef{va}{name=a,type=\Nat}{a}\vardef{vb}{name=b,type=\Nat}{b}
  \Definename{addition} $ \defnotation{\plus{\va}{\vb}}$%
    refers to the process of adding two \sn{\Nat}.
\end{paragraph}
```

Output:

```
Addition  $a+b$  refers to the process of adding two natural numbers.
```

Now if we hover over the a and b (in the [HTML](#)), it will show us that their type is \mathbb{N} !

We can of course also assign [types](#) to [symbols](#). In the [IDE](#), find the symbol “*function space*” with [semantic macro](#) `\funspace` (in `[sTeX/MathBase/Functions]{mod?Function}`). The [OMDoc](#) preview window shows you how to use this [symbol](#) ([Figure 19](#)). This tells

▼ Symbol `function space (\funspace{a_1, ..., a_n}{b})`

Type	$(A : \text{SET}, B : \text{SET}) \rightarrow \text{SET}$	
Notations	id	notation
arrowtimes		$a_1 \times \dots \times a_n \rightarrow b$
arrowcurry		$a_1 \rightarrow \dots \rightarrow a_n \rightarrow b$
Arrowtimes		$a_1 \times \dots \times a_n \Rightarrow b$
Arrowcurry		$a_1 \Rightarrow \dots \Rightarrow a_n \Rightarrow b$

Figure 19: Syntax Preview

us that if we write `\funspace{a_1, ..., a_n}{b}` (depending on which notation we use), we will get $a_1 \times \dots \times a_n \rightarrow b$.

We want `addition` to have type $\mathbb{N} \times \mathbb{N} \rightarrow \mathbb{N}$, hence we do:

```
\syndef{plus} [name=addition,args=2,
  type=\funspace{\Nat,\Nat}{\Nat}
] {#1 \mathbin{\maincomp{+}} #2}
```

So far (and when using the `use` button in the [IDE](#)), we have been using the `\usemodule` macro to import content. `\usemodule` is allowed anywhere and imports the referenced `module` content local to the current [TeX](#) group.



Now that we use imported [symbols](#) in [types](#) (and since we are *in* a `module`), we need to make sure that the imported `modules` are also (transitively) *exported*, since our new [symbols](#) now *depend* on the imported `module`.

For that we use the `\importmodule` macro within the `module`; i.e. the file should now look something like this:



```
\begin{smodule}{Nat}
\importmodule[sTeX/MathBase/Functions]{mod?Function}
...
```

Note that the `HTML` is aware of this now (after you save): *Clicking* on any occurrence of `addition` now yields [Figure 20](#).

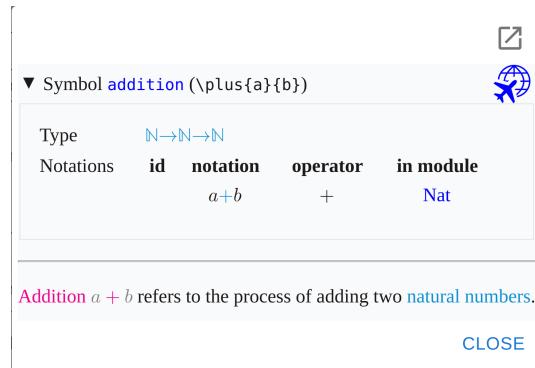


Figure 20: On-Click Popup in the `HTML`

However, the squiggly yellow `Invalid Unit` warnings are still there – that's because everything we did with `types` so far still depends on our `natural numbers symbol`, which does not have a `type` yet.

By virtue of using `[sTeX/MathBase/Functions]{mod?Function}`, we also imported `[sTeX/MathBase/Sets]{mod?Set}`, which gives us the “`collection`” symbol. Let's use this as a `type` for the `natural numbers`:

```
\symdef{Nat}[name=natural numbers,type=\collection]{\mathbb{N}}
```

Now if we save the file, all the squiggly lines are gone. Moreover, if you look at the `OMDoc` tab in the preview window, you can find [Figure 21](#). The **Document Elements**

▼ Document Elements

- ▶ Variable `a` (`\va`) of type `N`
- ▶ Variable `b` (`\vb`) of type `N`
- ▼ $\{a: \mathbb{N}, b: \mathbb{N}\}_I^{a+b}$

Inferred Type: $\{a: \mathbb{N}, b: \mathbb{N}\}_I^{\mathbb{N}}$

Figure 21: Inferred Type

block collects all semantically annotated expressions in a `module` or document; including `variables` and the `\plus{\va}{\vb}`. Here, it tells us that it has checked the expression `a + b` (in the context of `a : N` and `b : N`), and inferred that it has `type N`.

Here's what just happened:

1. The `MMT` system realized, that `\plus{\va}{\vb}` is the symbol “`addition`” applied to the two arguments `a` and `b`.
2. It knows, that “`addition`” has `type N × N → N`².
3. It knows, that this means that if the two arguments `a` and `b` both have `type N`, then the full expression has `type N`.

Here's something you can now try: If we *remove* the `types` from the `variables` `a` and `b` again, the warnings are *still* gone. We lose the `type` information on hover, but `MMT` still doesn't complain, because it now realizes that since `a` and `b` have no explicit `types` given, it should infer them. And by the same chain of reasoning as above, it can infer that since they are being used as arguments for `addition`, they need to have `type N`.

3.1.3 Flexary Macros and Argument Modes

Here is one thing you might wonder: Writing `\plus{a}{b}` is one thing, but what if we want to produce `a + b + c + d + e`? Do we really need to write `\plus{a}{\plus{b}{\plus{c}{\plus{d}{e}}}}`?

Of course not. We can declare the `symbol` such that the `semantic macro` `\plus` expects a (comma-separated) *sequence* of arguments instead of two “normal” arguments.

The optional `args`-argument of `\symdecl` expects a string of characters indicating the `semantic macro`'s **argument modes**. There are four such `modes`:

- i a **simple argument**,
- a a – (*left or right*) **associative – sequence argument**, represented as a single `TEX`-argument `{a,b,...}`,
- STEX** b A **binding argument** that expects a variable that is bound by the `symbol` in its application, and
- B A **binding sequence argument** of arbitrarily many bound variables by the `symbol` `{x,y,z,...}`.

If `args` is given as a number `n` instead, the `semantic macro` takes `n` arguments of mode i.

Example 8

- For `\plus{a,b,c}` yielding $a + b + c$, we do `\symdecl{plus}[args=a]`,
- for `\inset{a,b,c}{A}` yielding $a, b, c \in A$, we do `\symdecl{inset}[args=ai]`,
- in `\add{i}{1}{n}{f(i)}` yielding $\sum_{i=1}^n f(i)$, the variable `i` is `bound` in the expression, we hence do `\symdecl{add}[args=biii]`,

²Do not worry that the IDE actually reports the type `{a : N, b : N} IN`, this is an artefact of the underlying type system with dependent types used by `STEX`; it just means $N \times N \rightarrow N$ in this special case, but would also allow `a` and `b` to appear in the range type in more complex situations; see ?? for details.

- in `\foral{x,y,z}{P(x,y,z)}` yielding $\forall x, y, z. P(x, y, z)$, the variables x, y, z are all **bound** by the \forall , we hence do `\symdecl{foral}[args=Bii]`.

So when we wrote `\symdecl{plus}[args=2]`, this was actually shorthand for `\symdecl{plus}[args=ii]`.

Let's revise our previous declaration and the syntax of the `\plus` macro:

```
\symdef{plus}[name=addition,args=a,
  type=\funspace{\Nat,\Nat}{\Nat}
 ]{#1 \mathbin{\maincomp{+}} #2}
 \begin{sparagraph}[style=symdoc]
   \vardef{va}[name=a]{a}\vardef{vb}[name=b]{b}
   \Definename{addition} $ \defnotation{\plus{\va,\vb}}$%
   refers to the process of adding two \sn{\Nat}.
 \end{sparagraph}
```

Now we get new errors, that are easy to explain: Our **notation** `{#1 \mathbin{\maincomp{+}} #2}` refers to *two* arguments, but our **semantic macro** only takes *one* (albeit a **sequence argument**). We now need to let **sTeX** know what to do with the **sequence argument** in our **notation**. Using the `\argsep` macro, we can tell **sTeX** to insert the *separator* “`+`” between the individual elements of the **argument sequence** `#1`:

```
\symdef{plus}[name=addition,args=a,
  type=\funspace{\Nat,\Nat}{\Nat}
 ]{\argsep{#1}{\mathbin{\maincomp{+}}}}
```

Now we can finally write `$\plus{a,b,c,d,e}$` and get $a + b + c + d + e$ – hooray! ...expect that our squiggly yellow **Invalid Unit** warnings are back. That's because the **type** of **addition** still corresponds to a binary operation, rather than a unary function on sequences.

We *could* change the **type** of course, but we shouldn't *want* to or *have* to: platonically, **addition** is *still* a *binary function*; we just introduced the **a-mode** argument for *our convenience as authors*.

Instead, we can tell **MMT** how to “resolve” the **sequence argument** into a nested application of **addition**. In the very common case we have here, where the **symbol** represents an *associative binary operator*, we can just add the argument **assoc=bin** to the `\symdecl` (or `\symdef`) **macro**:

```
\symdef{plus}[name=addition,args=a,assoc=bin,
  type=\funspace{\Nat,\Nat}{\Nat}
 ]{\argsep{#1}{\mathbin{\maincomp{+}}}}
```

and the warnings are gone again. Formally/internally, **MMT** will now turn the term `addition(sequence(a,b,c))` into `addition(a,addition(b,c))`.

Exercise

Analogously to the above, implement a **symbol** “multiplication” with **semantic macro** `\mult`, that takes a single **sequence argument** and has a default **notation** such that `\mult{a,b,c}` produces $a \cdot b \cdot c$.

Solution: Can be found in `[sTeX/MathTutorial]mod/Nat.en.tex`

3.1.4 Precedences

If you have done the previous exercise, you now have *semantic macros* `\plus` and `\mult` at your disposal. We can of course nest them to produce e.g. $a + b \cdot c$ (with `\plus{a, \mult{b, c}}`). If we do `\mult{a, \plus{b, c}}` however, we get $a \cdot b + c$. Annoying – we now have to insert parentheses: `\mult{a, (\plus{b, c})}`... or do we?

We do *not*. Instead, we can assign *precedences* to *notations* to have *STEX* insert parentheses automatically.

notation (and hence *\symdef*) take an optional argument `prec=<opprec>;<argprec1>x...x<argprec n>` consisting of an **operator precedence** `<opprec>` and for each argument `k` an **argument precedence** `<argprec k>`.

All *precedences* are integers, e.g. 10 or -500. It is good practice to use *precedences* that leave enough room to smuggle values inbetween, so that we can fine-tune them later as more symbols may intervene.

The precise numbers used for *precedences* are arbitrary – what matters is which *precedence* is higher than which other *precedence* when used together.

By default, all *precedences* are 0, unless the *symbol* takes no arguments, in which case the *operator precedence* is `\neginfprec` (negative infinity).

If we only provide a single number in `prec=`, this is taken as both the *operator precedence* and all *argument precedences*.

The *lower* a *precedence*, the *stronger* a *notation* binds its arguments. In our particular case, we want *multiplication* to bind stronger than *addition*, so we can (arbitrarily) assign them *precedences* e.g. 10 and 20:

```
\symdef{plus}[name=addition,args=a,assoc=bin,prec=20,
  type=\funspace{\Nat,\Nat}{\Nat}
] {\argsep{\#1}{\mathbin{\maincomp{+}}}}
\symdef{mult}[name=multiplication,args=a,assoc=bin,prec=10,
  type=\funspace{\Nat,\Nat}{\Nat}
] {\argsep{\#1}{\mathbin{\maincomp{\cdot}}}}
```

And now if we type `\mult{a, \plus{b, c}}`, *STEX* will automatically insert parentheses and yield $a \cdot (b + c)$ – and conversely, if we do `\plus{a, \mult{b, c}}`, *STEX* will *not* insert parentheses and yield $a + b \cdot c$.

3.1.5 Implicit Arguments

Let us turn our attention back to *equality*. Here's an almost philosophical question: *What is the type of “equality”?* Asking (the right kind of) mathematicians this question can cause fist fights to break out. As such, we will not give a definitive answer, *but* here is an informative approach that has proven to be quite effective in computational settings:

Equality is a *polymorphic binary relation* on an *implicit collection A*. And a *relation* is a function into a *type of propositions*.

We will see the advantage of this approach over time. For now, consider that given objects a and b , the expression “ $a = b$ ” is either true or false³, and “*equal*” takes two argu-

³Assuming classical logic – if you prefer to remain intuitionistic/constructive, note that *STEX*, being *foundation independent*, does not enforce the law of excluded middle!

ments, so if we have a `type` of “truth values”, it makes sense to model “`equal`” as a function taking two arguments and returning that `type`. So we do `type=\funspace{...}`?

Here’s the idea with respect to *implicit arguments*. Let’s first declare a new `variable` of `type “collection”`:

```
\vardef{vA}[name=a,type=\collection]{A}
```

We now assign the `type` $A \times A \rightarrow \text{Prop}$ to `equal`:

```
\symdef{eq}[name=equal,args=2,eq,
  type=\funspace{\vA,\vA}{\prop}
]#1 \mathrel{\maincomp{=}} #2
```

(The symbol “`proposition`” with `semantic macro` `\prop` comes with `STEX` directly; we say that it is part of the `STEX`.)

Now our `type` has a free variable A . For `MMT`, this now means that `equal` actually takes *one more argument*, but one whose value is uniquely determined from the other arguments. Indeed, if you consider `equal` to take three arguments (the first one being some A of `type collection`), then the *next* two arguments *enforce* that the first argument has to be the `type` of the other two.

In other words: A is now an implicit argument that `MMT` is tasked with inferring whenever we use `equal`, and that we never explicitly provide in `STEX`.

Indeed, if we use our `module Nat` from before, and apply `\eq` to a variable of type \mathbb{N} , `MMT` does not complain:

```
\usemodule{mod?Nat}
\vardef{vn}[name=n,type=\Nat]{n}
\$ \eq{\vn}{m} \$
```

And if we inspect the `OMDOC` tab in the `HTML` preview, we can see exactly what `MMT` did (Figure 22). We can see

The screenshot shows the OMDoc tab in an HTML preview. It displays the definition of the `equal` symbol and its usage in a document element.

Module Equality

Includes Function

Symbol `equal` (`\eq{a}{b}`)

Type $\{A: \text{SET}\}_I A \rightarrow A \rightarrow \text{Prop}$

Notations id notation operator in module

eq	$a = b$	=	Equality
equiv	$a \equiv b$	\equiv	Equality

Document Elements

Includes `Nat`

► Variable `n` (`\vn`) of type \mathbb{N}

▼ $\{n: \mathbb{N}, m: \mathbb{N}\}_{\frac{n=m}{\mathbb{N}}}$

Inferred Type: $\{n: \mathbb{N}, m: \mathbb{N}\}_{\mathbb{N}} \text{Prop}$

Figure 22: Implicit Arguments

1. (by the $\{\cdot\}_I \dots$) that `MMT` considers A an implicit argument in the `type` of `equal`,

2. that the *inferred* type of $n = m$ is `Prop`,
3. that `MMT` inferred the implicit argument of `equal` in $n = m$ to be `N` (by the $\underbrace{\dots}_{N}$), and
4. that it was enough to give `\vn` the explicit `type N` – `MMT` also inferred that hence m also has to have `type N`!

3.1.6 Finishing Equality

You might wonder if – as with `addition` – we can make “`equal`” take a `sequence` argument as well. Naturally, we can:

```

1  \symdef{eq}{name=equal,args=a,eq,
2   type=\funspace{\vA,\vA}{\prop}
3   ]{\argsep{\#1}{\mathrel{\maincomp}}}}
4   \notation{eq}[equiv]{\argsep{\#1}{\mathrel{\maincomp\equiv}}}}
```

and as before, we now get `Invalid Unit` warnings. Unlike before, however, we can not just fix this with adding `assoc=bin`. As mentioned, `bin` instructs `MMT` to “fold” the `symbol` over the arguments, so when doing `\eq{a,b,c}`, `MMT` would turn this into `equal(a,equal(b,c))`, i.e. the claim that “ a ” is equal to “ $b = c$ ” – but that’s not what $a = b = c$ means. What we mean by $a = b = c$ is really “ $a = b$ and $b = c$ ”.

For that, we can use `assoc=conj` – however, that requires that some `symbol` that can be used for *conjunction* (i.e. “and”) is in the current scope.

If we search for `conjunction` in the `IDE`, we should find the `module [sTeX/Logic/General]{mod/syntax?Conjunction}`.

Using that, we can now write the following:

```

\usemodule{mod?Nat}
\usemodule[sTeX/Logic/General]{mod/syntax?Conjunction}
\vardef{\vn}{name=n,type=\Nat}{n}
\$ \eq{\vn,m,p} $
```

Upon saving, `MMT` does not complain; and if we inspect the `OMDoc` tab in the `HTML` window again, we now notice that `MMT` correctly resolved this as in [Figure 23](#).

3.1.7 Variable Sequences

There is a special kind of `variable` in `STEX` for when we want to use *sequences* of `variables`.

We can use the `\varseq` macro to declare a new sequence `variable`; in the simplest case that looks something like the following:

```
\varseq{\seqn}{name=n,type=\Nat}{1,\ellipses,k}{\maincomp{n}_{\#1}}
```

We have just declared a new variable sequence of `type N`, that ranges over indices $1, \dots, k$, with `notation` n_i for some specific index i .

If we now do `\seqn{i}`, we get n_i , and if we do `\seqn!`, we get n_1, \dots, n_k .

We can also do multi-dimensional sequences, e.g.

```
\varseq{\seqm}{name=m,type=\Nat, args=2}
{\{1\}\{1\},\ellipses,\{\ell\}\{k\}}
{\maincomp{m}_{\#1}^{\#2}}
```

The screenshot shows a software interface for defining mathematical structures. At the top, there's a section titled "Module Equality". Below it, under "Includes Function", is a symbol "equal" (\eq{a_1, ..., a_n}) with a small globe icon next to it. Under "Document Elements", there's a section for "Nat, Conjunction". Inside this, a conjunction of equalities is shown: $\{n: \mathbb{N}, m: \mathbb{N}, p: \mathbb{N}\} \frac{n=m \wedge m=p}{\mathbb{N}}$. Below this, the "Inferred Type" is given as $\{n: \mathbb{N}, m: \mathbb{N}, p: \mathbb{N}\} \text{Prop}$.

Figure 23: Conjunction of Equalities

Now $\text{\seqm}{i}{j}$ produces m_i^j , and $\text{\seqm}!$ produces m_1^1, \dots, m_ℓ^k .

Of course, we can manually change the way $\text{\seqn}!$ is typeset by providing an explicit **operator notation** using `op=`; e.g. if we do

```
\varseq{\seqn}[name=n,type=\Nat,op={(n_i)_{i=1}^k}]
  {1,\dots,k}\{\maincomp{n}_{\#1}\}
```

then $\text{\seqn}!$ produces $(n_i)_{i=1}^k$.

So far so nice, but sequence variables get especially useful in combination with **sequence arguments**: Consider for example the `\plus` semantic macro for **addition**. This expects one **sequence argument**, or alternatively, a *sequence variable*: `\plus{\seqn}` now produces $n_1 + \dots + n_k$, and `\eq{\seqm}` now produces $m_1^1 = \dots = m_\ell^k$.

TODO⁴

3.2 Statements

Now that we have **equality**, **natural numbers**, **addition** and **multiplication** at our disposal, let's implement some *statements*. Both **addition** and **multiplication** are, for example, *associative* and *commutative*.

We could state these properties directly for the two operations, but we can also first define *associativity* and *commutativity* in general, and then assert them specifically for **addition** and **multiplication**.

3.2.1 Definitions

Let's define what it means to be *associative*. This means, of course, declaring a new **symbol**. Note that we don't need a **semantic macro** for **associativity**, since there is no **notation** to attach to it. We will also for now ignore its **type**. Note however, that **associativity** is still a property of (binary) operations, so it still makes sense to have the **symbol** take an *argument*; namely the operation it applies to.

⁴TODO: seqmap

We will also finally provide an actual (more or less) formal *definition* for the `symbol`, so where we used the `sparagraph` environment with `style=symdoc` before, we will now use the `sdefinition` environment, which also gives us `\defname`, `\definiendum`, `\defnotation` and all that.

A first variant of a corresponding `module` could look like this:

Example 9

Input:

```
File [sTeX/MathTutorial]props/Associative1.en.tex
4 \begin{smodule}{Associative}
5   \importmodule{mod?Equality}
6
7   \symdecl*[associative][args=1]
8   \begin{sdefinition}[for=associative]
9     \vardef{vA}[name=A,type=\collection]{A}
10    \vardef{vop}[name=op,type=\funspace{\vA,\vA}\vA,args=a,assoc=bin]
11    {\argsep{\#1}{\mathbin{\maincomp{\circ}}}}
12    %
13    A binary operation \$\fun{\vop!}{\vA,\vA}\vA\$ is called
14    \defname{associative}, if
15    \$\eq{
16      \vop{(\vop{a,b}),c},
17      \vop{a,(\vop{b,c})}
18    }$ for all \$\inset{a,b,c}\vA$.
19  \end{sdefinition}
20 \end{smodule}
```

Output:

Definition 3.2.1. A binary operation $\circ : A \times A \rightarrow A$ is called **associative**, if $(a \circ b) \circ c = a \circ (b \circ c)$ for all $a, b, c \in A$.

Note, that the **semantic macros** `\fun` and `\inset` come from `[sTeX/MathBase/Functions]mod?Function` and `[sTeX/MathBase/Sets]mod?Set`, respectively. Also note, that the **variable** declaration for `\vop` makes use of all the fun features we already discussed for `addition`.



Note that the above is more than good enough, if you merely want to produce nice-looking, “wikified” [HTML](#) and [PDF](#) documents. The rest of this subsection will cover how to add more flexiformal semantics to the above.

If this seems laborious and/or difficult, keep in mind that this is to some degree experimental still, and you are not forced to go overboard with semantic annotations!

But if you aim to create a “library of symbols” for mathematical concepts, then all of the possibilities that we discuss here will add value for the community. Generally, the higher the ratio of readers to authors the more any investment in semantization will pay off.

Semantic Macros in Text Mode

The first thing we can do to further improve this document is marking up the “for all” in the definition – after all, there naturally is a `symbol` for the `universal quantifier`, which can be found in `[sTeX/Logic/General]mod/syntax?UniversalQuantifier` and has the `semantic macro` `\foral` (as to not conflict with the `TeX` primitive `macro` `\forall`).

The naive approach would be to replace the “for all” by e.g. `\sr{foral}{for all}`. That would (correctly) associate and highlight the text fragment with the `symbol` “universal quantifier”, *but* we are not just referencing the `symbol` here – we are actually using it, by *applying* it to the `variables` a, b, c and the expression $(a \circ b) \circ c = a \circ (b \circ c)$.

In *math mode*, we can just use the `semantic macro` `\foral` – that will take two arguments (of `modes` `B` and `i`) and produce the corresponding `notation`, so that

```
$\foral{\inset{a,b,c}{\vA}}{  
    \eq{\vop{(\vop{a,b}),c}, \vop{a,(\vop{b,c})}} }  
}$
```

will produce $\forall a, b, c \in A. (a \circ b) \circ c = a \circ (b \circ c)$.

In *text mode*, however, we don’t have a specific `notation` – instead, the specific “`notation`” is whatever sentence we want to mark up semantically. In text mode, `semantic macros` therefore behave differently:

1. They take *precisely* one argument, regardless of how many arguments the `macro` would take in math mode or (equivalently) the `args` property of the `symbol`.
2. *Within* that argument, we can use `\comp` to highlight arbitrary text fragments, and
3. we can use the `\arg` macro to mark up the *actual* arguments that the `symbol` is supposed to be applied to.

`\arg` takes as optional argument the index of the argument that is being marked up; if not they are used consecutively. The starred variant `\arg*` produces no output.

So we could now do

```
\foral{\comp{For all}}{$\arg{\inset{a,b,c}{\vA}}$, we have  
$ \arg{  
    \eq{\vop{(\vop{a,b}),c}, \vop{a,(\vop{b,c})}} }  
}$}
```

which produces “For all $a, b, c \in A$, we have $(a \circ b) \circ c = a \circ (b \circ c)$ ”.

In our case though, we want to “switch the arguments around” – first comes the equation, then the `variables` to be bound. Hence:

```
\foral{  
    $ \arg[2]{  
        \eq{\vop{(\vop{a,b}),c}, \vop{a,(\vop{b,c})}} }  
    }$  
    \comp{for all}  
    $ \arg[1]{\inset{a,b,c}{\vA}} $  
}
```

which produces “ $(a \circ b) \circ c = a \circ (b \circ c)$ for all $a, b, c \in A$ ”.

Definientia

Now we have a fully semantically annotated expression in the definition for “`associative`”. Can we let `MMT` know, that this expression really is *the* definition of the `symbol`?

Yes, we can. All we need to do is wrap the sentence in a `\definiens` macro (plural: `definientia`; like the word “`definiendum`” refers to “the term being defined”, “`definiens`” refers to “the thing the term is being defined *as*”).

The `\definiens` macro is only allowed within the `sdefinition` environment, and requires that the `environment` lists the `symbol` that gets the definientia attached explicitly in its `for=` argument. It is possible to attach definientia to multiple `symbols` within an `sdefinition environment`, in which case the symbol needs to be provided as an optional argument, e.g. we could do `\definiens[associative]{...}`. Since “`associative`” is the only `symbol` being defined in our definition, we can omit that argument.

Alternatively, as with `types` we can attach definientia to a `\symdecl` directly using the optional argument `def=....`

At this point, you might justifiably wonder, why we even still need to declare `associative` with `\symdecl*` before we define it. And indeed, we don’t – the `sdefinition environment` takes the same optional arguments as the `\symdecl` macro, and if we explicitly provide a `name=` (or a `macro=`), it will generate a `symbol` for us. We can hence get rid of the `\symdecl*` and instead do:

```
1 \begin{sdefinition}[name=associative,args=1]
2 ...
3 \end{sdefinition}
```

One more problem remains: We stated that `associative` is to take one argument – but we haven’t told `STEX` what it is yet. In our case, the argument is represented by the `variable` `\vop`. In fact, chances are that arguments to symbols in `types` or definientia are almost always represented by some `variable`.

We can use one of two ways to a `variable` as being an argument:

1. If the `variable` (e.g. `\vop` with name `op`) was already declared prior to the `sdefinition environment`, we can use the `\varbind` macro in the `environment`; e.g. by adding `\varbind{op}`.
2. We can move (or copy) the `\vardef` for the `variable` into the `environment` and add `bind` to its optional arguments.

In total, our fully annotated definition now looks like this:

Example 10

Input:

```

File [sTeX/MathTutorial]props/Associative.en.tex

8 \begin{sdefinition}[name=associative,args=1]
9   \vardef{vA}[name=A,type=\collection]{A}
10  \vardef{vop}[name=op,type=\funspace{\vA,\vA}\vA,
11    args=a,assoc=bin,bind % <- argument for the symbol
12  ]{\argsep[#1]{\mathbin{\maincomp{\circ}}}}
13  \vardef{va}[name=a,type=\vA]{a}
14  \vardef{vb}[name=b,type=\vA]{b}
15  \vardef{vc}[name=c,type=\vA]{c}
16  %
17  A binary operation $ \mathit{fun}(\mathit{vop})\{ \mathit{vA}, \mathit{vA} \} \mathit{vA} $ is called
18  \definename{associative}, if
19  \definiens{$ \mathit{foral} \{ \mathit{arg}[2] \{ \mathit{eq}(
20    \mathit{vop} \{ (\mathit{vA}, \mathit{vb}) \}, \mathit{vc} \},
21    \mathit{vop} \{ \mathit{vA}, (\mathit{vop} \{ \mathit{vb}, \mathit{vc} \}) \}
22  } \} \mathit{comp} \{ \mathit{for all} \} \{ \mathit{arg}[1] \{ \mathit{inset} \{ \mathit{va}, \mathit{vb}, \mathit{vc} \} \mathit{vA} \} \} \}.
23 \end{sdefinition}
24 %

```

Output:

Definition 3.2.2. A binary operation $\circ : A \times A \rightarrow A$ is called **associative**, if $(a \circ b) \circ c = a \circ (b \circ c)$ for all $a, b, c \in A$.

And indeed, if we look at the **OMDoc** tab of the **HTML** preview, we can see that not only does **MMT** attach the definiens to the **symbol**, it has also inferred the **type** of “**associative**” from the definiens (Figure 24).

▼ Symbol **associative**

Definiens $\{A: \text{SET}\}_I (\circ: A \rightarrow A \rightarrow A) \rightarrow \forall a: A, b: A, c: A. ((a \circ b) \circ c = \underline{a \circ (b \circ c)})$

Type $\{A: \text{SET}\}_I (\circ: A \rightarrow A \rightarrow A) \rightarrow \text{Prop}$

Figure 24: Type Inferred from Definiens

Using Symbols Without Semantic Macros and Exporting Code in Modules

So now we don't have a **semantic macro** for “**associative**”, but it *does* take an argument. How can we ever actually *use* the **symbol** now?

The answer is: with the **\symuse** macro. Like **\symref** and friends, **\symuse** takes a **symbol** name or the name of its **semantic macro** as argument, but behaves otherwise like using a **semantic macro** directly. So for, say, **addition**, **\symuse{addition}** and **\symuse{plus}** behave exactly like **\plus**.

In our case, this means we can do **\symuse{associative}**. “**associative**” does not have a **notation**, but in practice, we say something like “**+ is associative**” rather than using some specific mathematical **notation** for the same thing.

Combining this with what we just learned, we can now say that `addition` is associative by doing:

```
\symuse{associative}{$\arg{\plus!}$} \comp{is associative}
```

In fact, we would do the exact same thing every time we want to say that *some* operator is associative, so it makes sense to introduce a `macro` for this. In fact, such a `macro` is easy to define using standard `LATeX` methods. This is where `\STEXexport` becomes very handy:

In a `module`, we can put arbitrary `LATeX` code in an `\STEXexport`, and this code will be executed every time the `module` is imported via `\usemodule` or `\importmodule`. This is especially useful for `macro` definitions, and this way modules can almost act like `LATeX` packages!

So we can define a new `macro` `\isassociative` that applies “`associative`” to an arbitrary operation and produces the semantically marked-up text “#1 is `associative`”, and wrap that `macro` definition in an `\STEXexport`, and whenever we use the `Associative module`, we also get the `\isassociative` `macro`:

```
\STEXexport{
  \def\isassociative#1{
    \symuse{associative}{$\arg{\#1}$ ~is ~\comp{associative}}
  }
}
```

And now, we can do e.g. `\isassociative{\plus}` to produce “`+ is associative`”.



For technical reasons, `\STEXexport` processes its content in the `expl3` category code scheme – what this means is that all spaces are ignored entirely, and the characters `_` and `:` are valid characters in `macro` names.

In practice, this means you will have to use the `~` character for spaces, and if you want to use a subscript `_`, you should use the `macro` `\c_math_subscript_token` instead.

Exercise

Analogously to all the above, implement a `module` for `commutativity`; i.e the property of a binary operation that $a \circ b = b \circ a$ for all a, b . Make the `module` export a macro `\iscommutative` analogously to `\isassociative`.

Solution: Can be found in [sTeX/MathTutorial]props/Commutative.en.tex

TODO⁵

3.2.2 Assertions

Having defined `associativity` and `commutativity`, we can now assert that both properties hold for `addition` and `multiplication`.

For `assertions` (i.e. theorems, lemmata, axioms, claims,...), `STeX` provides the `sassertion` environment.

In the simplest case, that can look like the following:

```
\begin{sassertion}
  \isassociative{\Sn{plus}}
\end{sassertion}
```

⁵TODO: intent?

which yields

Addition is associative

Do we want this to be typeset as a **Theorem**? For that we just add a `[style=theorem]` to the `sassertion environment`, provided we have a customization for that – (see [chapter 9](#)). We can also load the `stexthm package`, which uses the `amsthm package` to provide common typesettings for the types: `theorem`, `observation`, `corollary`, `lemma`, `axiom` and `remark`.

So far, this is not too useful – after all, we could have just as well used e.g. the `amsthm package` and gone straight for the non-**STEX** variant

```
\begin{theorem}
  \isassociative{\Sn{plus}}
\end{theorem}
```

But as with `sdefinition`, we can immediately add a corresponding `symbol` in the `sassertion environment`, and have it be documented directly by the `environment`:

```
\begin{sassertion}[style=theorem,name=addition is associative]
  \isassociative{\Sn{plus}}
\end{sassertion}
```

And now, if we do `\sn{addition is associative}`, we get `addition is associative` with a corresponding hover pop-up (in the [HTML](#)).

Of course, the usefulness of this grows with more elaborate assertions. For very short assertions such as the above, we might not even want to typeset them in such a space hungry manner.

For that purpose, we provide the `\inlineass macro` (and analogously: `\inlinedef` for `sdefinition`), which takes the same optional arguments as the `environment`. So we could also do:

```
\inlineass [name=addition is associative]{\isassociative{\Sn{plus}}}
```

So far, **MMT** is blissfully unaware of the semantic contents of our assertions. We can easily remedy that by wrapping the expression representing the assertion in a `\conclusion macro`, analogously to the `definiens macro` in `sdefinitions`:

```
\inlineass [name=addition is associative]{
  \conclusion{\isassociative{\Sn{plus}}}
}
```

We can now see the statement in the `OMDOC` tab of the [HTML](#) preview ([Figure 25](#)).




Figure 25: Assertion Statement in `OMDOC`

Not exactly pretty – the `OMDOC` tab uses `notations` to render content, and we did not provide any for `associative`.

Notice the `⊢` symbol after the name of the assertion? As an aside for those who are curious:

The **judgments as types** paradigm represents the validity of **proposition** via a designated *type of proofs*: For any **proposition** P , we introduce a collection $\vdash P$ of **proofs** of P .

To say that the **proposition holds** is then equivalent to positing that *some* element $p : \vdash P$ exists – in which case *proofs* become typed objects in their own right.

Let's consider a more interesting statement now. How about the **induction axiom**?

```
\begin{assertion}[style=axiom, name=induction axiom]
  Let $\varphi(n)$ a property on $\mathbb{N}$. If
  \begin{enumerate}
    \item $\varphi(0)$ and
    \item if $\varphi(m)$ holds for some $m$, then
      $\varphi(\textcolor{green}{\text{plus}\{m, 1\}})$ also holds,
  \end{enumerate}
  then $\varphi(n)$ holds for all $\textcolor{green}{\text{inset}\{n\}}\{\mathbb{N}\}$.
\end{assertion}
```

Axiom 3.2.3. Let $\varphi(n)$ a property on **natural numbers**. If

1. $\varphi(0)$ and
 2. if $\varphi(m)$ holds for some m , then $\varphi(m + 1)$ also holds,
- then $\varphi(n)$ holds for all $n \in \mathbb{N}$.

Exercise

Annotate the above by:

1. **Variables** with appropriate **notations** for φ , m and n , and
2. marking up the second premise (“if $\varphi(m)$ holds for some...”) in text mode as the formula $\forall m. \varphi(m) \Rightarrow \varphi(m + 1)$ using the **semantic macros** `\forall` (which we saw earlier already) and `\Rightarrow` (**implication**) from [sTeX/Logic/General]mod/syntax?Implication. The text fragments that should be highlighted are “if” and “then”.
3. marking up the conclusion (“ $\varphi(n)$ holds for all $n \in \mathbb{N}$ ”) in text mode as the formula $\forall n. \varphi(n)$. The text fragment that should be highlighted is “for all”.

Solution: Can be found in [sTeX/MathTutorial]mod/NatTheorems.en.tex

So how can we teach **MMT** the semantics of this statement? Here's what we can do:

1. As with the simpler assertions (and hence the name), the *conclusion* of the assertion can be marked up with `\conclusion`.
2. As with **sdefinition**, we can mark **variables** as *bound* (using either `\bind` in the `\vardef` or `\varbind`). If a **symbol** that can act as a **universal quantifier** is in scope, **variables** marked as bound are abstracted away using that **symbol**.
3. Similarly to `\conclusion`, *premises* can be marked up as such using the `\premise` macro. If a **symbol** is in scope that can act as an **implication**, that will be used to connect the premise(s) to the conclusion.

Hence, if we mark the variable φ as bound and use `\premise` and `\conclusion` (see [sTeX/MathTutorial]mod/NatTheorems.en.tex), we can inspect the OMDoc tab in the HTML preview again and see that MMT has now constructed the proposition (Figure 26).

```
> Assertion induction axiom ⊢ ∀φ:N→Prop.φ(0)⇒( ∀m:N.φ(m)⇒φ(m+1) )⇒( ∀n:N.φ(n) )
```

Figure 26: The Induction Axiom in OMDoc

3.2.3 Proofs



sTeX provides the `sproof` environment for marking up *proofs*. The markup mechanism for `sproof` is still highly experimental and likely subject to change in the near future. As such, we omit a closer explanation of its usage until the syntax and functionality have sufficiently stabilized.

3.3 Mathematical Structures

A common concept in mathematics is that of a `mathematical structure` – a *tuple* of interdependent components. For example: A *monoid* is a `structure` $\langle M, \circ, e \rangle$ such that certain axioms hold; where M is a set, \circ is a binary operation, and $e \in M$.

From a representational perspective, this is particularly interesting: M , \circ and e in the above are not `symbols` in the same way that the previous `symbols` we considered were – they don't represent definite objects. Instead, they are *components* of some other object, namely a monoid; where a *particular* monoid could either be a fixed object (such as $\langle \mathbb{Z}, +, 0 \rangle$) or an *indefinite* monoid; i.e. a `variable`. We call the components of a `mathematical structure` `fields`.

In this section, we will discuss how to declare and use `mathematical structures` in sTeX, build them up modularly, and connect them among each other to avoid duplication.

We will do so by considering *lattices* both algebraically and order-theoretically, and identify the two perspectives.

3.3.1 Declaring and Using Structures

The simplest kinds of `structures` are *magmas* and *(directed) graphs*, so we might as well start there:

Definition 3.3.1. A **magma** is a `structure` $\langle U, \circ \rangle$, where U is a `collection` and \circ a binary operation $U \times U \rightarrow U$.

The obvious start is to create a new `module` `Magma`. Within this `module`, we import the `Functions module` so we can later assign a `type` to the operation. We can then use the `mathstructure` environment, that creates a new symbol “`magma`”:

```
\begin{smodule}{Magma}
\importmodule[sTeX/MathBase/Functions]{mod?Function}
\begin{mathstructure}{magma}
...
\end{mathstructure}
\end{smodule}
```

`mathstructure` behaves very similarly as `smodule` – within the `environment`, we can declare new `symbols`, `notations` and all that.

So within the `mathstructure`, we can add `symbols` for the two fields U and \circ :

```
\symdef{univ}[name=universe,type=\collection]{U}
\symdef{op}[name=operation,args=a,assoc=bin,
           type=\funspace{\univ,\univ}\univ
] {\argsep{\#1}{\mathbin{\maincomp{\circ}}}}
```

Once we close the `environment` (with `\end{mathstructure}`), the `symbols` are “gone”. However, we now have a new `symbol` “`magma`” with semantic macro `\magma`. Its usage is somewhat more complicated than “normal” `semantic macros`, but one thing we *can* do with it now is $\$ \magma ! \$$, which will produce $\langle U, \circ \rangle$.

Notably however, the `\magma` macro is already available *within* the `mathstructure` `environment` as well.

This allows us to provide an `sdefinition` using the `semantic macros` declared in the `structure`:

Example 11

Input:

```
File [sTeX/MathTutorial]algebra/Magma.en.tex

7 \begin{mathstructure}{magma}
8   \symdef{univ}[name=universe,type=\collection]{U}
9   \symdef{op}[name=operation,args=a,assoc=bin,
10             type=\funspace{\univ,\univ}\univ]
11   {\argsep{\#1}{\mathbin{\maincomp{\circ}}}}
12 
13 \begin{sdefinition}[for={magma,univ,op}]
14   A \defname{magma} is a \sr{mathstruct}{structure}  $\$ \magma ! \$$ ,
15   where  $\$ \univ \$$  is a \sn{collection} and  $\$ \op ! \$$ 
16   a binary operation  $\$ \funspace{\univ,\univ}\univ \$$ .
17 \end{sdefinition}
18 \end{mathstructure}
```

Output:

Definition 3.3.2. A `magma` is a `structure` $\langle U, \circ \rangle$, where U is a `collection` and \circ a binary operation $U \times U \rightarrow U$.

Instantiating Structures

More importantly however, we can now declare a `variable magma`, using the optional `return=` argument. For example, we can now do

```
\vardef{vM}[name=M,return=\magma]{M}
```

and we get the semantic macro `\vM` with which we can do the following:

Syntax	Result
$\$\\vM!$$	M
$\$\\vM{}$$	$\langle U_M, o_M \rangle$
$\$\\vM{univ}{}$$	U_M
$\$\\vM{op}!$$	o_M
$\$\\vM{op}{a,b,c}{}$$	$a o_M b o_M c$

In other words: Given a `symbol` or `variable` with `semantic macro` `\foo` and `return=\struct`, then `\foo{<fn>}` behaves like the `semantic macro` `\fn` *within* the `mathstructure environment` for `struct` – but instantiated for the specific instance `foo`.

By default, `STEX` attaches the `symbol`'s (or `variable`'s) `operator notation` as a subscript suffix to the notation component marked with `\maincomp` – e.g., since the “`\circ`” in the `notation` for `op` is marked with `\maincomp`, doing `$\\vM{op}{a,b}{}$` ultimately outputs a `\circ_{\\vM!} b`. Hence, we get $a o_M b$.

We can change the way the `\maincomp` notation component is modified, by using the optional argument `copm=` in the `semantic macro` for the `mathematical structure`. For example, to not change it at all, we can do:

```
\vardef{vM}[name=M,return={\magma[comp=##1]}]{M}
```

...or to suffix it with a `,`, we can do

```
\vardef{vMp}[name=Mp,return={\magma[comp=##1']}]{M'}
```

This allows us to do things like:

```
Let $\\vM! := \\vM{}$ and $\\vMp! := \\vMp{}$ \sns{\magma}. Then...
```

yielding

Let $M := \langle U, o \rangle$ and $M' := \langle U', o' \rangle$ magmas. Then...

We can also *assign* fields to (arbitrary) expressions, by doing `name=<tex>` in square brackets. For example we can do the following:

```
\vardef{vA}[type=\collection]{A}
\vardef{vM}[name=M,return={\magma[comp=##1][univ=\vA]}]{M}
\vardef{vMp}[name=Mp,return={\magma[comp={##1'}][univ=\vA]}]{M'}
```



```
Let $\\vM! := \\vM{}$ and $\\vMp! := \\vMp{}$ \sns{\magma} on $\\vA$....
```

Let $M := \langle A, o \rangle$ and $M' := \langle A, o' \rangle$ magmas.

Of course, we can also use `return=` with `variable` sequences – for example:

```
\varseq{vMs}[name=M,return={\magma[comp={##1}_{##1}],op=(M_i)_{1^n}}
{1,\ellipses,n}{\maincomp{M}_{##1}}
Let $\\vMs! := \\vMs{i}{}_{1^n}$ a sequence of \sns{\magma}...
```

Let $(M_i)_1^n := \langle U_i, o_i \rangle_1^n$ a sequence of magmas...

Note that in the above, it seems that using `#1` in the `return` argument is allowed. Indeed, it is – the `return` statement takes the same arguments as the `semantic macro` itself does and is appropriately instantiated. Since the first (and only) argument to the

sequence `\vMs` is the index, when doing `\vMs{i}...` the `#1` in the `return`-statement will be replaced by `i`.

Also, note that if we want to produce M_i – i.e. the `magma` at index i in the sequence, we can do `\vMs{i}!`.



Think of the `!` as a “stop sign” - if the expression up to the `!` has an associated presentation, the `!` tells `sTeX` to “stop eating arguments” and present whatever it has until now.

3.3.2 Extending Structures and Axioms

It is extremely common to “build up” `structures` in a hierarchical manner by adding new fields or axioms: A *semigroup* is an associative magma. A *band* is an idempotent semigroup. A *monoid* is a semigroup with a unit. A *partial order* is an antisymmetric preorder.

We alluded to the fact earlier, that the `mathstructure` environment behaves like an `smodule` – that is literally true: Every `mathstructure` `foo` in a `module` `FooMod` is in fact also a `module` `?FooMod/foo-module`. We can therefore easily extend `structures` using `\importmodule{...?FooMod/foo-module}` – but extending `structures` is so common, and using `\importmodule` tiring, that there is a shortcut: the `extstructure` environment. It takes as second argument a comma-separated list of `structure` names. That allows us to easily define `semigroups`:

Example 12

Input:

```
File [sTeX/MathTutorial]algebra/Semigroup.en.tex
8 \begin{extstructure}{semigroup}{magma}
9   \begin{sdefinition}
10     A \definename{semigroup} is a \sn{magma} \$\semigroup!\$,
11     where \inlineass[name=associative axiom]{
12       \conclusion{\isassociative{\op!}}}.
13   }
14 \end{sdefinition}
15 \end{extstructure}
```

Output:

Definition 3.3.3. A **semigroup** is a `magma` $\langle U, \circ \rangle$, where `circ` is **associative**.

Note our usage of `\inlineass` to generate a new `symbol` for the `associative axiom`.

If we look at the `OMDoc` tab in the `HTML` preview window, we can see the output in Figure 27.

So `MMT` has decided that our statement is an *axiom*.

Conservative Extensions

For `structures`, there is a *critical* distinction between *defined* and *undefined symbols*; and analogously between *theorems* and *axioms*.



Figure 27: Axioms in OMDoc

Remember that **structures** are more like *templates* that are *instantiated* by particular objects. An *undefined* field in a **structure**, in that sense, is like an *obligation*: If something is supposed to be a **semigroup**, it *has to* have a **universe**, an **operation** and the **operation** needs to satisfy the **associative axiom**.

Defined fields on the other hand have a *definiens* on the basis of the remaining fields – they don't need to be explicitly provided for something to instantiate the **structure**; if all the *undefined* fields are provided, the *defined* ones we get “*for free*”.

The same holds for *theorems*: If a statement is *provable* from the axioms, then we don't need to explicitly prove it to hold for some particular instance – we have a proof already, provided the axioms hold.

The relation between axioms and theorems is not just analogous to that between undefined and defined **symbols**: It is the very same. Remember the **judgments as types** paradigm?

STEX For a **proposition** P , an assertion in **STEX** induces a **symbol** of type $\vdash P$. Without a proof, this **symbol** is *undefined* – and hence an *axiom*. A *proof* for P is a specific term of type $\vdash P$ – i.e. a potential *definiens*. To prove an assertion turns it into a *theorem*, which is to say that the **symbol** can be *defined*.

One consequence of this is: Extending a **structure** only by *defined* fields does not actually (conceptually) introduce a *new structure* – every instance of the old one *should* also be an instance of the new one. The new fields are basically just “syntactic sugar”.

There is a name for extending a **structure** only by defined fields (or theorems): A *conservative extension*.

STEX provides the **extstructure*** environment for that purpose. Unlike **extstructure**, it does *not* take a name (technically, **STEX** generates one internally). Instead, conceptually **extstructure*** modifies the extended **structure** directly, rather than generating a new **structure**. The caveat however is, that every **symbol** introduced in an **extstructure*** **must** be defined.

Consider the following conservative extension:

Example 13

Input:

```

File [sTeX/MathTutorial]algebra/MagmaSquare.en.tex

7 \begin{extstructure}{magma}
8   \begin{sdefinition}[macro=sq,args=1]
9     \notation{sq}[op=\cdot^2]{\#1^{\comp 2}}
10    \vardef{va}[name=a,type=\univ,bind]{a}
11    Let $ \inset{\va}{\univ} $. We define
12    $\defnotation{\sq{\va}} := \definiens{\op{\va,\va}}$.
13  \end{sdefinition}
14 \end{extstructure}

```

Output:

Definition 3.3.4. Let $a \in U$. We define $a^2 := a \circ a$.

Via `\definiens`, the new symbol `sq` is now *defined* (note the `macro=` argument, taht generates a `semantic macro` as well). Whenever we import the containing `module`, we now have an additional field `sq` in (any extension of) `magma` – e.g., the following is now valid:

```

\usemodule [sTeX/MathTutorial]{algebra?MagmaSquare}
\vardef{vsg}[name=S,return=\semigroup]{S}
\$vsg{sq}{a}$

```

...producing a^2 .

3.3.3 Nesting Structures and `\this`

A perhaps not too surprising, but a notable aspect of `structures` is that fields themselves can be instances. This is important for example for implementing *vector spaces*, but can also be used to bundle things that are not normally thought of as `structures`, such as objects with certain defining properties.

Take as an example, the notion of a (`magma`) homomorphism:

Definition 3.3.5. Let $M_1 = \langle U_1, \circ_1 \rangle$ and $M_2 = \langle U_2, \circ_2 \rangle$ magmas. A **magma homomorphism** is a function $F : U_1 \rightarrow U_2$ such that $F(a \circ_1 b) = F(a) \circ_2 F(b)$ for all $a, b \in U_1$.

So a `homomorphism` is a `function` with certain properties. And `structures` can be used to “bundle” the `function` itself with both the `magmas` on whose universes the `function` operates, as well as the *axiom* that *makes* it a `homomorphism`. After all, considered as a mere `function`, $F : U_1 \rightarrow U_2$ contains no information about the operation with respect to which it is homomorphic.

The first thing to note is that we can provide `mathstructure` with an optional argument for a `name` distict from the name of its `semantic macro`. We then add two fields that `return` `magmas`. So far, so unexciting:

```

\begin{mathstructure}{magmahom}{magma homomorphism}
\symdef{dom}[name=domain,return={\magma[comp={##1}_1]}]{M_1}
\symdef{cod}[name=codomain,return={\magma[comp={##1}_2]}]{M_2}

```

For the `function` itself, we know how to give it a maningful `type`, already:

```

\symdef{f}[type=\funspace{\dom{\univ}}{\cod{\univ}},args=1]{???

```

...but what should its `notation` be? Ideally we would want it to just be the `notation` of whatever particular instance it is – in informal mathematics, we rarely distinguish notationally between a `homomorphism` and its underlying `function` (to the point where it's not clear, whether *informally* the distinction is even meaningful). Similarly, we rarely distinguish e.g. between a `magma` (or semigroup, monoid, group, ring, vector space,...) and its underlying universe.

This is where `\this` comes into play (pun intended). Within an `mathstructure` or `exstructure`, or in the context of a particular instance of one, `\this` represents “the” instance.

We can set it in the context of `mathstructure` as a further optional argument; e.g.

```
\begin{mathstructure}{magmahom}[magma homomorphism,this=F]
```

and then use `\this` in the `notation` for the `function`. We can further provide the `homomorphism` condition as an axiom using `\inlineass`:

Example 14

Input:

```
File [sTeX/MathTutorial]algebra/Homomorphism.en.tex
9 \begin{mathstructure}{magmahom}[magma homomorphism,this=F]
10  \symdef{dom}[name=domain,return={\magma[comp={##1}_1]}]{M_1}
11  \symdef{cod}[name=codomain,return={\magma[comp={##1}_2]}]{M_2}
12  \symdef{f}[op=\this,args=1,
13    type=\funspace{\dom{univ}}{\cod{univ}}]
14  ]{\this \dobrackets{#1}}
15
16 \begin{sdefinition}[for={magmahom,dom,cod,f}]
17  \vardef{va}[name=a,type=\dom{univ}]{a}
18  \vardef{vb}[name=b,type=\dom{univ}]{b}
19  Let $\dom!=\dom{}$ and $\cod!=\cod{}$ \sns{magma}.
20  A \defname{magmahom} is a function
21  $\fun{\f!}{\dom{univ}}{\cod{univ}}$ such that
22  \inlineass[name=homomorphism condition]{\conclusion{\forall{
23    $arg[2]{\leq[
24      \f{\dom{op}}{\va,\vb}, \cod{op}{\f{\va},\f{\vb}}
25      }]} \comp{for all} $arg[1]{\inset{\va,\vb}{\dom{univ}}}$.}
26  }}
27 \end{sdefinition}
28 \end{mathstructure}
```

Output:

Definition 3.3.6. Let $M_1 = \langle U_1, \circ_1 \rangle$ and $M_2 = \langle U_2, \circ_2 \rangle$ magmas. A **magma homomorphism** is a function $F : U_1 \rightarrow U_2$ such that $F(a \circ_1 b) = F(a) \circ_2 F(b)$ for all $a, b \in U_1$.

Now if we instantiate our `magma homomorphism`:

```
\vardef{vh}[name=H,return={\magmahom[this=H]}]{H}
```

Here is a list of what we can do now:

Syntax	Result
$\$\\vh!$$	H
$\$\\vh{}$$	$\langle M_1, M_2, H \rangle$
$\$\\vh{f}!$$	H
$\$\\vh{f}{a}$$	$H(a)$
$\$\\vh{dom}!$$	M_1
$\$\\vh{cod}{}$$	$\langle U_2, o_2 \rangle$
$\$\\vh{cod}{univ}$$	U_2
$\$\\vh{dom}{op}!$$	o_1
$\$\\vh{cod}{op}{a,b,c}$$	$a o_2 b o_2 c$

Note how – as one would expect – we can treat $\backslash vh\{dom\}$ and $\backslash vh\{cod\}$ like any other instance of [magma](#).

Note that some of the outputs in the above table are probably not quite what we want. Determining the precise typesetting of an expression involving *nested paths* of fields is difficult, to say the least (e.g., what exactly should `\this` refer to in a deeply nested sequence of fields?).

Using instances within [structures](#) is still very useful; at the very least when defining [structures](#). When subsequently *using structures*, however, accessing fields of fields (of fields (of ...)) of an instance should be avoided.

Luckily, there is rarely a need for doing so – in practice, those fields we might want to access in such a way, we usually also want to provide specific [notations](#) and talk about independently of the “containing” instance, such that introducing a new [variable](#) (or [symbol](#)), and assigning the corresponding field to that [variable](#), makes considerably more sense. And subsequently using the [variable](#) is easier than concatenating `{...}`, too.

3.4 Complex Inheritance and Theory Morphisms

We are starting to approach seriously experimental territory.

While the theory behind all the following is relatively well understood, and their implementation in [MMT](#) is mature, the same can not be said out the implementation in [sTeX](#).

There are still kinks to be ironed out, but feel free to experiment.

We now have all the tools available to progress towards something more interesting. Here is a list of documents with respective [modules](#) and [symbols](#) we will build on in the following:

[[sTeX/MathTutorial](#)]props/Idempotent.en.tex

Definition 3.4.1. Let $e \in A$ and $\circ : A \times A \rightarrow A$. e is called **idempotent** with respect to \circ , if $e \circ e = e$.

Definition 3.4.2. The operation $\circ : A \times A \rightarrow A$ is called **idempotent**, if every element $a \in A$ is **idempotent** with respect to \circ .

[sTeX/MathTutorial]props/Distributive.en.tex

Definition 3.4.3. Let $\odot : B \times A \rightarrow A$ and $\oplus : A \times A \rightarrow A$. We say \odot **distributes over** \oplus , if $b \odot (a_1 \oplus a_2) = (b \odot a_1) \oplus (b \odot a_2)$ for all $a_1, a_2 \in A$ and $b \in B$.

[sTeX/MathTutorial]props/Absorption.en.tex

Definition 3.4.4. Let $\odot : A \times B \rightarrow A$ and $\oplus : A \times B \rightarrow B$. We say \odot **absorbs** \oplus , if $a_1 \odot (a_1 \oplus b) = a_1$ for all $a_1 \in A$ and $b \in B$.

[sTeX/MathTutorial]algebra/Band.en.tex

Definition 3.4.5. A **band** is an **idempotent semigroup**.

[sTeX/MathTutorial]algebra/Semilattice.en.tex

Definition 3.4.6. A **semilattice** is a **commutative band**.

[sTeX/MathTutorial]props/Reflexive.en.tex

Definition 3.4.7. A binary relation R on A is called **reflexive**, if $R(a, a)$ for all $a \in A$.

[sTeX/MathTutorial]props/Symmetric.en.tex

Definition 3.4.8. A binary relation R on A is called **symmetric**, if $R(a, b)$ implies $R(b, a)$ for all $a, b \in A$.

[sTeX/MathTutorial]props/Transitive.en.tex

Definition 3.4.9. A binary relation R on A is called **transitive**, if $R(a, b)$ and $R(b, c)$ implies $R(a, c)$ for all $a, b, c \in A$.

[sTeX/MathTutorial]props/Antisymmetric.en.tex

Definition 3.4.10. A binary relation R on A is called **antisymmetric**, if $R(a, b)$ and $R(b, a)$ implies $a = b$ for all $a, b \in A$.

[sTeX/MathTutorial]orders/Graph.en.tex

Definition 3.4.11. A **directed graph** is a **structure** $\langle U, R \rangle$, where U is a **collection** and R a binary relation on U .

Definition 3.4.12. An **(undirected) graph** is a directed graph $\langle U, R \rangle$, where R is **symmetric**.

[sTeX/MathTutorial]orders/Preorder.en.tex

Definition 3.4.13. A structure $\langle U, \leq \rangle$ is called a **preorder** (or **quasiorder**, or **preordered set**; in short **proset**), if \leq is **reflexive** and **transitive**.

[sTeX/MathTutorial]orders/Poset.en.tex

Definition 3.4.14. A preorder $\langle U, \leq \rangle$ is called a **partial order** (or **poset**), if \leq is **antisymmetric**.

[sTeX/MathTutorial]orders/InfSup.en.tex

Definition 3.4.15. Let $\langle U, \leq \rangle$ a poset. An element $a \in U$ is called an **infimum** or **greatest lower bound** of x_1 and x_2 , if $a \leq x_1$, $a \leq x_2$, and for any x with $x \leq x_1$ and $x \leq x_2$, we have $x \leq a$.

Definition 3.4.16. Let $\langle U, \leq \rangle$ a poset. An element $a \in U$ is called a **supremum** or **least upper bound** of x_1 and x_2 , if $x_1 \leq a$, $x_2 \leq a$, and for any x with $x_1 \leq x$ and $x_2 \leq x$, we have $a \leq x$.



Note that **infima** and **suprema** are more generally defined on *sets* of elements. Doing so in **sTeX** is significantly more complicated *for now*, and will require some amount of research to make convenient – especially if we want to subsequently define *operators* on pairs of elements, as below. We therefore opt for the simpler version where it is defined as binary from the get go.

[sTeX/MathTutorial]orders/MeetJoinSemilattice.en.tex

Definition 3.4.17. A poset $\langle U, \leq \rangle$ is called a **meet semilattice** if for every two elements a, b the **infimum** $a \wedge b$ exists.

Definition 3.4.18. A poset $\langle U, \leq \rangle$ is called a **join semilattice** if for every two elements a, b the **supremum** $a \vee b$ exists.

Definition 3.4.19. An **(order) semilattice** is a meet and join semilattice.

Exercise

Try to implement all of the above yourself!

3.4.1 Glueing Structures Together

We now want to progress towards **lattices**, i.e. the following:

Definition 3.4.20. A **lattice** is a structure $\langle U, \wedge, \vee \rangle$ such that $\langle U, \wedge \rangle$ and $\langle U, \vee \rangle$

are **semilattices**, and **V** absorbs **Λ** and vice versa; i.e. $a \vee (a \wedge b) = a$ and $a \wedge (a \vee b) = a$.
The operations **Λ** and **V** are called **meet** and **join**, respectively.

So we make a new **module**, open an **extstructure environment** and... realize two problems:

1. We can't just extend **semilattice**: We need *two* copies of **semilattice** that share a universe, and importing **semilattice** twice is of course redundant.
2. We also want to *rename* the operations of the two **semilattices** to be subsequently called **join** and **meet**.

What we need is a way to *inherit* from **semilattice** while a) *modifying* the **symbols** therein, and b) not be **idempotent** – i.e. two imports from the same **structure** or **module** should not be identified. We can do that with the **\copymod** macro, which takes three arguments:

1. A *name* for the copy,
2. the **structure** or **module** to copy, and
3. a comma-separated list of renamings and redefinitions of the **symbol**. $\langle symbol \rangle = \langle def \rangle$ redefines $\langle symbol \rangle$, $\langle symbol \rangle @ \langle newname \rangle$ renames it, $\langle symbol \rangle = \langle def \rangle @ \langle newname \rangle$ (or $\langle symbol \rangle @ \langle newname \rangle = \langle def \rangle$) does both.

In our case, we want two copies of **semilattice**, which we will call **meetsl** and **joinsl**. In the first copy, we only want to rename **op** to **meet**. In the second, we want to rename **op** to **join**, and *also* redefine the universe to be the one from **meetsl**:

```
\copymod{meetsl}{semilattice}{
    op @ meet
}
\copymod{joinsl}{semilattice}{
    univ = \univ,
    op @ join
}
```

You might have already noticed some problem with that – which of the two universes does **univ** refer to now? (They are *defined* as equal, but **LATEX** does not know that!) Or which of the two **commutative axioms** does “**commutative axiom**” refer to now? Everything is ambiguous now!

Not really - if you have wondered why the **\copymod** takes a *name* as argument: The name is prefixed to every **symbol** name. Hence, the **universe** in **joinsl** is now called **joinsl/universe**, and the one in **meetsl** is called **meetsl/universe**. Furthermore, **\copymod** by default generates no **semantic macros** for any of the imported **symbols** – except for those renamed with **@**. In fact, what the **@** syntax actually does, is to generate a **semantic macro** by that name. If we want to change the *name* (that is shown when using **\symname** et al), we add that new name in square brackets. Hence, what we really want to do is:

```
\copymod{meetsl}{semilattice}{
    univ @ univ,
    op @ [meet] meet
}
\copymod{joinsl}{semilattice}{
    univ = \univ,
    op @ [join] join
}
```

This now gives us two copies of `semilattice`, generates semantic macros `\univ` for `meetsl/universe`, `\meet` for `meetsl/op` and `\join` for `joinsl/op`, and renames `meetsl/op` to `meet` and `joinsl/op` to `join`.

That allows us to then add the `absorption` axioms, an `sdefinition` for `lattice` and subsequently `$\lattice!` produces $\langle U, \wedge, \vee \rangle$, with all axioms inherited (see [sTeX/MathTutorial]algebra/Lattice.en.tex).

3.4.2 Realizations

A very common situation we find in connection with `mathematical structures` is that “every *this* is a *that*” (or the concrete case “*this* is a *that*”).

With what we did so far, we are in this situation regarding the algebraic definition of `semilattices` and the order-theoretic one (exemplary `meet semilattice`).

In MMT parlance, this corresponds to a `total (implicit) theory morphism` from “*that*” to “*this*”.

In `STEX` words, we want to inherit from “*that*” by assigning all the `symbols` in “*that*” to concrete terms. In our case:

```
[sTeX/MathTutorial]algebra/SemiLatticeOrder.en.tex
```

Definition 3.4.21. Let $\langle U, \circ \rangle$ a `semilattice`. We let $a \leq b$ iff $a \circ b = a$.

Theorem 3.4.22. $\langle U, \leq \rangle$ is a `meet semilattice`.

Proof: We need to prove the following

`reflexivity` $a \leq a$: We need to show $a \circ a = a$. Follows from the `idempotent axiom`.

`antisymmetry` $a \leq b$ and $b \leq a$ implies $a = b$: Assume $a \circ b = a$ and $b \circ a = b = a \circ b$ (by the `commutative axiom`). Hence, $a = b$

`transitivity` If $a \leq b$ and $b \leq c$, then $a \leq c$. : Assume $a \circ b = a$ and $b \circ c = b$. Then $a \circ c = (a \circ b) \circ c = a \circ (b \circ c) = a \circ b = a$. Hence, $a \leq c$.

$a \circ b$ is the `infimum` of $\{a, b\}$: By definition (and the `commutative axiom`), $a \circ b \leq a$ and $a \circ b \leq b$. We need to show, that if $x \leq a$ and $x \leq b$, then $x \leq a \circ b$. Assume $x \circ a = x$ and $x \circ b = x$. Then $x \circ (a \circ b) = (x \circ a) \circ b = x \circ b = x$. Hence $x \leq a \circ b$

So to be precise, we want to provide `definientia` for all undefined `symbols` in `meet semilattice` (i.e. the `relation` and `meet`) and `proofs` for all `axioms` (`reflexive axiom`, `antisymmetric axiom`, `transitive axiom`, and `infimum axiom`), and by so obtain the fact that every `semilattice` is a `meet semilattice`.

For that purpose, we have the `\realize` macro. It behaves like `\copymod`, but does not take a name, and additionally requires that all undefined fields get assigned. So we could do the following:

Example 15

Input:

```

File [sTeX/MathTutorial]algebra/SemiLatticeOrder1.en.tex

8 \begin{extstructure*}{semilattice}
9   \realize{meets1}[
10     univ = \univ,
11     meet = \op!,
12     rel @ [order]order = \map{a,b}{\eq{\op{a,b},a}},
13     reflexive axiom = trivial,
14     transitive axiom = trivial,
15     antisymmetric axiom = trivial,
16     infimum axiom = trivial
17   }
18 \end{extstructure*}
19
20 \vardef{mysl}[return=\semilattice]{S}
21 $mysl{order}{a,b} \qquad \mysl{}[\univ,op,order]$
```

Output:

$$a \leq_S b \quad \langle U_S, \circ_S, \leq_S \rangle$$

As we can see, we can now access the field `order`, which is renamed from `relation` in `meet semilattice` and also has the desired definiens in MMT. But of course this approach is very “declarative”: We do all the assigning in one `macro`, rather than narratively as what they *should* be: definitions and proofs.

If we want to achieve the more narrative version at the beginning of the subsection, we can use the `realization environment` instead. It behaves like the `\realize` macro, but allows us to do the assignments and renamings individual somewhere in the body of the `environment`, interleaved with arbitrary text. Additionally, within the `environment`, all `STEX` features that introduce *definientia* (like the `\definiens` macro) induce assignments instead.

To declaratively rename or assign fields, we can then use the `\assign` and `\renamedecl` macros instead. That allows us to do the following instead:

```

\begin{realization}{meets1}
\assign{univ}{\univ}
\assign{meet}{\op!}
\renamedecl{rel}[order]{order}
...
```

...and then use text to do the remaining assignments. For example, we can use the `sdefinition environment` to assign `rel` to the desired definiens:

```

\usestructure{meets1}
\begin{sdefinition}[for=order]
\varbind{va,vb}
Let $ \semilattice! [\univ,op] $ a \sn{semilattice}.
We let $ \rel{\va,\vb} $.
iff $ \definiens{\eq{\op{\va,\vb},\va}} $.
\end{sdefinition}
```

And now `STEX` will use the `\definiens` to assign $a, b \mapsto a \circ b = a$ to the relation of `meet semilattice`.

Analogously, we can use the `sproof` and `subproof` environments to produce “definientia” (i.e. proofs) for the axioms (see [sTeX/MathTutorial]algebra/SemiLatticeOrder.en.tex)

Chapter 4

Extensions for Education

The last two chapters have shown generic markup and semantization facilities in **S_TE_X**. As said before, investments in semantic markup pay off, iff the impact of a document is high, e.g. if there are many more readers than authors or if the semantic services afforded by the semantic markup can help reduce the help readers need to understand the material.

Educational documents constitute one category of high-impact documents which are supported by the **S_TE_X** ecosystem, we will cover them here. In fact, educational documents have been one of the initial document categories **S_TE_X** has been developed for. The idea is that if we can mark up the meaning and didactic role of learning objects, we can base learning support services on that and embed them into the documents.

Another reason educational documents are particularly interesting is that in a sense all academic communication is educational, as all documents try to “teach” the reader new concepts and results.

Concretely, we cover a document class for combining slides and course notes ([section 4.1](#)) and functionality for marking up problems and exercises ([section 4.2](#)) and for marking up homework assignments and exams ([section 4.5](#)).

4.1 Slides and Course Notes

TODO⁶

4.2 Problems and Exercises

Problems/exercises are text fragments that contain a task assigned to the learner – e.g. computing the value of a specified quantity, simplifying an expression, modeling a described situation in a mathematical structure, or judging the veracity of a given statement. They often come with auxiliary functions: hints, notes, and solutions. Furthermore, we can specify how long the solution to a given problem is estimated to take and how many points will be awarded for a perfect solution.

The **problem** package provides functionality for marking up problems and exercises as semantic sources from which various presentations can be generated: documents without solutions for paper or online exams, and the corresponding exams with master solutions

⁶**TODO:** `notesslides.sty`

for exam reviews. Similarly with/without hints, or points. Their visibility is specified in the options of the `problem` package, which can be used in any L^AT_EX class. The following is a typical preamble for a problem file:

```
\documentclass{article}
\usepackage[solutions,hints,pts,min]{problem}
```

Here we have specified the options `solutions` (solutions should be shown), `hints` (hints should be given), `pts` (display the points awarded for solving the problem?), `min` (display the estimated minutes for problem solving). Leaving out the options would make the corresponding functionality invisible.

4.2.1 Simple Problems

The main environment provided by the `problem` package is (surprise surprise) the `problem` environment. It is used to mark up problems and exercises. The following example shows the main functionality:

Example 16

Input:

```
File [sTeX/Documentation]tutorial/ext/simple-problem.en.tex
1 \begin{document}
2 \begin{sproblem}[id=prob.elefants,pts=10,min=2,title=Fitting Elefants]
3   How many Elefants can you fit into a Volkswagen beetle?
4   \begin{hint}
5     Think positively, this is simple!
6   \end{hint}
7   \begin{exnote}
8     Justify your answer
9   \end{exnote}
10  \begin{gnote}
11    if they do not give the justification deduct 5 pts
12  \end{gnote}
13  \begin{solution}
14    Four, two in the front seats, and two in the back.
15  \end{solution}
```

Output:

Exercise (Fitting Elefants)

How many Elefants can you fit into a Volkswagen beetle?

Solution: Four, two in the front seats, and two in the back.

The `sproblem` environment takes an optional key/value argument with the keys `id` as an identifier that can be reference later, `pts` for the points to be gained from this exercise in homework or quiz situations, `min` for the estimated minutes needed to solve the problem, and finally `title` for an informative title of the problem.

The additional functionality is specified in the `hint` `exnote` (notes in exercises), `solution`, and `gnote` (grading notes) environments. Here, the first three are shown whereas the grading notes are hidden, since the corresponding option was not given in the `\usepackage[...]{problem}`. All of these environments can occur any number

of times in the `sproblem` environment. The `solution` environment takes an optional argument that is interpreted as the identifier.

4.2.2 Multiple Choice Blocks

Multiple choice blocks can be formatted using the `mcb` environment, in which single choices are marked up with `\mcc` macro.

`\mcc` `\mcc[<keyvals>]{<text>}` takes an optional key/value argument `<keyvals>` for choice metadata and a required argument `<text>` for the proposed answer text. The following keys are supported

- `T` for true answers, `F` for false ones,
- `Ttext` the verdict for true answers, `Ftext` for false ones, and
- `feedback` for a short feedback text given to the student.

What we see when this is formatted to PDF depends on the context. In solutions mode (we start the solutions in the code fragment below) we get

Example 17

Input:

```
1 \startsolution
2 \begin{sproblem}[title=Functions, name=functions1]
3 What is the keyword to introduce a function definition in python?
4 \begin{mcb}
5   \mcc[T]{def}
6   \mcc[F, feedback=that is for C and C++]{function}
7   \mcc[F, feedback=that is for Standard ML]{fun}
8   \mcc[F, Ftext=Noooooooooooo, feedback=that is for Java]{public static void}
9 \end{mcb}
10 \end{sproblem}
```

Output:

Exercise (Functions)

What is the keyword to introduce a function definition in python?

- def – Correct
that is for C and C++
- function – Wrong
that is for Standard ML
- fun – Wrong
that is for Java
- public static void – Noooooooooooo
that is for Java

In “exam mode” where disable solutions (here via `\stopsolutions`) we get the questions without solutions (that is what the students see during the exam/quiz).

Example 18

Input:

```
1 \stopsolutions
2 \begin{sproblem}[title=Functions,name=functions1]
3 What is the keyword to introduce a function definition in python?
4 \begin{mcb}
5   \mcc[T]{def}
6   \mcc[F,feedback=that is for C and C++]{function}
7   \mcc[F,feedback=that is for Standard ML]{fun}
8   \mcc[F,Ftext=Nooooooooo,feedback=that is for Java]{public static void}
9 \end{mcb}
10 \end{sproblem}
```

Output:

Exercise (Functions)

What is the keyword to introduce a function definition in python?

- def
- function
- fun
- public static void

4.2.3 Filling-In Concrete Solutions

The next simplest situation, where we can implement auto-grading is the case where we have fill-in-the-blanks

The `\fillinsol` macro takes a single argument, which contains a concrete solution (i.e. a number, a string, ...), which generates a fill-in-box in test mode:

Example 19

Input:

```
1 \stopsolutions
2 \begin{sproblem}[id=elefants.fillin,title=Fitting Elefants]
3 How many Elefants can you fit into a Volkswagen beetle? \fillinsol{4}
4 \end{sproblem}
```

Output:

Exercise (Fitting Elefants)

How many Elefants can you fit into a Volkswagen beetle?

and the actual solution in solutions mode:

Example 20

Input:

```
1 \begin{sproblem}[id=elefants.fillin,title=Fitting Elefants]
2   How many Elefants can you fit into a Volkswagen beetle? \fillinsol{4}
3 \end{sproblem}
```

Output:

Exercise (Fitting Elefants)

How many Elefants can you fit into a Volkswagen beetle?

If we do not want to leak information about the solution by the size of the blank we can also give `\fillinsol` an optional argument with a size: `\fillinsol[3cm]{12}` makes a box three cm wide.

Obviously, the required argument of `\fillinsol` can be used for auto-grading. For concrete data like numbers, this is immediate, for more complex data like strings “soft comparisons” might be in order.⁷

4.3 Including Problems

`\includeproblem` The `\includeproblem` macro can be used to include a problem from another file. It takes an optional KeyVal argument and a second argument which is a path to the file containing the problem (the macro assumes that there is only one problem in the include file). The keys `title`, `min`, and `pts` specify the problem title, the estimated minutes for solving the problem and the points to be gained, and their values (if given) overwrite the ones specified in the `problem` environment in the included file.

The sum of the points and estimated minutes (that we specified in the `pts` and `min` keys to the `problem` environment or the `\includeproblem` macro) to the log file and the screen after each run. This is useful in preparing exams, where we want to make sure that the students can indeed solve the problems in an allotted time period.

The `\min` and `\pts` macros allow to specify (i.e. to print to the margin) the distribution of time and reward to parts of a problem, if the `pts` and `pts` options are set. This allows to give students hints about the estimated time and the points to be awarded.

4.4 Testing and Spacing

The `problem` package is often used by the `hwexam` package, which is used to create homework assignments and exams. Both of these have a “test mode” (invoked by the

⁷For the moment we only assume a single concrete value as correct. In the future we will almost certainly want to extend the functionality to multiple answer classes that allow different feedback like in MCQ. This still needs a bit of design. Also we want to make the formatting of the answer in solutions/test mode configurable.

package option `test`), where certain information –master solutions or feedback – is not shown in the presentation.

`\testspace` `\testspace` takes an argument that expands to a dimension, and leaves vertical space accordingly. Specific instances exist: `\testsmallspace`, `\testmedspace`, `\testlargepage` give small (1cm), medium (2cm), and big (3cm) vertical space.
`\testsmallspace` `\testnewpage` makes a new page in `test` mode, and `\testemptypage` generates an empty page with the cautionary message that this page was intentionally left empty.
`\testemptypage` TODO⁸

4.5 Homework Assignments and Exams

TODO⁹

⁸TODO: check what is still undescribed problem.sty and make examples for it.

⁹TODO: hwexam.sty

Part II

User Manual

*The dynamic [HTML](#) version of this part can be found at
<https://stexmmt.mathhub.info/>:
<https://stexmmt.mathhub.info/stex/fullhtml?archive=stex/Documentation&filepath=manual.xhtml>*

Chapter 5

Basics

5.1 Package and Class Options

- `debug=(prefixes)`: (see Developer Manual)
- `lang=(languages)`: If set, **S_TE_X** will load the `babel` package with the provided languages. Supported languages (currently) are:

<code>ar</code>	arabic
<code>bg</code>	bulgarian
<code>de</code>	german (with option <code>ngerman</code>)
<code>en</code>	english
<code>fi</code>	finnish
<code>fr</code>	french
<code>ro</code>	romanian
<code>ru</code>	russian
<code>tr</code>	turkish (with option <code>shorthands=:</code> !)

- `mathhub=(path)`: Uses the provided file path as `MathHub` directory (see [section 5.2](#)).
- `usesms/writesms`: If `writesms` is set, content loaded from external `math archives` (i.e. `modules`) is persisted in the file `\jobname.sms`.

If `usesms` is set, the content of the `.sms`-file is loaded, obviating the need to reprocess the original files.

The options are not mutually exclusive, but care should be taken if dependencies have changed between builds.

This offers two advantages:

1. If a document has many (transitive) dependencies, `usesms` should significantly speed up the build process, and
2. setting `usesms` allows for distributing the `.sms`-file to make the document *standalone*, allowing for compilation without needing imported/used modules to be present.

The options `debug`, `mathhub`, `usesms` and `writesms` can also be set by the environment variables `STEX_DEBUG`, `MATHHUB`, `STEX_USESMS` and `STEX_WRITESMS`. In fact, the `MATHHUB` environment variable is the recommended way to set the `MathHub` directory. This is the only option where the *package option* overrides the environment variable.

The environment variables for `USE/WRITESMS` are particularly useful, in that they allow for convenient compilation workflows. For example, the `Build PDF/XHTML/OMDoc`-button in the `IDE` does the following:

```
STEX_WRITESMS=true pdflatex <job>.tex
[bibtex|biber] <job>
STEX_USESMS=true pdflatex <job>.tex
STEX_USESMS=true pdflatex <job>.tex
```

Guaranteeing (in the first run) that all dependencies are loaded from their respective sources and persisted, and in the two subsequent runs read from the generated `.sms` file, (likely) speeding up the subsequent runs significantly.

5.2 Math Archives and the MathHub Directory

`STEX` uses `math archives` to organize document content modularly, without a user having to specify absolute paths, which would differ between users and machines.

All `STEX` archives need to exist in the local `MathHub`-directory. `STEX` knows where this folder is via one of five means:

1. If the `STEX package` is loaded with the option `mathhub=/path/to/mathhub`, then `STEX` will consider `/path/to/mathhub` as the local `MathHub` directory.
2. If the `mathhub` package option is *not* set, but the macro `\mathhub` exists when the `STEX`-package is loaded, then this macro is assumed to point to the local `MathHub` directory; i.e. `\def\mathhub{/path/to/mathhub}\usepackage{stex}` will set the `MathHub` directory as `path/to/mathhub`.
3. Otherwise, `STEX` will attempt to retrieve the system variable `MATHHUB`, assuming it will point to the local `MathHub` directory. Since this variant needs setting up only *once* and is machine-specific (rather than defined in tex code), it is compatible with collaborating and sharing tex content, and hence recommended.
4. If that too fails, `STEX` will look for a file `~/.stex/mathhub.path`. If this file exists, `STEX` will assume that it contains the path to the local `MathHub`-directory. This method is recommended on systems where it is difficult to set environment variables, and is used by the `IDE` setup.
5. Finally, if all else fails, `STEX` considers `~/MathHub` to be the `MathHub` directory.

The `STEX IDE` allows you to directly download `math archives` from [gl.mathhub.info](#) – currently available `archives` there are:

- `sTeX/*` – a group of semi-experimental documents showcasing `STEX`3 features,
- `smgloM/*` – a vast collection of multilingual `modules` of concepts in mathematics and computer science. The SMGloM predates `STEX`3 and is thus largely “underannotated” with respect to (formal) semantics,
- `MiKoMH/*` – a vast collection of lecture slides and notes in computer science for courses held by Michael Kohlhase. They largely make use of SMGloM `modules`.

5.2.1 The Structure of Math Archives

An `archive` group/name is stored in the directory `<MathHub>/group/name`; e.g. assuming your local MathHub-directory is set as `/user/foo/MathHub`, then in order for the sTeX/Documentation `archive` to be found by the `sTeX` system, it needs to be in `/user/foo/MathHub/sTeX/Documentation`.

Each such `archive` needs two subdirectories:

- `/source` – this is where all your tex files go.
- `/META-INF` – a directory containing a single file `MANIFEST.MF`, the content of which we will consider shortly.

An additional `lib`-directory is optional, and is discussed in [section 5.3](#).

5.2.2 MANIFEST.MF-Files

The `MANIFEST.MF` in the `META-INF` directory consists of key-value-pairs, informing `sTeX` (and associated software, e.g. `MMT`) of various properties of an `archive`. For example, the `MANIFEST.MF` of the sTeX/Documentation archive looks like this:

```
id: sTeX/Documentation
ns: http://mathhub.info/sTeX/Documentation
narration-base: http://mathhub.info/sTeX/Documentation
format: stex
title: The sTeX Documentation
teaser: The full Documentation for the sTeX system
url-base: https://stexmmt.mathhub.info/:sTeX
dependencies:sTeX/ComputerScience/Software,sTeX/MathTutorial
ignore: */code/*|*/tikz/*|*/tutorial/solution/*
```

Many of these are in fact ignored by `sTeX`, but some are important:

`id`: The name of the `archive`, including its group (e.g. `sTeX/Document`). This is used by the `MMT` system in favor of the directory, but `TeX`'s limited access to the file system enforces the directory structure.

`source-base` or

`ns`: The namespace from which all `symbol` and `module MMT-URIs` in this `archive` are formed.

`narration-base`: The namespace from which all document `MMT-URI` in this repository are formed. It can safely match the `ns`-field.

`url-base`: A URL that is formed as a basis for *external references*. and hyperlinks. An `MMT` (or comparable system) instance should run there and host (`sTeX`-generated) `HTML`.

`dependencies`: All `archives` that this `archive` depends on. `sTeX` ignores this field, but `MMT` can pick up on them to resolve dependencies, e.g. when downloading `archives` in the `IDE`, which will also download all dependencies.

`ignore`: A regular expression of `.tex` files in the `source` directory that should be ignored; e.g. they will not be compiled when building a whole directory or archive in the `IDE`.

5.3 The lib-Directory

A `math archive`/`archive` may have a `lib` directory primarily intended for preamble code, `packages`, `.bib` files, etc., the files in which can be referenced in various ways.

Additionally, a *group* of archives `group` may have an additional `archive` `group/meta-inf`. If this `meta-inf` archive has a `/lib`-subdirectory, they too will be considered by the following.

`\libinput` `\libinput` {`some/file`} searches for a file `some/file[.tex]` in

- the `lib`-directory of the current archive, and
- the `lib`-directory of a `meta-inf`-archive in (any of) the archive groups containing the current archive

and `\inputs` all found files in reverse order; e.g. `\libinput{preamble}` in a `.tex`-file in `sTeX/Documentation` will *first* input `.../sTeX/meta-inf/lib/preamble.tex` and then `.../sTeX/Documentation/lib/preamble.tex`.

`\libinput` will throw an error if *no* candidate for `some/file` is found.

`\libinput[some/archive]{some/file}` will do the same, but starting in the `lib` directory of the `math archive` `some/archive`.

`\libusepackage` `\libusepackage` [`package-options`] {`some/file`} searches for a file `some/file.sty` in the same way that `\libinput` does, but will call `\usepackage[package-options]{path/to/some/file}` instead of `\input`.

`\libusepackage` throws an error if not *exactly one* candidate for `some/file.sty` is found.

`\addmhbibresource` `\addmhbibresource` [`some/archive`] {`some/file`} searches for a file like `some/file.bib` in `some/archive`'s `lib` directory and calls `\addbibresource` to the result.

`\libusetikzlibrary` `\libusetikzlibrary` behaves like `\libusepackage` but looks specifically for tikz libraries and calls `\usetikzlibrary` on the results.

throws an error if not *exactly one* candidate for the library is found.

A good practice is to have individual `sTEX` fragments follow basically this document frame:

```
\documentclass{sTEX}
\libinput{preamble}
\setsectionlevel{<your preference>}
\begin{document}
\IfInputref{}{
...
\maketitle
\ifstexhtml \else \tableofcontents \fi
}
...
\IfInputref{}{\libinput{postamble}}
\end{document}
```

Then the `preamble.tex` files can take care of loading the generally required `packages`, setting presentation customizations etc. (per archive or archive group or both), and a `postamble.tex` can e.g. print the bibliography, index etc.

`\libusepackage` is particularly useful in such a `preamble.tex` when we want to use custom packages that are not part of a `TeX` distribution, or on CTAN. In this case we commit the respective packages in one of the `lib` folders and use `\libusepackage` to load them.

5.4 Basic Macros

`\sTeX` The `\sTeX` macro produces this S^ITeX logo. It is provided by the `sTEX-logo` package, `\stex` included with the `stex` package.

`\ifstexhtml` The `\ifstexhtml` conditional is *true* if the current compilation generates `HTML`, and *false* otherwise (i.e. generates `PDF`).

`\STEXinvisible` `\STEXinvisible{\langle code \rangle}`

Processes `\langle code \rangle`, but does not generate any output. In the `HTML`, `\langle code \rangle` is exported with `display:none`.

Can be used to declare formal content and preserve its semantics in `HTML` without generating output.

Chapter 6

Document Features

6.1 Document Fragments

sfragment (env.) To make reusability of document fragments more feasible, **STEX** provides the **sfragment** environment. `\begin{sfragment}[id=<id>,short=<short title>]{section title}` calls `\part`, `\chapter`, `\section`, `\subsection`, `\subsubsection`, `\paragraph` or `\ subparagraph` with argument `{section title}` depending on the current *section level* and availability, and increases the level accordingly.

The `<id>` can be used for cross-document references (see section 6.3).

blindfragment (env.) In the case where we want to increase the section level *without* producing a corresponding section header, the **blindfragment** environment can be used. This allows e.g. typesetting `\sections` before the first `\chapter`.

\skipfragment The `\skipfragment` macro “skips an **sfragment**”, i.e. it just steps the respective sectioning counter. This macro is useful, when we want to keep two documents in sync structurally, so that section numbers match up: Any section that is left out in one becomes a `\skipfragment`.

\setsectionlevel The `\setsectionlevel` macro sets the current section level to that provided as argument. This is particularly useful in the preamble of a document, as to be ignored in e.g. `\inputref` and make sure that sectioning proceeds as desired; e.g. `\setsectionlevel{section}` make sure that the first **sfragment** will be typeset as a `\section` (rather than e.g. a `\part`).

\currentsectionlevel The `\currentsectionlevel` macro produces the literal string corresponding to the current section level – e.g. within a chapter (but outside of a section), `\currentsectionlevel` produces “chapter”.
The `\Currentsectionlevel` macro does the same, but capitalizes the first letter; e.g. in the above situation, `\Currentsectionlevel` produces “Chapter”.

6.2 Using and Referencing Document Fragments

`\inputref` `\inputref [<archive>]{<file>}`

Inputs the file `<file>` in `<archive>`'s `source` directory. If `[<archive>]` is empty, the current `archive`'s `source` directory is used. If there is no current `archive`, `<file>` is resolved relative to the current file.

The file's content is processed within a `TEX` group when using `pdflatex`. When converting to `HTML` however, the file is not processed *at all*, and instead, a reference to the file is inserted, that can be replaced by the `HTML` generated by the referenced file by e.g. the `MMT` system.

This is the recommended method to assemble documents from individual `.tex` files.

`\mhinput` Like `\inputref`, but actually calls `\input` in both `PDF` and `HTML` mode. Useful for small fragments or those without `modules`, but generally `\inputref` should be preferred.

`\ifinputref` `\ifinputref` is a `TEX` conditional for whether the current file is currently processed via `\IfInputref` `\inputref`.

`\IfInputref {<true code>}{<false code>}` behaves like `\ifinputref{<true code>}\else{<false code>}\fi` when using `pdflatex`; in `HTML` mode however, *both* arguments are processed and marked-up accordingly, so a hosting server (like `MMT`) can dynamically decide which parts to show or omit.

`\mhgraphics` `\mhgraphics` If the `graphicx` package is loaded, `\mhgraphics` takes the same arguments as `\includegraphics`, with the additional optional key `archive`. It then resolves the file path in

`\mhgraphics[archive=some/archive]{some/image}` relative to the `source`-folder of the `some/archive` `archive`. If no `archive` is provided, the file path `some/image` is resolved relative to the current `archive` (if existent).

`\cmhgraphics` additional wraps the image in a `center`-environment.

`\lstinputmhlisting` `\lstinputmhlisting` Like `\mhgraphics`, but for `\lstinputlisting` instead of `\includegraphics`. Only defined if the `listings` package is loaded.

6.3 Cross-Document References

If we take features like `\inputref` and `\mhinput` (and the `sfragment` environment) seriously and build large documents modularly from individually compiling documents for sections, chapters and so on, cross-referencing becomes an interesting problem.

Say, we have a document `main.tex`, which `\inputrefs` a section `section1.tex`, which references a definition with label `some_definition` in `section2.tex` (subsequently also `\inputrefed` in `main.tex`). Then the numbering of the definition will depend on the *document context* in which the document fragment `section2.tex` occurs - in `section2.tex` itself (as a standalone document), it might be *Definition 1*, in `main.tex`

it might be *Definition 3.1*, and in `section1.tex`, the definition *does not even occur*, so it needs to be referenced by some other text.

What we would want in that instance is an equivalent of `\autoref`, that takes the document context into account to yield something like *Definition 1*, *Definition 3.1* or “*Definition 1 in the section on Foo*” respectively.

For that to work, we need to supply (up to) three pieces of information:

- The *label* of the reference target (e.g. `some_definition`),
- (optionally) the *file/document* containing the reference target (e.g. `section2`). This is not strictly necessary if the reference target occurs in the *same* document, but if not, we need to know where to find the label,
- (optionally) the document context, in which we want to refer to the reference target (e.g. `main`).

Additionally, the document in which we want to reference a label needs a title for external references.

```
\sref
\sref [archive=<archive1>,file=<file1>]
{<label>}[archive=<archive2>,file=<file2>,title=<title>]
```

This `macro` references *label* (declared in *file1* in `math archive <archive1>`). If the object (section, figure, etc.) with that label occurs (eventually) in the same document, `\sref` will ignore the second set of optional arguments and simply defer to `\autoref` if that command exists, or `\ref` if the `hyperref` package is not included.

If the referenced object does *not* occur in the current document however, `\sref` will refer to it by the object’s name as it occurs in the file *file2* in `archive <archive2>`, followed by the title.

In `HTML` mode, the reference additionally links to the `HTML` of the *file1*.¹⁰

This works by storing labels during compilation in a file *jobname*.`sref`, analogous to e.g. the `.toc`. Note that this consequently requires both `file1.tex` and `file2.tex` to have been compiled previously, to generate the `.sref` file.

For example, doing

```
\sref[file=tutorial/full.en]{sec:basics}[file=tutorial.en,title=the \stex Tutorial]
in this very document fragment ([sTeX/Documentation]macros/sref.en.tex) will yield
Part I (The Basics) in the \stex Tutorial if compiled itself, or if compiled as part of the
\stex manual, and will yield the \autoref link chapter 2 in the documentation (which
includes the tutorial).
```

```
\srefsetin
\srefsetin [<archive2>]{<file2>}{<title>}
```

Sets a default value for the optional arguments *archive2*, *file2* and *title* of `\sref`. If the second set of optional arguments in `\sref` are omitted, these default values are used. Particularly useful to set in a preamble.

```
\sreflabel
\sreflabel {<label>} sets a label analogous to \label{<label>}, but for use in \sref.
Note that for every \stex macro or environment that takes an optional id=<id>
argument, the <id> (if non-empty) generates an \sreflabel automatically.
For example, \begin{sfragment}[id=foo]{Foo} is equivalent to
\begin{sfragment}{Foo}\sreflabel{foo}.
```

`\extref` `\extref [archive=<archive1>,file=<file1>]
{<label>} {archive=<archive2>,file=<file2>,title=<title>}`

Like `\sref`, but with the third argument mandatory, `\extref` will *always* produce the output as if `<label>` would *not* occur in the current document.

Chapter 7

Modules and Symbols

7.1 Modules

A `module` is required to declare any new formal content such as `symbols` or `notations` (but not `variables`, which may be introduced anywhere).

↳ An `STEX module` corresponds to an `MMT/OMDOC theory`. As such
↳ it gets assigned an `MMT-URI` (*universal resource identifier*) of the form
↳ `~T~> <namespace>?<module-name>`.

`smodule (env.)` A new module is declared using the basic syntax

```
\begin{smodule}[options]{ModuleName}...\end{smodule}.
```

A module is required to declare any new formal content such as symbols or notations (but not variables, which may be introduced anywhere).

The `smodule`-environment takes several keyword arguments, all of which are optional:

- `title` (*token list*) to display in customizations.
- `style` (*string*)* for use in customizations, see [chapter 9](#)
- `id` (*string*) for cross-referencing, see `\sreflabel`.
- `ns` (*URI*) the namespace to use. *Should not be used, unless you know precisely what you're doing.* If not explicitly set, is computed from the containing file and `archive`'s namespace.
- `lang` (*language*) if not set, computed from the current file name (e.g. `foo.en.tex`).
- `sig` (*language*) see below.

`\STEXexport` `\STEXexport{<code>}` executes `<code>` immediately and every time the current `module` is being used.



For technical reasons, `\STEXexport` processes its content in the `expl3` category code scheme – what this means is that all spaces are ignored entirely, and the characters `_` and `:` are valid characters in `macro` names.

In practice, this means you will have to use the `~` character for spaces, and if you want to use a subscript `_`, you should use the `macro` `\c_math_subscript_token` instead.

Also, note that no *global macro* definitions should happen in `\STEXexport`; this can lead to unexpected behaviour if the containing `module` has been used previously in the current document.

7.1.1 Signature Modules, Languages, and Multilinguality

if the current file is a translation of a file with the same base name but a different language suffix, setting `sig=<lang>` will preload the `module` from that language file. This helps ensuring that the (formal) content of both `modules` is (almost) identical across languages and avoids duplication.

For example, we can have a file `Foo.en.tex`, that declares and documents a `module` `Foo` (using `\begin{smodule}{Foo}`). If we put a file `Foo.de.tex` next to it, we can do `\begin{smodule}[sig=en]{Foo}` to have all the content in the `module` `Foo` (as declared in `Foo.en.tex`) available and translate its document content to german.

The `MMT` backend, when serving `STEX` content as `HTML`, will always attempt to find documentation in the language corresponding to the context; e.g. a user's preference.

7.2 Symbol Declarations

`\symdecl` `\symdecl {<mname>}[<options>]`

The `\symdecl` `macro` is the simplest way to introduce a new `symbol`. If `<options>` contains `name=<name>`, then `<name>` is the *name* of the `symbol`; otherwise, `<mname>` is used for the *name*. Additionally, a `semantic macro` `\mname` is generated.

The starred variant `\symdecl*` does not generate a `semantic macro`, in which case the `name`-option is superfluous.

→ `\symdecl` introduces a new `MMT/OMDoc constant` in the current `module` (i.e. → `MMT/OMDoc theory`). Correspondingly, they get assigned the `MMT-URI` ↵ `<module-URI>?<constant-name>`.

`\symdecl` takes the following optional arguments:

`name` see above,

`args` the arity of the `symbol` and its `semantic macro`; may be a number `0...9` or a string consisting of the characters `i`, `a`, `b` and `B` of length ≤ 9 ,

`type` the `symbol`'s `type`,

`def` the `symbol`'s `definiens`,

`return` the `symbol`'s *return code* (see below), most commonly the `semantic macro` of a `mathematical structure`,

`assoc` how to resolve arguments of `mode` `a` or `B`; may be `pre`, `bin`, `binl`, `binr` or `conj`,

`reorder` how to reorder the arguments in `OMDoc` (*advanced*),

`role` `symbols` with certain roles are treated in particular ways in `MMT/OMDoc` (*advanced*),

`argtypes` `TODO11`.

`\textsymdecl` `\textsymdecl{<symbol>}[<options>]{<code>}`

Like `\symdecl`, but requires that the `symbol` has arity 0 (hence `\textsymdecl` does not take the `args`-option), and generates a `semantic macro` that takes no arguments in either text or math mode, and produces marked-up `<code>` as output.

Additionally, a `macro` `\<symbol>name` is generated that produces `<code>` without any semantic markup.

`\symdef` `\symdef{<symbol>}[<options>]{<notation>}`

Combines the functionalities and optional arguments of `\symdecl` and `\notation` in one.

7.2.1 Returns

Assume we have a `symbol` `foo` with `semantic macro` `\foo`, (exemplary) taking two arguments, and `return=<code>`. If we do `\foo{a}{b}!`, the return code is simply ignored. If we do `\foo{a}{b}` *without* the `!`, here is what happens:

1. `STEX` will replace `#1` and `#2` in `<code>` by `a` and `b`, yielding `<retcode>`.
2. `STEX` will insert `<retcode>\foo{a}{b}!` in the input token stream.

This means that `<code>` should contain at most `(arity of foo)` argument markers, and eat precisely one argument appended to `<code>`.

When in doubt, we recommend only using `semantic macros` for `mathematical structures` (with only optional arguments) and `\apply` (with only optional arguments) in `return`.

7.3 Referencing Symbols

`\symref` `\sr` `\symref{<symbol>}{<text>}`

The `\symref` macro (and its short version `\sr`) is the most general variant to mark-up arbitrary `LATEX` code `<text>` with the `symbol`.

¹¹TODO: experimental

This is as good a place as any other to explain how **STEX** resolves a string `symbol` to an actual `symbol`.

If `\symbol` is a `semantic macro`, then **STEX** has no trouble resolving `symbolname` to the full `MMT-URI` of the `symbol` that is being invoked.

However, especially in `\symname` (or if a `symbol` was introduced using `\symdecl*` without generating a `semantic macro`), we might prefer to use the `name` of a symbol directly for readability – e.g. we would want to write A `\symname{natural number}` is... rather than A `\symname{Nat}` is.... **STEX** attempts to handle this case thusly:



If `symbol` does *not* correspond to a `semantic macro` `\symbol` and does *not* contain a ?, then **STEX** checks all `symbols` currently in scope until it finds one, whose name is `symbol`. If `symbol` is of the form `pre?name`, **STEX** first looks through all `modules` currently in scope, whose full `MMT-URI` ends with `pre`, and then looks for a symbol with name `name` in those. This allows for disambiguating more precisely, e.g. by saying `\symname{Integers?addition}` or `\symname{RealNumbers?addition}` in the case where several additions are in scope.

M → `\symref{\symbol}{\text}` in MMT/OMDoc generates the term
 M → `<OMS name="\symbol URI"/>`.
 ~T →

`\symname` `\symname[pre=\pre,post=\post]{\symbol}`

`\sn` `\symname[pre=\pre,post=\post]{\symbol}`

`\Symname` If the `symbol` referenced by `\symbol` has name `name`, this is a shortcut for

`\Sn` `\symref{\symbol}{\pre\name\post}`.

`\sns` For example, given a symbol `agroup` with name `abelian group`, we can do `\symname[pre=Non-,post=s]{agroup}` to produce `Non-abelian groups`.

`\sn` is a shorter variant for `\symname`; `\Symname` and `\Sn` additionally capitalize the first letter. `\sns` and `\Sns` are short for `\sn [post=s]` and `\Sn [post=s]`, respectively.

`\srefsym` `\srefsym{\symbol}{\text}`
`\srefsymuri` `\srefsymuri{\symbol}{\text}`

turns `\text` into a link to

- The documentation of `\symbol`, if it occurs in the same document, or
- the `symbol`'s documentation online, based on the containing `math archive`'s `url-base`.

`\srefsymuri` does the same, but expects a `symbol`'s full `MMT-URI` as first argument. This is particularly useful for e.g. customizing highlighting (see [chapter 9](#)).

`\symuse` `\symuse{\symbol}` behaves exactly like a `semantic macro` for `\symbol`.

7.4 Notations and Semantic Macros

`\notation` `\notation{\symbol}{[options]}{code}`

introduces a new `notation` for the referenced `symbol`.

The starred variant `\notation*` sets this `notation` as the (new) default `notation`.

The optional arguments are:

- `prec=(opprec);(argprec 1)x...x(argprec n)`: An `operator precedence` and one `argument precedence` for each argument of the `semantic macro`. If no `argument precedences` are given, all `argument precedences` are equal to the `operator precedence`. By default, all `precedences` are 0, unless the `symbol` takes no argument, in which case the `operator precedence` is `\neginfpref` (negative infinity).
- `prec=nobrackets` is an abbreviation for `prec=\neginfpref;\infprec x...x\infprec`.
- `op=(code)`: An `operator notation`. If none is given, the notation component marked with `\maincomp` is used. If no `\maincomp` occurs in the `notation`, the default `operator notation` is `\symname{\symbol}`.
- `variant=(id)`: An id for this `notation`. The key `variant=` can be omitted; i.e. `\notation[foo]` is equivalent to `\notation[variant=foo]`.

`\comp` `\maincomp`

`\comp` is used to mark notation components in a `\notation` to be highlighted. Additionally, each `notation` can use `\maincomp` at most once to mark the *primary* notation component.



Ideally, `\comp` would not be necessary: Everything in a `notation` that is *not* an argument should be a notation component. Unfortunately, it is computationally expensive to determine where an argument begins and ends, and the argument markers `#n` may themselves be nested in other `macro` applications or `TeX` groups, making it ultimately almost impossible to determine them automatically while also remaining compatible with arbitrary highlighting customizations (such as tooltips, hyperlinks, colors) that users might employ, and that are ultimately invoked by `\comp`.



Note that it is required that

1. the argument markers `#n` never occur inside a `\comp`, and
2. no `semantic macros` may ever occur inside a `notation`.

Both criteria are not just required for technical reasons, but conceptionally meaningful:

The underlying principle is that the arguments to a `semantic macro` represent *arguments to the mathematical operation* represented by a `symbol`. For example, a `semantic macro` application `\plus{a}{b}` would represent *the actual addition of (mathematical objects) a and b*. It should therefore be impossible for `a` or `b` to be part of a notation component of `\plus`.

Similarly, a `semantic macro` can not conceptually be part of the `notation` of `\plus`,

since a `symbol` represents a *distinct (mathematical) concept* with *its own semantics*, and `notations` are syntactic representations of the very `symbol` to which the `notation` belongs.



If you want an argument to a `semantic macro` to be a purely syntactic parameter, then you are likely somewhat confused with respect to the distinction between the precise *syntax* and *semantics* of the `symbol` you are trying to declare (which happens quite often even to experienced `STEX` users, like us), and might want to give those another thought - quite likely, the concept you aim to implement does not actually represent a semantically meaningful (mathematical) concept, and you will want to use `\def` and similar native `LATEX` `macro` definitions rather than `semantic macros`.

`\setnotation` The first `notation` provided will stay the default `notation` unless explicitly changed:
`\setnotation{\langle symbol \rangle}{\langle id \rangle}` sets the default `notation` of `\langle symbol \rangle` to that with id `\langle id \rangle`.

7.4.1 Precedences and Bracketing

`\infprec` and `\neginfprec` represent *infinitely large* and *infinitely small precedences*, respectively.



`STEX` decides whether to insert parentheses by comparing `operator precedences` to a *downward precedence* p_d with initial value `\infprec`. When encountering a `semantic macro`, `STEX` takes the `operator precedence` p_{op} of the `notation` used and checks whether $p_{op} > p_d$. If so, `STEX` inserts parentheses.

When `STEX` steps into an argument of a `semantic macro`, it sets p_d to the respective `argument precedence` of the `notation` used.

Example 21

Consider `semantic macros` `\plus` and `\mult` taking two arguments, with `notations` $a + b$ and $a \cdot b$ respectively, and `precedences` 100 for `\plus` and 50 for `\mult`.

Consider `$(\plus{a, \mult{b, (\plus{c, d})}})$` (i.e. $a + b \cdot (c + d)$). Then:

1. `STEX` starts out with $p_d = \infprec$.
2. `STEX` encounters `\plus` with $p_{op} = 100$. Since $100 \not> \infprec$, it inserts no parentheses.
3. Next, `STEX` encounters the two arguments for `\plus`. Both have no specifically provided `argument precedence`, so `STEX` uses $p_d = p_{op} = 100$ for both and recurses.
4. Next, `STEX` encounters `\mult{b, ...}`, whose `notation` has $p_{op} = 50$.
5. We compare to the current downward `precedence` p_d set by `\plus`, arriving at $p_{op} = 50 \not> 100 = p_d$, so `STEX` again inserts no parentheses.

6. Since the **notation** of `\mult` has no explicitly set **argument precedences**, **STEX** again uses the **operator precedence** for the arguments of `\mult`, hence sets $p_d = p_{op} = 50$ and recurses.
7. Next, **STEX** encounters the inner `\plus{c, ...}` whose **notation** has $p_{op} = 100$. We compare to the current downward **precedence** p_d set by `\mult`, arriving at $p_{op} = 100 > 50 = p_d$ – which finally prompts **STEX** to insert parentheses, and we proceed as before.

\dobracket `\dobracket{<code>}` wraps parentheses around `{<code>}`.

\withbrackets `\withbrackets{<left>}{<right>}{<code>}` uses the opening and closing parentheses `<left>` and `<right>` for the next pair of parentheses automatically inserted in `{<code>}`.

7.4.2 Notations for Argument Sequences

The following **macros** can be used in **notations** that take **mode a** or **B** arguments:

\argssep `\argssep{<parameter token>}{<separator>}`

takes the elements of the argument sequence in position `<parameter token>` and separates them by `<separator>`.

Note that the first argument *must* be a parameter token of the form `#k`, and the argument at position `k` of the **notation** has to have **argument mode a** or **B**.

\argmap `\argmap{<parameter token>}{<code>}{<separator>}`

takes the elements of the argument sequence in position `<parameter token>`, applies the code `{<code>}` to each of them (which therefore should use `##1`) and separates them by `<separator>`.

For example, the **notation** `{\argmap{#1}{X^{##1}}{++}}` applied to the argument `{a,b,c}` produces $X^a + X^b + X^c$.

\argarraymap `TODO12`

7.4.3 Semantic Macros

Assume we have a **semantic macro** `\smacro` taking (exemplary) two arguments. The precise behaviour of `\smacro` depends on whether we are in text or math mode.

Math Mode `\smacro!` produces the default **operator notation** of its **symbol**. Without `!`, `\smacro` expects at least two arguments, and `\smacro{a}{b}!` produces the default **notation** of its **symbol**.

If the **symbol** has a **return** code, then `\smacro{a}{b}` continues with executing the **return** code. Otherwise, `\smacro{a}{b}` also simply produces the default **operator notation**.

The starred variants `\smacro*` and `\smacro!*` behave as in *text mode*.

Text Mode `\smacro!{\langle arg\rangle}` marks up $\langle arg \rangle$ similarly to how `\symref{\smacro}{\langle arg\rangle}` would.

Without the `!`, `\smacro` still only takes a single argument, but it is expected, that within $\langle arg \rangle$, the arguments for the `symbol` are explicitly marked up. The `\comp` macro is allowed in $\langle arg \rangle$ to determine the components of $\langle arg \rangle$ to be highlighted.

`\arg` The `\arg` macro can be used to explicitly mark the arguments of a `semantic macro` in text mode.

By default, they are numbered consecutively; e.g. `\smacro{... \arg{a} ... \arg{b}}` determines `a` and `b` to be the (first and second) arguments.

The starred variant `\arg*` allows for marking up the arguments, but does not produce any output. This can be used to provide arguments that are not mentioned in the text we want to mark up, because they are implicitly obvious or mentioned elsewhere.

If we want to change the order of the arguments, we can provide the precise argument number as an optional argument; e.g. `\smacro{... \arg[2]{a} ... \arg[1]{b}}` determines `b` to be the first and `a` to be the second argument.

An argument number may be used repeatedly, if the corresponding `argument mode` is `a` or `B`.

M → Applications of `semantic macros` with arguments are translated to `MMT/OMDoc` as `OMA-terms` with head `<OMS name="⟨symbol⟩"/>`, or `<OMBIND name="⟨symbol⟩"/>`,
 M → depending on the absence or presence of `argument mode` `b` or `B` arguments.
 ~T → Semantic macros with no arguments or invoked with `!` correspond to `OMS` directly.

7.5 Simple Inheritance

There are three `macros` that allow for opening a `module`, making its contents available for use:

`\usemodule` `\usemodule{\langle module\rangle}` is allowed anywhere and makes the `module`'s contents available up to the current `TEX` group. This is the right `macro` to use outside of `modules`, or when none of its contents use any of the used `module`'s `symbols` directly (e.g. in `types` or `definientia`).

`\requiremodule` `\requiremodule{\langle module\rangle}` is only allowed in `modules` and makes the required `module`'s contents available within the current `module`. The imported `symbols` can be safely used in `types` and `definientia`, but not in the `return` code of `symbols`, and the imported content is not exported further – i.e. using the current `module` does not also open the required `module`.

`\importmodule` `\importmodule{\langle module\rangle}` is only allowed in `modules` and makes the required `module`'s contents available within the current `module`. The imported `symbols` can be safely used anywhere, and the imported content exported to any `modules` subsequently importing the current one.

$\hookrightarrow M \rightarrow$ In **MMT**, every **document** and every **module** induces an **MMT theory**. **\usemodule**
 $\dashv M \rightarrow$ induces and **MMT include** in the document **theory**, **\importmodule** and
 $\rightsquigarrow T \rightsquigarrow \requiremodule$ both induce an **include** in the **module's theory**.

It is worth going into some detail how exactly **\usemodule**, **\importmodule** and **\requiremodule** resolve their arguments to find the desired **module** – which is closely related to the *namespace* generated for a **module**, that is used to generate its **MMT-URI**.

Ideally, **STEX** would allow for arbitrary **MMT-URIs** for **modules**, with no forced relationships between the *logical namespace* of a **module** and the *physical location* of the file declaring it – like **MMT** in fact allows for.

Unfortunately, **TEX** only provides very restricted access to the file system, so we are forced to generate namespaces systematically in such a way that they reflect the physical location of the associated files, so that **STEX** can resolve them accordingly. Largely, users need not concern themselves with namespaces at all, but for completeness sake, we describe how they are constructed:



- If **\begin{smodule}{Foo}** occurs in a file `/path/to/file/Foo[.(lang)].tex` which does not belong to an **math archive**, the namespace is `file://path/to/file`.
- If the same statement occurs in a file `/path/to/file/bar[.(lang)].tex`, the namespace is `file://path/to/file/bar`.

In other words: outside of **math archives**, the namespace corresponds to the file URI with the filename dropped iff it is equal to the **module** name, and ignoring the (optional) language suffix.

If the current file is in an **archive**, the procedure is the same except that the initial segment of the file path up to the **archive**'s **source** directory is replaced by the **archive**'s namespace URI.

Conversely, here is how namespaces/URIs and file paths are computed in import statements, exemplary **\importmodule**:



- **\importmodule{Foo}** outside of an **archive** refers to **module Foo** in the current namespace. Consequently, Foo must have been declared earlier in the same file or, if not, in a file `Foo[.(lang)].tex` in the same directory.
- The same statement *within* an **archive** refers to either the **module Foo** declared earlier in the same file, or otherwise to the **module Foo** in the **archive**'s top-level namespace. In the latter case, it has to be declared in a file `Foo[.(lang)].tex` directly in the **archive**'s **source** directory.
- Similarly, in **\importmodule{some/path?Foo}** the path **some/path** refers to either the sub-directory and relative namespace path of the current directory and namespace outside of an **archive**, or relative to the current **archive**'s top-level namespace and **source** directory, respectively.

The **module Foo** must either be declared in the file `(top-directory)/some/path/Foo[.(lang)].tex`, or in `(top-directory)/some/path[.(lang)].tex` (which are checked in that order).



- Similarly, `\importmodule[Some/Archive]{some/path?Foo}` is resolved like the previous cases, but relative to the archive `Some/Archive` in the `MathHub` directory.

7.6 Variables and Sequences

`\vardef` `\vardef{\<name>}[\<options>]{\<notation>}`

Takes the same arguments as `\symdef`, but produces a `variable` rather than a `symbol`. `Variables` definitions are always local to the current `TeX` group and are allowed anywhere (i.e. outside of `modules`).

`<options>` may include the additional keyword `bind`, in which case the `variable` will be appropriately abstracted away in statements (see also `\varbind`).

Unlike `\symdef`, there is no starred variant `\vardef*` – `variables` always generate a semantic macro.

The semantic macro for a `variable` behaves analogously to that of a `symbol`.

`\varnotation` `\varnotation{\<variable>}[\<options>]{\<notation>}`

Takes the exact same arguments as `\notation`, but attaches an additional `notation` to the `variable` `<variable>` rather than a `symbol`.

`\svar` `\svar[\<name>]{\<text>}`

Semantically marks up `<text>` as representing a `variable` `<name>`. The `variable` does not need to have been defined prior. If no `<name>` is given, `<text>` will be used as the name.

This is useful in situations like “throwaway expressions” or remarks; e.g.

`$\plus{\svar{n}, \svar{m}}$` means...

`\varseq` `\varseq{\<name>}[\<options>]{\<range>}{\<notation>}`

Declares a new `variable` sequence. The `<options>` are the same as for `\vardef`. If not provided, `args=1` by default (a 0-ary sequence would just be a normal `variable`).

A `type` (given as `type=`) is interpreted to be the `type` of every element a_i of the sequence a_1, \dots, a_n (not of the sequence itself). If the `type` is itself a sequence A_1, \dots, A_n , the assumption is that its range is the same as the one of the new sequence, and the type of every a_i in the sequence is A_i .

`<range>` needs to be a comma-separated sequence of either `args` many arguments, or `\ellipses`.

The resulting semantic macro is allowed anywhere `STEX` expects an argument mode `a` or `B` argument.

\ellipses Represents ellipses in a range; produces `\ellipses` in math mode.

\seqmap `\seqmap{\langle code \rangle}{\langle sequence \rangle}`

Maps the function $\langle code \rangle$ (containing #1) over every element of the $\langle sequence \rangle$.
Is allowed anywhere STeX expects an argument mode a or B argument.

7.7 Structures

Mathematical structure bundle interdependent symbols together.

`mathstructure (env.)`

`\begin{mathstructure}{\langle mname \rangle}[\langle name \rangle, this=\langle code \rangle]` opens a new mathematical structure with name $\langle mname \rangle$ (if provided) or $\langle mname \rangle$ (otherwise), and semantic macro `\mname`. It subsequently behaves like the `smodule` environment.

\this

The optional `this=\langle code \rangle` option allows for setting the typesetting of the `\this` macro within a `mathstructure`. In particular, `\this` can be used in notations for symbols declared in the structure. `\this` can be thought of as representing “the” (current) instance of this structure.

`extstructure (env.)`

`\begin{extstructure}{\langle mname \rangle}[\langle name \rangle, this=\langle code \rangle]{\langle structs \rangle}` opens a new mathematical structure extending the structures given in $\langle structs \rangle$ (a comma-separated list of names).

`extstructure* (env.)`

`\begin{extstructure*}{\langle struct \rangle}` opens a new mathematical structure conservatively extending the (single) structure $\langle struct \rangle$. Conservative meaning: Every symbol newly introduced in this structure needs to have a definiens. The new symbols are attached as fields directly to $\langle struct \rangle$.

\usestructure

The `\usestructure` macro behaves like `\usemodule` for mathematical structures, making the symbols available to use directly.

`mathstructure` make use of the *Theories-as-Types* paradigm (see [MueRabKoh:tat18]):

`\begin{mathstructure}{\langle name \rangle}` creates a nested theory with name $\langle name \rangle$ -module. The constant $\langle name \rangle$ is defined as a dependent record type with manifest fields, the fields of which are generated from (and correspond to) the constants in $\langle name \rangle$ -module.

7.7.1 Semantic Macros for Structures

Assume we have a mathematical structure with semantic macro `\struct`:

Example 22

```
\begin{mathstructure}{\struct}
\symdef{fielda}{a}
\symdef{fieldb}[args=2]{#1 \maincomp{b} #2}
\symdef{fieldc}[args=2,def=\sn{fieldb}]{#1 \maincomp{c} #2}
```

```

\inliness[name=axiom1]{\conclusion{some axiom}}
\end{mathstructure}
\notation{struct}{StRuCt}

```

- If `\struct` has no `notations`, then `\struct!` produces $\langle a, b, c \rangle$. Otherwise, it produces the notation, i.e. `StRuCt`. In both cases, `\struct{}{}` produces $\langle a, b, c \rangle$ (for reasons that will become clearer in a moment).
- `\struct{}{}` (or `\struct!` in the case where no `notations` are around) can be modified in the following ways:
 - `\struct{}{{}}[\langle fieldname \rangle, ...]` lets you pick, which precise fields to show, so e.g. `\struct{}{{}}[fielda, fieldb]` produces $\langle a, b \rangle$. By default, `\struct{}{}` shows exactly the fields that have `semantic macros` (which are also used to access the fields in `\struct{{}}{\langle fieldname \rangle}`).
 - `\struct{}{{}}[\langle id \rangle]` lets you pick the `notation` of the “`mathematical structure`” symbol to use to typeset the `structure`; e.g. `\struct{}{{}}[parens]` yields $\langle a, b, c \rangle$, and (combining both) `\struct{}{{}}[fielda, fieldb][angle]` yields $\langle a, b \rangle$.
- The two arguments in `\struct{first}{second}` represent 1. the term that is to be treated as an instance of `\struct`, and 2. the precise field to invoke. If the first is empty, then there is no instance. If the second is empty, `StTeX` will present all of them (that are not assertions). Hence, `\struct{S}{{}}` yields $\langle a_S, b_S, c_S \rangle$, `\struct{S}{fielda}` produces a_S , `\struct{}{fielda}` produces a , and `\struct{S}{fieldb}{x}{y}` produces $x b_S y$.
- For the sake of completion, `\struct{first}!` simply produces the given argument; e.g. `\struct{S}!` simply produces S .

More precisely: `\struct{\langle code \rangle}` acts like a “type coercion” of $\langle code \rangle$ to be an instance of `\struct`.

Of course, it is (occasionally, but) rarely useful to use the `semantic macro` `\struct` by giving it two arguments *manually*; but this is what `StTeX` does when using `\struct` in the `return` of a `symbol` (or `variable`).

Continuing:

- `\struct[comp=\langle code \rangle]{...}{...}` applies $\langle code \rangle$ (using #1) to every occurrence of `\maincomp` in the `notations` of the fields, as a replacement for the default modification `\#1_{\this}`. For example, `\struct[comp=\#1^{\langle Foo \rangle}]{S}{{}` produces $\langle a^{F\!oo}, b^{F\!oo}, c^{F\!oo} \rangle$, and `\struct[comp=\#1^{\langle \this \rangle}]{S}{fieldb}{x}{y}` yields $x b_S y$.
- `\struct[this=\langle code \rangle]{...}{...}` modifies the way `\this` is being typeset; i.e. the presentation of the first `{...}` argument. For example `\struct[this=T]{S}{{}}` produces $\langle a, b, c \rangle$ – since `\this` is not being used in the `notations` of the fields. Note that the `this=` and `comp=` variants are (as of yet) mutually incompatible.
- Finally, `\struct[\langle fieldname \rangle=\langle code \rangle]{...}{...}` assigns the field $\langle fieldname \rangle$ to the term $\langle code \rangle$. $\langle code \rangle$ is subsequently used when using `{...}{}`, but not in fields directly. For example, `\struct[fielda=A]{S}{{}}` produces $\langle A!, b_S, c_S \rangle$, but `\struct[fielda=A]{S}{fielda}` produces a_S .

Note the insertion of ! behind the A – this is to make sure that assignments to [semantic macros](#) that takes arguments don't accidentally eat more than they should.

Also note that multiple assignments can be done in the same pair of [], or chained – i.e. both `$\struct{fielda=A,fieldb=B}...` and `$\struct{fielda=A}[fieldb=B]...` are valid and equivalent. `$\struct{fielda=A,fielda=B}...` however is not – every field may be assigned at most once.

Chapter 8

Statements

STEX provides four environments to semantically annotate various kinds of statements:

sdefinition (*env.*) The **sdefinition environment** represents (primarily mathematical) *definitions*; in particular for **symbols**. The contents of the environment will be used as *documentation* for any **symbol** that either occurs as a **\definiendum** (or **\definename**) within the **sdefinition**, or that is listed in the optional **for=** argument of the **environment**.

If a **\definiens** occurs, this will be used by **MMT** as the formal definiens for the respective **symbol**.

sassertion (*env.*) The **sassertion environment** represents *assertions*, i.e. **propositions** such as *theorems, lemmata, axioms*, etc. If a **\conclusion** occurs within the **sassertion**, its argument will be used as the formal *statement* of the assertion.

sexample (*env.*) The **sexample environment** represents examples (or counterexamples).

sparagraph (*env.*) The **sparagraph environment** represents all other kinds of (logical) paragraphs, such as remarks, comments, transitions between topics, recaps, reminders, etc.

All of these take the same arguments:

- **for=(csl)**: a comma-separated list of **symbols**.
- The same optional arguments as **\symdecl**, with **macro=** replacing the name of the **semantic macro**. All of them are only relevant, if either **name=** or **macro=** are provided.

As with **\symdecl**, if no **name** is given, but **macro** is, then the same name is used for both the **semantic macro** and the **symbol** itself.

If **name** is given but **macro** isn't, no **semantic macro** is generated. Subsequently, the newly generated **symbol** is added to the **for**-list.

- **style**: see **chapter 9**.
- **title**: a title to use in various styles (see **chapter 9**).
- **id**: a label to use for **\sref**.

\inlineass The macros `\inlineass`, `\inlinedef` and `\inlineex` behave like the `sassertion`, `sdefinition` and `sexample` environments respectively, but take the text to annotate as an argument, rather than as the body of an environment, and do not break paragraphs.

The same macros available in the environments are also available in the argument of the `\inline*` macros.

\varbind `\varbind{\langle cls \rangle}`

retroactively attaches the `bind` option to every `variable` provided (as a comma-separated list).

8.1 More on Definitions

In `sdefinition` (and `sparagraph` with `style=symdoc`), the following additional macros are available:

\definiendum The `\definiendum` macro behaves largely like `\symref`, but it uses a dedicated highlighting for `definienda` and adds the referenced `symbol` to the `for=` list of the environment.
\defname `\defname` is to `\definiendum` as `\symname` is to `\symref`. Analogously, `\Defname` behaves like `\Symname`.

`\defnotation` can be used in math mode to apply the `\definiendum` highlighting to `notations`.

\definiens The `\definiens` macro can be used to semantically annotate the `definiens` in a `sdefinition`.

If the `sdefinition` environment has several elements in its `for` list, an optional argument `\definiens[\langle symbol \rangle]{...}` can be used to tell `STEX` which `symbol`'s definiens this is. By default, the *first* `symbol` in the `for` list is used.

Here is how `MMT` will treat the fragment marked up with `\definiens`:

Firstly, it will attempt to translate its contents into an `MMT/OMDoc` term. This succeeds easily if `\definiens` is some semantic macro (applied to arguments).

Secondly, it will check for all `variables` currently in scope, that were defined with the optional argument `bind`. It then will check, whether a `symbol` is in scope, that has `role=lambda`. If so, it will use that `lambda symbol` to bind all these variables (in the order in which they were defined) in the term. If no `lambda symbol` is found, it will use the `bind symbol` that ships with `STEX`.

The final term will be attached as definiens to the corresponding `MMT` constant, if it was declared in the same `module` as the `\definiens` occurrence.

8.2 More on Assertions

\premise
\conclusion

The `\conclusion` macro can be used to mark up the actual statement within an `sassertion`. The `\premise` macro can be used to additionally mark up *premises*.

If the `sassertion` environment has several elements in its `for` list, an optional argument `\conclusion[⟨symbol⟩]{...}` can be used to tell `STEX` which `symbol`'s statement this is. By default, the *first symbol* in the `for` list is used.

Here is how `MMT` will treat the fragments marked up with `\conclusion` and `\premise`:

Firstly, it will attempt to translate the contents of `\conclusion` into an `MMT/OM-Doc` term c . This succeeds easily if the `\conclusion` is some semantic macro (applied to arguments).

Secondly, it will collect all fragments marked up with `\premise` and do the same to them (p_1, \dots, p_n).

It will then check, whether a `symbol` is in scope, that has `role=implication`. If so, it will use that `implication symbol` to attach all the premises to the conclusion, resulting in $t := \text{imply}(p_1, \dots, p_n, c)$.

Next, it will check for all `variables` currently in scope, that were defined with the optional argument `bind`. It then will check, whether a `symbol` is in scope, that has `role forall`. If so, it will use that `forall symbol` to bind all these variables (in the order in which they were defined) in the term t .

Finally, it will check, whether a `symbol` is in scope, that has `role=judgment`. If so, it will set $t := \text{judgment}(t)$.

If no `forall symbol` is found, it will first apply the `judgment symbol` (if existent) and then use the `bind symbol` that ships with `STEX` to bind the `variables`.

The final term will be attached as `type` to the corresponding `MMT constant`, if it was declared in the same `module` as the `\definiens` occurrence.

`sproof (env.)`

TODO¹³

¹³TODO: proofs

Chapter 9

Customizing Typesetting

There are two kinds of typesetting that can be customized in **STEX**: **symbol** references (**notation** components, `\symref`, **variables**, etc.) are highlighted using a small set of **macros** that can be simply redefined by authors.

Other **macros** and **environments** usually have more complicated “typesetting rules” associated with them – often in the form of other already existing **environments** that should be used.

Lastly, in **HTML** we can provide custom CSS rules in **math archives** that determine the styling of certain **environments**, so that the actual presentation depends on the document in which the fragments are included (e.g. via `\inputref`), rather than the file the fragment is implemented in.

It is generally recommended to implement these customizations in a preamble in the `lib` directory (see [section 5.3](#))

9.1 Highlighting Symbol References

`\symrefemph`
`\symrefemph@uri`

`\symrefemph` governs how references via `\symref` (or `\symname`, or their short variants) are highlighted;

Doing `\symref{<symbol>}{<text>}` ultimately expands to `\symrefemph@uri{<text>}{{<symbol URI>}}`, the default implementation of which is just `\symrefemph{<text>}`. The default implementation of `\symrefemph`, in turn, is just `\emph{<text>}`.

If you only want to change e.g. the color of `\symrefs`, you only need to redefine `\symrefemph`, e.g. using

```
\renewcommand\symrefemph[1]{\textcolor{red}{#1}}
```

the `@uri` variant is useful if you want to link somewhere, or show the URI in a tooltip. The **stex-highlighting package** does both, using:

```
\usepackage{pdfcomment}
\protected\def\symrefemph@uri#1#2{%
  \pdftooltip{%
    \srefsymuri{#2}{\symrefemph{#1}}%
  }{%
    URI:~\detokenize{#2}%
  }%
```

```

}
\def\symrefemph#1{%
  \ifcsname textcolor\endcsname
    \textcolor{teal}{#1}%
  \else#1\fi
}

```

`\compemph` Like `\symrefemph` and `\symrefemph@uri`, but governs the highlighting of components
`\compemph@uri` (marked with `\comp` or `\maincomp`) in `notations`.

`\defemph` Like `\symrefemph` and `\symrefemph@uri`, but governs the highlighting of definienda
`\defemph@uri` marked with `\definiendum` (or `\definename`).

`\varemph` Like `\compemph` and `\compemph@uri`, but governs the highlighting of components (marked
`\varemph@uri` with `\comp` or `\maincomp`) in the `notations` of `variables`.
The second argument to `\varemph@uri` is the *name* of the `variable`.

9.2 Styling Environments and Macros

A variety of `environments` and `macros` provided by `STEX` are *stylistable* using the `macros` `\stextstyle{name}[\langle style \rangle]{...}`. These *stylistable environments* and `macros` bind various of their parameters to `macros` `\this{parameter}`, which can then be used in the styles.

For example, if we have a `definition environment` that we would want to use to style our `sdefinitions`, we can do (in the simplest case)

```
\stextstyledefinition{\begin{definition}}{\end{definition}}
```

This tells `STEX` to insert `\begin{definition}` at the beginning of every `sdefinition environment`, and `\end{definition}` at the end.

If we have a `environments theorem` and `lemma`, we probably want the `sassertion environment` to use those for theorems and lemma. We can achieve that by doing

```
\stextstyleassertion[theorem]{\begin{theorem}}{\end{theorem}}
\stextstyleassertion[lemma]{\begin{lemma}}{\end{lemma}}
```

Now if we do `\begin{sassertion}[style=theorem]`, it will wrap the `environment` with `\begin{theorem}... \end{theorem}`.

Of course, many such statements might have a title, as e.g. in

Theorem 9.2.1 (Gödel's First Incompleteness Theorem). ...

In `sassertion`, we can provide that title as optional argument using `title=....` Before calling the styling provided, `sassertion` will store that title in the macro `\thistitle`, which we can use in the styling. For example, we might prefer to pass it on to the `theorem environment`:

```
\stextstyleassertion[theorem]{\ifx\thistitle\empty
  \begin{theorem}\else\begin{theorem}[\thistitle]\fi
  \end{theorem}}
```

```
\stexstylemodule           TODO14
\stexstylecopymodule
\stexstyleinterpretmodule
\stexstylerealization
\stexstylemathstructure
\stexstyleextstructure
\stexstyledefinition
\stexstyleassertion
\stexstyleexample
\stexstyleparagraph
\stexstyleproof
\stexstylesubproof
```

Additionally, we can style certain [macros](#), if we want them to produce output. For example, we might (for debuggin or documentation purposes) `\symdecl` to give a short summary of the symbol.

We can achieve that by doing, for example:

```
\stexstylesymdecl[debug]{
    Symbol \thisdeclname~(with arity \thisargs) of type \$\thistype$.
```

in which case

```
\symdecl{foo}[args=2,type=\mathbb{N},style=debug]
```

will yield

```
Symbol foo (with arity ii) of type N.
```

```
\stexstyleusemodule
\stexstyleimportmodule
\stexstylerequiremodule
\stexstyleassign
\stexstylerenamedecl
\stexstyleassignMorphism
\stexstylecopymod
\stexstyleinterpretmod
\stexstylerealize
\stexstylesymdecl
\stexstyleextsymdecl
\stexstylenotation
\stexstylevarnotation
\stexstylesymdef
\stexstylevardef
\stexstylevarseq
\stexstylepsfsketch
\stexstyleMMTinclude
```

9.3 Custom CSS for Environments

Chapter 10

Additional Packages

10.1 NotesSlides Manual

10.1.1 Introduction

The `notesslides` document class is derived from `beamer.cls` [`beamerclass:on`], it adds a “notes version” for course notes that is more suited to printing than the one supplied by `beamer.cls`.

The `notesslides` class takes the notion of a slide frame from Till Tantau’s excellent `beamer` class and adapts its notion of frames for use in the `STEX` and OMDoc. To support semantic course notes, it extends the notion of mixing frames and explanatory text, but rather than treating the frames as images (or integrating their contents into the flowing text), the `notesslides` package displays the slides as such in the course notes to give students a visual anchor into the slide presentation in the course (and to distinguish the different writing styles in slides and course notes).

In practice we want to generate two documents from the same source: the slides for presentation in the lecture and the course notes as a narrative document for home study. To achieve this, the `notesslides` class has two modes: *slides mode* and *notes mode* which are determined by the package option.

10.1.2 Package Options

The `notesslides` class takes a variety of class options:

`slides` The options `slides` and `notes` switch between slides mode and notes mode (see [subsection 10.1.3](#)).

`sectocframes` If the option `sectocframes` is given, then for the `sfragments`, special frames with the `sfragment` title (and number) are generated.

`frameimages` If the option `frameimages` is set, then slide mode also shows the `\frameimage`-generated `fiboxed` frames (see [??](#)). If also the `fiboxed` option is given, the slides are surrounded by a box.

10.1.3 Notes and Slides

frame (*env.*) Slides are represented with the **frame** environment just like in the **beamer** class, see [Tantau:ugbc] for details.

note (*env.*) The **notesslides** class adds the **note** environment for encapsulating the course note fragments.



Note that it is essential to start and end the **notes** environment at the start of the line – in particular, there may not be leading blanks – else L^AT_EX becomes confused and throws error messages that are difficult to decipher.

By interleaving the **frame** and **note** environments, we can build course notes as shown here:

```
1 \ifnotes\maketitle\else
2 \frame[noframenumbering]\maketitle\fi
3
4 \begin{note}
5   We start this course with ...
6 \end{note}
7
8 \begin{frame}
9   \frametitle{The first slide}
10 ...
11 \end{frame}
12 \begin{note}
13   ... and more explanatory text
14 \end{note}
15
16 \begin{frame}
17   \frametitle{The second slide}
18 ...
19 \end{frame}
20 ...
```

\ifnotes Note the use of the **\ifnotes** conditional, which allows different treatment between **notes** and **slides** mode – manually setting **\notestrue** or **\notesfalse** is strongly discouraged however.



We need to give the title frame the **noframenumbering** option so that the frame numbering is kept in sync between the slides and the course notes.




The **beamer** class recommends not to use the **allowframebreaks** option on frames (even though it is very convenient). This holds even more in the **notesslides** case: At least in conjunction with **\newpage**, frame numbering behaves funny (we have tried to fix this, but who knows).

\inputref* If we want to transclude a the contents of a file as a note, we can use a new variant `\inputref*` of the `\inputref` macro: `\inputref*{foo}` is equivalent to `\begin{note}\inputref{foo}\end{note}`.

nparagraph (env.) There are some environments that tend to occur at the top-level of `note` environments.
nparagraph (env.) We make convenience versions of these: e.g. the `nparagraph` environment is just an
ndefinition (env.) `sparagraph` inside a `note` environment (but looks nicer in the source, since it avoids one
nexample (env.) level of source indenting). Similarly, we have the `nfragment`, `ndefinition`, `nexample`,
nsproof (env.) `nsproof`, and `nassertion` environments.
nassertion (env.)

10.1.4 Customizing Header and Footer Lines

The `notesslides` package and class comes with a simple default theme named `sTeX` that provided by the `beamterthemesTeX`. It is assumed as the default theme for `sTeX`-based notes and slides. The result in `notes` mode (which is like the `slides` version except that the slide height is variable) is

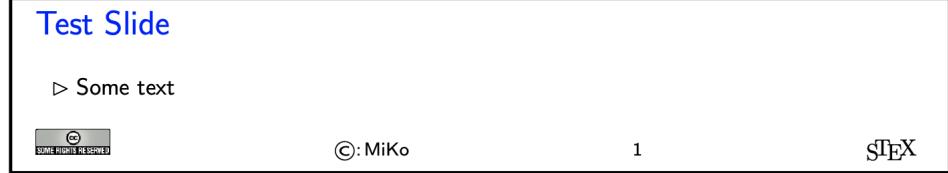

The footer line can be customized. In particular the logos.

\setslidelogo The default logo provided by the `notesslides` package is the `sTeX` logo it can be customized using `\setslidelogo{\langle logo name \rangle}`.

\setsource The default footer line of the `notesslides` package mentions copyright and licensing. In `notesslides` `\source` stores the author's name as the copyright holder. By default it is the author's name as defined in the `\author` macro in the preamble. `\setsource{\langle name \rangle}` can change the writer's name.

\setlicensing For licensing, we use the Creative Commons Attribution-ShareAlike license by default to strengthen the public domain. If package `hyperref` is loaded, then we can attach a hyperlink to the license logo. `\setlicensing[\langle url \rangle]{\langle logo name \rangle}` is used for customization, where `\langle url \rangle` is optional.

10.1.5 Frame Images

Sometimes, we want to integrate slides as images after all – e.g. because we already have a PowerPoint presentation, to which we want to add `sTeX` notes.

```
\frameimage  
\mhframeimage
```

In this case we can use `\frameimage[⟨opt⟩]{⟨path⟩}`, where `⟨opt⟩` are the options of `\includegraphics` from the `graphicx` package [CarRah:tpp99] and `⟨path⟩` is the file path (extension can be left off like in `\includegraphics`). We have added the `label` key that allows to give a frame label that can be referenced like a regular `beamer` frame.

The `\mhframeimage` macro is a variant of `\frameimage` with repository support. Instead of writing

```
1 \frameimage{\MathHub{fooMH/bar/source/baz/foobar}}
```

we can simply write (assuming that `\MathHub` is defined as above)

```
1 \mhframeimage[fooMH/bar]{baz/foobar}
```

Note that the `\mhframeimage` form is more semantic, which allows more advanced document management features in `MathHub`.

If `baz/foobar` is the “current module”, i.e. if we are on the `MathHub` path `...MathHub/fooMH/bar...`, then stating the repository in the first optional argument is redundant, so we can just use

```
1 \mhframeimage{baz/foobar}
```

```
\textwarning
```

The `\textwarning` macro generates a warning sign: 

10.1.6 Ending Documents Prematurely

```
\prematurestop  
\afterprematurestop
```

For prematurely stopping the formatting of a document, S^TE_X provides the `\prematurestop` macro. It can be used everywhere in a document and ignores all input after that – backing out of the `sfragment` environments as needed. After that – and before the implicit `\end{document}` it calls the internal `\afterprematurestop`, which can be customized to do additional cleanup or e.g. print the bibliography.

`\prematurestop` is useful when one has a driver file, e.g. for a course taught multiple years and wants to generate course notes up to the current point in the lecture. Instead of commenting out the remaining parts, one can just move the `\prematurestop` macro. This is especially useful, if we need the rest of the file for processing, e.g. to generate a theory graph of the whole course with the already-covered parts marked up as an overview over the progress; see `import_graph.py` from the `lmhtools` utilities [lmhtools:github:on].

Text fragments and modules can be made more re-usable by the use of global variables. For instance, the admin section of a course can be made course-independent (and therefore re-usable) by using variables (actually token registers) `courseAcronym` and `courseTitle` instead of the text itself. The variables can then be set in the S^TE_X preamble of the course notes file.

10.1.7 Global Document Variables

To make document fragments more reusable, we sometimes want to make the content depend on the context. We use **document variables** for that.

\setSGvar `\setSGvar{\<vname>}{\<text>}` to set the global variable `\<vname>` to `\<text>` and **\useSGvar** `\useSGvar{\<vname>}` to reference it.

\ifSGvar With `\ifSGvar` we can test for the contents of a global variable: the macro call `\ifSGvar{\<vname>}{\<val>}{\<ctext>}` tests the content of the global variable `\<vname>`, only if (after expansion) it is equal to `\<val>`, the conditional text `\<ctext>` is formatted.

10.1.8 Excursions

In course notes, we sometimes want to point to an “excursion” – material that is either presupposed or tangential to the course at the moment – e.g. in an appendix. The typical setup is the following:

```
1 \excursion{founif}{../fragments/founif.en}
2   {We will cover first-order unification in}
3 ...
4 \begin{appendix}\printexcursions\end{appendix}
```

It generates a paragraph that references the excursion whose source is in the file `../fragments/founif.en.tex` and automatically books the file for the `\printexcursions` command that is used here to put it into the appendix. We will look at the mechanics now.

\excursion The `\excursion{\<ref>}{\<path>}{\<text>}` is syntactic sugar for

```
1 \begin{nparagraph}[title=Excursion]
2   \activateexcursion{founif}{../ex/founif}
3   We will cover first-order unification in \sref{founif}.
4 \end{nparagraph}
```

\activateexcursion Here `\activateexcursion{\<path>}` augments the `\printexcursions` macro by a call `\inputref{\<path>}`. In this way, the `\printexcursions` macro (usually in the appendix) will collect up all excursions that are specified in the main text.

Sometimes, we want to reference – in an excursion – part of another. We can use `\excursionref{\<label>}` for that.

\excursiongroup Finally, we usually want to put the excursions into an `sfragment` environment and add an introduction, therefore we provide the a variant of the `\printexcursions` macro: `\excursiongroup[id=\<id>, intro=\<path>]` is equivalent to

```
1 \begin{note}
2 \begin{sfragment}[id=<id>]{Excursions}
3   \inputref{<path>}
4   \printexcursions
5 \end{sfragment}
6 \end{note}
```



When option `book` which uses `\pagestyle{headings}` is given and semantic macros are given in the `sfragment` titles, then they sometimes are not defined by the time the heading is formatted. Need to look into how the headings are made. This is a problem of the underlying document-structure package.

Local Variables: mode: latex TeX-master: .../**stex-manual** End:

10.2 Problem Manual

10.2.1 Introduction

The `problem` package supplies an infrastructure that allows specify problem. Problems are text fragments that come with auxiliary functions: hints, notes, and solutions¹⁶. Furthermore, we can specify how long the solution to a given problem is estimated to take and how many points will be awarded for a perfect solution.

Finally, the `problem` package facilitates the management of problems in small files, so that problems can be re-used in multiple environment.

10.2.2 Problems and Solutions

`solutions` The `problem` package takes the options `solutions` (should solutions be output?), `notes` (should the problem notes be presented?), `hints` (do we give the hints?), `gnotes` (do we show grading notes?), `pts` (do we display the points awarded for solving the problem?), `min` (do we display the estimated minutes for problem soling). If theses are specified, then the corresponding auxiliary parts of the problems are output, otherwise, they remain invisible.

`boxed` The `boxed` option specifies that problems should be formatted in framed boxes so that they are more visible in the text. Finally, the `test` option signifies that we are in a test situation, so this option does not show the solutions (of course), but leaves space for the students to solve them.

`problem (env.)` The main environment provided by the `problem` package is (surprise surprise) the `problem` environment. It is used to mark up problems and exercises. The environment takes an optional KeyVal argument with the keys `id` as an identifier that can be reference later, `pts` for the points to be gained from this exercise in homework or quiz situations, `min` for the estimated minutes needed to solve the problem, and finally `title` for an informative title of the problem.

Example 23

Input:

¹⁶for the moment multiple choice problems are not supported, but may well be in a future version

```

1 \documentclass{article}
2 \usepackage[solutions,hints,pts,min]{problem}
3 \begin{document}
4 \begin{sproblem}[id=elefants,pts=10,min=2,title=Fitting Elefants]
5 How many Elefants can you fit into a Volkswagen beetle?
6 \begin{hint}
7 Think positively, this is simple!
8 \end{hint}
9 \begin{exnote}
10 Justify your answer
11 \end{exnote}
12 \begin{solution}[for=elefants]
13 Four, two in the front seats, and two in the back.
14 \begin{gnote}
15 if they do not give the justification deduct 5 pts
16 \end{gnote}
17 \end{solution}
18 \end{sproblem}
19 \end{document}

```

Output:

Exercise (Fitting Elefants)

How many Elefants can you fit into a Volkswagen beetle?

solution (env.) The **solution** environment can be used to specify a solution to a problem. If the package option **solutions** is set or **\solutionstrue** is set in the text, then the solution will be presented in the output. The **solution** environment takes an optional KeyVal argument with the keys **id** for an identifier that can be referenced **for** to specify which problem this is a solution for, and **height** that allows to specify the amount of space to be left in test situations (i.e. if the **test** option is set in the **\usepackage** statement).

hint (env.) The **hint** and **exnote** environments can be used in a **problem** environment to give hints
exnote (env.) and to make notes that elaborate certain aspects of the problem. The **gnote** (grading)
gnote (env.) notes environment can be used to document situations that may arise in grading.

\startsolution Sometimes we would like to locally override the **solutions** option we have given to
\stopsolution the package. To turn on solutions we use the **\startsolution**, to turn them off,
\stopsolution. These two can be used at any point in the documents.

\ifsolutions Also, sometimes, we want content (e.g. in an exam with master solutions) conditional
on whether solutions are shown. This can be done with the **\ifsolutions** conditional.

10.2.3 Markup for Added-Value Services

The **problem** package is all about specifying the meaning of the various moving parts of practice/exam problems. The motivation for the additional markup is that we can base added-value services from these, for instance auto-grading and immediate feedback.

The simplest example of this are multiple-choice problems, where the `problem` package allows to annotate answer options with the intended values and possibly feedback that can be delivered to the users in an interactive setting. In this section we will give some infrastructure for these, we expect that this will grow over time.

Multiple Choice Blocks

`mcb` (*env.*) Multiple choice blocks can be formatted using the `mcb` environment, in which single choices are marked up with `\mcc` macro.

`\mcc` `\mcc[<keyvals>]{<text>}` takes an optional key/value argument `<keyvals>` for choice metadata and a required argument `<text>` for the proposed answer text. The following keys are supported

- `T` for true answers, `F` for false ones,
- `Ttext` the verdict for true answers, `Ftext` for false ones, and
- `feedback` for a short feedback text given to the student.

What we see when this is formatted to PDF depends on the context. In solutions mode (we start the solutions in the code fragment below) we get

Example 24

Input:

```

1 \startSolutions
2 \begin{sproblem}[title=Functions, name=functions1]
3 What is the keyword to introduce a function definition in python?
4 \begin{mcb}
5   \mcc[T]{def}
6   \mcc[F, feedback=that is for C and C++]{function}
7   \mcc[F, feedback=that is for Standard ML]{fun}
8   \mcc[F, Ftext=Noooooooooooo, feedback=that is for Java]{public static void}
9 \end{mcb}
10 \end{sproblem}

```

Output:

Exercise (Functions)

What is the keyword to introduce a function definition in python?

- def – Correct
that is for C and C++
- function – Wrong
that is for Standard ML
- fun – Wrong
that is for Java
- public static void – Nooooooooooooo
that is for Java

In “exam mode” where disable solutions (here via `\stopsolutions`)

Example 25

Input:

```
1 \stopsolutions
2 \begin{sproblem}[title=Functions,name=functions1]
3 What is the keyword to introduce a function definition in python?
4 \begin{mcb}
5   \mcc[T]{def}
6   \mcc[F,feedback=that is for C and C++]{function}
7   \mcc[F,feedback=that is for Standard ML]{fun}
8   \mcc[F,Ftext=Nooooooooo,feedback=that is for Java]{public static void}
9 \end{mcb}
10 \end{sproblem}
```

Output:

Exercise (Functions)

What is the keyword to introduce a function definition in python?

- def
- function
- fun
- public static void

we get the questions without solutions (that is what the students see during the exam/quiz).

Filling-In Concrete Solutions

The next simplest situation, where we can implement auto-grading is the case where we have fill-in-the-blanks

\fillinsol The `\fillinsol` macro takes a single argument, which contains a concrete solution (i.e. a number, a string, ...), which generates a fill-in-box in test mode:

Example 26

Input:

```
1 \stopsolutions
2 \begin{sproblem}[id=elefants.fillin,title=Fitting Elefants]
3 How many Elefants can you fit into a Volkswagen beetle? \fillinsol{4}
4 \end{sproblem}
```

Output:

Exercise (Fitting Elefants)

How many Elefants can you fit into a Volkswagen beetle?

and the actual solution in solutions mode:

Example 27

Input:

```
1 \begin{sproblem}[id=elefants.fillin,title=Fitting Elefants]
2 How many Elefants can you fit into a Volkswagen beetle? \fillinsol{4}
3 \end{sproblem}
```

Output:

Exercise (Fitting Elefants)

How many Elefants can you fit into a Volkswagen beetle?

If we do not want to leak information about the solution by the size of the blank we can also give `\fillinsol` an optional argument with a size: `\fillinsol[3cm]{12}` makes a box three cm wide.

Obviously, the required argument of `\fillinsol` can be used for auto-grading. For concrete data like numbers, this is immediate, for more complex data like strings “soft comparisons” might be in order. ¹⁷

¹⁷For the moment we only assume a single concrete value as correct. In the future we will almost certainly want to extend the functionality to multiple answer classes that allow different feedback like in MCQ. This still needs a bit of design. Also we want to make the formatting of the answer in solutions/test mode configurable.

10.2.4 Including Problems

\includeproblem

The `\includeproblem` macro can be used to include a problem from another file. It takes an optional KeyVal argument and a second argument which is a path to the file containing the problem (the macro assumes that there is only one problem in the include file). The keys `title`, `min`, and `pts` specify the problem title, the estimated minutes for solving the problem and the points to be gained, and their values (if given) overwrite the ones specified in the `problem` environment in the included file.

The sum of the points and estimated minutes (that we specified in the `pts` and `min` keys to the `problem` environment or the `\includeproblem` macro) to the log file and the screen after each run. This is useful in preparing exams, where we want to make sure that the students can indeed solve the problems in an allotted time period.

The `\min` and `\pts` macros allow to specify (i.e. to print to the margin) the distribution of time and reward to parts of a problem, if the `pts` and `pts` options are set. This allows to give students hints about the estimated time and the points to be awarded.

10.2.5 Testing and Spacing

The `problem` package is often used by the `hwexam` package, which is used to create homework assignments and exams. Both of these have a “test mode” (invoked by the package option `test`), where certain information –master solutions or feedback – is not shown in the presentation.

```
\testspace      \testspace takes an argument that expands to a dimension, and leaves vertical space accordingly. Specific instances exist: \testsmallspace, \testmediumspace, \testlargepage \testsmallspace give small (1cm), medium (2cm), and big (3cm) vertical space.  
\testsmallspace \testnewpage makes a new page in test mode, and \testemptypage generates an empty page with the cautionary message that this page was intentionally left empty.  
\testemptypage Local Variables: mode: latex TeX-master: ../stex-manual End:  
  LocalWords: solutions,notes,hints,gnotes,pts,min,boxed,test gnotes elefants,pts gnote  
  LocalWords: 2,title exnote hint,exnote,gnote ifsolutions mcb keyvals Ttext Ftext Local-  
  Words: Functions,name F,feedback Noooooooooo,feedback 2,title includeproblem Local-  
  Words: elefants.fillin,title
```

10.3 HWExam Manual

10.3.1 Introduction

The `hwexam` package and class supplies an infrastructure that allows to format nice-looking assignment sheets by simply including problems from problem files marked up with the `problem` package. It is designed to be compatible with `problems.sty`, and inherits some of the functionality.

10.3.2 Package Options

solutions The `hwexam` package and class take the options `solutions`, `notes`, `hints`, `gnotes`, `pts`, `min`, and `boxed` that are just passed on to the `problems` package (cf. its documentation for a description of the intended behavior).

gnotes

pts

min

multiple Furthermore, the `hwexam` package takes the option `multiple` that allows to combine multiple assignment sheets into a compound document (the assignment sheets are treated as section, there is a table of contents, etc.).

test Finally, there is the option `test` that modifies the behavior to facilitate formatting tests. Only in `test` mode, the macros `\testspace`, `\testnewpage`, and `\testemptypage` have an effect: they generate space for the students to solve the given problems. Thus they can be left in the L^AT_EX source.

10.3.3 Assignments

assignment (*env.*) This package supplies the `assignment` environment that groups problems into assignment sheets. It takes an optional KeyVal argument with the keys `number` (for the assignment number; if none is given, 1 is assumed as the default or — in multi-assignment documents `title` — the ordinal of the `assignment` environment), `title` (for the assignment title; this is referenced in the title of the assignment sheet), `type` (for the assignment type; e.g. “quiz”, `given` or “homework”), `given` (for the date the assignment was given), and `due` (for the date `due` the assignment is due).

10.3.4 Including Assignments

\inputassignment The `\inputassignment` macro can be used to input an assignment from another file. It takes an optional KeyVal argument and a second argument which is a path to the file containing the problem (the macro assumes that there is only one `assignment` environment in the included file). The keys `number`, `title`, `type`, `given`, and `due` are just as for the `assignment` environment and (if given) overwrite the ones specified in the `assignment` environment in the included file.

10.3.5 Typesetting Exams

testheading (*env.*) The `\testheading` takes an optional keyword argument where the keys `duration` specifies a string that specifies the duration of the test, `min` specifies the equivalent in number `min` of minutes, and `reqpts` the points that are required for a perfect grade.

```
1 \title{320101 General Computer Science (Fall 2010)}
2 \begin{testheading}[duration=one hour,min=60,reqpts=27]
3   Good luck to all students!
4 \end{testheading}
```

Will result in

Name:

Matriculation Number:

320101 General Computer Science (Fall 2010)

2023-04-06

You have one hour (sharp) for the test;

Write the solutions to the sheet.

The estimated time for solving this exam is 20 minutes, leaving you 40 minutes for revising your exam.

You can reach 20 points if you solve all problems. You will only need 27 points for a perfect score, i.e. -7 points are bonus points.

You have ample time, so take it slow and avoid rushing to mistakes!

Different problems test different skills and knowledge, so do not get stuck on one problem.

	To be used for grading, do not write here									
prob.	4.1	1.1	1.2	2.1	2.2	2.3	2.4	2.5	20	Sum
total	0	0	0	10	0	0	0	0	0	
reached										

good luck

18

Local Variables: mode: latex TeX-master: .../stex-manual End:

LocalWords: hwexam solutions,notes,hints,gnotes,pts,min gnotes testemptypage reqpts LocalWords: inputassignment reqpts hour,min 60,reqpts

10.4 Tikzinput Manual

image The behavior of the `ikzinput` package is determined by whether the `image` option is given. If it is not, then the `tikz` package is loaded, all other options are passed on to it and `\tikzinput{<file>}` inputs the TIKZ file `<file>.tex`; if not, only the `graphicx` package is loaded and `\tikzinput{<file>}` loads an image file `<file>.(<ext>)` generated from `<file>.tex`.

¹⁸MK: The first three “problems” come from the stex examples above, how do we get rid of this?

The selective input functionality of the `tikzinput` package assumes that the TIKZ pictures are externalized into a standalone picture file, such as the following one

```

1 \documentclass{standalone}
2 \usepackage{tikz}
3 \usetikzlibrary{...}
4 \begin{document}
5   \begin{tikzpicture}
6     ...
7   \end{tikzpicture}
8 \end{document}
```

The `standalone` class is a minimal L^AT_EX class that when loaded in a document that uses the `standalone` package: the preamble and the `document` environment are disregarded during loading, so they do not pose any problems. In effect, an `\input` of the file above only sees the `tikzpicture` environment, but the file itself is standalone in the sense that we can run L^AT_EX over it separately, e.g. for generating an image file from it.

`\tikzinput` This is exactly where the `tikzinput` package comes in: it supplies the `\tikzinput` macro, which – depending on the `image` option – either directly inputs the TIKZ picture (source) or tries to load an image file generated from it.

Concretely, if the `image` option is not set for the `tikzinput` package, then `\tikzinput[<opt>]{<file>}` disregards the optional argument `<opt>` and inputs `<file>.tex` via `\input` and resizes it to as specified in the `width` and `height` keys. If it is, `\tikzinput[<opt>]{<file>}` expands to `\includegraphics[<opt>]{<file>}`.

`\ctikzinput` is a version of `\tikzinput` that is centered.

`\mhtikzinput` `\cmhtikzinput` `\mhtikzinput` is a variant of `\tikzinput` that treats its file path argument as a relative path in a math archive in analogy to `\inputref`. To give the archive path, we use the `mhrepos=` key. Again, `\cmhtikzinput` is a version of `\mhtikzinput` that is centered.

`\libusetikzlibrary` Sometimes, we want to supply archive-specific TIKZ libraries in the `lib` folder of the archive or the `meta-inf/lib` of the archive group. Then we need an analogon to `\libinput` for `\usetikzlibrary`. The `stex-tikzinput` package provides the `libusetikzlibrary` for this purpose.

Local Variables: mode: latex TeX-master: `../stex-manual` End:

Part III

Documentation

Chapter 11

sTeX Developer Manual



Keeping the implementation properly up-to-date is pretty much incompatible with the kinds of workflows systemically enforced in academia. Any of the following may be out of date.

* indicates fully expandable functions, which can be used within an x-type argument (in plain TeX terms, inside an `\edef`), as well as within an f-type argument. ☆ indicates restricted expandable functions, which can be used within an x-type argument but cannot be fully expanded within an f-type argument. *TF* indicates conditional (if) functions whose variants with T, F and TF argument specifiers expect different “true”/“false” branches.

`\stex_debug:nn \stex_debug:nn {<prefix>} {<msg>}`

Logs the debug message `{<msg>}` under the prefix `{<prefix>}`. A message is shown if its prefix is in a list of prefixes given either via the package option `debug=<prefixes>` or the environment variable `STEX_DEBUG=<prefixes>`, where the latter overrides the former.

`_stex_do_deprecation:n` TODO `_stex_do_deprecation:n`

11.1 Documents

`\l_stex_docheader_sect` integer register keeping track of the current sectioning level:

- 0 part
- 1 chapter
- 2 section
- 3 subsection
- 4 subsubsection
- 5 paragraph
- > 5 subparagraph

`\setsectionlevel` sets `\l_stex_docheader_sect` to the corresponding integer value.

`\stex_ref_new_doc_target:n` internal variant of `\sreflabel`. If the argument is empty, the label is determined to be `REF<counter>` and `<counter>` is increased.

`\stex_ref_new_symbol:n` registers a new link target for the symbol with the given full uri (as string), using the `url-base`-field of the current archive's manifest file to link the symbol to `<url-base>/symbol?<uri>`.

`\stex_ref_new_sym_target:n` sets a new label for the symbol with the given full uri (as string). If called in sms-mode, defers to `\stex_ref_new_symbol:n`, if not already registered. Otherwise, sets a `\label` for the symbol.

`\stex_ref_new_sym_target:nn` `\stex_ref_new_sym_target:nn {<symbol>} {<target>}`

redirects links for `<symbol>` to the one for the symbol `<target>`. Useful for e.g. symbols elaborated from structural features. Note that this acts as a *default*, in that previous or subsequent calls of `\stex_ref_new_sym_target:n{<symbol>}` are prioritized.

Requires that either `\stex_ref_new_sym_target:n{<target>}` or `\stex_ref_new_sym_target:nn{<target>} {<other-target>}` have been called previously.

11.2 Modules

The contents of a module with full URI `<uri>` are represented as four macros:

- `\c_stex_module_<uri>_code`: code to be executed every time the module is activated; e.g. the contents of `\STEXexport`, defines semantic macros and macros for notations, activates dependency modules, etc.

- `\c_stex_module_<uri>_morphisms_prop`: property list containing all module dependencies of this module (see `\stex_module_add_morphism:nnn`).
- `\c_stex_module_<uri>symbols_prop`: property list containing all declarations in this module (see `\stex_module_add_symbol:nnnnnnN`).
- `\c_stex_module_<uri>_notations_prop`: property list containing all notations introduced in this module (see `\stex_add_module_notation:nnnnn`).

`\l_stex_current_module_str` contains the full URI of the current module.

`\l_stex_all_modules_seq` contains the full URIs of all modules currently in scope.

`\stex_module_setup:n \stex_module_setup:n {<name>}`

Computes the full URI of a new module with name `<name>` in the current namespace, initializes the four macros above and sets `\l_stex_current_module_str` accordingly. Also takes care of correct naming for nested modules, activates the meta theory and loads the signature module if `sig=` was provided (according to `\l_stex_key_sig_str`).

`\stex_close_module:` closes the current module; checks whether we are currently in sms mode, and if so, calls `\stex_persist:n` to write the module contents to the sms-file.

`\stex_every_module:n \stex_every_module:n {<code>}`

executes `<code>` every time a new module is opened.

`\stex_if_in_module_p: *` tests whether we are currently in a module.
`\stex_if_in_module:TF *`

`\stex_if_module_exists_p:n *`
`\stex_if_module_exists:nTF *`

tests whether a module with the given full URI exists, in the sense of *has been parsed at some point in the current document*.

`\stex_activate_module:n` activates the module with the given full URI *if and only if* it has not already been activated in the current scope.
`\stex_activate_module:(o|x)`

`\stex_execute_in_module:n` executes the provided code, adds it to the current module activation code, and makes sure the macros defined in it are valid in the current module TeX group level.
`\stex_execute_in_module:x`

This macro is a combination of the following two macros:

`\stex_do_up_to_module:n` executes the provided code such that all definitions in it are valid in the current module
`\stex_do_up_to_module:x` regardless of TeX group level (using `\stex_metagroup_do_in:nn`).

`\stex_module_add_code:n` adds the provided code to the module's `\c_stex_module_<uri>_code`-macro.
`\stex_module_add_code:x`

11.3 Symbols

A symbol in **STEX** is represented as a tuple of several components:

`\stex_module_add_symbol:nnnnnnnN`

#1 : `<id>`: An *identifier* (possibly empty) that determines its semantic macro name, or e.g. in `mathstructure` its accessor-identifier (if empty, the name is used for that),
#2 : `<name>` a unique *name*, which in combination with the containing module determines its URI as `<module-URI>?<name>`,
#3 : `<arity>` a numeric string in the range 0..9,
#4 : `<args>` a list of argument specifiers of the form `<i><mode>{<argname>}` (the length of `<args>` must be 3·`<arity>`),
#5 : `<definiens>` (or empty),
#6 : `<type>` (or empty),
#7 : `<return code>` (or empty), and
#8 : `<\invocation_macro>`.

the arguments are stored in the property list `\c_stex_module_<\l_stex_current_module>_symbols_prop` under key `<name>`.

If the identifier `<id>` is non-empty, the macro `\id` is defined as `{\stex_invoke_symbol:nnnnnnnN}` with the arguments described there.

TeXhackers note: `\invocation_macro` must be `\protected`.

`\stex_iterate_symbols:n`
`\stex_iterate_break:`

`\stex_iterate_symbols:n {<code>}`

`\stex_iterate_break:n`

iterates over all symbols currently in scope and calls `<code>` for all of them with arguments `{<module>} {<name>} {<arity>} {<args>} {<definiens>} {<type>} {<return code>} {<\invocation_macro>}`.

Iteration can be stopped prematurely with `\stex_iterate_break:` and can stop and return code with `\stex_iterate_break:n`.

`\stex_iterate_symbols:nn`

`\stex_iterate_symbols:nn {<csl>} {<code>}`

iterates over all symbols in the provided `<csl>` of full module URIs. `<code>` receives the same arguments as `\stex_iterate_symbols:n`, but iteration can not be stopped early.

```
\stex_get_symbol:n  
\l_stex_get_symbol_mod_str  
\l_stex_get_symbol_name_str  
\l_stex_get_symbol_arity_int  
\l_stex_get_symbol_args_tl  
\l_stex_get_symbol_def_tl  
\l_stex_get_symbol_type_tl  
\l_stex_get_symbol_return_tl  
\l_stex_get_symbol_invoke_cs
```

`\stex_get_symbol:n` attempts to find a symbol with the given name or id that is currently in scope. A name may be prefixed with a module name/path separated by `?`.

Throws an error if no such symbol is found; otherwise, sets the listed `\l_stex_get_symbol_...` macros to the components of the found symbol.

```
\stex_if_check_terms_p: * whether to typeset declaration components (notations, types, definientia etc.) in a throw-  
\stex_if_check_terms:TF * away box. Is true iff the backend is pdflatex and either the STEX_CHECKTERMS environment variable or checkterms package option is set.
```

`\stex_check_term:n` typesets the argument in a throwaway box in math mode iff `\stex_if_check_terms:` is true.

Is deactivated in sms-mode.

```
\stex_symdecl_do:  
\l_stex_key_name_str  
\l_stex_key_args_str  
\l_stex_key_argnames_clist  
\l_stex_assoc_args_count  
\l_stex_argnames_seq
```

`\stex_symdecl_do:` processes the shared (mandatory and optional) arguments of e.g. `\symdecl`, `\symdef`, `\vardef` etc.

Requires the following macros to be set

- `\l_stex_key_name_str`: the name of the symbol,
- `\l_stex_key_args_str`: the `args`-string (e.g. `3` or `ai`)
- `\l_stex_key_argnames_clist`: a list of *names* for the arguments, the length of which should be \leq the arity of the symbol

and will generate the following macros:

- `\l_stex_get_symbol_arity_int`: the arity of the symbol,
- `\l_stex_key_args_str`: the args string as a definite sequence of argument-mode characters, whose length is the arity of the symbol; e.g. `3` is turned into `iii`,
- `\l_stex_assoc_args_count`: the number of sequence arguments (i.e. `a` or `B` mode),
- `\l_stex_argnames_seq`: the full sequence of argument names; those not provided by `\l_stex_key_argnames_clist` are set to be `$j`, where `j` is the index of the argument,
- `\l_stex_get_symbol_args_tl`: a token list of triples `j{argname}`, where `j` is the index and `m` the respective argument mode character (i.e. `i`, `a`, `b` or `B`).

`_stex_symdecl_check_terms:`

calls `\stex_check_term:n` for the type and definiens stored in `\l_stex_key_type_tl` and `\l_stex_key_def_tl`

`\stex_symdecl_top:n \stex_symdecl_top:n {{maybename}}`

checks whether `\l_stex_key_name_str` is empty, and if so, sets it to be `<maybename>`. Then calls `\stex_symdecl_do:` and `_stex_symdecl_check_terms:`, writes the components to the HTML (if applicable) and adds the symbol to the current module with invocation macro `\stex_invoke_symbol:` and id/macroname `\l_stex_mroname_str`.

Variables work very similar to symbols, except that their declarations are local to the current TeX-group rather than the current module, and they are not exported in modules.

`\l_stex_variables_prop` stores all variables currently in scope as a property list with key `<name>` and value `{{id}}{{name}}{{arity}}{{args}}{{definiens}}{{type}}{{return code}}{{\invokation_macro}}`.
The invocation macro for “normal” variables declared with `\vardef` is `\stex_invoke_symbol:`.

`_stex_vardecl_notation_macro:`

generates the notation macro for a variable, based on the values of the `\l_stex_key-` macros und `\l_stex_notation_macrocode_cs`.

`\stex_get_var:n` like `\stex_get_symbol:n`, but attempts to retrieve a variables and throws an error if none is found.

`\stex_get_symbol_or_var:n` like `\stex_get_symbol:n`, but first attempts to find a *variable*, and if none is found, defers to `\stex_get_symbol:n`.

11.4 Notations

`\stex_module_add_notation:nnnnn \stex_module_add_notation:eoexo \stex_module_add_notation:nnnnn`
 `{{symboluri}}{{id}}{{arity}}{{code}}{{op code}}`

stores the arguments in the property list `\c_stex_module_{\l_stex_current_module}_notations_prop` under key `<symboluri>!<id>` and calls `\stex_set_notation_macro:nnnnn`.

```
\stex_set_notation_macro:nnnnn \stex_set_notation_macro:nnnnn
\stex_set_notation_macro:eoexo {symboluri}{id}{arity}{code}{op code}
```

Declares the following macros:

An active notation for a symbol with uri $\langle symboluri \rangle$ and id $\langle id \rangle$ is represented as a macro $\backslash l_stex_notation_{\langle symboluri \rangle}_{\langle id \rangle}_cs$, that takes $\langle arity \rangle$ many argument and expands to $\langle code \rangle$, and (if nonempty) an *operator* notation as a macro $\backslash l_stex_notation_{\langle symboluri \rangle}_op_{\langle id \rangle}_cs$ that expands to $\langle op code \rangle$.

The default notation is represented as the *empty* id. If the correponding macros $\backslash l_stex_notation_{\langle symboluri \rangle}_cs$, and $\backslash l_stex_notation_{\langle symboluri \rangle}_op__cs$ do not yet exist, they are now defined as $\langle id \rangle$.

```
\stex_iterate_notations:nn \stex_iterate_notations:nn {csl}{code}
```

iterates over all notations in the provided $\langle csl \rangle$ of full module URIs and calls $\langle code \rangle$ on each of them with arguments $\{symboluri\}{id}{arity}{code}{op code}$.

```
\stex_notation_parse_and_then:nw \stex_notation_parse_and_then:nw {code}{notations}
\l_stex_key_prec_str
\l_stex_key_variant_str
\l_stex_notation_macrocode_cs
```

parses a notation (which may consist of multiple braced components, depending on the argument modes) and subsequently calls $\langle code \rangle$.

Requires the following macros to be set:

- $\backslash l_stex_get_symbol_arity_int$,
- $\backslash l_stex_get_symbol_args_tl$,
- $\backslash l_stex_key_prec_str$: The precedence string as provided by a user in the optional `precs`-argument,
- $\backslash l_stex_key_variant_str$: the id of the notation variant.

Stores the final notation in the macro $\backslash l_stex_notation_macrocode_cs$ taking $\backslash l_stex_get_symbol_arity_int$ many arguments.

Some thing to consider when we generate a notation macro:

- The notation macro generated by the `\notation`-command should contain the variant identifier and the precedences, as these are intrinsic parts of the notation.
- It should *not* contain the symbol itself however, so that notations can be copied between symbols.
- Notations as provided by users will largely adhere to the standard L^AT_EX category code scheme, and
- notations need to be “persistable” in `.deps`-files.

We therefore want to augment the simple code provided by a user by various “annotations” that contain the relevant information (such as precedences) and to mark the

argument positions for semantic extractions, but we should adhere to the default L^AT_EX category code scheme in doing so.

```
\STEXInternalTermMathArgiii
\STEXInternalTermMathAssocArgiiii
\STEXInternalAssocArgMarkerI
\STEXInternalAssocArgMarkerII
\STEXInternalTermMathOMSOrOMViii
\STEXInternalTermMathOMAiii
\STEXInternalTermMathOMBiii
\STEXInternalSymbolAfterInvocationTL
```

In OPENMATH/OMDOC, there are (for our purposes) three kinds of expressions that an application of a semantic macro – and hence a notation macro – can represent, each of which corresponds to a macro taking care of the semantic annotations:

- OMS/OMV: a simple symbol (arity 0) (`\STEXInternalTermMathOMSOrOMViii`)
- OMA: an application of a symbol to argument (arity > 0, `\STEXInternalTermMathOMAiii`)
- OMB: a binding application of a symbol that binds/declares one or more variables (argument string contains b or B, `\STEXInternalTermMathOMBiii`).

The arguments are marked with `\STEXInternalTermMathArgiii` (i or b) or `\STEXInternalTermMathAssocArgiiii` (a or B). Finally, the notation is closed with `\STEXInternalSymbolAfterInvocationTL`.

How this works is best explained by example.

Example 28

Assume we have a symbol and notation:

```
1 \symdecl{someSymbol}[args=iai]
2 \notation{someSymbol}[prec=10;20x30x40,variant=foo]
3 {First: #1; Second: #2; Third: #3; End}
4 {(#1 -- ##1 split ##2 -- #3)}
```

Since the symbol corresponds to an OMA, the whole notation is wrapped in `\STEXInternalTermMathOMAiii`, taking as arguments the variant identifier (foo), the operator precedence (10) and the body of the notation.

The second argument in the notation, being associative, is wrapped in a `\STEXInternalTermMathAssocArgiiii`, taking as arguments the argument number (2), the precedence (30), the T_EX parameter token (#2) the notation body ((#1 -- ##1 split ##2 -- #3)), and finally the argument mode (a). Additionally, the markers ##1 and ##2 are replaced by `\STEXInternalAssocArgMarkerI` and `\STEXInternalAssocArgMarkerII`, respectively.

Subsequently, the non-sequence parameter tokens are wrapped in `\STEXInternalTermMathArgiii` with arguments mj (where m is the mode und j the index), the precedence (20 or 40 respectively), and the parameter token.

Finally, a `\STEXInternalSymbolAfterInvocationTL` is inserted.

The final expansion of `\l_stex_notation_macrocode_cs` is thus:

```
1 \STEXInternalTermMathOMAiii{foo}{10}{
2   First: \STEXInternalTermMathArgiii{i1}{20}{#1};
3   Second: \STEXInternalTermMathAssocArgiiii{2}{30}{#2}{
4     (\STEXInternalTermMathArgiii{i1}{20}{##1} --
```

```

5      \STEXInternalAssocArgMarkerI split
6      \STEXInternalAssocArgMarkerII --
7      \STEXInternalTermMathArgiii{i3}{40}{##3}
8  }{a};
9  Third: \STEXInternalTermMathArgiii {i3}{40}{#3}; End
10 }\STEXInternalSymbolAfterInvocationTL

```

`\stex_notation_top:nw` `\stex_notation_top:nw {<symboluri>}{<code>}`

calls `\stex_notation_parse_and_then:nw{<code>}` and, adds the notation for the symbol with URI `<symboluri>` to the current module and exports it to the HTML (if applicable).

11.5 Structural Features

`\stex_structural_feature_module:nn` `\stex_structural_feature_module:nn {<name>}{<typeid>}`
`\stex_structural_feature_module_end:` `\g_stex_last_feature_str`

opens a new module-like structural feature of type `<typeid>` with name `<name>`, which needs to be closed with `\stex_structural_feature_module_end:`.

Its body behaves like a nested module with name `<modulename>/<name>`, the full URI of which is stored in `\g_stex_last_feature_str` for subsequent elaboration.

```
\stex_structural_feature_morphism:nnnnn
\stex_structural_feature_morphism_end: \stex_structural_feature_morphism:nnnnn
{\morphisname}{\typeid}{\archive}{\domain}{\annotations}
\l_stex_current_domain_str
\l_stex_feature_name_str
\l_stex_morphism_symbols_prop
\l_stex_morphism_renames_prop
\l_stex_morphism_morphisms_seq
```

opens a new morphism-like structural feature of type $\langle typeid \rangle$ with name $\langle morphisname \rangle$ and the module $[\langle archive \rangle] \{ \langle domain \rangle \}$ as domain, which needs to be closed with `\stex_structural_feature_morphism_end:`.

Deactivates `\symdecl`, `\textsymdecl`, `\symdef`, `\notation` and `smodule`, and activates `\assign`, `\assignMorphism` and `\renamedecl`.

Defines the following macros:

- `\l_stex_feature_name_str ={\langle name \rangle}.`
- `\l_stex_current_domain_str` = the full uri of $\langle domain \rangle$.
- `\l_stex_morphism_symbols_prop`: This property list is initialized as follows: For every symbol transitively included in $\langle domain \rangle$ with data $\langle module \rangle$, $\langle name \rangle$, $\langle id \rangle$, $\langle arity \rangle$, $\langle args \rangle$, $\langle definiens \rangle$, $\langle type \rangle$, and $\langle return code \rangle$, the property list contains an entry with key $[\langle module \rangle]/[\langle name \rangle]$ and value $\{\langle id \rangle\}\{\langle arity \rangle\}\{\langle args \rangle\}\{\langle definiens \rangle\}\{\langle type \rangle\}\{\langle return code \rangle\}$.
- `\l_stex_morphism_renames_prop`: An initially empty property list.
- `\l_stex_morphism_morphisms_seq`: TODO

At `\stex_structural_feature_morphism_end:`, the elaboration is computed from the above data thusly:

For every entry in `\l_stex_morphism_symbols_prop`, a new symbol is created with the values $\langle arity \rangle$, $\langle args \rangle$, $\langle definiens \rangle$, $\langle type \rangle$ and $\langle return code \rangle$ from that property list, and either:

- if `\l_stex_morphism_renames_prop` does not contain an entry with key $\langle module \rangle? \langle name \rangle$, then the elaborated name is $\langle morphisname \rangle / \langle name \rangle$ and its $\langle id \rangle$ is empty (no semantic macro is generated), or
- if `\l_stex_morphism_renames_prop` contains an entry with key $\langle module \rangle? \langle name \rangle$, then its value needs to be of the form $\{\langle id \rangle\} \{\langle name \rangle\}$, which are used for the elaborated symbol.

All notations of the symbols transitively included in the domain are copied over to their elaborations.

11.6 Imports and Morphisms

```
\stex_module_add_morphism:nnnn
\stex_module_add_morphism:(nonn|ooox)
```

adds a new module morphism (i.e. inheritance, possibly with modification) to the current module

#1 : The name of the morphism (may be empty for e.g. `\importmodule`, but may be named for e.g. `copymodule`),

#2 : the URI of the module being “imported”,

#3 : the “type” of the morphism (e.g. `import` or `copymodule`),

#4 : a list of assignments as pairs $\{\langle source \rangle\} \{\langle target \rangle\}$ that signify that the symbol with full URI $\langle source \rangle$ is being mapped or elaborated to the new symbol with name $\langle target \rangle$ in the current module. May be empty for e.g. `\importmodule`.

The provided arguments are stored in `\c_stex_module_<uri>_morphisms_prop` with key #1 (if non-empty) or [#2] (if #1 is empty) and value {#1}{#2}{#3}{#4}

Import-like statements in STEX are usually given as pairs $[\langle archive \rangle] \{\langle path \rangle? \langle module \rangle\}$, which be relative to the current archive and/or file path. For persistence and sms-mode, these pairs first need to be resolved into an *absolute* specification:

```
\stex_import_module_uri:nn
\l_stex_import_archive_str
\l_stex_import_name_str
\l_stex_import_uri_str
\l_stex_import_path_str
```

`\stex_import_module_uri:nn` $\{\langle archive \rangle\} \{\langle pathstring \rangle\}$

(where $\langle archive \rangle$ may be empty) resolves the given arguments into:

- `\l_stex_import_archive_str` the given archive id (in which case `\stex_require_archive:n` is called), or the id of the current archive (if existent and $\langle archive \rangle$ empty), or empty,
- `\l_stex_import_uri_str` if an archive id is given, or we currently are in an archive, its corresponding namespace; otherwise `{file:}`,
- `\l_stex_import_path_str` the path of the URI relative to the given (or current) archive, or (if not existent) the absolute path of $\langle pathstring \rangle$ (without a module name) resolved relative to the current file’s parent directory, and
- `\l_stex_import_name_str` the name of the module.

If $\langle pathstring \rangle$ does not contain the character ?, the whole pathstring is assumed to be the name of the module and the path is empty (or the current file’s parent directory, depending on the above).

```
\stex_require_module:nnn
```

takes as arguments values `\l_stex_import_archive_str`, `\l_stex_import_path_str` and `\l_stex_import_name_str` as computed by `\stex_import_module_uri:nn` and (optionally loads and) activates the corresponding module (or throws an error if it does not exist).

Most complex morphisms (`copymodule` et al) are implemented as structural features using `\stex_structural_feature_morphism:nnnn`.

```
\stex_get_in_morphism:n  
\l_stex_get_symbol_macro_str
```

finds a symbol with the provided name or id in the domain of the current morphism. Sets the same macros as `\stex_get_symbol:n`, and additionally `\l_stex_get_symbol_macro_str` to the $\langle id \rangle$ of the symbol. Throws an error if no such symbol is found.

11.7 Expressions and Semantic Macros

<code>_stex_invoke_symbol:nnnnnnnN</code>	<code>\l_stex_current_symbol_str</code>	<code>_stex_invoke_symbol:nnnnnnnN</code>
<code>\l_stex_current_arity_str</code>		<code>\{\langle module \rangle\}\{\langle name \rangle\}\{\langle arity \rangle\}\{\langle args \rangle\}\{\langle definiens \rangle\}</code>
<code>\l_stex_current_args_tl</code>		<code>\{\langle type \rangle\}</code>
<code>\l_stex_current_return_tl</code>		<code>\{\langle return code \rangle\}</code>
<code>\l_stex_current_type_tl</code>		<code>\{\langle invocation_macro \rangle\}</code>

is how a semantic macro is/should be defined. `_stex_invoke_symbol:nnnnnnnN` first checks whether semantic macros are currently allowed, and throws an error if not. Otherwise, it sets the `\comp`-controlled highlighting to `\compemph@uri`, initializes `\STEXInternalSymbolAfterInvocationTL`, defines the following macros for all of its arguments, and subsequently calls the `\invocation_macro`:

- `\l_stex_current_symbol_str ={\langle module \rangle?{\langle name \rangle}}`
- `\l_stex_current_arity_str ={\langle arity \rangle}`
- `\l_stex_current_args_tl ={\langle args \rangle}`
- `\l_stex_current_type_tl ={\langle type \rangle}`
- `\l_stex_current_return_tl ={\langle return code \rangle}`

The simplest example for an `\invocation_macro` is `\stex_invoke_symbol:`.

```
\_stex_invoke_variable:nnnnnnN
```

analogous to `_stex_invoke_symbol:nnnnnnnN`, but for variables; sets the `\comp`-controlled highlighting to `\varemph@uri`.

```
\stex_invoke_symbol:
```

branches based on the mode and following characters:

- If math, check next character:
 - ! operator; defer to operator notation
 - else defer to notation and check the value of `\l_stex_current_return_tl={\langle return \rangle}`.
 - * If $\langle return \rangle$ is empty, call the notation macro,
 - * otherwise, call $\langle return \rangle\{\l_stex_invoke_symbol!\}$.
- If text:

```
\stex_invoke_sequence_range:  
\stex_invoke_sequence_in:
```

TODO

11.8 Optional (Key-Value) Argument Handling

LATEX3 is surprisingly weak when it comes to handling optional (key-val) arguments in such a manner that *only* the freshly set macros are defined, and to modularly build up sets of argument keys. The following macros attempt to fix that:

```
\stex_keys_define:nnnn  
\stex_keys_set:nn
```

```
\stex_keys_define:nnnn {\langle id\rangle}{\langle setup code\rangle}  
{\langle keyval setup code\rangle}{\langle parents\rangle}
```

Defines a set of keys and their allowed values with identifier **stex**/*id*, that inherits from the sets with identifiers in *parents*.

\stex_keys_set:nn {\i{id}}{\i{CSL}} first executes *setup code* (e.g. to empty the macros holding the values) and then sets the keys in set *id* with the values provided in *CSL*.

_stex_do_id: should be called whenever a macro or environment has a label id, i.e. calls **\stex_keys_set:nn**{*id*}{{...}}, after the title has been typeset. Sets a **\label** by calling **\stex_ref_new_doc_target:n**{*id*}.

Example 29

If we define a set of keys with:

```
1 \stex_keys_define:nnnn{archive file}{  
2   \str_clear:N \l_stex_key_archive_str  
3   \str_clear:N \l_stex_key_file_str  
4 }{  
5   archive .str_set_x:N = \l_stex_key_archive_str ,  
6   file .str_set_x:N = \l_stex_key_file_str  
7 }{id}
```

then calling **\stex_keys_set:nn**{*archive file*}{{*id=foo,file=bar*}} sets **\l_stex_key_file_str**=*bar*, assures that **\l_stex_key_archive_str** is empty, and executes the code associated with *id*, i.e. it sets **\l_stex_key_id_str**=*foo*.

11.9 Stylistable Commands and Environments

```
\stex_new_stylistable_cmd:nnnn \stex_new_stylistable_cmd:nnnn {<name>} {<arity>} {<code>}
{<default>}
```

Creates a new macro $\langle name \rangle$ with expansion $\langle code \rangle$ taking $\langle arity \rangle$ many arguments, that is customizable in presentation by a user by calling $\text{\stexstyle}\langle name \rangle$. On calling \stex_style_apply : executes the presentation code provided by a user.

$\langle code \rangle$ should:

- Call $\text{\stex_keys_set:nn}\{style\} \dots$ (or a keyset inheriting from $style$),
- set macros with prefix $\backslash this\dots$ that a user might want to use for presentation (e.g. $\backslash thistitle$),
- call \stex_style_apply : at some point.

```
\stex_new_stylistable_env:nnnnnnn \stex_new_stylistable_env:nnnnnnn {<name>} {<arity>} {<begincode>}
{<endcode>} {<default begin>} {<default end>} {<prefix>}
```

Like $\text{\stex_new_stylistable_cmd:nnnn}$, but defines a new environment $\langle prefix \rangle \langle name \rangle$ stylistable via $\text{\stexstyle}\langle name \rangle$. Should call \stex_style_apply : twice; once in the $\langle begincode \rangle$ and once in $\langle endcode \rangle$.

\stex_style_apply: Sets $\backslash thisstyle$ to be the head of the CSL $\text{\l_stex_key_style_clist}$ and checks whether a style for the current stylistable macro/environment has been defined; if not, executes the code for the default style.

Example 30

\importmodule is defined something like the following:

```
1 \stex_new_stylistable_cmd:nnnn{importmodule}{0{} m}{
2 ...
3 \def\thismoduleuri{...}
4 \def\thismodulename{...}
5 \stex_style_apply:
6 ...
7 }{}
```

A user can then customize the output generated by \importmodule (by default none) via $\text{\stexstyleimportmodule}\{...\} \text{\thismodulename}\{...\}$.

Example 31

\smodule does something like

```
1 \stex_new_stylistable_env:nnnnnnn{module}{0{} m} {
2 ...
3 \def\thismoduleuri{...}
4 \def\thismodulename{...}
5 \stex_style_apply:
6 ...
7 }{
8 ...
```

```
9  \stex_style_apply:  
10 ...  
11 }{}{s}
```

which defines the environment name to be `smodule` and generates `\stextylemodule`.

11.10 Math Archives

Math archives are represented as L^AT_EX3 property lists, the keys/values of which correspond to the entries in the archive's manifest file. The most important fields are

- `id`,
- `narr` the document namespace,
- `ns` the content namespace, and
- `docurl` the document URL base.

`\stex_resolve_path_pair:Nnn` `\stex_resolve_path_pair:Nnn {(\target)}{(\archive-id)}{(\pathstring)}`

computes the absolute file path of `(pathstring)` relative to the source-folder of `(archive-id)` (if non-empty), or the current archive (if existent) or the parent working directory (otherwise), and stores the result in `\target`.

`\l_stex_current_archive_prop`

`\l_stex_current_archive_prop` always points to the current math archive or is `\undefined`, if the current file is not part of a math archive.

`\c_stex_main_archive_prop` `\c_stex_main_archive_prop` represents the math archive in which the main file resides (if existent).

`\stex_require_archive:n` `\stex_require_archive:n {(\id)}`

looks for a math archive `(id)` in the MathHub directory, parses its manifest file, creates the corresponding property list `\c_stex_mathhub_{\id}_manifest_prop`, and throws a fatal error if the archive is not found.

If the archive has been found and parsed before, does nothing, so it is cheap and safe to call repeatedly for the same id.

`\stex_set_current_archive:n` `\stex_set_current_archive:n {(\id)}`

Calls `\stex_require_archive:n{(\id)}` and sets `\l_stex_current_archive_prop`.

`\stex_in_archive:nn` `\stex_in_archive:nn {(\opt-id)}{(\code)}`

Executes `(code)` in the context of math archive `(opt-id)` (using `\stex_require_archive:n`), i.e. iff `(opt-id)` is non-empty, changes the current archive to the one with id `(opt-id)`, call `(code)` with `(opt-id)` as argument (in #1) and changes it back afterwards.

If `(opt-id)` is empty, `(code)` is called with the id of the *current* math archive as #1, or with #1 empty if there is no current math archive.

11.11 SMS-Mode

STEX has to extract formal content (i.e. modules and their symbols) from LATEX-files, that may otherwise contain arbitrary code, including macros that may not be defined unless the file is fully processed by TEX. Those modules and symbols also may depend on other modules that have not yet been loaded. The naive way to achieve this, which would be to just suppress output (e.g. by storing it in a box register) and then \input the required file, does not work thanks to TEX's limited *file stack*, which would overflow quickly for modules that have a deeply nested list of dependencies.

To solve those problems, STEX reads dependencies in what we call *sms mode*, which can be summarized thusly:

- In a first pass, we parse the file token by token, ignoring everything other than a select list of macros and environments that introduce dependencies (such as \importmodule and \begin{smodule}[sig=...]). Instead of loading those, we remember them for later.
- After the file has been fully parsed thusly, the dependencies found are loaded, again in sms-mode.
- In a second pass, we parse the file *again* in the same way, but this time execute all macros that are explicitly allowed in sms mode, such as \importmodule, \symdecl, \notation, \symdef, etc.
- all this parsing happens additionally in a \setbox\throwaway\vbox{...}-block to suppress any accidental output.

This means that TEX's input stack never grows by more than +1, but still behaves *as if* the dependencies were loaded recursively, at the detriment of being somewhat slow.

\stex_if_smsmode_p: * tests for whether we are currently in sms-mode.
\stex_if_smsmode:TF *

\stex_file_in_smsmode:nn
\stex_file_in_smsmode:on \stex_file_in_smsmode:nn {\<filestring>} {\<setup-code>}
sets up sms-mode and internal grouping, calls *<setup-code>* and subsequently processes the file *<filestring>* in sms-mode as described above.

11.11.1 Second Pass

\stex_sms_allow:N \stex_sms_allow:N {\<macro>}

registers the \macro-command to be allowed in sms mode.

This only works, if \macro takes no arguments and/or does not touch the subsequent tokens.

For macros taking arguments, we can use

```
\stex_sms_allow_escape:N
```

```
\stex_sms_allow_escape:N {(\macro)}
```

registers the `\macro`-command to be allowed in sms mode.

If `\macro` is subsequently encountered in sms-mode, parsing is halted and `\macro` can process arguments as desired. It then needs to continue parsing manually though, by calling `\stex_smsmode_do:` as (usually) its last token.

```
\stex_sms_allow_env:n
```

```
\stex_sms_allow_env:n {(<envname>)}
```

registers the environment `<envname>` to be allowed in sms mode.

As with `\stex_sms_allow_escape:N`, the `\begin{(<envname>)}` is escaped, hence the begin-code of the environment needs to call `\stex_smsmode_do:`. Since `\end{(<envname>)}` never takes arguments, it does not need to be escaped.

```
\stex_smsmode_do:
```

continues with sms-mode-style parsing. Does nothing if not in sms-mode, and is therefore safe to be called “just in case”.

11.11.2 First Pass

```
\stex_sms_allow_import:Nn
```

```
\stex_sms_allow_import_env:nn
```

behave like `\stex_sms_allow_escape:N` and `\stex_sms_allow_env:n` respectively, but the macro or environment provided is now allowed in the *first* pass of sms-mode.

This macro should process arguments, add content to `\g_stex_sms_import_code`, and finally call `\stex_smsmode_do:`.

The code provided in the *second* argument is called before the first pass of sms-mode, as to set up functionality for these macros. For example, `\importmodule` provides code that redefines `\importmodule` to store the identified dependency in `\g_stex_sms_import_code` instead of activating it directly.

```
\g_stex_sms_import_code
```

is built up in the first pass of sms mode and called subsequently; before the second pass.

Code in this token list should load and activate dependencies found in the first pass.

11.12 Strings, File Paths, URIs

```
\stex_str_if_starts_with_p:nn *
```

```
\stex_str_if_starts_with:nnTF *
```

```
\stex_str_if_starts_with:nn {(<first>){(<second>)}}
```

Checks whether the string `<first>` starts with the string `<second>` (i.e. `<second>` is a prefix of `<first>`).

```
\stex_str_if_ends_with_p:nn *
```

```
\stex_str_if_ends_with:nnTF *
```

```
\stex_str_if_ends_with:nn {(<first>){(<second>)}}
```

Checks whether the string `<first>` ends with the string `<second>` (i.e. `<second>` is a suffix of `<first>`).

11.12.1 File Paths

File paths are represented as L^AT_EX3 sequences. The following methods make sure to

- canonicalize paths, i.e. resolve .. and . segments,
- set all category codes to 12 (other), and
- transform windows file paths containing \ uniformly to /.

\stex_file_resolve:Nn
\stex_file_resolve:(No|Nx) \stex_file_resolve:Nn {(\macro)}{(\string)}

resolves and canonicalizes the file path string *string* and stores the result in \macro.

\stex_file_set:Nn
\stex_file_set:(No|Nx) \stex_file_set:Nn {(\macro)}{(\string)}

represents an already canonicalized file path string as a L^AT_EX3 sequence and stores it in \macro.

\stex_if_file_absolute_p:N *
\stex_if_file_absolute:NTF *

\stex_if_file_absolute:N tests whether the given file path (represented as a canonicalized L^AT_EX3 sequence) is an absolute file path.

\stex_file_use:N * \stex_file_use:N expands to a string representation of the given file path.

\stex_if_file_starts_with:NNTF \stex_if_file_starts_with:NN {(\first)}{(\second)}

tests whether the file path \first is a child of \second. (*Not expandable*)

\stex_file_split_off_ext:NN \stex_file_split_off_ext:NN {(\target)}{(\source)}

splits off the file extension of \source and stores the resulting file path in \target

\stex_file_split_off_lang:NN \stex_file_split_off_lang:NN {(\target)}{(\source)}

checks whether the file path \source ends with a language abbreviation (e.g. .en), if so removes it, and stores the result in \target.

The following are primarily used in file hooks, but might occasionally be useful to call manually:

\stex_filestack_push:n pushes the given file to the file stack, recomputing \g_stex_current_file, the current language, document URI and namespace.

\stex_filestack_pop: pops the current top entry of the file stack. If the file stack is empty, resets to \c_stex_main_file.

File Path Constants and Variables

\c_stex_pwd_file store the parent working directory and the absolute path of the main file being processed
\c_stex_main_file (with guessed file extension .tex).

\c_stex_home_file stores the user's home directory.

\c_stex_mathhub_file stores the user's MathHub directory; its string representation is stored in \mathhub.

\g_stex_current_file always points to the *current* file.

11.12.2 URIs

MMT URIs are represented as token lists of the form

`{__stex_path_auth:n{\(authority\)} __stex_path_path:n{\(path\)} __stex_path_module:n{\(modulename\)} __stex_path_name:n{\(declname\)}},`

all of which may be empty. Largely, URIs are used as strings only, but the above representation is used in `\stex_uri_resolve:Nn` to canonicalize URIs when they are computed the first time.

\stex_map_uri:Nnnnn `\stex_map_uri:Nnnnn {\(uri\)}{\(authority code\)}{\(path code\)}{\(modulename code\)}{\(declname code\)}`
executes the provided `\code`s with the components of the `\uri` as arguments.

\stex_uri_resolve:Nn behaves analogously to `\stex_file_resolve:Nn`.
\stex_uri_resolve:(No|Nx)

\stex_uri_set:Nn behaves analogously to `\stex_file_set:Nn`.
\stex_uri_set:(No|Nx)

\stex_uri_use:N * behaves analogously to `\stex_file_use:N`.

A common usage of URIs is computing the namespace of content elements (modules or documents) from the namespace of a math archive and some relative file path within that archive.

\stex_uri_from_repo_file:NNNn `\stex_uri_from_repo_file:NNNn {\(target\)}{\(repo_prop\)}{\(filepath\)}{\(ns_field\)}`

computes the namespace URI from the property list `\repo_prop` of some math archive, the file path `\filepath` and the archive field `\{ns_field\}` (`narr` or `ns`), and stores the result in `\target`.

`\stex_uri_from_repo_file_nolang:NNNn`

behaves like `\stex_uri_from_repo_file:NNNn`, but makes sure to split off language abbreviations from the file name (e.g. `.en`).

`\stex_uri_from_current_file:Nn`
`\stex_uri_from_current_file_nolang:Nn`

Special cases for `\stex_uri_from_repo_file[_nolang]:NNNn`, for `\repo_prop=\l_stex_current_archive_prop` and `\filepath=\g_stex_current_file`.

`\stex_set_document_uri:` sets the current value of `\l_stex_current_doc_uri` based on the current file and archive.

`\stex_set_current_namespace:`

sets the current value of `\l_stex_current_ns_uri` based on the current file and archive.

`\stex_uri_add_module:NNn`
`\stex_uri_add_module:NNo` `\stex_uri_add_module:NNn {\langle target \rangle}{\langle uri \rangle}{\langle name \rangle}`

Checks that URI `\uri` has no module name, adds the provided `\name` and stores the result in `\target`.

URI Constants and Variables

`\l_stex_current_doc_uri` always points to the current document URI.

`\l_stex_current_ns_uri` always points to the current content namespace.

11.13 Language Handling

`\c_stex_languages_prop`
`\c_stex_language_abrevs_prop`

Property lists converting babel languages to/from their abbreviations; e.g.

- `\prop_item:Nn \c_stex_languages_prop {de}` yields `ngerman`, and
- `\c_stex_language_abrevs_prop {ngerman}` yields `de`.

`\l_stex_current_language_str`

always stores the current language.

```
\stex_set_language:n  
\stex_set_language:(x|o)
```

```
\stex_set_language:n {⟨abbrev⟩}
```

Sets `\l_stex_current_language_str`, and, if the `babel` package is loaded, calls `\selectlanguage` on the language corresponding to `{⟨abbrev⟩}`.

Note that the package option `lang=` automatically loads the `babel` package.

If `⟨abbrev⟩=tr`, additionally call `\selectlanguage` with the option `shorthands=:!`.

Throws `error/unknownlanguage` if no language with abbreviation `{⟨abbrev⟩}` is known.

```
\stex_language_from_file:
```

infers the current language from file ending (e.g. `.en.tex`) and sets it appropriately.

Is called in a file hook, i.e. always switches language when inputting a file `.<lang>.<ext>`.

11.14 Inserting Annotations

`STEX` can be used to produce either `HTML` or `PDF`. In `HTML`-mode, multiple macros exist to insert annotations. The same macros are also valid in `PDF` mode but implemented as null operations.

```
\stex_suppress_html:n
```

```
\stex_suppress_html:n {⟨code⟩}
```

turns annotations off temporarily in `⟨code⟩` (e.g. as to not generate additional annotations for elaborated declarations, or in sms-mode).

For that to work, code that inserts annotations should use

```
\stex_if_do_html_p: *
```

tests whether to generate `HTML` annotations.

```
\stex_if_do_html:TF *
```

```
\stex@backend
```

should be set by a backend engine, such that a file `stex-backend-\stex@backend.cfg` exists.

11.14.1 Backend macros

Such a backend config file should provide the following:

```
\stex_if_html_backend_p: *
```

can be used to determine whether the backend produces `HTML` (e.g. `RuSTEX` or `LATEXML`) or not (e.g. `pdflatex`).

`\ifstexhtml` is set accordingly.

```
\stex_annotation:nnn
```

```
\stex_annotation:nnn {⟨attr⟩}{⟨value⟩}{⟨code⟩}
```

In `HTML` mode, annotates the output of `⟨code⟩` with the `XML`-attribute `⟨attr⟩="⟨value⟩"`.
In `PDF` mode, just calls `⟨code⟩`.

\stex_annotation_invisible:n
\stex_annotation_invisible:n

\stex_annotation_invisible:n {⟨code⟩}

Should annotate ⟨code⟩ with `shtml:visible="false" style="display:none;"`. In PDF mode, does nothing.

\stex_annotation_invisible:nnn combines \stex_annotation_invisible:n and \stex_annotation:nnn.

`stex_annotation_env (env)` \begin{stex_annotation_env}{⟨attr⟩}{⟨value⟩} ⟨code⟩ \end{stex_annotation_env}
should behave like \stex_annotation:nnn{⟨attr⟩}{⟨value⟩}{⟨code⟩}

\stex_mathml_intent:nn MathML Intent (TODO)
\stex_mathml_arg:nn

11.15 Persisting Content from Math Archives in sms-Files

\stex_persist:n
\stex_persist:e

\stex_persist:n {⟨code⟩}

writes ⟨code⟩ to the `\jobname.sms`-file, if `writesms` is active.

TeXhackers note: ⟨code⟩ is being read with `expl3` category codes (except for spaces having catcode 10), but not pretokenized; i.e. ⟨code⟩ can safely change the current catcode scheme.

\c_stex_persist_mode_bool
\c_stex_persist_write_mode_bool

whether `usesms` or `writesms` are active.

11.16 Utility Methods

\stex_macro_body:N *

expands to the *expansion* of the provided macro, including parameter tokens, with the original category codes intact; e.g. if `\def\foo#1{First #1}`, then \stex_macro_body:N `\foo` expands to `First #1`.

\stex_macro_definition:N *

expands to the token list *defining* the provided macro, including parameters, command attributes (i.e. `\long`, `\protected`), with the original category codes intact; e.g. if `\protected\def\foo#1{First #1}`, then \stex_macro_definition:N `\foo` expands to `\protected\def\foo#1{First #1}`.

TeXhackers note: Does not work with “higher” parameter tokens, i.e. `##1`, `####1` etc.

`\stex_deactivate_macro:Nn` `\stex_reactivate_macro:N`

`\stex_deactivate_macro:Nn {(\macro)} {(msg)}`

Makes `\macro` throw an error message `error/deactivated-macro{(msg)}`, notifying an author that the macro is only allowed in certain environments.

`\stex_reactivate_macro:N` restores the functionality of the macro.

`\stex_kpsewhich:Nn`

`\stex_kpsewhich:Nn {(\macro)} {(args)}`

Calls “`kpsewhich args`” and stores the result in `\macro`,

TeXhackers note: Does not require `shell-escape`

`\stex_get_env:Nn`

`\stex_get_env:Nn {(\macro)} {(envvar)}`

Stores the value of the environment variable `(envvar)` in `\macro`.

`\stex_fatal_error:n` `\stex_fatal_error:nn` `\stex_fatal_error:nxx`

Mimic the `\msg_error:-macros`, but make sure that TeX stops processing.

TeXhackers note: Calls `\input{non-existent file}`.

`\stex_ignore_spaces_and_pars:`

As the name suggests, ignores all subsequent spaces and `\pars` until the first non-expandable macro is encountered.

Useful for e.g. ending `\symdecl` and related macros with, so that formatting sources with empty lines does not cause paragraph breaks.

11.16.1 Group-like Behaviours

`\stex_pseudogroup_with:nn`

`\stex_pseudogroup_with:nn {(\macros)}{(\code)}`

Calls `(code)` and subsequently restores the values of the `(macros)` given.

TeXhackers note: Does *not* work recursively!

`\stex_pseudogroup:nn`

`\stex_pseudogroup:nn {(\code1)}{(\code2)}`

Expands `(code2)`, and inserts the result after `(code1)`. Works recursively and allows for restoring the values of macros in combination with `\stex_pseudogroup_restore:N`, but *only for macros that take no arguments*:

`\stex_pseudogroup_restore:N *` `\stex_pseudogroup_restore:N {(\macro)}`

Example 32

```
1 \stex_pseudogroup:nn{  
2   something changing \foo  
3   something changing \num  
4 }{  
5   \stex_pseudogroup_restore:N\foo  
6   \int_set:Nn \num {\int_use:N \num}  
7 }
```

restores the values of macro `\foo` and register `\num` after calling the first block.

Commands like `\symdecl` and `\importmodule` that generate (semantic) macros should be local *to the current module*, e.g. `smodule`. For that purpose, we open a new “metagroup” with some identifier (e.g. `\l_stex_current_module_str`) and then execute the relevant code *in the metagroup with that identifier*:

```
\stex_metagroup_new:n  
\stex_metagroup_new:o
```

`\stex_metagroup_new:n {⟨id⟩}`

Opens a new metagroup at the current TeX group level with identifier `⟨id⟩`.

```
\stex_metagroup_do_in:nn  
\stex_metagroup_do_in:nx
```

`\stex_metagroup_do_in:nn {⟨id⟩}{⟨code⟩}`

Executes `⟨code⟩` and adds its content to `\aftergroup` up until the TeX group level of the metagroup with identifier `⟨id⟩`.

Chapter 12

Additional Packages

12.1 NotesSlides Documentation

TODO

12.2 Problem Documentation

TODO

12.3 HWExam Documentation

TODO

12.4 Tikzinput Documentation

TODO

Part IV
Implementation

Chapter 13

The sTeX Implementation

13.1 Setting up

Setup code for the document class

```
1  <*cls>
2  %%%%%%%%%%%%%%% stex.dtx %%%%%%%%%%%%%%%
3
4  \RequirePackage{expl3,13keys2e}
5  \ProvidesExplClass{stex}{2023/03/19}{3.3.0}{sTeX document class}
6  \IfFileExists{stex-expl-compat.sty}{
7      \usepackage{stex-expl-compat}
8  }{}
9
10 \DeclareOption*{\PassOptionsToPackage{\CurrentOption}{stex}}
11 \ProcessOptions
12
13 \RequirePackage{stex}
14
15 \LoadClass{article}
16 </cls>

    Setup code for the package

17 <*package>
18 \RequirePackage{expl3,13keys2e,ltxcmds}
19 \ProvidesExplPackage{stex}{2023/03/19}{3.3.0}{sTeX package}
20 \IfFileExists{stex-expl-compat.sty}{
21     \usepackage{stex-expl-compat}
22 }{}
23 \RequirePackage{stex-logo} % externalized for backwards-compatibility reasons
24 \RequirePackage{standalone}
25
26 \message{^^J*~This~is~sTeX~version~3.3.0~*^^J}

    Package options:

27 \keys_define:nn { stex / package } {
28     debug      .str_set_x:N = \c_stex_debug_clist ,
29     lang       .clist_set:N = \c_stex_languages_clist ,
30     mathhub    .tl_set_x:N = \mathhub ,
```

```

31   usesms     .bool_set:N  = \c_stex_persist_mode_bool ,
32   writesms   .bool_set:N  = \c_stex_persist_write_mode_bool ,
33   checkterms .bool_set:N  = \c_stex_check_terms_bool ,
34   image      .bool_set:N  = \c_tikzinput_image_bool,
35   unknown     .code:n     = {}
36 }
37 \exp_args:NNo \clist_set:Nn \c_stex_debug_clist \c_stex_debug_clist
38 \ProcessKeysOptions { stex / package }

Error messages:
39 \input{stex-en.ldf}

```

13.2 Utilities

40 \cs_set_eq:NN \stex_undefined: \undefined

13.2.1 Calling kpsewhich and Environment Variables

41 ⟨@=stex_envs⟩

\stex_kpsewhich:Nn

```

42 \cs_new_protected:Nn \stex_kpsewhich:Nn {\group_begin:
43   \catcode`\|=12
44   \sys_get_shell:nnN { kpsewhich ~ #2 } { } \l_tmpa_tl
45   \tl_gset_eq:NN \l_tmpa_tl \l_tmpa_tl
46   \group_end:
47   \exp_args:NNo\str_set:Nn #1 {\l_tmpa_tl}
48   \tl_trim_spaces:N #1
49 }

```

(End definition for \stex_kpsewhich:Nn. This function is documented on page 137.)

\stex_get_env:Nn

```

50 \sys_if_platform_windows:TF{
51   \cs_new_protected:Nn \stex_get_env:Nn {\group_begin:
52     \escapechar=-1\catcode`\\=12
53     \exp_args:NNe \stex_kpsewhich:Nn #1 {-expand-var~\c_percent_str#2\c_percent_str}
54     \exp_args:NNx\use:nn\group_end:{\str_set:Nn \exp_not:N #1 { #1 }
55   }
56 }
57 }
58 }{
59   \cs_new_protected:Nn \stex_get_env:Nn {
60     \stex_kpsewhich:Nn #1 {-var-value~#2}
61   }
62 }

```

(End definition for \stex_get_env:Nn. This function is documented on page 137.)

13.2.2 Logging

```

63  <@=stex_debug>
\stex_debug:nn
64 \cs_new_protected:Nn \stex_debug:nn {
65   \exp_args:NNo \clist_if_in:NnTF \c_stex_debug_clist { \tl_to_str:n{all} }{
66     \__stex_debug_:nn{#1}{#2}
67   }{
68     \exp_args:NNo \clist_if_in:NnT \c_stex_debug_clist { \tl_to_str:n{#1} }{
69       \__stex_debug_:nn{#1}{#2}
70     }
71   }
72 }
73
74 \cs_new_protected:Nn \__stex_debug_:nn {
75   \msg_set:nnn{stex}{debug / #1}{
76     \\\Debug~#1:~#2\\
77   }
78   \msg_none:nn{stex}{debug / #1}
79 }

```

(End definition for `\stex_debug:nn`. This function is documented on page [115](#).)

`\stex_fatal_error:n`
`\stex_fatal_error:nnn`
`\stex_fatal_error:nxx`

To avoid dead locks etc., we throw errors and make tex stop entirely:

```

80 \cs_new_protected:Nn \stex_fatal_error:n {
81   \msg_error:nn{stex}{#1}\input{Fatal-Error!!}
82 }
83 \cs_new_protected:Nn \stex_fatal_error:nnn {
84   \msg_error:nnn{stex}{#1}{#2}{#3}\input{Fatal-Error!!}
85 }
86 \cs_generate_variant:Nn \stex_fatal_error:nnn {nxx}

```

(End definition for `\stex_fatal_error:n` and `\stex_fatal_error:nnn`. These functions are documented on page [137](#).)

We check an environment variable for debugging and set things up:

```

87 \stex_get_env:Nn\__stex_debug_env_str{STEX_DEBUG}
88 \str_if_empty:NTF\__stex_debug_env_str {
89   \clist_set_eq:NN \l__stex_debug_cl \c_stex_debug_clist
90 }{
91   \clist_set:No \l__stex_debug_cl {\__stex_debug_env_str}
92 }
93 \clist_clear:N \c_stex_debug_clist
94 \clist_map_inline:Nn \l__stex_debug_cl {
95   \exp_args:NNo \clist_put_right:Nn \c_stex_debug_clist
96   { \tl_to_str:n{#1} }
97 }
98
99 \exp_args:NNo \clist_if_in:NnTF \c_stex_debug_clist {\tl_to_str:n{all}} {
100   \msg_redirect_module:nnn{ stex }{ none }{ warning }
101   \stex_debug:nn{all}{Logging~everything!}
102 }{
103   \clist_map_inline:Nn \c_stex_debug_clist {
104     \msg_redirect_name:nnn{ stex }{ debug / #1 }{ warning }
105     \stex_debug:nn{#1}{Logging~#1}

```

```

106     }
107 }
```

13.2.3 Languages

```
108 <@@=stex_lang>
```

\c_stex_languages_prop

\c_stex_language_abrevs_prop

We store language abbreviations in two (mutually inverse) property lists:

```

109 \exp_args:NNx \prop_const_from_keyval:Nn \c_stex_languages_prop { \tl_to_str:n {
110   en = english ,
111   de = ngerman ,
112   ar = arabic ,
113   bg = bulgarian ,
114   ru = russian ,
115   fi = finnish ,
116   ro = romanian ,
117   tr = turkish ,
118   fr = french
119 } }
120
121 \exp_args:NNx \prop_const_from_keyval:Nn \c_stex_language_abrevs_prop { \tl_to_str:n {
122   english = en ,
123   ngerman = de ,
124   arabic = ar ,
125   bulgarian = bg ,
126   russian = ru ,
127   finnish = fi ,
128   romanian = ro ,
129   turkish = tr ,
130   french = fr
131 } }
132 % todo: chinese simplified (zhs)
133 %         chinese traditional (zht)
```

(End definition for \c_stex_languages_prop and \c_stex_language_abrevs_prop. These variables are documented on page 134.)

\l_stex_current_language_str

```
134 \str_new:N \l_stex_current_language_str
```

(End definition for \l_stex_current_language_str. This variable is documented on page 134.)

we use the lang-package option to load the corresponding babel languages:

\stex_set_language:n

\stex_set_language:x

\stex_set_language:o

```

135 \cs_new_protected:Nn \stex_set_language:n {
136   \str_set:Nn \l_stex_current_language_str { #1 }
137   \prop_if_in:NnTF \c_stex_languages_prop {#1} {
138     \tl_set_rescan:Nnx \l__stex_lang_lang_str {}{\prop_item:Nn \c_stex_languages_prop {#1}}
139     \cs_if_eq:NNTF @onlypreamble @notprerr {
140       \ltx@ifpackageloaded{babel} {
141         \exp_args:N\selectlanguage\l__stex_lang_lang_str
142       } {}
143     } {
144       \ltx@ifpackageloaded{babel} {} {
145         \str_if_eq:nnTF {#1} {tr} {
```

```

146     \RequirePackage[turkish,shorthands=:!]{babel}
147 }
148     \RequirePackage[\l__stex_lang_lang_str]{babel}
149 }
150 }
151 }
152 }{
153     \msg_error:nnx{stex}{error/unknownlanguage}{#1}
154 }
155 }
156 \cs_generate_variant:Nn \stex_set_language:n {x,o}

```

(End definition for `\stex_set_language:n`. This function is documented on page 135.)

`\stex_language_from_file:`

```

157 \cs_new_protected:Nn \stex_language_from_file: {
158     \seq_get_right:NN \g_stex_current_file \l_tmpa_str
159     \seq_set_split:NnV \l_tmpa_seq . \l_tmpa_str
160     \seq_pop_right:NN \l_tmpa_seq \l_tmpa_str % = ".tex/.dtx/.sty"
161     \exp_args:No \str_if_eq:nnF \l_tmpa_str {tex} {
162         \exp_args:No \str_if_eq:nnF \l_tmpa_str {dtx} {
163             \exp_args:No \str_if_eq:nnF \l_tmpa_str {ltx} {
164                 \exp_args:NNo \seq_put_right:Nn \l_tmpa_seq \l_tmpa_str
165             }
166         }
167     }
168     \seq_pop_left:NN \l_tmpa_seq \l_tmpa_str % <filename>
169     \seq_if_empty:NF \l_tmpa_seq { %remaining element should be [<something>.]language
170         \seq_pop_right:NN \l_tmpa_seq \l__stex_lang_str
171         \str_if_eq:NNF \l__stex_lang_str \l_stex_current_language_str {
172             \exp_args:NNo \prop_if_in:NnT \c_stex_languages_prop \l__stex_lang_str {
173                 \stex_set_language:o \l__stex_lang_str
174             }
175         }
176         \stex_debug:nn{lang} {Language~\l_stex_current_language_str~
177             inferred~from~file~name}
178     }
179 }

```

(End definition for `\stex_language_from_file:`. This function is documented on page 135.)

Loading babel:

```

180 \clist_if_empty:NF \c_stex_languages_clist {
181     \bool_set_false:N \l__stex_lang_turkish_bool
182     \seq_clear:N \l_tmpa_seq
183     \clist_map_inline:Nn \c_stex_languages_clist {
184         \str_set:Nx \l_tmpa_str {#1}
185         \str_if_eq:nnT {#1}{tr} {
186             \bool_set_true:N \l__stex_lang_turkish_bool
187         }
188         \prop_get:NoNTF \c_stex_languages_prop \l_tmpa_str \l_tmpa_str {
189             \tl_set_rescan:Nno \l_tmpa_str {} \l_tmpa_str
190             \seq_put_right:No \l_tmpa_seq \l_tmpa_str
191         } {
192             \msg_error:nnx{stex}{error/unknownlanguage}{\l_tmpa_str}

```

```

193     }
194   }
195 \stex_debug:nn{lang} {Languages:~\seq_use:Nn \l_tmpa_seq {,~} }
196 \bool_if:NTF \l_stex_lang_turkish_bool {
197   \exp_args:NNe \use:nn \RequirePackage
198   {[main=\seq_use:Nn \l_tmpa_seq, ,shorthands=:!]}{babel}
199 }{
200   \exp_args:NNe \use:nn \RequirePackage
201   {[main=\seq_use:Nn \l_tmpa_seq, ]}{babel}
202 }
203 }

```

13.2.4 Group-like Behaviours

204 ⟨@=stex_groups⟩

\stex_pseudogroup:nn

\stex_pseudogroup_restore:N

```

205 \cs_new_protected:Npn \stex_pseudogroup:nn {
206   \exp_args:Nne \use:nn
207 }
208 \cs_new:Nn \stex_pseudogroup_restore:N {
209   \tl_if_exist:NTF #1 {
210     \tl_set:Nn \exp_not:N #1 { \exp_args:No \exp_not:n #1 }
211   }{
212     \cs_undefine:N \exp_not:N #1
213   }
214 }

```

(End definition for \stex_pseudogroup:nn and \stex_pseudogroup_restore:N. These functions are documented on page 137.)

\stex_pseudogroup_with:nn

```

215 \cs_new_protected:Nn \stex_pseudogroup_with:nn {
216   \tl_map_inline:nn{#1} {
217     \cs_set_eq:cN{\__stex_groups_\tl_to_str:n{##1}}{#1}
218   }
219   #2
220   \tl_map_inline:nn{#1} {
221     \cs_set_eq:Nc{#1}{\__stex_groups_\tl_to_str:n{##1}}
222     \cs_undefine:c{\__stex_groups_\tl_to_str:n{##1}}
223   }
224 }

```

(End definition for \stex_pseudogroup_with:nn. This function is documented on page 137.)

\stex_metagroup_new:n List of all currently existing metagroup identifiers

\stex_metagroup_new:o

start a new metagroup at the current group level with id #1

```

225 \seq_new:N \l_stex_groups_ids_seq
226 \cs_new_protected:Nn \stex_metagroup_new:n {
227   \str_set:cx{\l_stex_groups_#1_int} {\int_use:N\currentgrouplevel}
228   \seq_put_right:Nn \l_stex_groups_ids_seq {#1}
229 }
230 \cs_generate_variant:Nn \stex_metagroup_new:n {o}

```

(End definition for \stex_metagroup_new:n. This function is documented on page 138.)

```

\stex_metagroup_do_in:nn
\stex_metagroup_do_in:nx
231 \prg_new_conditional:Nnn \__stex_groups_exists:n {TF} {
232     \str_if_exist:cTF{l__stex_groups_#1_int}
233         \prg_return_true: \prg_return_false:
234 }
235
236 \cs_new_protected:Nn \stex_metagroup_do_in:nn {
237     \__stex_groups_exists:nTF{#1}{
238         \__stex_groups_do_in:nn{#1}{#2}
239     }{
240         \msg_error:nnn{stex}{error/metagroup/missing}{#1}
241     }
242 }
243 \cs_generate_variant:Nn \stex_metagroup_do_in:nn {nx}
244
245 \cs_new_protected:Nn \__stex_groups_do_in:nn {
246     \exp_args:Nnx\stex_debug:nn{metagroup}{adding~to~\detokenize{#1}:^~J\tl_to_str:n{#2}}
247     \tl_set:Nn\__stex_groups_tmp{#2}
248     \exp_args:Nx \int_compare:nNnF {\use:c{l__stex_groups_#1_int}}
249         = \currentgrouplevel {
250             \tl_if_exist:cTF{g__stex_groups_#1_\the\currentgrouplevel _content} {
251                 \exp_args:Nno \tl_gput_right:cng{g__stex_groups_#1_\the\currentgrouplevel _content}
252             }{
253                 \exp_args:Nno \tl_gset:cn{g__stex_groups_#1_\the\currentgrouplevel _content}
254             }\__stex_groups_tmp
255             \bool_if_exist:cF {l__stex_groups_\the\currentgrouplevel _bool} {
256                 \group_insert_after:N \__stex_groups_do:
257                 \bool_set_true:c {l__stex_groups_\the\currentgrouplevel _bool}
258             }
259         }
260         \__stex_groups_tmp
261     }
262
263 \cs_new_protected:Nn \__stex_groups_do: {
264     \seq_map_inline:Nn \l__stex_groups_ids_seq {
265         \tl_if_exist:cT{g__stex_groups_#1_\int_eval:n{\currentgrouplevel+1}_content} {
266             \exp_args:NNno \exp_args:Nno \__stex_groups_do_in:nn{##1} {
267                 \csname g__stex_groups_##1_\int_eval:n{\currentgrouplevel+1}_content\endcsname
268             }
269             \cs_undefine:c{g__stex_groups_##1_\int_eval:n{\currentgrouplevel+1}_content}
270         }
271         \bool_if_exist:cF {l__stex_groups_\int_eval:n\currentgrouplevel _bool} {
272             \group_insert_after:N \__stex_groups_do:
273             \bool_set_true:c {l__stex_groups_\int_eval:n\currentgrouplevel _bool}
274         }
275     }
276 }

```

(End definition for `\stex_metagroup_do_in:nn`. This function is documented on page 138.)

13.2.5 HTML Annotations

277 `<@=stex_annotation>`

```

\stex_if_do_html:TF Whether to (locally) produce HTML output
278 \bool_new:N \_stex_html_do_output_bool
279 \bool_set_true:N \_stex_html_do_output_bool
280
281 \prg_new_conditional:Nnn \stex_if_do_html: {p,T,F,TF} {
282     \bool_if:nTF \_stex_html_do_output_bool
283     \prg_return_true: \prg_return_false:
284 }

```

(End definition for `\stex_if_do_html:TF`. This function is documented on page 135.)

`\stex_suppress_html:n` Temporarily disable HTML output

```

285 \cs_new_protected:Nn \stex_suppress_html:n {
286     \stex_pseudogroup:nn{
287         \bool_set_false:N \_stex_html_do_output_bool
288         #1
289     }{
290         \stex_if_do_html:T {
291             \bool_set_true:N \_stex_html_do_output_bool
292         }
293     }
294 }

```

(End definition for `\stex_suppress_html:n`. This function is documented on page 135.)

We determine the backend:

```

\stex_if_html_backend_p:
\stex_if_html_backend:TF
    \ifstexhtml
        \stex@backend
    \fi
295 \ifcsname if@rustex\endcsname\else
296     \expandafter\newif\csname if@rustex\endcsname
297     \@rustexfalse
298 \fi
299
300 \stex_get_env:Nn\__stex_annotation_env_str{STEX_FORCE_PDF}
301 \exp_args:No \str_if_eq:nnTF \__stex_annotation_env_str {true} {
302     \def\stex@backend{pdflatex}
303 }{
304     \tl_if_exist:NF\stex@backend{
305         \if@rustex
306             \def\stex@backend{rustex}
307         \else
308             \cs_if_exist:NTF\HCode{
309                 \def\stex@backend{tex4ht}
310             }{
311                 \def\stex@backend{pdflatex}
312             }
313         \fi
314     }
315 }
316 \input{stex-backend-\stex@backend.cfg}
317 \newif\ifstexhtml
318 \stex_if_html_backend:TF {
319     \stexhtmltrue
320 }
321 
```

```

322     \bool_set_true:N \_stex_html_do_output_bool
323 }{
324     \stexhtmlfalse
325     \bool_set_false:N \_stex_html_do_output_bool
326 }

```

(End definition for `\stex_if_html_backend:TF`, `\ifstexhtml`, and `\stex@backend`. These functions are documented on page 135.)

```

\_stex_annotation_force_break:n
327 \stex_if_html_backend:TF {
328     \cs_new_protected:Nn \_stex_annotation_force_break:n {
329         \stex_annotation_invisible:n{~}
330         #1
331         \stex_annotation_invisible:n{~}
332     }
333 }{
334     \cs_new_protected:Nn \_stex_annotation_force_break:n { #1 }
335 }

```

(End definition for `_stex_annotation_force_break:n`. This function is documented on page ??.)

```

\mmlintent
\mmlarg
336 \stex_if_html_backend:TF {
337     \cs_new_protected:Npn \mmlintent #1 #2 {
338         \stex_annotation_nn{mml:intent={#1}}{#2}
339     }
340     \cs_new_protected:Npn \mmlarg #1 #2 {
341         \stex_annotation_nn{mml:arg={#1}}{#2}
342     }
343 }{
344     \cs_new_protected:Npn \mmlintent #1 #2 { #2 }
345     \cs_new_protected:Npn \mmlarg #1 #2 { #2 }
346 }

```

(End definition for `\mmlintent` and `\mmlarg`. These functions are documented on page ??.)

13.2.6 Auxiliary Methods

```
347 <@@=stex_aux>
```

```

\stex_deactivate_macro:Nn
\stex_reactivate_macro:N
348 \cs_new_protected:Nn \stex_deactivate_macro:Nn {
349     \tl_set_eq:cN{\tl_to_str:n{#1}~~~orig}{#1}
350     \tl_set:Nn#1{
351         \msg_error:nnnn{stex}{error/deactivated-macro}{\detokenize{#1}}{#2}
352     }
353 }
354 \cs_new_protected:Nn \stex_reactivate_macro:N {
355     \exp_after:wN\let\exp_after:wN#1\csname \detokenize{#1}~~~orig\endcsname
356 }

```

(End definition for `\stex_deactivate_macro:Nn` and `\stex_reactivate_macro:N`. These functions are documented on page 137.)

```

\stex_ignore_spaces_and_pars:
357 \protected\def\stex_ignore_spaces_and_pars:{%
358   \begingroup\catcode13=10\relax
359   \@ifnextchar\par{%
360     \endgroup\expandafter\stex_ignore_spaces_and_pars:\@gobble
361   }{%
362     \endgroup
363   }
364 }

```

(End definition for `\stex_ignore_spaces_and_pars:`. This function is documented on page 137.)

`\stex_keys_define:nnnn`

```

365 \cs_new_nopar:Nn \stex_keys_define:nnnn {
366   \tl_gset:cn {__stex_aux_keys_#1_pre_tl}{#2}
367   \tl_gset:cn {__stex_aux_keys_#1_def_tl}{#3}
368   \tl_if_empty:nF{#4}{%
369     \clist_map_inline:nn{#4}{%
370       \tl_set_eq:Nc \l__stex_aux_tl {__stex_aux_keys_##1_pre_tl}
371       \tl_gput_left:co{__stex_aux_keys_#1_pre_tl} \l__stex_aux_tl
372       \tl_set_eq:Nc \l__stex_aux_tl {__stex_aux_keys_##1_def_tl}
373       \tl_gput_left:cn{__stex_aux_keys_#1_def_tl} ,
374       \tl_gput_left:co{__stex_aux_keys_#1_def_tl} \l__stex_aux_tl
375     }
376   }
377   \tl_set_eq:Nc \l__stex_aux_tl {__stex_aux_keys_#1_def_tl}
378   \exp_args:Nno \keys_define:nn {stex / #1} {\l__stex_aux_tl}
379 }

```

(End definition for `\stex_keys_define:nnnn`. This function is documented on page 127.)

`\stex_keys_set:nn`

```

380 \cs_new_nopar:Nn \stex_keys_set:nn {
381   \use:c{\l__stex_aux_keys_#1_pre_tl}
382   \keys_set:nn {stex / #1} { #2 }
383 }

```

(End definition for `\stex_keys_set:nn`. This function is documented on page 127.)

Some ubiquitous key sets:

```

384 \stex_keys_define:nnnn{archive file}{%
385   \str_clear:N \l_stex_key_archive_str
386   \str_clear:N \l_stex_key_file_str
387 }{%
388   archive .str_set_x:N = \l_stex_key_archive_str ,
389   file .str_set_x:N = \l_stex_key_file_str
390 }{}%
391 \stex_keys_define:nnnn{id}{%
392   \str_clear:N \l_stex_key_id_str
393 }{%
394   id .str_set_x:N = \l_stex_key_id_str
395 }{}%
396 \stex_keys_define:nnnn{title}{%

```

```

399     \tl_clear:N \l_stex_key_title_tl
400 }{
401     title .tl_set:N = \l_stex_key_title_tl
402 }{}
403
404 \stex_keys_define:nnnn{style}{%
405     \clist_clear:N \l_stex_key_style_clist
406 }{
407     style .clist_set:N = \l_stex_key_style_clist
408 }{}
409
410 \stex_keys_define:nnnn{deprecate}{%
411     \str_clear:N \l_stex_key_deprecate_str
412 }{
413     deprecate .str_set_x:N = \l_stex_key_deprecate_str
414 }{}
415
416 \stex_keys_define:nnnn{uses}{%
417     uses .code:n = {
418         \clist_map_inline:nn{#1}{%
419             \stex_if_starts_with:nTF{##1}[%
420                 \_stex_aux_split_at_bracket:w ##1 \_stex_end:
421             }{
422                 \usemodule{##1}
423             }
424         }
425     }%
426 }{}%
427
428 \cs_new_protected:Npn \_stex_aux_split_at_bracket:w [ #1 ] #2 \_stex_end: {%
429     \usemodule[#1]{#2}
430 }

```

_stex_do_deprecation:n

```

431 \cs_new:Nn \_stex_do_deprecation:n {
432     \str_if_empty:NF \l_stex_key_deprecate_str {
433         \msg_warning:nnxx{stex}{warning/deprecated}{#1}{\l_stex_key_deprecate_str}
434     }
435 }

```

(End definition for `_stex_do_deprecation:n`. This function is documented on page 115.)

_stex_do_id:

```

436 \cs_new_protected:Nn \_stex_do_id: {
437     \stex_if_smsmode:F {
438         \str_if_empty:NF \l_stex_key_id_str {
439             \exp_args:No \stex_ref_new_doc_target:n \l_stex_key_id_str
440         }
441     }
442 }

```

(End definition for `_stex_do_id:`. This function is documented on page 127.)

```

\stex_new_stytable_env:nmmmmnnn
\stex_new_stytable_cmd:nnnn
\stex_style_apply:
443 \cs_new_protected:Nn \stex_new_stytable_cmd:nnnn {
444   \exp_after:wN \newcommand \cs:w stexstyle#1 \cs_end:[2] [] {
445     \__stex_aux_patch:nnn{#1}{##1}{##2}
446   }
447   \exp_after:wN \NewDocumentCommand\cs:w #1\cs_end:{#2} {
448     \cs_set:Npn \stex_style_apply: {
449       \__stex_aux_apply_patch:n{#1}
450     }
451     #3
452   }
453   \tl_set:cn {__stex_aux_style_#1:} { #4 }
454 }
455
456 \cs_new_protected:Nn \__stex_aux_apply_patch:n {
457   \clist_if_empty:NTF \l_stex_key_style_clist {
458     \tl_clear:N \thisstyle
459     \use:c{__stex_aux_style_#1:}
460   }{
461     \clist_get:NN \l_stex_key_style_clist \thisstyle
462     \tl_if_exist:cTF{__stex_aux_style_#1_\thisstyle :} {
463       \use:c{__stex_aux_style_#1_\thisstyle :}
464     }{
465       \use:c{__stex_aux_style_#1:}
466     }
467   }
468 }
469
470 \cs_new_protected:Nn \__stex_aux_patch:nnn {
471   \str_if_empty:nTF {#2} {
472     \tl_set:cn{__stex_aux_style_#1:}{#3}
473   }{
474     \tl_set:cn{__stex_aux_style_#1_#2:}{#3}
475   }
476 }
477
478 \cs_new_protected:Nn \stex_new_stytable_env:nnnnnnnn {
479   \exp_after:wN \newcommand \cs:w stexstyle#1 \cs_end:[3] [] {
480     \__stex_aux_patch:nnnn{#1}{##1}{##2}{##3}
481   }
482   \NewDocumentEnvironment{#7#1}{#2} {
483     \cs_set:Npn \stex_style_apply: {
484       \__stex_aux_apply_patch_begin:n{#1}
485     }
486     #3
487   }{
488     \cs_set:Npn \stex_style_apply: {
489       \__stex_aux_apply_patch_end:n{#1}
490     }
491     #4
492   }
493   \tl_set:cn {__stex_aux_style_#1_start:} { #5 }
494   \tl_set:cn {__stex_aux_style_#1_end:} { #6 }
495 }

```

```

496 \cs_new_protected:Nn \__stex_aux_patch:n {
497   \str_if_empty:nTF {#2} {
498     \tl_set:cn{\__stex_aux_style_#1_start:}{#3}
499     \tl_set:cn{\__stex_aux_style_#1_end:}{#4}
500   }{
501     \tl_set:cn{\__stex_aux_style_#1_#2_start:}{#3}
502     \tl_set:cn{\__stex_aux_style_#1_#2_end:}{#4}
503   }
504 }
505 }
506
507 \cs_new_protected:Nn \__stex_aux_apply_patch_begin:n {
508   \clist_if_empty:NTF \l_stex_key_style_clist {
509     \tl_clear:N \thisstyle
510     \use:c{\__stex_aux_style_#1_start:}
511   }{
512     \clist_get:NN \l_stex_key_style_clist \thisstyle
513     \stex_debug:nn{styling}{dominant-style:~\thisstyle}
514     \tl_if_exist:cTF{\__stex_aux_style_#1_\thisstyle_start:}{
515       \use:c{\__stex_aux_style_#1_\thisstyle_start:}
516     }{
517       \use:c{\__stex_aux_style_#1_start:}
518     }
519   }
520 }
521
522 \cs_new_protected:Nn \__stex_aux_apply_patch_end:n {
523   \tl_if_empty:NTF \thisstyle {
524     \use:c{\__stex_aux_style_#1_end:}
525   }{
526     \tl_if_exist:cTF{\__stex_aux_style_#1_\thisstyle_end:}{
527       \use:c{\__stex_aux_style_#1_\thisstyle_end:}
528     }{
529       \use:c{\__stex_aux_style_#1_end:}
530     }
531   }
532 }

```

(End definition for `\stex_new_stylable_env:nnnnnnn`, `\stex_new_stylable_cmd:nnnn`, and `\stex_style_apply:..`. These functions are documented on page 128.)

`\stex_str_if_ends_with_p:nn`

`\stex_str_if_ends_with:nnTF`

```

533 \prg_new_conditional:Nnn \stex_str_if_ends_with:nn {p,T,F,TF} {
534   \exp_args:Ne \str_if_eq:nnTF {
535     \str_range:nnn{#1}{-}\str_count:n{#2}{-1}
536   }{#2}\prg_return_true: \prg_return_false:
537 }

```

(End definition for `\stex_str_if_ends_with:nnTF`. This function is documented on page 131.)

`\stex_str_if_starts_with_p:nn`

`\stex_str_if_starts_with:nnTF`

```

538 \prg_new_conditional:Nnn \stex_str_if_starts_with:nn {p,T,F,TF} {
539   \exp_args:Ne \str_if_eq:nnTF {
540     \str_range:nnn{#1}{1}{\str_count:n{#2}}
541   }{#2}\prg_return_true: \prg_return_false:

```

```
542 }
```

(End definition for `\stex_if_starts_with:nNF`. This function is documented on page 131.)

`\stex_macro_body:N`

```
543 \cs_new:Npn \__stex_aux_start:#1\__stex_aux_end: {\exp_not:n{#1}}
544 \cs_new_protected:Nn \__stex_aux_end: {}
545 \cs_new:Nn \stex_macro_body:N {
546     \exp_args:Nne\use:nn{\exp_after:wN \__stex_aux_start: #1} {
547         \__stex_aux_args:e {\cs_parameter_spec:N #1}\__stex_aux_end:
548     }
549 }
550
551 \cs_new:Nn \__stex_aux_args:n {
552     \tl_if_empty:nF{#1} {
553         {##}\exp_args:Ne \tl_head:n {\tl_tail:n {#1}}
554         \__stex_aux_args:e {\exp_args:Ne\tl_tail:n{\tl_tail:n{#1}}}
555     }
556 }
557 \cs_generate_variant:Nn \__stex_aux_args:n {e}
```

(End definition for `\stex_macro_body:N`. This function is documented on page 136.)

`\stex_macro_definition:N`

```
558 \cs_new:Nn \stex_macro_definition:N {
559     \__stex_aux_prefix:e {\cs_prefix_spec:N #1}
560     \def\exp_not:N #1
561     \__stex_aux_params:e {\cs_parameter_spec:N #1}
562     {
563         \stex_macro_body:N #1
564     }
565 }
566
567 \cs_new:Nn \__stex_aux_prefix:n {
568     \tl_if_empty:nF{#1} {
569         \str_if_eq:eeTF {
570             \tl_range:nnn{#1}{1}{10}~
571         }{\tl_to_str:n{\protected}}{
572             \protected
573             \__stex_aux_prefix_long:e {
574                 \str_range:nnn{#1}{11}{-1}
575             }
576         }{
577             \__stex_aux_prefix_long:n {#1}
578         }
579     }
580 }
581 \cs_generate_variant:Nn \__stex_aux_prefix:n {e}
582
583 \cs_new:Nn \__stex_aux_prefix_long:n {
584     \tl_if_empty:nF{#1} {
585         \str_if_eq:eeT {
586             \tl_range:nnn{#1}{1}{10}~
587         }{\tl_to_str:n{\long}}{\long}
588     }
589 }
```

```

589 }
590 \cs_generate_variant:Nn \__stex_aux_prefix_long:n {e}
591
592 \cs_new:Nn \__stex_aux_params:n {
593     \tl_if_empty:nF{#1} {
594         \exp_args:NNe \str_if_eq:VnTF \c_hash_str {\tl_head:n{#1}}{
595             #####
596         }{
597             \tl_head:n{#1}
598         }
599         \__stex_aux_params:e {\tl_tail:n{#1}}
600     }
601 }
602 \cs_generate_variant:Nn \__stex_aux_params:n {e}

```

(End definition for `\stex_macro_definition:N`. This function is documented on page [136](#).)

13.2.7 Persistence

```
603 <@=stex_persist>
```

We check the environment variables:

```

604 \stex_get_env:Nn\__stex_persist_env_str{STEX_USESMS}
605 \str_if_empty:NF\__stex_persist_env_str{
606     \exp_args:No \str_if_eq:nnF \__stex_persist_env_str{false} {
607         \bool_set_true:N \c_stex_persist_mode_bool
608     }
609 }
610 \stex_get_env:Nn\__stex_persist_env_str{STEX_WRITESMS}
611 \str_if_empty:NF\__stex_persist_env_str{
612     \exp_args:No \str_if_eq:nnF \__stex_persist_env_str{false} {
613         \bool_set_true:N \c_stex_persist_write_mode_bool
614     }
615 }

```

```

\stex_persist:n
\stex_persist:e
616 \iow_new:N \c__stex_persist_sms_iow
617
618 \bool_if:NTF \c_stex_persist_write_mode_bool {
619     \stex_if_html_backend:TF{
620         \cs_new:Npn \stex_persist:n #1 {}
621         \cs_new:Npn \stex_persist:e #1 {}
622     }{
623         \cs_new_protected:Nn \stex_persist:n {
624             \iow_now:Nn \c__stex_persist_sms_iow {#1}
625         }
626         \cs_generate_variant:Nn \stex_persist:n {e}
627     }
628 }{
629     \cs_new:Npn \stex_persist:n #1 {}
630     \cs_new:Npn \stex_persist:e #1 {}
631 }

```

(End definition for `\stex_persist:n`. This function is documented on page [136](#).)

Is called at the end of the .sty-file:

```

632 \cs_new_protected:Nn \__stex_persist_load_file:n {
633   \file_if_exist:nT{#1} {
634     \group_begin:
635     \cs_set:Npn \stex_persist:n ##1 {}
636     \cs_set:Npn \stex_persist:e ##1 {}
637     \stex_debug:n{persist}{restoring~from~sms~file}
638     \catcode`\ =10\relax
639     \cs:w @ @ input \cs_end:#1\relax
640     \group_end:
641   }
642 }
643 }
644
645 \cs_new_protected:Nn \__stex_persist_write_only: {
646   \iow_open:Nn \c__stex_persist_sms_iow {\jobname.sms}
647   \AtEndDocument{ \iow_close:N \c__stex_persist_sms_iow }
648 }
649
650 \cs_new_protected:Nn \__stex_persist_read_and_write: {
651   \file_if_exist:nTF{\jobname.sms} {
652     \ior_open:Nn \g_tmpa_ior {\jobname.sms}
653     \iow_open:Nn \g_tmpa_iow {\jobname.sms2}
654     \ior_str_map_inline:Nn \g_tmpa_ior {
655       \iow_now:Nn \g_tmpa_iow {##1}
656     }
657     \iow_close:N \g_tmpa_iow
658     \ior_close:N \g_tmpa_ior
659     \__stex_persist_write_only:
660     \ior_open:Nn \g_tmpa_ior {\jobname.sms2}
661     \ior_str_map_inline:Nn \g_tmpa_ior {
662       \iow_now:Nn \c__stex_persist_sms_iow {##1}
663     }
664     \ior_close:N \g_tmpa_ior
665     \__stex_persist_load_file:n{\jobname.sms2}
666   }\__stex_persist_write_only:
667 }
668
669 \cs_new_protected:Nn \_stex_persist_read_now: {
670   \bool_if:NTF \c_stex_persist_mode_bool {
671     \bool_if:NTF \c_stex_persist_write_mode_bool {
672       \__stex_persist_read_and_write:
673       {
674         \__stex_persist_load_file:n{\jobname.sms}
675       }
676     }{
677       \bool_if:NT \c_stex_persist_write_mode_bool \__stex_persist_write_only:
678     }
679 }

```

13.2.8 Files, Paths and URIs

680 <@=stex_path>

```
\stex_file_set:Nn
\stex_file_set:No
\stex_file_set:Nx
```

```

681 \cs_new_protected:Nn \stex_file_set:Nn {
682   \str_if_empty:nTF {#2} { \seq_clear:N #1 }{
683     \exp_args:NNno \seq_set_split:Nnn #1 / { \tl_to_str:n{#2} }
684   }
685 }
686 \cs_generate_variant:Nn \stex_file_set:Nn {No, Nx}

```

(End definition for `\stex_file_set:Nn`. This function is documented on page 132.)

```

\stex_file_resolve:Nn
\stex_file_resolve:Nn
\stex_file_resolve:Nx
687 \sys_if_platform_windows:TF{
688   \cs_new_protected:Npn \__stex_path_win_take:w #1#2#3 \__stex_path_:
689     \str_set:Nn \l__stex_path_win_drive {#1#2}
690     \str_set:Nn \l__stex_path_str{#3}
691   }
692   \cs_new_protected:Nn \stex_file_resolve:Nn {
693     \str_set:Nn \l__stex_path_str {#2}
694     \str_clear:N \l__stex_path_win_drive
695     \exp_args:NNo \str_replace_all:Nnn \l__stex_path_str \c_underscore_str /
696     \exp_args:Nx \str_if_eq:nnT {\str_item:Nn \l__stex_path_str 2} : {
697       \exp_after:wN \__stex_path_win_take:w \l__stex_path_str \__stex_path_:
698     }
699     \stex_file_set:No #1 \l__stex_path_str
700     \__stex_path_canonicalize:N #1
701     \str_if_empty:NF \l__stex_path_win_drive {
702       \seq_pop_left:NN #1 \l__stex_path_str
703       \seq_put_left:No #1 \l__stex_path_win_drive
704     }
705     \%stex_debug:nn{files}{Set~\tl_to_str:n{#1}~to~\stex_file_use:N #1}
706   }
707 }{
708   \cs_new_protected:Nn \stex_file_resolve:Nn {
709     \str_set:Nn \l__stex_path_str {#2}
710     \stex_file_set:No #1 \l__stex_path_str
711     \__stex_path_canonicalize:N #1
712     \%stex_debug:nn{files}{Set~\tl_to_str:n{#1}~to~\stex_file_use:N #1}
713   }
714 }
715 \cs_generate_variant:Nn \stex_file_resolve:Nn {No, Nx}
716
717 \cs_new_protected:Nn \__stex_path_canonicalize:N {
718   \seq_if_empty:NF #1 {
719     \seq_pop:NN #1 \l__stex_path_str
720     \seq_clear:N \l__stex_path_seq
721     \str_if_empty:NTF \l__stex_path_str {
722       \seq_map_function:NN #1 \__stex_path_dodots:n
723       \seq_put_left:Nn \l__stex_path_seq {}
724     }{
725       \seq_push:No #1 \l__stex_path_str
726       \seq_map_function:NN #1 \__stex_path_dodots:n
727     }
728     \seq_set_eq:NN #1 \l__stex_path_seq
729   }
730 }

```

```

731   \cs_new_protected:Nn \__stex_path_dodots:n {
732     \str_if_empty:nF{#1} {
733       \str_if_eq:nnF {#1} {.} {
734         \str_if_eq:nnTF {#1} {..} {
735           \seq_if_empty:N \l__stex_path_seq {
736             \seq_pop_right:NN \l__stex_path_seq \l__stex_path_str
737           }
738         }
739       }
740       \seq_put_right:Nn \l__stex_path_seq {#1}
741     }
742   }
743 }
744 }
```

(End definition for `\stex_file_resolve:Nn`. This function is documented on page 132.)

```

\stex_if_file_absolute_p:N
\stex_if_file_absolute:NTF
745
746 \sys_if_platform_windows:TF {
747   \prg_new_conditional:Nnn \stex_if_file_absolute:N {p, T, F, TF} {
748     \seq_if_empty:NTF #1 \prg_return_false: {
749       \tl_set:Nx \l__stex_path_maybein_str {\seq_item:Nn #1 1}
750       \exp_args:No \tl_if_empty:nTF \l__stex_path_maybein_str \prg_return_true: {
751         \exp_args:Nx \str_if_eq:nnTF {\str_item:Nn \l__stex_path_maybein_str 2} :
752           \prg_return_true: \prg_return_false:
753         }
754       }
755     }
756   }
757   \prg_new_conditional:Nnn \stex_if_file_absolute:N {p, T, F, TF} {
758     \seq_if_empty:NTF #1 \prg_return_false: {
759       \exp_args:Nx \tl_if_empty:nTF {\seq_item:Nn #1 1}
760         \prg_return_true: \prg_return_false:
761       }
762     }
763 }
```

(End definition for `\stex_if_file_absolute:NTF`. This function is documented on page 132.)

```

\stex_file_use:N
764 \cs_new:Nn \stex_file_use:N {
765   \seq_use:Nn #1 /
766 }
```

(End definition for `\stex_file_use:N`. This function is documented on page 132.)

```

stex_if_file_starts_with:NNTF
767 \prg_new_protected_conditional:Nnn \stex_if_file_starts_with:NN {T,F,TF} {
768   \seq_set_eq:NN \l__stex_path_a_seq #1
769   \seq_set_eq:NN \l__stex_path_b_seq #2
770   \tl_clear:N \l__stex_path_return_tl
771   \bool_while_do:nn{
772     \bool_not_p:n{
773       \bool_lazy_any_p:n{
```

```

774     {\seq_if_empty_p:N \l__stex_path_a_seq}
775     {\seq_if_empty_p:N \l__stex_path_b_seq}
776     {\bool_not_p:n{\tl_if_empty_p:N \l__stex_path_return_tl}}
777   }
778 }
779 }{
780   \seq_pop_left:NN \l__stex_path_a_seq \l__stex_path_a_tl
781   \seq_pop_left:NN \l__stex_path_b_seq \l__stex_path_b_tl
782   \str_if_eq:NNF \l__stex_path_a_tl \l__stex_path_b_tl {
783     \tl_set:Nn \l__stex_path_return_tl {\prg_return_false:}
784   }
785 }
786 \tl_if_empty:NTF \l__stex_path_return_tl {
787   \seq_if_empty:NTF \l__stex_path_b_seq \prg_return_true: \prg_return_false:
788 } \l__stex_path_return_tl
789 }

```

(End definition for `\stex_if_file_starts_with:NNTF`. This function is documented on page 132.)

`\stex_file_split_off_ext:NN`
`\stex_file_split_off_lang:NN`

```

790 \cs_new_protected:Nn \stex_file_split_off_ext:NN {
791   \seq_set_eq:NN #1 #2
792   \seq_pop_right:NN #1 \l__stex_path_str
793   \seq_set_split:NnV \l__stex_path_seq . \l__stex_path_str
794   \seq_pop_right:NN \l__stex_path_seq \l__stex_path_str
795   \seq_put_right:Nx #1 {\seq_use:Nn \l__stex_path_seq .}
796 }
797 \cs_new_protected:Nn \stex_file_split_off_lang:NN {
798   \seq_set_eq:NN #1 #2
799   \seq_pop_right:NN #1 \l__stex_path_str
800   \seq_set_split:NnV \l__stex_path_seq . \l__stex_path_str
801   \seq_pop_right:NN \l__stex_path_seq \l__stex_path_str
802
803   \seq_pop_right:NN \l__stex_path_seq \l__stex_path_str
804   \exp_args:NNo \prop_if_in:NnF \c_stex_languages_prop \l__stex_path_str {
805     \seq_put_right:No \l__stex_path_seq \l__stex_path_str
806   }
807
808   \seq_put_right:Nx #1 {\seq_use:Nn \l__stex_path_seq .}
809 }

```

(End definition for `\stex_file_split_off_ext:NN` and `\stex_file_split_off_lang:NN`. These functions are documented on page 132.)

URIs:

`\stex_map_uri:Nnnnn`

```

810 \cs_set_protected:Nn \__stex_path_auth:n {
811   \msg_error:nnx{stex}{error/misused-uri}{\tl_to_str:n{#1}}
812 }
813 \cs_set_eq:NN \__stex_path_path:n \__stex_path_auth:n
814 \cs_set_eq:NN \__stex_path_module:n \__stex_path_auth:n
815 \cs_set_eq:NN \__stex_path_name:n \__stex_path_auth:n
816
817 \cs_set_protected:Nn \stex_map_uri:Nnnnn{
818   \stex_pseudogroup_with:nn{\__stex_path_auth:n\__stex_path_path:n\__stex_path_module:n\__st

```

```

819   \cs_set:Npn \__stex_path_auth:n ##1 {#2}
820   \cs_set:Npn \__stex_path_path:n ##1 {#3}
821   \cs_set:Npn \__stex_path_module:n ##1 {#4}
822   \cs_set:Npn \__stex_path_name:n ##1 {#5}
823   #1
824 }
825 }

```

(End definition for `\stex_map_uri:Nnnnn`. This function is documented on page 133.)

```

\stex_uri_set:Nn
\stex_uri_set:Nn
\stex_uri_set:Nx
826 \str_set:Nx\__stex_path_colonslash{\cColonStr}
827 \cs_new_protected:Nn \__stex_path_uri_set:NnN {
828   \str_if_empty:nTF {#2} {
829     \msg_error:nnxx{stex}{error/invalid-uri}{\tl_to_str:n{#2}}{empty}
830   }{
831     \exp_args:NNNo \exp_args:NNno \seq_set_split:Nnn #1 \__stex_path_colonslash { \tl_to_str
832     \seq_pop_left:NN #1 \l__stex_path_auth_str
833     \seq_if_empty:NTF #1 {
834       \msg_error:nnxx{stex}{error/invalid-uri}{\tl_to_str:n{#2}}{missing-authority}
835     }{
836       \exp_args:NNnx \seq_set_split:Nnn #1 ? {\exp_args:NNo \seq_use:Nn #1 \__stex_path_colon
837       \seq_pop_left:NN #1 \l__stex_path_path
838       #3 \l__stex_path_path \l__stex_path_path
839       \seq_if_empty:NTF #1 {
840         \exp_args:NNo \__stex_path_uri_set:Nnxnn #1 \l__stex_path_auth_str
841         {\stex_file_use:N \l__stex_path_path} {} {}
842       }{
843         \seq_pop_left:NN #1 \l__stex_path_mod
844         \seq_if_empty:NTF #1 {
845           \exp_args:NNo \__stex_path_uri_set:Nnxon #1 \l__stex_path_auth_str
846           {\stex_file_use:N \l__stex_path_path} \l__stex_path_mod {}
847         }{
848           \seq_pop_left:NN #1 \l__stex_path_name
849           \seq_if_empty:NTF #1 {
850             \exp_args:NNo \__stex_path_uri_set:Nnxon #2 \l__stex_path_auth_str
851             {\stex_file_use:N \l__stex_path_path} \l__stex_path_mod \l__stex_path_name
852           }{
853             \msg_error:nnxx{stex}{error/invalid-uri}{\tl_to_str:n{#2}}{too-many~?s}
854           }
855         }
856       }
857     }
858   }
859   \stex_debug:nn{uris}{Set~\tl_to_str:n{#1}~to~\stex_uri_use:N #1}
860 }
861
862 \cs_new_protected:Nn \__stex_path_uri_set:Nnnnn{
863   \tl_set:Nn #1 {
864     \__stex_path_auth:n{ #2 }
865     \__stex_path_path:n{ #3 }
866     \__stex_path_module:n{ #4 }
867     \__stex_path_name:n{ #5 }
868   }

```

```

869 }
870 \cs_generate_variant:Nn\__stex_path_uri_set:Nnnnn {Nnxnn,Nnxon,Nnxoo}
871
872 \cs_new_protected:Nn \stex_uri_set:Nn {
873   \__stex_path_uri_set:Nnn #1 {#2} \stex_file_set:No
874 }
875 \cs_generate_variant:Nn \stex_uri_set:Nn {No, Nx}

```

(End definition for `\stex_uri_set:Nn`. This function is documented on page 133.)

`\stex_uri_resolve:Nn`

```

\stex_uri_resolve:Nn
\stex_uri_resolve:Nn
\stex_uri_resolve:Nx
876 \cs_new_protected:Nn \stex_uri_resolve:Nn {
877   \__stex_path_uri_set:Nnn #1 {#2} \stex_file_resolve:No
878 }
879 \cs_generate_variant:Nn \stex_uri_resolve:Nn {No, Nx}

```

(End definition for `\stex_uri_resolve:Nn`. This function is documented on page 133.)

`\stex_uri_use:N`

```

\stex_uri_use:N
880 \cs_new:Npn \__stex_path_uri_use:w \__stex_path_auth:n #1 \__stex_path_path:n #2 \__stex_path_
881   #1\c_colon_str/ #2 \tl_if_empty:nF { #3 }{ ? #3
882     \tl_if_empty:nF { #4 }{ ? #4 } }
883 }
884 \cs_new:Nn \stex_uri_use:N {
885   \exp_args:Ne \cs_if_eq:NNTF { \tl_head:N #1 } \__stex_path_auth:n {
886     \exp_after:wn \__stex_path_uri_use:w #1
887   }{
888     \msg_error:nnnn{stex}{error/invalid-uri}{#1}{Not~a~URI}
889   }
890 }

```

(End definition for `\stex_uri_use:N`. This function is documented on page 133.)

`\stex_uri_from_repo_file>NNNn`

`\stex_uri_from_repo_file_nolang:NNNn`

```

\stex_uri_from_repo_file>NNNn
\stex_uri_from_repo_file_nolang:NNNn
891 \cs_new_protected:Npn \stex_uri_from_repo_file_nolang:NNNn {
892   \__stex_path_from_repo_file:NNNNn \stex_file_split_off_lang:NN
893 }
894 \cs_new_protected:Npn \stex_uri_from_repo_file:NNNn {
895   \__stex_path_from_repo_file:NNNNn \stex_file_split_off_ext:NN
896 }
897
898 \cs_new_protected:Nn \__stex_path_from_repo_file:NNNNn {
899   #1 \l__stex_path_file #4
900   \prop_if_exist:NTF #3 {
901     \str_clear:N \l__stex_path_uri
902     \prop_get:NnNF #3 {#5} \l__stex_path_uri {
903       \prop_get:NnNF #3 {ns} \l__stex_path_uri {
904         \__stex_path_uri_set:Nnxnn #2 {file}
905         {\stex_file_use:N \l__stex_path_file} {} {}
906       }
907     }
908     \str_if_empty:NF \l__stex_path_uri {\__stex_path_relativize:N #2}
909   }{
910     \exp_args:NNx \__stex_path_uri_set:Nnxnn #2 {\tl_to_str:n{file}}
911     {\stex_file_use:N \l__stex_path_file} {} {}

```

```

912     }
913 }
914
915 \cs_new_protected:Nn \__stex_path_relativize:N {
916     \seq_set_eq:NN \l__stex_path_seq \l__stex_path_file
917     \seq_map_inline:Nn \c_stex_mathhub_file { % mathhub path
918         \seq_pop_left:NN \l__stex_path_seq \l__stex_path_tl
919     }
920     \stex_file_set:Nx \l__stex_path_path {\prop_item:Nn \l_stex_current_archive_prop {id} }
921     \seq_map_inline:Nn \l__stex_path_path { % id
922         \seq_pop_left:NN \l__stex_path_seq \l__stex_path_tl
923     }
924     \seq_pop_left:NN \l__stex_path_seq \l__stex_path_tl % source
925
926     \stex_uri_set:Nx #1 { \l__stex_path_uri / \stex_file_use:N \l__stex_path_seq }
927 }

```

(End definition for `\stex_uri_from_repo_file:NNNn` and `\stex_uri_from_repo_file_nolang:NNNn`. These functions are documented on page 133.)

```

\stex_uri_from_current_file:Nn
\stex_uri_from_current_file_nolang:Nn
928 \cs_new_protected:Nn \stex_uri_from_current_file:Nn {
929     \stex_debug:nn{docuri}{Here:~\stex_file_use:N \g_stex_current_file}
930     \stex_uri_from_repo_file:NNNn #1 \l_stex_current_archive_prop
931         \g_stex_current_file {#2}
932     \stex_debug:nn{docuri}{resolved:~\stex_uri_use:N #1}
933 }
934 \cs_new_protected:Nn \stex_uri_from_current_file_nolang:Nn {
935     \stex_uri_from_repo_file_nolang:NNNn #1 \l_stex_current_archive_prop
936         \g_stex_current_file {#2}
937 }

```

(End definition for `\stex_uri_from_current_file:Nn` and `\stex_uri_from_current_file_nolang:Nn`. These functions are documented on page 134.)

```

\stex_uri_add_module:NNn
\stex_uri_add_module:NNo
938 \cs_new_protected:Nn \stex_uri_add_module:NNn {
939     \exp_args:Ne \cs_if_eq:NNTF { \tl_head:N #2 } \__stex_path_auth:n {
940         \stex_pseudogroup_with:nn
941             {\__stex_path_auth:n\__stex_path_path:n\__stex_path_module:n\__stex_path_name:n}
942             {
943                 \cs_set:Npn \__stex_path_module:n ##1 {
944                     \tl_if_empty:nTF{##1} {
945                         \exp_not:N \__stex_path_module:n {#3}
946                     }{
947                         \msg_error:nnn{stex}{error/invalid-dpath}{#2}
948                     }
949                 }
950                 \cs_set:Npn \__stex_path_name:n ##1 {
951                     \tl_if_empty:nTF{##1} {
952                         \exp_not:N \__stex_path_name:n {}
953                     }{
954                         \msg_error:nnn{stex}{error/invalid-dpath}{#2}
955                     }
956                 }

```

```

957         \tl_set:Nx #1 {#2}
958     }
959     }{
960         \msg_error:nnnn{stex}{error/invalid-uri}{#2}{Not~a~URI}
961     }
962 }
963 \cs_generate_variant:Nn \stex_uri_add_module:NNn {NNo}

```

(End definition for `\stex_uri_add_module:NNn`. This function is documented on page 134.)

`\l_stex_current_doc_uri`

```
964 \tl_new:N \l_stex_current_doc_uri
```

(End definition for `\l_stex_current_doc_uri`. This variable is documented on page 134.)

`\stex_set_document_uri:`

```

965 \cs_new_protected:Nn \stex_set_document_uri: {
966     \stex_uri_from_current_file:Nn \l_stex_current_doc_uri {narr}
967     \%stex_debug:nn{sref}{Document~URI:~\stex_uri_use:N \l_stex_current_doc_uri}
968 }

```

(End definition for `\stex_set_document_uri:`. This function is documented on page 134.)

`\stex_set_current_namespace:`

```

969 \cs_new_protected:Nn \stex_set_current_namespace: {
970     \stex_uri_from_current_file_nolang:Nn \l_stex_current_ns_uri {source-base}
971     \%stex_debug:nn{modules}{Namespace~URI:~\stex_uri_use:N \l_stex_current_ns_uri}
972 }

```

(End definition for `\stex_set_current_namespace:`. This function is documented on page 134.)

We determine the PWD

```

\c_stex_pwd_file
\c_stex_main_file
973 \sys_if_platform_windows:TF{
974     \stex_get_env:Nn\l_stex_path_str{CD}
975 }{
976     \stex_get_env:Nn\l_stex_path_str{PWD}
977 }
978 \stex_file_resolve:No \c_stex_pwd_file \l_stex_path_str
979 \seq_set_eq:NN \c_stex_main_file \c_stex_pwd_file
980 \seq_put_right:Nx \c_stex_main_file {\jobname\tl_to_str:n{.tex}}
981
982 \stex_debug:nn {files} {PWD:~\stex_file_use:N \c_stex_pwd_file}

```

(End definition for `\c_stex_pwd_file` and `\c_stex_main_file`. These variables are documented on page 133.)

13.2.9 File Hooks

keeps track of file changes:

```
983 \seq_gclear_new:N\g__stex_path_stack
984 \seq_gclear_new:N\g_stex_current_file
```

`\stex_filestack_push:n`

```
985 \cs_new_protected:Nn \stex_filestack_push:n {
986     \stex_if_ends_with:nNTF {#1}{.tex} {
987         \stex_file_resolve:No \g_stex_current_file {#1}
988     }{
989         \stex_file_resolve:No \g_stex_current_file {#1.tex}
990     }
991     \stex_if_file_absolute:NF \g_stex_current_file {
992         \stex_file_resolve:Nx \g_stex_current_file {
993             \stex_file_use:N \c_stex_pwd_file / \stex_file_use:N \g_stex_current_file
994         }
995     }
996     \seq_gset_eq:NN \g_stex_current_file \g_stex_current_file
997     \exp_args:NNx \seq_gpush:Nn \g__stex_path_stack {\stex_file_use:N \g_stex_current_file}
998     \_stex_every_file:
999 }
1000 \cs_new_protected:Nn \_stex_every_file: {
1001     \stex_set_document_uri:
1002     \stex_language_from_file:
1003     \stex_set_current_namespace:
1004 }
1005 \%AtBeginDocument{\_stex_every_file:}
```

(End definition for `\stex_filestack_push:n`. This function is documented on page 132.)

`\stex_filestack_pop:`

```
1007 \cs_new_protected:Nn \stex_filestack_pop: {
1008     \seq_if_empty:NF \g__stex_path_stack {
1009         \seq_gpop:NN \g__stex_path_stack \l__stex_path_str
1010     }
1011     \seq_if_empty:NTF \g__stex_path_stack {
1012         \seq_gset_eq:NN \g_stex_current_file \c_stex_main_file
1013     }{
1014         \seq_get:NN \g__stex_path_stack \l__stex_path_str
1015         \exp_args:NNo \stex_file_set:Nn \g_stex_current_file \l__stex_path_str
1016         \seq_gset_eq:NN \g_stex_current_file \g_stex_current_file
1017     }
1018     \_stex_every_file:
1019 }
```

(End definition for `\stex_filestack_pop:..`. This function is documented on page 132.)

Hooks for the current file:

```
1020 \cs_new_protected:Nn \stex_input_with_hooks:n {
1021     \tl_set:Nn \l__stex_path_do_hooks_pre_tl {
1022         \tl_gset:Nn \l__stex_path_do_hooks_pre_tl {}
1023         \stex_debug:nn{HERE}{Hook~for~#1^~J\meaning\CurrentFilePath^~J\CurrentFile}
1024         \tl_if_empty:NTF\CurrentFilePath{
```

```

1025     \exp_args:No \stex_filestack_push:n {\CurrentFile}
1026     }{
1027         \exp_args:Ne \stex_filestack_push:n { \CurrentFilePath / \CurrentFile }
1028     }
1029 }
1030 \input{#1}
1031 \stex_debug:nn{HERE}{Hook-end-for~#1}
1032 \stex_filestack_pop:
1033 }
1034 \tl_new:N \l__stex_path_do_hooks_pre_tl {}
1035
1036 \AddToHook{file/before}{
1037     \l__stex_path_do_hooks_pre_tl
1038 }
1039 \%AddToHook{file/after}{ \stex_filestack_pop: }

```

13.3 Math Archives

```

1040 <@=stex_mathhub>
\mathhub
\c_stex_home_file
\c_stex_mathhub_file
1041
1042 \sys_if_platform_windows:TF{
1043     \stex_get_env:Nn \l__stex_mathhub_str {homedrive\c_percent_str\c_percent_str homepath}
1044 }{
1045     \stex_get_env:Nn \l__stex_mathhub_str {HOME}
1046 }
1047 \stex_file_resolve:No \c_stex_home_file \l__stex_mathhub_str
1048
1049 \str_if_empty:NTF\mathhub{
1050     \stex_get_env:Nn \l__stex_mathhub_str {MATHHUB}
1051     \str_if_empty:NTF \l__stex_mathhub_str {
1052         \ior_open:NnTF \g_tmpa_iorf{\stex_file_use:N \c_stex_home_file/.stex/mathhub.path}{
1053             \group_begin:
1054                 \escapechar=-1\catcode`\\"=12
1055                 \ior_str_get:NN \g_tmpa_ior \l__stex_mathhub_str
1056                 \str_gset_eq:NN \l__stex_mathhub_str \l__stex_mathhub_str
1057             \group_end:
1058                 \ior_close:N \g_tmpa_ior
1059                 \stex_debug:nn{mathhub}{MathHub-directory-determined-from-home-directory}
1060             }{
1061                 \str_clear:N \l__stex_mathhub_str
1062             }
1063     }{
1064         \stex_debug:nn{mathhub}{MathHub-directory-determined-from-environment-variable}
1065     }
1066 }{
1067     \str_set_eq:NN \l__stex_mathhub_str \mathhub
1068 }
1069
1070 \str_if_empty:NTF \l__stex_mathhub_str {
1071     \msg_warning:nn{stex}{warning/nomathhub}

```

```

1072   \exp_args:NNe \stex_file_set:Nn \c_stex_mathhub_file {\stex_file_use:N \c_stex_home_file \
1073   \seq_clear:N \c_stex_mathhub_file
1074 }{
1075   \stex_file_resolve:No \c_stex_mathhub_file \l_stex_mathhub_str
1076   \stex_if_file_absolute:NF \c_stex_mathhub_file {
1077     \exp_args:NNe \stex_file_resolve:Nn \c_stex_mathhub_file {
1078       \stex_file_use:N \c_stex_main_file / .. / \l_stex_mathhub_str
1079     }
1080   }
1081 }
1082
1083 \exp_args:NNe \str_set:Nn \mathhub {\stex_file_use:N \c_stex_mathhub_file}
1084 \stex_debug:nn{mathhub}{MATHHUB:~\mathhub}

```

(End definition for `\mathhub`, `\c_stex_home_file`, and `\c_stex_mathhub_file`. These variables are documented on page ??.)

```

\l_stex_current_archive
\stex_set_current_archive:n
1085 \cs_new_protected:Nn \stex_set_current_archive:n {
1086   \stex_require_archive:n { #1 }
1087   \stex_debug:nn{mathhub}{switching-to-archive-#1}
1088   \prop_set_eq:Nc \l_stex_current_archive_prop {
1089     c_stex_mathhub_#1_manifest_prop
1090   }
1091 }

```

(End definition for `\l_stex_current_archive` and `\stex_set_current_archive:n`. These variables are documented on page ??.)

```

\stex_in_archive:nn
1092 \cs_new_protected:Nn \stex_in_archive:nn {
1093   \cs_if_exist:NF \l_stex_mathhub_cs {
1094     \cs_set:Npn \l_stex_mathhub_cs ##1 {}
1095   }
1096   \stex_pseudogroup:nn{
1097     \cs_set:Npn \l_stex_mathhub_cs ##1 {#2}
1098     \tl_if_empty:nTF{#1} {
1099       \prop_if_exist:NTF \l_stex_current_archive_prop {
1100         \exp_args:Ne \l_stex_mathhub_cs {\prop_item:Nn \l_stex_current_archive_prop { id }}
1101       }{
1102         \l_stex_mathhub_cs {}
1103       }
1104     }{
1105       \stex_set_current_archive:n{#1}
1106       \l_stex_mathhub_cs {#1}
1107     }
1108   }{
1109     \stex_pseudogroup_restore:N \l_stex_current_archive_prop
1110     \cs_set:Npn \exp_not:N \l_stex_mathhub_cs ##1 {
1111       \exp_args:No \exp_not:n {\l_stex_mathhub_cs {##1}}
1112     }
1113   }
1114 }

```

(End definition for `\stex_in_archive:nn`. This function is documented on page 129.)

```

\stex_require_archive:n
\stex_require_archive:o
1115 \cs_new_protected:Nn \stex_require_archive:n {
1116   \prop_if_exist:cF { c_stex_mathhub_#1_manifest_prop } {
1117     \seq_if_empty:NTF \c_stex_mathhub_file {
1118       \stex_fatal_error:n{warning/nomathhub}
1119     }{
1120       \stex_debug:nn{mathhub}{Opening~archive:~#1}
1121       \__stex_mathhub_do_manifest:n { #1 }
1122     }
1123   }
1124 }
1125 \cs_generate_variant:Nn \stex_require_archive:n {o}

```

(End definition for `\stex_require_archive:n`. This function is documented on page 129.)

Code for finding and parsing manifest files:

```

1126 \cs_new_protected:Nn \__stex_mathhub_do_manifest:n {
1127   \exp_args:Ne \__stex_mathhub_find_manifest:n {\stex_file_use:N \c_stex_mathhub_file / #1}
1128   \str_if_empty:NT \l__stex_mathhub_manifest_str {
1129     \stex_fatal_error:nxx{error/noarchive}
1130     {#1}\stex_file_use:N \c_stex_mathhub_file
1131   }
1132   \__stex_mathhub_parse_manifest:n {#1}
1133 }
1134
1135 \cs_new_protected:Nn \__stex_mathhub_find_manifest:n {
1136   \str_clear:N \l__stex_mathhub_manifest_str
1137   \seq_set_split:Nnn \l__stex_mathhub_seq / {#1}
1138   \bool_set_true:N \l__stex_mathhub_bool
1139   \bool_while_do:Nn \l__stex_mathhub_bool {
1140     \tl_if_eq:NNTF \l__stex_mathhub_seq \c_stex_mathhub_file {
1141       \bool_set_false:N \l__stex_mathhub_bool
1142     }{
1143       \__stex_mathhub_check_manifest:
1144       \bool_if:NT \l__stex_mathhub_bool {
1145         \seq_pop_right:NN \l__stex_mathhub_seq \l__stex_mathhub_tl
1146       }
1147     }
1148   }
1149 }
1150 \cs_generate_variant:Nn \__stex_mathhub_find_manifest:n {x}
1151
1152 \cs_new_protected:Nn \__stex_mathhub_check_manifest: {
1153   \__stex_mathhub_check_manifest:n {MANIFEST.MF}
1154   \bool_if:NT \l__stex_mathhub_bool {
1155     \__stex_mathhub_check_manifest:n {META-INF/MANIFEST.MF}
1156     \bool_if:NT \l__stex_mathhub_bool {
1157       \__stex_mathhub_check_manifest:n {meta-inf/MANIFEST.MF}
1158     }
1159   }
1160 }
1161
1162 \cs_new_protected:Nn \__stex_mathhub_check_manifest:n {
1163   \stex_debug:nn{mathhub}{Checking~\stex_file_use:N \l__stex_mathhub_seq / #1}
1164   \file_if_exist:nT {\stex_file_use:N \l__stex_mathhub_seq / #1} {

```

```

1165     \bool_set_false:N \l__stex_mathhub_bool
1166     \str_set:Nx \l__stex_mathhub_manifest_str {\stex_file_use:N \l__stex_mathhub_seq / #1}
1167   }
1168 }
1169
1170 \ior_new:N \c__stex_mathhub_manifest_ior
1171 \cs_new_protected:Nn \__stex_mathhub_parse_manifest:n {
1172   \ior_open:Nn \c__stex_mathhub_manifest_ior \l__stex_mathhub_manifest_str
1173   \prop_clear:N \l__stex_mathhub_prop
1174   \ior_map_inline:Nn \c__stex_mathhub_manifest_ior {
1175     \exp_args:NNNo \exp_args:NNNx
1176       \seq_set_split:Nnn \l__stex_mathhub_seq \c_colon_str {\tl_to_str:n{##1}}
1177     \seq_pop_left:NNT \l__stex_mathhub_seq \l__stex_mathhub_key {
1178       \exp_args:NNo \str_set:Nn \l__stex_mathhub_key \l__stex_mathhub_key
1179       \str_set:Nx \l__stex_mathhub_val {\seq_use:Nn \l__stex_mathhub_seq :}
1180       \str_case:Nn \l__stex_mathhub_key {
1181         {id}           {\prop_put:Nno \l__stex_mathhub_prop { id }      \l__stex_mathhub_}
1182         {narration-base} {\prop_put:Nno \l__stex_mathhub_prop { narr }    \l__stex_mathhub_}
1183         {furl-base}    {\prop_put:Nno \l__stex_mathhub_prop { docurl }  \l__stex_mathhub_}
1184         {source-base}   {\prop_put:Nno \l__stex_mathhub_prop { ns }     \l__stex_mathhub_}
1185         {ns}            {\prop_put:Nno \l__stex_mathhub_prop { ns }     \l__stex_mathhub_}
1186       }
1187     }
1188   }
1189 \ior_close:N \c__stex_mathhub_manifest_ior
1190 \prop_gset_eq:cN { c_stex_mathhub_#1_manifest_prop } \l__stex_mathhub_prop
1191 \stex_debug:nn{mathhub}{Result:~\prop_to_keyval:N \l__stex_mathhub_prop}
1192 \stex_persist:e {
1193   \prop_gset_from_keyval:cn {c_stex_mathhub_#1_manifest_prop} {
1194     \prop_to_keyval:N \l__stex_mathhub_prop
1195   }
1196 }
1197 }

```

Current MathHub archive

```

\c_stex_main_archive_prop
\l_stex_current_archive_prop
1198 \cs_new_protected:Nn \stex_main_archive: {
1199   \stex_if_file_starts_with:NNTF \c_stex_pwd_file \c_stex_mathhub_file {
1200     \__stex_mathhub_find_manifest:x { \stex_file_use:N \c_stex_pwd_file }
1201     \str_if_empty:NT \l__stex_mathhub_manifest_str {
1202       \stex_debug:nn{mathhub}{Not~currently~in~a~MathHub~archive}
1203     }{
1204       \__stex_mathhub_parse_manifest:n { main }
1205       \prop_set_eq:NN \c_stex_main_archive_prop \c_stex_mathhub_main_manifest_prop
1206       \cs_undefine:N \c_stex_mathhub_main_manifest_prop
1207       \prop_get:NnN \c_stex_main_archive_prop {id}
1208         \l__stex_mathhub_str
1209       \prop_set_eq:cN { c_stex_mathhub_\l__stex_mathhub_str _manifest_prop }
1210         \c_stex_main_archive_prop
1211       \exp_args:No \stex_set_current_archive:n { \l__stex_mathhub_str }
1212       \stex_debug:nn{mathhub}{Current~archive:~}
1213         \prop_item:Nn \l_stex_current_archive_prop {id}
1214     }
1215     \bool_if:NT \c_stex_persist_write_mode_bool {

```

```

1216   \tl_put_right:Nx \_stex_persist_read_now: {
1217     \stex_persist:n {
1218       \prop_gset_from_keyval:cN {c_stex_mathhub_\l_stex_mathhub_str} _manifest_prop} {
1219         \prop_to_keyval:N \c_stex_main_archive_prop
1220       }
1221       \prop_gset_eq:Nc \exp_not:N \l_stex_current_archive_prop {
1222         c_stex_mathhub_\l_stex_mathhub_str _manifest_prop
1223       }
1224       \prop_gset_eq:Nc \exp_not:N \c_stex_main_archive_prop {
1225         c_stex_mathhub_\l_stex_mathhub_str _manifest_prop
1226       }
1227     }
1228   }
1229 }
1230 }{
1231   \stex_debug:nn{mathhub}{Not~currently~in~the~MathHub~directory}
1232 }
1233 }
1234 }

1235 \%bool_if:NF \c_stex_persist_mode_bool {
1236   \_stex_main_archive:
1237 }
1238 }
```

(End definition for `\c_stex_main_archive_prop` and `\l_stex_current_archive_prop`. These variables are documented on page 129.)

13.4 Documents

13.4.1 Title

Stores the title, if it exists:

```

1239 <@=stex_doc>
1240 \tl_new:N \g__stex_doc_title_tl
```

`\stexdoctitle` Initial definition, will be changed at begin document:

```

1241 \cs_new_protected:Npn \stexdoctitle #1 {
1242   \tl_gset:Nn \g__stex_doc_title_tl { #1 }
1243   \global\def\stexdoctitle##1{}
1244 }
```

At begin document, we switch to:

```

1245 \cs_new_protected:Nn \__stex_doc_set_title:n {
1246   \stex_if_smsmode:F{
1247     \global\def\stexdoctitle##1{}
1248     \stex_debug:nn{title}{Setting~title~to:\tl_to_str:n##1}
1249     \tl_gset:Nn \g__stex_doc_title_tl { #1 }
1250     \__stex_doc_title_html:
1251   }
1252 }
```

Hooks, changes and HTML:

```

1253 \cs_new_protected:Nn \__stex_doc_title_html: {
1254   \stex_if_do_html:T{\stex_if_html_backend:T{
```

```

1255     \stex_annotation_invisible:nn{shtml:doctitle={}}{ \hbox{\g__stex_doc_title_tl} }
1256   }
1257 }
1258
1259 \AtBeginDocument {
1260   \tl_if_empty:NTF \g__stex_doc_title_tl {
1261     \cs_set_eq:NN \stexdoctitle \__stex_doc_set_title:n
1262   }{
1263     \stex_debug:nn{title}{Setting~title~to:\exp_args:No\tl_to_str:n\g__stex_doc_title_tl}
1264     \global\def\stexdoctitle{\#1}
1265     \__stex_doc_title_html:
1266   }
1267
1268   \cs_set_eq:NN \__stex_doc_maketitle: \maketitle
1269   \global\protected\def\maketitle{
1270     \tl_if_empty:NF \@title {
1271       \exp_args:No \stexdoctitle \@title
1272     }
1273     \__stex_doc_maketitle:
1274   }
1275 }
```

(End definition for `\stexdoctitle`. This function is documented on page ??.)

13.4.2 Sectioning

```

1276 \int_new:N \l_stex_docheader_sect
1277
1278 \tl_set:Nn \stex_current_section_level {document}
1279
1280 \cs_set_protected:Npn \currentsectionlevel {
1281   \stex_if_do_html:TF{
1282     \stex_annotation:nn{shtml:currentsectionlevel={},shtml:capitalize=false}{}}
1283   }{
1284     \stex_current_section_level
1285   }
1286 \tl_if_exist:NT\xspace\xspace
1287 }
1288
1289 \cs_set_protected:Npn \Currentsectionlevel {
1290   \stex_if_do_html:TF{
1291     \stex_annotation:nn{shtml:currentsectionlevel={},shtml:capitalize=true}{}}
1292   }{
1293     \exp_args:No \__stex_capitalize:n \stex_current_section_level
1294   }
1295 \tl_if_exist:NT\xspace\xspace
1296 }
1297
1298 \stex_if_html_backend:TF {
1299   \cs_new_protected:Nn \_sfragment_do_level:nn {
1300     \stexdoctitle{\#2}
1301     \par
1302     \begin{stex_annotation_env}{shtml:section={\int_use:N \l_stex_docheader_sect}}
1303       \noindent\stex_annotation:nn{shtml:sectiontitle={}}{
```

```

1304         \_stex_annotation_force_break:n{#2}
1305     }\par
1306 }
1307 \cs_new_protected:Nn \_sfragment_end: {
1308     \end{stex_annotation_env}
1309 }
1310 }{
1311     \cs_new_protected:Nn \_sfragment_do_level:nn {
1312         \stexdotitle{#2}
1313         \tl_if_empty:NTF \l_stex_key_short_tl {
1314             \use:c{#1}
1315         }{
1316             \exp_args:Nnx \use:nn{\use:c{#1}}{[\exp_args:No \exp_not:n \l_stex_key_short_tl]}
1317         }{#2}
1318         \int_incr:N \l_stex_docheader_sect
1319         \tl_set:Nn \stex_current_section_level{#1}
1320     }
1321     \cs_new_protected:Nn \_sfragment_end: {}
1322 }
1323
1324
1325 \cs_new_protected:Npn \__stex_doc_do_section:n {
1326     \int_case:nnF \l_stex_docheader_sect {
1327         {0}{\cs_if_exist:NTF \thepart {\_sfragment_do_level:nn{part}}{
1328             \int_incr:N \l_stex_docheader_sect
1329             \__stex_doc_do_section:n
1330         }}
1331         {1}{\cs_if_exist:NTF \thechapter {\_sfragment_do_level:nn{chapter}}{
1332             \int_incr:N \l_stex_docheader_sect
1333             \__stex_doc_do_section:n
1334         }}
1335         {2}{\_sfragment_do_level:nn{section}}
1336         {3}{\_sfragment_do_level:nn{subsection}}
1337         {4}{\_sfragment_do_level:nn{subsubsection}}
1338         {5}{\_sfragment_do_level:nn{paragraph}}
1339         }{\_sfragment_do_level:nn{subparagraph}}
1340     }
1341
1342 \stex_keys_define:nnnn{ sfragment }{
1343     \tl_clear:N \l_stex_key_short_tl
1344 }{
1345     short .tl_set:N = \l_stex_key_short_tl
1346 }{id}
1347
1348 \NewDocumentEnvironment{sfragment}{ O{} m}{
1349     \stex_keys_set:nn{sfragment}{#1}
1350     \__stex_doc_do_section:n{#2}
1351     \stex_do_id:
1352 }{
1353     \_sfragment_end:
1354 }
1355
1356 \%int_incr:N \l_stex_docheader_sect
1357 \NewDocumentEnvironment{blindfragment}{}{

```

```

1358     \__stex_doc_skip_section:
1359 }{
1360   \stex_if_html_backend:T{
1361     \stex_annotate_invisible:n{~}
1362     \end{stex_annotate_env}
1363   }
1364 }
1365
1366
1367 \cs_new_protected:Nn \__stex_doc_skip_section_i: {
1368   \int_case:nn \l_stex_docheader_sect {
1369     {0}{\cs_if_exist:NF \thepart {
1370       \int_incr:N \l_stex_docheader_sect \__stex_doc_skip_section_i:
1371     }}
1372     {1}{\cs_if_exist:NF \thechapter {
1373       \int_incr:N \l_stex_docheader_sect \__stex_doc_skip_section_i:
1374     }}
1375   }
1376   \int_incr:N \l_stex_docheader_sect
1377 }
1378
1379 \stex_if_html_backend:TF {
1380   \cs_new_protected:Nn \__stex_doc_skip_section: {
1381     \__stex_doc_skip_section_i:
1382     \begin{stex_annotate_env}{shtml:skipsection={\int_use:N \l_stex_docheader_sect}}
1383     \stex_annotate_invisible:n{~}
1384   }
1385 }
1386   \cs_set_eq:NN \__stex_doc_skip_section: \__stex_doc_skip_section_i:
1387 }
1388
1389
1390 \cs_new_protected:Nn \__stex_doc_skip_fragment:n {
1391   \stepcounter{#1}
1392 }
1393
1394 \cs_new_protected:Npn \skipfragment {
1395   \int_case:nnF \l_stex_docheader_sect {
1396     {0}{\cs_if_exist:NTF \thepart {\__stex_doc_skip_fragment:n{part}}{
1397       \int_incr:N \l_stex_docheader_sect
1398       \skipfragment
1399     }}
1400     {1}{\cs_if_exist:NTF \thechapter {\__stex_doc_skip_fragment:n{chapter}}{
1401       \int_incr:N \l_stex_docheader_sect
1402       \skipfragment
1403     }}
1404     {2}{\__stex_doc_skip_fragment:n{section}}
1405     {3}{\__stex_doc_skip_fragment:n{subsection}}
1406     {4}{\__stex_doc_skip_fragment:n{subsubsection}}
1407     {5}{\__stex_doc_skip_fragment:n{paragraph}}
1408   }{\__stex_doc_skip_fragment:n{subparagraph}}
1409 }

```

\setsectionlevel

```

1410 \cs_new_protected:Npn \setsectionlevel #1 {
1411   \str_case:nnF{#1}{
1412     {part}{\int_set:Nn \l_stex_docheader_sect 0}
1413     {chapter}{\int_set:Nn \l_stex_docheader_sect 1}
1414     {section}{\int_set:Nn \l_stex_docheader_sect 2}
1415     {subsection}{\int_set:Nn \l_stex_docheader_sect 3}
1416     {subsubsection}{\int_set:Nn \l_stex_docheader_sect 4}
1417     {paragraph}{\int_set:Nn \l_stex_docheader_sect 5}
1418   }{
1419     \int_set:Nn \l_stex_docheader_sect 6
1420   }
1421   \cs_if_eq:NNTF\onlypreamble\notprerr{
1422     \stex_annotation_invisible:nn{shtml:sectionlevel={\int_use:N\l_stex_docheader_sect}}{}
1423   }{}
1424 }
1425
1426 \stex_if_html_backend:T{
1427   \cs_new_protected:Nn \__stex_doc_check_topsect: {
1428     \int_case:nnF \l_stex_docheader_sect {
1429       {0}{\cs_if_exist:NTF \thechapter {
1430         \stex_annotation_invisible:nn{shtml:sectionlevel=0}{}}
1431       }{
1432         \int_incr:N \l_stex_docheader_sect
1433         \__stex_doc_check_topsect:
1434       }
1435       {1}{\cs_if_exist:NTF \thechapter {
1436         \stex_annotation_invisible:nn{shtml:sectionlevel=1}{}}
1437       }{
1438         \int_incr:N \l_stex_docheader_sect
1439         \__stex_doc_check_topsect:
1440       }
1441     }{
1442       \stex_annotation_invisible:nn{shtml:sectionlevel={\int_use:N\l_stex_docheader_sect}}{}
1443     }
1444   }
1445   \AtBeginDocument{\__stex_doc_check_topsect:}
1446 }
1447
1448 \AtBeginDocument{
1449   \cs_if_exist:NTF\frontmatter{
1450     \let\__stex_doc_orig_frontmatter\frontmatter
1451     \let\frontmatter\relax
1452   }{
1453     \tl_set:Nn\__stex_doc_orig_frontmatter{
1454       \clearpage
1455       %\mainmatterfalse
1456       \pagenumbering{roman}
1457     }
1458   }
1459   \cs_if_exist:NTF\backmatter{
1460     \let\__stex_doc_orig_backmatter\backmatter
1461     \let\backmatter\relax
1462   }{
1463     \tl_set:Nn\__stex_doc_orig_backmatter{

```

```

1464     \clearpage
1465     %\ominusmainmatterfalse
1466     \pagenumbering{roman}
1467 }
1468 }
1469 \newenvironment{frontmatter}{%
1470     \__stex_doc_orig_frontmatter
1471 }{
1472     \cs_if_exist:NTF\mainmatter{%
1473         \mainmatter
1474     }{
1475         \clearpage
1476         %\ominusmainmattertrue
1477         \pagenumbering{arabic}
1478     }
1479 }
1480 \newenvironment{backmatter}{%
1481     \__stex_doc_orig_backmatter
1482 }{
1483     \cs_if_exist:NTF\mainmatter{%
1484         \mainmatter
1485     }{
1486         \clearpage
1487         %\ominusmainmattertrue
1488         \pagenumbering{arabic}
1489     }
1490 }
1491 }

```

(End definition for `\setsectionlevel`. This function is documented on page 77.)

13.4.3 References

```
1492 <@=stex_refs>
```

References are stored in the file `\jobname.sref`, to enable cross-referencing external documents.

```

1493 \iow_new:N \c__stex_refs_iow
1494 \AtBeginDocument{\iow_open:Nn \c__stex_refs_iow {\jobname.sref}}
1495 \AtEndDocument{\iow_close:N \c__stex_refs_iow}

```

The following macros are written to the `.aux`-file, and hence use L^AT_EX2e character code scheme:

```

1496 \cs_new_protected:Npn \STEXInternalSrefRestoreTarget #1#2#3#4#5 {}
1497
1498 \cs_new_protected:Npn \STEXInternalSetSrefSymURL #1 #2 {
1499     \str_gset:cn{g_stex_sref_sym_\tl_to_str:n{#1}_target}{#2}
1500 }
1501

```

```

\stex_ref_new_doc_target:n
\srflabel
1502 \seq_new:N \g__stex_refs_files_seq
1503 \int_new:N \l__stex_refs_unnamed_counter_int
1504
1505 \cs_new_protected:Nn \_stex_ref_new_id:n {

```

```

1506 \str_if_empty:nTF {#1}{
1507   \int_gincr:N \l__stex_refs_unnamed_counter_int
1508   \str_set:Nx \l__stex_refs_str {REF\int_use:N \l__stex_refs_unnamed_counter_int}
1509 }{
1510   \str_set:Nn \l__stex_refs_str {#1}
1511 }
1512 \str_set:Nx \l_stex_ref_url_str {\stex_uri_use:N \l_stex_current_doc_uri ? \l__stex_refs_s
1513 }
1514
1515 \cs_new_protected:Nn \stex_ref_new_doc_target:n {
1516   \stex_ref_new_id:n{#1}
1517   \%stex_uri_add_module:NNo \l__stex_refs_uri \l_stex_current_doc_uri \l__stex_refs_str
1518   \%stex_debug:nn{sref}{New-document-target:~\stex_uri_use:N \l__stex_refs_uri}
1519   \__stex_refs_add_doc_ref:xo {\stex_uri_use:N \l_stex_current_doc_uri} \l__stex_refs_str
1520   \stex_if_smemode:F {
1521     \iow_now:Nx \c__stex_refs_iow {
1522       \STEXInternalSrefRestoreTarget
1523       {\stex_uri_use:N \l_stex_current_doc_uri}
1524       {\l__stex_refs_str}
1525       {\@currentcounter}
1526       {\@currentlabel}
1527       {
1528         \tl_if_exist:NT\@currentlabelname{
1529           \exp_args:No\exp_not:n\@currentlabelname
1530         }
1531       }
1532     }
1533     \exp_args:Nx \label {sref@\l_stex_ref_url_str}
1534     \stex_if_do_html:T {
1535       \pdfdest name "sref@\l_stex_ref_url_str" xyz\relax
1536     }
1537   }
1538 }
1539 \NewDocumentCommand \sreflabel {m} {\stex_ref_new_doc_target:n {#1}}
1540
1541 \cs_new_protected:Nn \__stex_refs_add_doc_ref:nn {
1542   \seq_if_in:NnTF \g__stex_refs_files_seq {#1} {
1543     \seq_if_in:cnF {g__stex_refs_#1_seq}{#2}{
1544       \seq_gput_left:cn{g__stex_refs_#1_seq}{#2}
1545     }
1546   }{
1547     \seq_gput_right:Nn \g__stex_refs_files_seq {#1}
1548     \seq_new:c{g__stex_refs_#1_seq}
1549     \seq_gput_left:cn{g__stex_refs_#1_seq}{#2}
1550   }
1551 }
1552 \cs_generate_variant:Nn \__stex_refs_add_doc_ref:nn {xo,xx}

```

(End definition for `\stex_ref_new_doc_target:n` and `\sreflabel`. These functions are documented on page 116.)

\sref Optional arguments:

\extref

```

1553 \stex_keys_define:nnnn{sref / 1}{}{
1554   % TODO get rid of this

```

```

1555     fallback .code:n = {},
1556     pre .code:n = {},
1557     post .code:n = {}
1558 }{archive file}
1559 \stex_keys_define:nnnn{sref / 2}{}{}{archive file, title}
1560
1561 \str_new:N \l__stex_refs_default_archive_str
1562 \str_new:N \l__stex_refs_default_file_str
1563 \tl_new:N \l__stex_refs_default_title_tl
1564
1565 \cs_set_protected:Nn \__stex_refs_set_keys_b:n {
1566     \tl_if_empty:nTF{#1}{%
1567         \str_set_eq:NN \l_stex_key_archive_str \l__stex_refs_default_archive_str
1568         \str_set_eq:NN \l_stex_key_file_str \l__stex_refs_default_file_str
1569         \tl_set_eq:NN \l_stex_key_title_tl \l__stex_refs_default_title_tl
1570     }{%
1571         \stex_keys_set:nn{ sref / 2 }{ #1 }
1572     }
1573 }
1574
1575 \newcommand\srefsetin[3][]{%
1576     \str_set:Nx \l__stex_refs_default_archive_str {#1}
1577     \str_set:Nx \l__stex_refs_default_file_str {#2}
1578     \tl_set:Nn \l__stex_refs_default_title_tl {#3}
1579 }
1580

```

Auxiliary methods:

```

1581 \cs_new_protected:Nn \__stex_refs_find_uri:n {
1582     \str_clear:N \l__stex_refs_uri_str
1583     \stex_debug:nn{sref}{%
1584         File:~\l_stex_key_file_str^^J
1585         Repo:\l_stex_key_archive_str
1586     }
1587     \str_if_empty:NTF \l_stex_key_file_str {%
1588         \stex_debug:nn{sref}{Empty.~Checking~current~file~for~#1}
1589         \seq_if_exist:cT{\g__stex_refs_\stex_uri_use:N \l_stex_current_doc_uri _seq}{%
1590             \exp_args:Nnx \__stex_refs_find_uri_in_file:nnn{#1}{%
1591                 \stex_uri_use:N \l_stex_current_doc_uri}\seq_map_break:
1592             }
1593             \str_if_empty:NT \l__stex_refs_uri_str {%
1594                 \seq_map_inline:Nn \g__stex_refs_files_seq {%
1595                     \__stex_refs_find_uri_in_file:nnn{#1}{##1}{\seq_map_break:n{\seq_map_break:}}
1596                 }
1597             }
1598 }{%
1599     \str_if_empty:NTF \l_stex_key_archive_str {%
1600         \prop_if_exist:NTF \l_stex_current_archive_prop {%
1601             \__stex_refs_find_uri_in_prop_file:N \l_stex_current_archive_prop
1602         }{%
1603             \stex_file_resolve:Nx \l__stex_refs_file
1604             { \stex_file_use:N \g_stex_current_file / .. / \l_stex_key_file_str }
1605             \str_set:Nx \l__stex_refs_uri_str { file:/ \stex_file_use:N \l__stex_refs_file }
1606         }
1607     }
1608 }
```

```

1607     }{
1608         \stex_require_archive:o \l_stex_key_archive_str
1609         \prop_set_eq:Nc \l__stex_refs_prop { c_stex_mathhub_\l_stex_key_archive_str _manifest_
1610             \__stex_refs_find_uri_in_prop_file:N \l__stex_refs_prop
1611     }
1612 }
1613 }
1614
1615 \cs_new_protected:Nn \__stex_refs_find_uri_in_prop_file:N {
1616     \str_set:Nx \l__stex_refs_uri_str {
1617         \stex_file_use:N \c_stex_mathhub_file /
1618         \prop_item:Nn #1 {id} /
1619         source / \l_stex_key_file_str .sref
1620     }
1621 \stex_file_resolve:No \l__stex_refs_file \l__stex_refs_uri_str
1622 \stex_uri_from_repo_file:NNNn \l__stex_refs_uri #1
1623     \l__stex_refs_file {narr}
1624 \str_set:Nx \l__stex_refs_uri_str {\stex_uri_use:N \l__stex_refs_uri}
1625 }
1626
1627 \cs_new_protected:Nn \__stex_refs_find_uri_in_file:nnn {
1628     \stex_debug:nn{sref}{Checking~file~#2}
1629     \seq_map_inline:cn{g__stex_refs_#2_seq}{%
1630         \str_if_eq:nnT{#1}{##1}{%
1631             \str_set:Nx \l__stex_refs_uri_str {\stex_uri_use:N \l_stex_current_doc_uri}
1632             \stex_debug:nn{sref}{Found.}
1633             #3
1634         }
1635     }
1636 }

```

Doing the actual referencing:

```

1637 \cs_new_protected:Nn \__stex_refs_do_autoref:n {
1638     \cs_if_exist:cTF{autoref}{%
1639         \exp_args:Nx\autoref{sref@#1}
1640     }{
1641         \exp_args:Nx\ref{sref@#1}
1642     }
1643 }
1644
1645 \cs_new_protected:Nn \__stex_refs_do_sref:nn {
1646     \str_if_empty:NTF \l__stex_refs_uri_str {
1647         \str_if_empty:NTF \l_stex_key_file_str {
1648             \stex_debug:nn{sref}{autoref~on~\stex_uri_use:N \l_stex_current_doc_uri?#1}
1649             \exp_args:Ne \__stex_refs_do_autoref:n{\stex_uri_use:N \l_stex_current_doc_uri ? #1}
1650         }{
1651             \stex_debug:nn{sref}{srefin~on~#1}
1652             \__stex_refs_set_keys_b:n{ #2 }
1653             \__stex_refs_do_sref_in:n{#1}
1654         }
1655     }{
1656         \exp_args:NNo \seq_if_in:NnTF \g__stex_refs_files_seq \l__stex_refs_uri_str {
1657             \stex_debug:nn{sref}{Using~ref~file~\l__stex_refs_uri_str}
1658             \exp_args:Nnx \seq_if_in:cnTF{g_stex_ref}\l__stex_refs_uri_str _seq}{\detokenize{#1}}
1659     }
1660 }

```

```

1659     \stex_debug:nn{sref}{Reference-found-in-ref-files;-autoref-on-\l__stex_refs_uri_str?#1}
1660     \l__stex_refs_do_autoref:n{\l__stex_refs_uri_str?#1}
1661 }{
1662     \str_if_empty:NTF \l_stex_key_file_str {
1663         \stex_debug:nn{sref}{in-empty;-autoref-on-\l__stex_refs_uri_str?#1}
1664         \l__stex_refs_do_autoref:n{\l__stex_refs_uri_str?#1}
1665     }{
1666         \stex_debug:nn{sref}{in-non-empty;~srefin-on-\l__stex_refs_uri_str?#1}
1667         \l__stex_refs_set_keys_b:n{ #2 }
1668         \l__stex_refs_do_sref_in:n{#1}
1669     }
1670 }
1671 }{
1672     \stex_debug:nn{sref}{No-ref-file-found-for-\l__stex_refs_uri_str}
1673     \str_if_empty:NTF \l_stex_key_file_str {
1674         \stex_debug:nn{sref}{in-empty;-autoref-on-\l__stex_refs_uri_str?#1}
1675         \l__stex_refs_do_autoref:n{\l__stex_refs_uri_str?#1}
1676     }{
1677         \stex_debug:nn{sref}{in-non-empty;~srefin-on-\l__stex_refs_uri_str?#1}
1678         \l__stex_refs_set_keys_b:n{ #2 }
1679         \l__stex_refs_do_sref_in:n{#1}
1680     }
1681 }
1682 }
1683 }
1684
1685 \cs_new_protected:Nn \l__stex_refs_do_sref_in:n {
1686     \stex_debug:nn{sref}{In: \l_stex_key_file_str^JRepo:\l_stex_key_archive_str}
1687     \stex_debug:nn{sref}{URI: \l__stex_refs_uri_str?#1}
1688     \tl_if_exist:cTF{r@sref@\l__stex_refs_uri_str?#1} {
1689         \l__stex_refs_do_autoref:n{\l__stex_refs_uri_str?#1}
1690     }{
1691         \%msg_warning:nnn{stex}{warning/smsmissing}{<filename>}
1692         \group_begin: \catcode13=9\relax \catcode10=9\relax
1693             \str_if_empty:NTF \l_stex_key_archive_str {
1694                 \prop_if_exist:NTF \l_stex_current_archive_prop {
1695                     \str_set:Nx \l__stex_refs_file_str {
1696                         \stex_file_use:N \c_stex_mathhub_file /
1697                         \prop_item:Nn \l_stex_current_archive_prop { id }
1698                         / source / \l_stex_key_file_str .sref
1699                     }
1700                 }{
1701                     \str_set:Nx \l__stex_refs_file_str {
1702                         \stex_file_use:N \g_stex_current_file / .. / \l_stex_key_file_str .sref
1703                     }
1704                 }
1705             }{
1706                 \str_set:Nx \l__stex_refs_file_str {
1707                     \stex_file_use:N \c_stex_mathhub_file / \l_stex_key_archive_str
1708                     / source / \l_stex_key_file_str .sref
1709                 }
1710             }
1711             \stex_file_resolve:No \l__stex_refs_file \l__stex_refs_file_str
1712             \str_set:Nx \l__stex_refs_file_str {\stex_file_use:N \l__stex_refs_file }

```

```

1713     \stex_debug:nn{sref}{File: \l__stex_refs_file_str }
1714     \exp_args:NNNx \exp_args:No \str_if_eq:nnTF \l__stex_refs_file_str {\stex_file_use:N\c
1715         \l__stex_refs_do_autoref:n{
1716             \str_if_empty:NF\l__stex_refs_uri_str{\l__stex_refs_uri_str?}#1
1717         }
1718     }{
1719         \exp_args:No \IfFileExists \l__stex_refs_file_str {
1720             \tl_clear:N \l__stex_refs_return_tl
1721             \str_set:Nn \l__stex_refs_id_str {\#1}
1722             \let\STEXInternalSrefRestoreTarget\l__stex_refs_restore_target:nnnn
1723             \use:c{@ input}{\l__stex_refs_file_str}
1724             \exp_args:No \tl_if_empty:nTF \l__stex_refs_return_tl {
1725                 \exp_args:Nnno \msg_warning:nnnn{stex}{warning/smslabelmissing}\l__stex_refs_file_
1726                 \l__stex_refs_do_autoref:n{
1727                     \str_if_empty:NF\l__stex_refs_uri_str{\l__stex_refs_uri_str?}#1
1728                 }
1729             }{
1730                 \l__stex_refs_return_tl
1731             }
1732         }{
1733             \exp_args:Nnno \msg_warning:nnn{stex}{warning/smsmissing}\l__stex_refs_file_str
1734             \l__stex_refs_do_autoref:n{
1735                 \str_if_empty:NF\l__stex_refs_uri_str{\l__stex_refs_uri_str?}#1
1736             }
1737         }
1738     }
1739     \group_end:
1740 }
1741 }
1742
1743 \cs_new_protected:Nn \l__stex_refs_do_return:nnnn {
1744     \tl_set:Nn \l__stex_refs_return_tl {
1745         \stex_annotation:nn{shtml:sref={#4},shtml:srefin={\l__stex_refs_file_str}}{
1746             \use:c{\#3autorefname}-\#1\tl_if_empty:nF{\#2}{~(\#2)}
1747             \tl_if_empty:NF\l_stex_key_title_tl{
1748                 {}~\l_stex_key_title_tl
1749             }
1750         }
1751     }
1752 }
1753
1754 \cs_new_protected:Nn \l__stex_refs_restore_target:nnnn {
1755     \str_if_empty:NTF \l__stex_refs_uri_str {
1756         \exp_args:No \str_if_eq:nnT \l__stex_refs_id_str {\#2}){
1757             \l__stex_refs_do_return:nnnn{\#4}{\#5}{\#3}{\#1?\#2}
1758         }
1759     }{
1760         \stex_debug:nn{sref}{\l__stex_refs_uri_str{}~ == ~ \#1 ~ ?}
1761         \exp_args:No \str_if_eq:nnT \l__stex_refs_uri_str {\#1}){
1762             \stex_debug:nn{sref}{\l__stex_refs_id_str~ == ~ \#2 ~ ?}
1763             \exp_args:No \str_if_eq:nnT \l__stex_refs_id_str {\#2}){
1764                 \stex_debug:nn{sref}{success!}
1765                 \l__stex_refs_do_return:nnnn{\#4}{\#5}{\#3}{\#1?\#2}
1766             \endinput

```

```

1767     }
1768   }
1769 }
1770 }
```

The actual macros:

```

1771 \NewDocumentCommand \sref { O{} m O{} }{
1772   \stex_keys_set:nn { sref / 1 }{ #1 }
1773   \__stex_refs_find_uri:n { #2 }
1774   \__stex_refs_do_sref:nn{#2}{#3}
1775 }
1776 \NewDocumentCommand \extref { O{} m m }{
1777   \stex_keys_set:nn { sref / 1 }{ #1 }
1778   \__stex_refs_find_uri:n { #2 }
1779   \__stex_refs_set_keys_b:n{#3}
1780   \str_if_empty:NT \l_stex_key_file_str {
1781     \msg_error:nn{stex}{error/extrefmissing}
1782   }
1783   \__stex_refs_do_sref_in:n{#2}
1784 }
```

(End definition for `\sref` and `\extref`. These functions are documented on page 79.)

`\stex_ref_new_sym_target:n`

```

1785 \cs_new_protected:Nn \stex_ref_new_symbol:n {
1786   \cs_if_exist:cF{r@sref@sym@\tl_to_str:n{#1}}{
1787     \__stex_refs_new_symbol:n{#1}
1788   }
1789 }
1790 \cs_new_protected:Nn \__stex_sref_do_aux:n {
1791   #1 \iow_now:Nn \auxout {#1}
1792 }
1793
1794 \cs_new_protected:Nn \__stex_refs_new_symbol:n {
1795   \prop_if_exist:NTF \l_stex_current_archive_prop {
1796     \prop_get:NnNTF \l_stex_current_archive_prop {docurl} \l__stex_refs_str {
1797       \exp_args:Ne \__stex_sref_do_aux:n {
1798         \STEXInternalSetSrefSymURL{#1}{\l__stex_refs_str / symbol? #1}
1799       }
1800     }{
1801       \__stex_sref_do_aux:n { \STEXInternalSetSrefSymURL{#1}{} }
1802     }
1803   }{
1804     \__stex_sref_do_aux:n { \STEXInternalSetSrefSymURL{#1}{} }
1805   }
1806 }
1807
1808 \cs_new_protected:Nn \stex_ref_new_sym_target:n {
1809   \exp_args:Ne \label{\tl_to_str:n{sref@sym@ #1}}
1810 }
1811
1812 \cs_new_protected:Nn \stex_ref_new_sym_target:nn {
1813   \str_if_eq:nnTF{#1}{#2} {
1814     \stex_ref_new_sym_target:n{#1}
```

```

1816   }{
1817     \str_gset:cn{g_stex_sref_sym_ #1 _label}{#2}
1818   }
1819 }

```

(End definition for `\stex_ref_new_sym_target:n`. This function is documented on page 116.)

`\srefsym`

```

1820 \NewDocumentCommand \srefsym { m m }{
1821   \stex_get_symbol:n { #1 }
1822   \exp_args:Ne
1823   \__stex_refs_sym_aux:nn{\l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str}
1824 }
1825
1826 \cs_new_protected:Npn \__stex_refs_do_internal_link:nn #1 {
1827   \cs_if_exist:NTF \hyperref {
1828     \hyperref[{#1}]
1829   }\use:n
1830 }
1831
1832 \cs_new_protected:Npn \__stex_refs_do_url_link:nn {
1833   \cs_if_exist:NTF \href \href \use_i:nn
1834 }
1835
1836 \cs_new_protected:Npn \__stex_refs_sym_aux:nn #1 {
1837   \cs_if_exist:cTF{r@sref@sym@\tl_to_str:n{#1}}{
1838     \exp_args:Ne \__stex_refs_do_internal_link:nn{\tl_to_str:n{sref@sym@#1}}
1839   }{
1840     \str_if_exist:cTF{g_stex_sref_sym_#1_label}{
1841       \exp_args:Ne \__stex_refs_sym_aux:nn{\use:c{g_stex_sref_sym_#1_label}}
1842     }{
1843       \str_if_empty:cTF{g_stex_sref_sym_#1_target}{
1844         \exp_args:Ne \__stex_refs_do_internal_link:nn{\tl_to_str:n{sref@sym@#1}}
1845       }{
1846         \exp_args:Ne \__stex_refs_do_url_link:nn{\use:c{g_stex_sref_sym_#1_target}}
1847       }
1848     }
1849   }
1850 }

```

(End definition for `\srefsym`. This function is documented on page 84.)

`\srefsymuri`

```

1851 \cs_new_protected:Npn \srefsymuri #1 {
1852   \__stex_refs_sym_aux:nn{#1}
1853 }

```

(End definition for `\srefsymuri`. This function is documented on page 84.)

13.4.4 Inputs

```
1854 ⟨@@=stex_inputs⟩
```

```
\stex_resolve_path_pair:Nnn
\stex_resolve_path_pair:Nxx
1855 \cs_new_protected:Nn \stex_resolve_path_pair:Nnn {
```

```

1856 \stex_debug:nn{resolving-path}{#3-in-[#2]}
1857 \str_if_empty:nTF{#2}{
1858   \prop_if_exist:NTF \l_stex_current_archive_prop {
1859     \str_set:Nx #1 {\stex_file_use:N \c_stex_mathhub_file /
1860     \prop_item:Nn \l_stex_current_archive_prop { id } / source /
1861     #3}
1862     \stex_debug:nn{resolving-path}{In-current-archive-
1863       \prop_item:Nn \l_stex_current_archive_prop { id }
1864       ;~result:-#1}
1865   }{
1866     \str_set:Nx #1 {\stex_file_use:N \c_stex_pwd_file / .. / #3 }
1867     \stex_debug:nn{resolving-path}{No-current-archive;~result:-#1}
1868   }
1869 }{
1870   \stex_require_archive:n { #2 }
1871   \str_set:Nx #1 {\stex_file_use:N \c_stex_mathhub_file /
1872   \prop_item:cn {c_stex_mathhub_#2_manifest_prop} { id } / source /
1873   #3}
1874   \stex_debug:nn{resolving-path}{result:~#1}
1875 }
1876 }
1877 \cs_generate_variant:Nn \stex_resolve_path_pair:Nnn {Nxx}

```

(End definition for `\stex_resolve_path_pair:Nnn`. This function is documented on page 129.)

```

\inputref
\mhinput
\ifinputref
1878 \newif \ifinputref \inputreffalse
1879
1880 \cs_new_protected:Nn \__stex_inputs_mhinput:nn {
1881   \stex_in_archive:nn {#1} {
1882     \ifinputref
1883       \stex_input_with_hooks:n{ \stex_file_use:N \c_stex_mathhub_file / ##1 / source / #2 }
1884     \else
1885       \inputreftrue
1886       \stex_input_with_hooks:n{ \stex_file_use:N \c_stex_mathhub_file / ##1 / source / #2 }
1887       \inputreffalse
1888     \fi
1889   }
1890 }
1891
1892 \NewDocumentCommand \mhinput { O{} m }{
1893   \exp_args:NNx \exp_args:Nnx \__stex_inputs_mhinput:nn{ \tl_to_str:n{#1} }{ \tl_to_str:n{#2} }
1894 }
1895
1896 \cs_new_protected:Nn \__stex_inputs_inputref_html:nn {
1897   \str_clear:N \l_tmpa_str
1898   \prop_get:NnNF \l_stex_current_archive_prop { narr } \l_tmpa_str {
1899     \prop_get:NnNF \l_stex_current_archive_prop { ns } \l_tmpa_str {}
1900   }
1901   \tl_if_empty:nTF{ #1 }{
1902     \IfFileExists{#2} {
1903       \ifvmode\noindent\fi\stex_annotation_invisible:nn{shtml:inputref={%
1904         \l_tmpa_str / #2
1905       }}{}}

```

```

1906    }{
1907      \stex_input_with_hooks:n{#2}
1908    }
1909  }{
1910    \IfFileExists{ \stex_file_use:N \c_stex_mathhub_file / #1 / source / #2 }{
1911      \par\stex_annotation_invisible:nn{shml:inputref= {
1912        \l_tmpa_str / #2
1913      }}{~}
1914    }{
1915      \input{ \stex_file_use:N \c_stex_mathhub_file / #1 / source / #2 }
1916    }
1917  }
1918 }

1919 \cs_new_protected:Nn \__stex_inputs_inputref_pdf:nn {
1920   \begingroup
1921     \inputreftrue
1922     \tl_if_empty:nTF{ #1 }{
1923       \stex_input_with_hooks:n{#2}
1924     }{
1925       \stex_input_with_hooks:n{ \stex_file_use:N \c_stex_mathhub_file / #1 / source / #2 }
1926     }
1927   \endgroup
1928 }
1929 }

1930 \cs_new_protected:Nn \__stex_inputs_inputref:nn {
1931   \stex_in_archive:nn {#1} {
1932     \stex_if_html_backend:TF
1933       \__stex_inputs_inputref_html:nn
1934       \__stex_inputs_inputref_pdf:nn
1935       {##1}{#2}
1936     }
1937   }
1938 }

1939 \NewDocumentCommand \inputref { O{} m }{
1940   \exp_args:NNx \exp_args:Nnx \__stex_inputs_inputref:nn{ \tl_to_str:n{#1} }{ \tl_to_str:n{#2} }
1941 }
1942 }
```

(End definition for `\inputref`, `\mhinput`, and `\ifinputref`. These functions are documented on page 78.)

\addmhbibresource

```

1943 \cs_new_protected:Nn \__stex_inputs_bibresource:n {
1944   \__stex_inputs_up_archive:nn{#1}{bib}
1945   \seq_if_empty:NTF \l__stex_inputs_libinput_files_seq {
1946     \msg_error:nnxx{stex}{error/nofile}{\exp_not:N\addmhbibresource}{#1.bib}
1947   }{
1948     \seq_map_inline:Nn \l__stex_inputs_libinput_files_seq {
1949       \addbibrssource{ ##1 }
1950     }
1951   }
1952 }
1953 \newcommand\addmhbibresource[2][]{%
1954   \tl_if_empty:nTF{#1}{%
```

```

1955     \__stex_inputs_bibresource:n{#2}
1956   }{
1957     \stex_in_archive:nn{#1}{\__stex_inputs_bibresource:n{#2}}
1958   }
1959 }

```

(End definition for `\addmhbibresource`. This function is documented on page 75.)

\IfInputref

```

1960 \stex_if_html_backend:TF{
1961   \newcommand \IfInputref[2]{
1962     \stex_annotation:nn{shtml:ifinputref=true}{#1}
1963     \stex_annotation:nn{shtml:ifinputref=false}{#2}
1964   }
1965 }{
1966   \newcommand \IfInputref[2]{
1967     \ifinputref #1 \else #2 \fi
1968   }
1969 }

```

(End definition for `\IfInputref`. This function is documented on page 78.)

\libinput

```

1970 \cs_new_protected:Nn \__stex_inputs_up_archive:nn {
1971   \prop_if_exist:NF \l_stex_current_archive_prop {
1972     \msg_error:nnn{stex}{error/notinarchive}\libinput
1973   }
1974   \prop_get:NnNF \l_stex_current_archive_prop {id} \l__stex_inputs_id_str {
1975     \msg_error:nnn{stex}{error/notinarchive}\libinput
1976   }
1977   \seq_clear:N \l__stex_inputs_libinput_files_seq
1978   \seq_set_eq:NN \l__stex_inputs_path_seq \c_stex_mathhub_file
1979   \seq_set_split:NnV \l__stex_inputs_id_seq / \l__stex_inputs_id_str
1980
1981   \bool_while_do:nn { ! \seq_if_empty_p:N \l__stex_inputs_id_seq }{
1982     \str_set:Nx \l__stex_inputs_path_str {\stex_file_use:N \l__stex_inputs_path_seq / meta-i
1983     \IfFileExists{ \l__stex_inputs_path_str }{
1984       \seq_put_right:No \l__stex_inputs_libinput_files_seq \l__stex_inputs_path_str
1985     }{}
1986     \seq_pop_left:NN \l__stex_inputs_id_seq \l__stex_inputs_path_str
1987     \seq_put_right:No \l__stex_inputs_path_seq \l__stex_inputs_path_str
1988   }
1989
1990   \str_set:Nx \l__stex_inputs_path_str {\stex_file_use:N \l__stex_inputs_path_seq / lib / #1
1991   \IfFileExists{ \l__stex_inputs_path_str }{
1992     \seq_put_right:No \l__stex_inputs_libinput_files_seq \l__stex_inputs_path_str
1993   }{}
1994 }
1995
1996 \cs_new_protected:Nn \__stex_inputs_libinput:n {
1997   \__stex_inputs_up_archive:nn{#1}{tex}
1998   \seq_if_empty:NTF \l__stex_inputs_libinput_files_seq {
1999     \msg_error:nnxx{stex}{error/nofile}{\exp_not:N\libinput}{#1.tex}
2000   }{
2001     \seq_map_inline:Nn \l__stex_inputs_libinput_files_seq {

```

```

2002     \input{ ##1 }
2003   }
2004 }
2005 }
2006
2007 \newcommand \libinput [2] [] {
2008   \tl_if_empty:nTF{#1} {
2009     \__stex_inputs_libinput:n{#2}
2010   }{
2011     \stex_in_archive:nn{#1}{\__stex_inputs_libinput:n{#2}}
2012   }
2013 }
```

(End definition for `\libinput`. This function is documented on page 75.)

\libusepackage

```

2014 \newcommand\libusepackage[2] [] {
2015   \__stex_inputs_up_archive:nn{#2}{sty}
2016   \int_compare:nNnTF {\seq_count:N \l__stex_inputs_libinput_files_seq} = 1 {
2017     \str_set:Nx \l__stex_inputs_tmp_str {\seq_item:Nn \l__stex_inputs_libinput_files_seq 1}
2018     \exp_args:Nne \use:n {\usepackage[#1]} {
2019       \str_range:Nnn\l__stex_inputs_tmp_str 1 {-5}
2020     }
2021   }{
2022     \stex_fatal_error:nnn{error/nofile}{\libusepackage}{#1.sty}
2023   }
2024 }
```

(End definition for `\libusepackage`. This function is documented on page 75.)

\mhgraphics

```

2025 \str_new:N \l__stex_inputs_gin_repo_str
2026 \ltx@ifpackageloaded{graphicx}{\use:n}{\AtEndOfPackageFile{graphicx}}{
2027   \define@key{Gin}{archive}{
2028     \tl_set:Nx\Gin@mrepos{\stex_file_use:N \c_stex_mathhub_file / #1 / source /}
2029   }
2030   \providecommand\mhgraphics[2] [] {
2031     \tl_set:Nx\Gin@mrepos{
2032       \stex_file_use:N \c_stex_mathhub_file / \prop_item:Nn \l_stex_current_archive_prop {id}
2033     }
2034     \setkeys{Gin}{#1}
2035     \includegraphics[#1]{ \Gin@mrepos #2 }
2036   }
2037   \providecommand\cmhgraphics[2] [] {\begin{center}\mhgraphics[#1]{#2}\end{center}}
2038 }
```

2039

```

2040 \ltx@ifpackageloaded{listings}{\use:n}{\AtEndOfPackageFile{listings}}{
2041   \define@key{lst}{archive}{
2042     \def\lst@mrepos{\stex_file_use:N \c_stex_mathhub_file / #1 / source /}
2043   }
2044   \newcommand\lstinputmhlisting[2] []{%
2045     \def\lst@mrepos{
2046       \stex_file_use:N \c_stex_mathhub_file / \prop_item:Nn \l_stex_current_archive_prop {id}
2047     }
2048     \setkeys{lst}{#1}%
```

```

2049     \lstinputlisting[#1]{\lst@mrepos #2}
2050     \newcommand\clstinputmhlisting[2][]{\begin{center}\lstinputmhlisting[#1]{#2}\end{center}}
2051 }
2052
2053 \ltx@ifpackageloaded{tikzinput}{\use:n{AtEndOfFile{tikzinput}}}{%
2054     \define@key{Gin}{archive}{%
2055         \str_set:Nn \l_stex_inputs_gin_repo_str {#1}
2056         \def\Gin@mrepos{\stex_file_use:N \c_stex_mathhub_file / #1 / source /}
2057     }
2058     \newcommand\mhtikzinput[2][]{%
2059         \str_clear:N \l_stex_inputs_gin_repo_str
2060         \def\Gin@mrepos{%
2061             \stex_file_use:N \c_stex_mathhub_file / \prop_item:Nn \l_stex_current_archive_prop {id}
2062         }
2063         \setkeys{Gin}{#1}%
2064         \exp_args:No \stex_in_archive:nn \l_stex_inputs_gin_repo_str {%
2065             \tikzinput[#1]{\Gin@mrepos #2}
2066         }
2067     }
2068     \newcommand\cmhtikzinput[2][]{\begin{center}\mhtikzinput[#1]{#2}\end{center}}
2069 }

```

(End definition for `\mhgraphics` and others. These functions are documented on page 78.)

`\libusetikzlibrary`

```

2070 \cs_new_protected:Nn \__stex_inputs_usetikzlibrary:nn {
2071     \pgfkeys@spdef\pgf@temp{#1}
2072     \expandafter\ifx\csname tikz@library@\pgf@temp @loaded\endcsname\relax%
2073     \expandafter\global\expandafter\let\csname tikz@library@\pgf@temp @loaded\endcsname=\pgfutil@empty
2074     \expandafter\edef\csname tikz@library@#1@atcode\endcsname{\the\catcode`@}
2075     \expandafter\edef\csname tikz@library@#1@barcode\endcsname{\the\catcode`\|}%
2076     \expandafter\edef\csname tikz@library@#1@dollarcode\endcsname{\the\catcode`\$}
2077     \catcode`\@=11
2078     \catcode`\|=12
2079     \catcode`\$=3
2080     \pgfutil@InputIfFileExists{#2}{}{%
2081         \catcode`\@=\csname tikz@library@#1@atcode\endcsname
2082         \catcode`\|= \csname tikz@library@#1@barcode\endcsname
2083         \catcode`\$= \csname tikz@library@#1@dollarcode\endcsname
2084     }
2085
2086 \cs_new_protected:Npn \libusetikzlibrary #1 {
2087     \cs_if_exist:NF \usetikzlibrary {
2088         \msg_error:nnx{stex}{error/notikz}{\tl_to_str:n{\libusetikzlibrary}}
2089     }
2090     \__stex_inputs_up_archive:nn{tikzlibrary#1}{code.tex}
2091     \int_compare:nNnTF {\seq_count:N \l_stex_inputs_libinput_files_seq} = 1 {
2092         \exp_args:Nne \__stex_inputs_usetikzlibrary:nn{#1}{ \seq_item:Nn \l_stex_inputs_libinput_files_seq{1}}
2093     }{
2094         \stex_fatal_error:nnn{error/nofile}{\libusetikzlibrary}{tikzlibrary#1.code.tex}
2095     }
2096 }

```

(End definition for `\libusetikzlibrary`. This function is documented on page 113.)

13.5 SMS Mode

```

2097 <@@=stex_smsmode>
      Macros and environments allowed in sms mode:
2098 \tl_new:N \g__stex_smsmode_allowed_tl
2099 \tl_new:N \g__stex_smsmode_allowed_escape_tl
2100 \seq_new:N \g__stex_smsmode_allowedenvs_seq

\stex_sms_allow:N
\stex_sms_allow_escape:N
\stex_sms_allow_env:n
2101 \cs_new_protected:Nn \stex_sms_allow:N {
2102   \tl_gput_right:Nn \g__stex_smsmode_allowed_tl {#1}
2103 }
2104
2105 \cs_new_protected:Nn \stex_sms_allow_escape:N {
2106   \tl_gput_right:Nn \g__stex_smsmode_allowed_escape_tl {#1}
2107 }
2108
2109 \cs_new_protected:Nn \stex_sms_allow_env:n {
2110   \exp_args:NNx \seq_gput_right:Nn \g__stex_smsmode_allowedenvs_seq {\tl_to_str:n{#1}}
2111 }

```

(End definition for `\stex_sms_allow:N`, `\stex_sms_allow_escape:N`, and `\stex_sms_allow_env:n`. These functions are documented on page 130.)

Some initial allowed macros:

```

2112 \stex_sms_allow:N \makeatletter
2113 \stex_sms_allow:N \makeatother
2114 \stex_sms_allow:N \ExplSyntaxOn
2115 \stex_sms_allow:N \ExplSyntaxOff
2116 \stex_sms_allow:N \rustexBREAK

```

`\stex_if_smsmode_p:`

`\stex_if_smsmode:TF`

```

2117 \bool_new:N \g__stex_smsmode_bool
2118 \bool_set_false:N \g__stex_smsmode_bool
2119 \prg_new_conditional:Nnn \stex_if_smsmode: { p, T, F, TF } {
2120   \bool_if:NTF \g__stex_smsmode_bool \prg_return_true: \prg_return_false:
2121 }

```

(End definition for `\stex_if_smsmode:TF`. This function is documented on page 130.)

`\stex_sms_allow_import:Nn`

`\stex_sms_allow_import_env:nn`

```

2122 \tl_new:N \g__stex_smsmode_allowed_import_tl
2123 \seq_new:N \g__stex_smsmode_allowed_import_env_seq
2124 \cs_new_protected:Nn \stex_sms_allow_import:Nn {
2125   \tl_gput_right:Nn \g__stex_smsmode_allowed_import_tl {#1}
2126   \tl_gset:cn{\tl_to_str:n{#1}~~~smsmode} {#2}
2127 }
2128 \cs_new_protected:Nn \stex_sms_allow_import_env:nn {
2129   \exp_args:NNx \seq_gput_right:Nn \g__stex_smsmode_allowed_import_env_seq {\tl_to_str:n{#1}~~~env~~~smsmode} {#2}
2130
2131 }
2132
2133 \tl_new:N \g_stex_sms_import_code

```

(End definition for `\stex_sms_allow_import:Nn` and `\stex_sms_allow_import_env:nn`. These functions are documented on page 131.)

```

\stex_file_in_smsmode:nn
\stex_file_in_smsmode:on 2134 \cs_new_protected:Nn \__stex_smsmode_in_smsmode:n { \stex_suppress_html:n {
2135   \vbox_set:Nn \l_tmpa_box {
2136     \bool_set_true:N \g__stex_smsmode_bool
2137     \bool_set_false:N \stex_html_do_output_bool
2138     #1
2139   }
2140   \%box_clear:N \l_tmpa_box
2141 } }

2142 \quark_new:N \q__stex_smsmode_break
2143 \cs_new_protected:Nn \__stex_smsmode_start_smsmode:n {
2144   \everyeof{\q__stex_smsmode_break\exp_not:N}
2145   \let\stex_smsmode_do:\__stex_smsmode_smsmode_do:
2146   \exp_after:wN \exp_after:wN \exp_after:wN
2147   \stex_smsmode_do:
2148   \cs:w @ @ input\cs_end: "#1" \relax
2149 }
2150
2151 \cs_new_protected:Nn \stex_file_in_smsmode:nn {
2152   \seq_gclear:N \l__stex_smsmode_importmodules_seq
2153   \seq_gclear:N \l__stex_smsmode_sigmodules_seq
2154   \tl_clear:N \g_stex_sms_import_code
2155   \group_begin:
2156     \let \l_stex_metatheory_uri \c_stex_default_metatheory
2157     \cs_set:Npn \stex_check_term:n #1 {}
2158     \seq_clear:N \l_stex_all_modules_seq
2159     \str_clear:N \l_stex_current_module_str
2160     #2
2161     \stex_filestack_push:n{#1}
2162     \__stex_smsmode_in_smsmode:n {
2163       \let \__stex_smsmode_do_aux_curr:N \__stex_smsmode_do_aux_imports:N
2164       \tl_map_inline:Nn \g__stex_smsmode_allowed_import_tl {
2165         \use:c{\tl_to_str:n{##1}~~~smsmode}
2166       }
2167     }
2168     \seq_map_inline:Nn \g__stex_smsmode_allowed_import_env_seq {
2169       \use:c{\tl_to_str:n{##1}~~~env~~~smsmode}
2170     }
2171     \__stex_smsmode_start_smsmode:n{#1}
2172   }
2173   \__stex_smsmode_in_smsmode:n \g_stex_sms_import_code
2174   \__stex_smsmode_in_smsmode:n {
2175     \let \__stex_smsmode_do_aux_curr:N \__stex_smsmode_do_aux_normal:N
2176     \__stex_smsmode_start_smsmode:n{#1}
2177   }
2178   \stex_filestack_pop:
2179   \group_end:
2180 }
2181 \cs_generate_variant:Nn \stex_file_in_smsmode:nn {on}

```

(End definition for `\stex_file_in_smsmode:nn`. This function is documented on page 130.)

`\stex_smsmode_do:`

```

2183 \cs_new_protected:Nn \__stex_smsmode_smsmode_do: {
2184   \%stex_if_smsmode:T {
2185     \__stex_smsmode_do:w
2186   %}
2187 }
2188 \let\stex_smsmode_do:\relax
2189
2190
2191 \cs_new:Nn \__stex_smsmode_check_cs:NNn {
2192   \exp_after:wN\if\exp_after:wN\relax\exp_not:N#3
2193   \exp_after:wN#1\exp_after:wN#3\else
2194   \exp_after:wN#2\fi
2195 }
2196
2197 \cs_new_protected:Npn \__stex_smsmode_do:w #1 {
2198   \exp_args:Nx \tl_if_empty:nTF { \tl_tail:n{ #1 } }{
2199     \__stex_smsmode_check_cs:NNn \__stex_smsmode_do_aux:N \__stex_smsmode_do:w { #1 }
2200   }{
2201     \__stex_smsmode_do:w
2202   }
2203 }
2204
2205 \cs_new_protected:Nn \__stex_smsmode_do_aux:N {
2206   \cs_if_eq:NNF #1 \q__stex_smsmode_break {
2207     \__stex_smsmode_do_aux_curr:N #1
2208   }
2209 }
2210
2211 \cs_new_protected:Nn \__stex_smsmode_do_aux_imports:N {
2212   \%stex_debug:nn{sms}{Checking~\tl_to_str:n{#1}-in-import}
2213   \tl_if_in:NnTF \g__stex_smsmode_allowed_import_tl {#1} {
2214     \stex_debug:nn{sms}{Executing~\tl_to_str:n{#1}-in-import}
2215     #1
2216   }{
2217     \cs_if_eq:NNTF \begin{ #1 {
2218       \__stex_smsmode_check_begin:Nn \g__stex_smsmode_allowed_import_env_seq
2219     }{
2220       \cs_if_eq:NNTF \end #1 {
2221         \__stex_smsmode_check_end:Nn \g__stex_smsmode_allowed_import_env_seq
2222       }{
2223         \__stex_smsmode_do:w
2224       }
2225     }
2226   }
2227 }
2228
2229 \cs_new_protected:Nn \__stex_smsmode_do_aux_normal:N {
2230   \%stex_debug:nn{sms}{Checking~\tl_to_str:n{#1}-in-sms-mode}
2231   \tl_if_in:NnTF \g__stex_smsmode_allowed_tl {#1} {
2232     \stex_debug:nn{sms}{Executing~\tl_to_str:n{#1}}
2233     #1\__stex_smsmode_do:w
2234   }{
2235     \tl_if_in:NnTF \g__stex_smsmode_allowed_escape_tl {#1} {
2236       \stex_debug:nn{sms}{Executing~escaped~\tl_to_str:n{#1}}

```

```

2237     #1
2238 }{
2239   \cs_if_eq:NNTF \begin #1 {
2240     \__stex_smsmode_check_begin:Nn \g__stex_smsmode_allowedenvs_seq
2241   }{
2242     \cs_if_eq:NNTF \end #1 {
2243       \__stex_smsmode_check_end:Nn \g__stex_smsmode_allowedenvs_seq
2244     }{
2245       \__stex_smsmode_do:w
2246     }
2247   }
2248 }
2249 }
2250 }
2251
2252 \cs_new_protected:Nn \__stex_smsmode_check_begin:Nn {
2253   % \stex_debug:nn{sms}{Checking~environment~#2}
2254   \seq_if_in:NxTF #1 { \tl_to_str:n{#2} }{
2255     \stex_debug:nn{sms}{Environment~#2}
2256     \begin{#2}
2257   }{
2258     \__stex_smsmode_do:w
2259   }
2260 }
2261 \cs_new_protected:Nn \__stex_smsmode_check_end:Nn {
2262   % \stex_debug:nn{sms}{Checking~end~environment~#2}
2263   \seq_if_in:NxTF #1 { \tl_to_str:n{#2} }{
2264     \stex_debug:nn{sms}{End~Environment~#2}
2265     \end{#2}\__stex_smsmode_do:w
2266   }{
2267     \%str_if_eq:nnTF{#2}{document} \endinput
2268     \__stex_smsmode_do:w
2269   }
2270 }

```

(End definition for `\stex_smsmode_do:`. This function is documented on page 131.)

13.6 Modules

13.6.1 The smodule-environment

2271 `<@=stex_modules>`

`\l_stex_current_module_str` The current module:

2272 `\str_new:N \l_stex_current_module_str`

(End definition for `\l_stex_current_module_str`. This variable is documented on page 117.)

`\l_stex_all_modules_seq` Stores all modules currently in scope

2273 `\seq_new:N \l_stex_all_modules_seq`

(End definition for `\l_stex_all_modules_seq`. This variable is documented on page 117.)

\stex_every_module:n

```
2274  (@@=stex_module_setup)
2275  \tl_clear:N \g_stex_every_module_tl {
2276  }
2277  \cs_new_protected:Nn \stex_every_module:n {
2278      \tl_gput_right:Nn \g_stex_every_module_tl { #1 }
2279  }
```

(End definition for \stex_every_module:n. This function is documented on page 117.)

\stex_module_setup:n Sets up a new module:

```
2280  \cs_new_protected:Npn \stex_module_setup:n {
2281      \stex_if_in_module:TF \__stex_module_setup_setup_nested:n \__stex_module_setup_setup_top:n
2282  }
2283
2284  \cs_new_protected:Nn \__stex_module_setup_setup_top:n {
2285      \__stex_module_setup_get_uri_str:n{#1}
2286      \stex_debug:nn{module}{Module~URI:~\l__stex_module_setup_ns_str?#1}
2287      \str_if_empty:NTF \l_stex_key_sig_str
2288          \stex_module_setup_top_nosig:n \__stex_module_setup_setup_top_sig:n {\l__stex_module_setup_ns_str}
2289          \stex_metagroup_new:o \l_stex_current_module_str
2290          \g_stex_every_module_tl
2291          \stex_execute_in_module:x {
2292              \stex_do_deprecation:n{#1}
2293          }
2294          \__stex_module_setup_load_meta:
2295  }
2296
2297  \cs_new_protected:Nn \stex_module_setup_top_nosig:n {
2298      \stex_if_module_exists:nTF{#1} {
2299          \stex_debug:nn{modules}{(already exists)}
2300      }{
2301          \tl_gclear:c{c_stex_module_ #1 _code}
2302          \prop_gclear:c{c_stex_module_ #1 _morphisms_prop }
2303          \prop_gclear:c{c_stex_module_ #1 _symbols_prop }
2304          \prop_gclear:c{c_stex_module_ #1 _notations_prop }
2305      }
2306      \str_set:Nx \l_stex_current_module_str {#1}
2307      \seq_put_right:No \l_stex_all_modules_seq \l_stex_current_module_str
2308  }
2309
2310  \cs_new_protected:Nn \__stex_module_setup_setup_top_sig:n {
2311      \stex_if_module_exists:nTF{#1} {
2312          \stex_debug:nn{modules}{(already exists)}
2313      }{
2314          \stex_debug:nn{modules}{(needs loading)}
2315          \__stex_module_setup_load_sig:
2316      }
2317      \%stex_if_smsmode:F { % WHY?
2318          \stex_activate_module:x {
2319              #1
2320          }
2321      }
2322      \str_set:Nx \l_stex_current_module_str{#1}
```

```

2323 }
2324
2325 \cs_new_protected:Nn \__stex_module_setup_load_sig: {
2326   \stex_file_split_off_ext:NN \l__stex_module_setup_sigfile \g_stex_current_file
2327   \stex_file_split_off_lang:NN \l__stex_module_setup_sigfile \l__stex_module_setup_sigfile
2328   \exp_args:Ne \stex_file_in_smsmode:nn {
2329     \stex_file_use:N \l__stex_module_setup_sigfile . \l_stex_key_sig_str . tex
2330   }{}
2331 }
2332
2333 \cs_new_protected:Nn \__stex_module_setup_setup_nested:n {
2334   \exp_after:wN
2335     \__stex_module_setup_split_module:n \l_stex_current_module_str \__stex_module_setup_end:
2336   \stex_debug:nn{module}{Nested~Module~URI:~\l_stex_current_module_str}
2337   \seq_put_right:No \l_stex_all_modules_seq \l_stex_current_module_str
2338   \stex_metagroup_new:o \l_stex_current_module_str
2339 }
2340
2341
2342 \cs_new_protected:Nn \__stex_module_setup_get_uri_str:n {
2343   \str_clear:N \l__stex_module_setup_ns_str
2344   \stex_map_uri:Nnnnn \l_stex_current_ns_uri {
2345     \str_set:Nx \l__stex_module_setup_ns_str{\##1\cColonStr}
2346   }{
2347     \seq_set_split:Nnn \l__stex_module_setup_seq / {\##1}
2348     \seq_pop_right:NN \l__stex_module_setup_seq \l__stex_module_setup_seg
2349     \exp_args:No \str_if_eq:nnF \l_stex_module_setup_seg {\#1} {
2350       \seq_put_right:No \l__stex_module_setup_seq \l__stex_module_setup_seg
2351     }
2352     \tl_put_right:Nx \l__stex_module_setup_ns_str {\seq_use:Nn \l__stex_module_setup_seq /}
2353   }{}{}
2354 }
2355
2356 \cs_new_protected:Npn \__stex_module_setup_split_module:n #1?#2 \__stex_module_setup_end: #3
2357   \stex_module_setup_top_nosig:n { #1 ? #2 / #3}
2358 }
2359
2360 \bool_new:N \l_stex_in_meta_bool
2361 \bool_set_false:N \l_stex_in_meta_bool
2362
2363 \cs_new_protected:Nn \__stex_module_setup_load_meta: {
2364   \tl_if_empty:NF \l_stex_metatheory_uri {
2365     \stex_execute_in_module:x{
2366       \stex_pseudogroup_with:nn{\l_stex_in_meta_bool}{%
2367         \stex_activate_module:n {\stex_uri_use:N \l_stex_metatheory_uri }%
2368       }%
2369     }%
2370   }%
2371 }
2372
2373 <@@=stex_modules>

```

(End definition for `\stex_module_setup:n`. This function is documented on page 117.)

```

\stex_close_module:
2374 \cs_new:Nn \stex_close_module: {
2375   \bool_if:NT \c_stex_persist_write_mode_bool \__stex_modules_persist_module:
2376   \stex_debug:nn{module}{%
2377     Closing~module~\l_stex_current_module_str^~J
2378     Code:~\expandafter\meaning\csname c_stex_module_\l_stex_current_module_str _code\endcsna
2379     Imports:\exp_after:wN \prop_to_keyval:N \cs:w c_stex_module_\l_stex_current_module_str
2380     Declarations:\exp_after:wN \prop_to_keyval:N \cs:w c_stex_module_\l_stex_current_module_
2381     Notations:\exp_after:wN \prop_to_keyval:N \cs:w c_stex_module_\l_stex_current_module_str
2382   }
2383 }
2384
2385 \cs_new_protected:Nn \__stex_modules_persist_module: {
2386   \stex_persist:e {%
2387     \__stex_modules_restore_module:nnnn {\l_stex_current_module_str}{%
2388       \exp_after:wN \prop_to_keyval:N \cs:w
2389         c_stex_module_\l_stex_current_module_str _morphisms_prop
2390       \cs_end:
2391     }{%
2392       \exp_after:wN \prop_to_keyval:N \cs:w
2393         c_stex_module_\l_stex_current_module_str _symbols_prop
2394       \cs_end:
2395     }{%
2396       \exp_after:wN \exp_after:wN \exp_after:wN \exp_not:n
2397       \exp_after:wN \exp_after:wN \exp_after:wN
2398       { \cs:w c_stex_module_\l_stex_current_module_str _code \cs_end: }
2399     }{%
2400       \prop_map_function:cN{c_stex_module_\l_stex_current_module_str _notations_prop}
2401         \__stex_modules_persist_nots_i:nn
2402       \exp_not:N \STEXRestoreNotsEnd {}
2403     }
2404   }
2405
2406 \cs_new_protected:Nn \__stex_modules_restore_module:nnnn {
2407   \prop_gset_from_keyval:cn{c_stex_module_\tl_to_str:n{#1}_morphisms_prop}{#2}
2408   \cs_set:Npn \__stex_modules_tl {#3}
2409   \exp_args:Nno \prop_gset_from_keyval:cn{c_stex_module_\tl_to_str:n{#1}_symbols_prop}\__st
2410   \prop_map_inline:cn{c_stex_module_\tl_to_str:n{#1}_symbols_prop}{%
2411     \stex_ref_new_symbol:n{#1?##1}
2412   }
2413   \cs_gset:cpn{c_stex_module_\tl_to_str:n{#1}_code}{#4}
2414   \prop_gclear:c{c_stex_module_\tl_to_str:n{#1} _notations_prop}
2415   \str_set:Nn \l__stex_modules_restore_mod_str {#1}
2416   \group_begin:
2417     \catcode`_=8\relax
2418     \catcode`:=12\relax
2419     \__stex_modules_restore_nots:n
2420   }
2421
2422 \cs_new:Nn \__stex_modules_persist_nots_i:nn {
2423   \exp_not:n{#2}
2424 }
2425
2426 \quark_new:N \STEXRestoreNotsEnd

```

```

2427 \cs_new_protected:Nn \__stex_modules_restore_nots:n {
2428   \__stex_modules_restore_nots_i:n
2429 }
2430 }
2431
2432 \cs_new_protected:Nn \__stex_modules_restore_nots_i:n {
2433   \tl_if_eq:nnTF{#1}{\STEXRestoreNotsEnd}{
2434     \group_end:
2435   }{
2436     \__stex_modules_restore_nots_ii:nnnnn {#1}
2437   }
2438 }
2439
2440 \cs_new_protected:Nn \__stex_modules_restore_nots_ii:nnnnn {
2441   \cs_set:Npn \l__stex_modules_tl {{#4}{#5}}
2442   \exp_args:NNe\use:nn\prop_gput:cnn{
2443     {c_stex_module_\l__stex_modules_restore_mod_str _notations_prop}
2444     {\tl_to_str:n{#1!#2}}{
2445       {\tl_to_str:n{#1}}{\tl_to_str:n{#2}}{#3}
2446       \exp_args:No \exp_not:n \l__stex_modules_tl
2447     }
2448   }
2449   \__stex_modules_restore_nots_i:n
2450 }

```

(End definition for `\stex_close_module`. This function is documented on page 117.)

`\l_stex_metatheory_uri`

```
2451 \tl_new:N \l_stex_metatheory_uri
```

(End definition for `\l_stex_metatheory_uri`. This variable is documented on page ??.)

`\setmetatheory`

```

2452 \cs_new_protected:Nn \__stex_modules_set_matatheory:nn {
2453   \group_begin:
2454   \stex_debug:nn{metatheory}{Setting-metatheory~[#1]#2}
2455   \stex_import_module_uri:nn { #1 } { #2 }
2456   \stex_debug:nn{metatheory}{Here:^^J
2457     \l_stex_import_archive_str^^J
2458     \l_stex_import_path_str^^J
2459     \l_stex_import_name_str^^J
2460   }
2461   \stex_import_require_module:ooo
2462     \l_stex_import_archive_str
2463     \l_stex_import_path_str
2464     \l_stex_import_name_str
2465   \stex_debug:nmf{metatheory}{Found:~\l_stex_import_ns_str}
2466   \exp_args:Nne \use:nn {
2467     \group_end: \stex_uri_resolve:Nn \l_stex_metatheory_uri
2468     }{\l_stex_import_ns_str}
2469 }
2470
2471 \NewDocumentCommand \setmetatheory {O{} m} {
2472   \__stex_modules_set_matatheory:nn { #1 }{ #2 }
2473   \stex_smsmode_do:

```

```

2474 }
2475 \stex_sms_allow_escape:N \setmetatheory

(End definition for \setmetatheory. This function is documented on page ??.)

Keys and key handling:

2476 \stex_keys_define:nnnn{smodule}{
2477   \str_clear:N \l_stex_key_sig_str
2478 }{
2479   meta .code:n = {
2480     \str_if_empty:nTF {#1}{%
2481       \tl_clear:N \l_stex_metatheory_uri
2482     }{
2483       \stex_uri_resolve:Nx \l_stex_metatheory_uri { #1 }
2484     }
2485   },
2486   ns .code:n = {
2487     \stex_uri_resolve:Nx \l_stex_current_ns_uri { #1 }
2488   },
2489   lang .code:n = {
2490     \stex_set_language:n { #1 }
2491   },
2492   sig .str_set_x:N = \l_stex_key_sig_str ,
2493   creators .code:n = {} , % todo ?
2494   contributors .code:n = {} , % todo ?
2495   srccite .code:n = {} % todo ?
2496 }{id, title, deprecate}

smodule (env.)

2497 \stex_new_stylable_env:nnnnnnn {module} {O{} m}{%
2498   \stex_keys_set:nn { smodule }{ #1 }
2499   \tl_set_eq:NN \thistitle \l_stex_key_title_tl
2500   \tl_if_empty:NF \thistitle {
2501     \exp_args:No \stexdoctitle \thistitle
2502   }
2503   \exp_args:Nx \stex_module_setup:n { \tl_to_str:n{ #2 } }
2504
2505 \stex_if_do_html:T {
2506   \exp_args:Nne \begin{stex_annotation_env} {
2507     shtml:theory={\l_stex_current_module_str},
2508     shtml:language={ \l_stex_current_language_str},
2509     shtml:signature={\l_stex_key_sig_str}
2510     \tl_if_empty:NF \l_stex_metatheory_uri {,
2511       shtml:metatheory={\stex_uri_use:N \l_stex_metatheory_uri}
2512     }
2513   }
2514   \stex_annotation_invisible:nf}
2515 }
2516 \stex_if_smsmode:F {
2517   \str_set_eq:NN \thismoduleuri \l_stex_current_module_str
2518   \tl_set:Nn \thismodulename {#2}
2519   \stex_style_apply:
2520 }
2521 \stex_smsmode_do:
2522 }{

```

```

2523   \stex_close_module:
2524   \stex_if_smsmode:F \stex_style_apply:
2525   \stex_if_do_html:T{ \end{stex_annotation_env} }
2526 }{}{}{s}
2527
2528 \stex_sms_allow_env:n{smodule}

```

\stex_if_in_module_p: Are we currently in a module?

\stex_if_in_module:TF

```

2529 \prg_new_conditional:Nnn \stex_if_in_module: {p, T, F, TF} {
2530   \str_if_empty:NTF \l_stex_current_module_str
2531   \prg_return_false: \prg_return_true:
2532 }

```

(End definition for \stex_if_in_module:TF. This function is documented on page 117.)

\stex_if_module_exists_p:n Does a module with this URI exist?

\stex_if_module_exists:nTF

```

2533 \prg_new_conditional:Nnn \stex_if_module_exists:n {p, T, F, TF} {
2534   \tl_if_exist:cTF { c_stex_module_#1_code }
2535   \prg_return_true: \prg_return_false:
2536 }

```

(End definition for \stex_if_module_exists:nTF. This function is documented on page 117.)

\stex_do_up_to_module:n Execute code in the current module (i.e. as if the \begin{*smodule*} was the current tex group)

```

2537 \cs_new_protected:Nn \stex_do_up_to_module:n {
2538   \exp_args:No \stex_metagroup_do_in:nn \l_stex_current_module_str {#1}
2539 }
2540 \cs_generate_variant:Nn \stex_do_up_to_module:n {x}

```

(End definition for \stex_do_up_to_module:n. This function is documented on page 118.)

\stex_module_add_code:n

\stex_module_add_code:x

```

2541 \cs_new_protected:Nn \stex_module_add_code:n {
2542   \tl_gput_right:cn {c_stex_module_\l_stex_current_module_str _code} { #1 }
2543 }
2544 \cs_generate_variant:Nn \stex_module_add_code:n {x}

```

(End definition for \stex_module_add_code:n. This function is documented on page 118.)

\stex_execute_in_module:n

\stex_execute_in_module:x

```

2545 \cs_new_protected:Nn \stex_execute_in_module:n { \stex_if_in_module:TF {
2546   \stex_module_add_code:n { #1 }
2547   \stex_do_up_to_module:n { #1 }
2548 }{ #1 }}
2549 \cs_generate_variant:Nn \stex_execute_in_module:n {x}

```

(End definition for \stex_execute_in_module:n. This function is documented on page 117.)

\STEXexport

```

2550 \NewDocumentCommand \STEXexport {} {
2551   \ExplSyntaxOn
2552   \__stex_modules_export:n
2553 }
2554 \cs_new_protected:Nn \__stex_modules_export:n {

```

```

2555   \stex_ignore_spaces_and_pars:#1\ExplSyntaxOff
2556   \stex_module_add_code:n { \stex_ignore_spaces_and_pars:#1}
2557   \stex_smsmode_do:
2558 }

```

Only allowed in modules, and allowed (escaped) in sms mode:

```

2559 \stex_deactivate_macro:Nn \STEXexport {module~environments}
2560 \stex_sms_allow_escape:N \STEXexport
2561 \stex_every_module:n {\stex_reactivate_macro:N \STEXexport}

```

(End definition for \STEXexport. This function is documented on page 81.)

\stex_module_add_morphism:nnnn

\stex_module_add_morphism:nonn
\stex_module_add_morphism:ooox

```

2562 \cs_new_protected:Nn \stex_module_add_morphism:nnnn {
2563   \exp_args:Nne \prop_gput:cnn{c_stex_module_\l_stex_current_module_str _morphisms_prop} {
2564     \tl_if_empty:nTF{#1}{[#2]}{#1}
2565     }{{#1}{#2}{#3}{#4}}
2566 }
2567 \cs_generate_variant:Nn \stex_module_add_morphism:nnnn {nonn,ooox}

```

(End definition for \stex_module_add_morphism:nnnn. This function is documented on page 125.)

\stex_module_add_symbol:nnnnnnN

#1 : {⟨Macro name⟩}
#2 : {⟨Name⟩}
#3 : {⟨arity⟩}
#4 : {⟨Arg num⟩}{⟨Arg str⟩}*
#5 : Definiens
#6 : type
#7 : Return
#8 : Command

```

2568 \cs_new_protected:Nn \stex_module_add_symbol:nnnnnnN {
2569   \stex_debug:nn{declaration}{New~declaration:~\l_stex_current_module_str?#2^^J
2570     Macro:#1^^JArity:#3~(#4)^~J
2571     Def:~\tl_to_str:n{#5}^^J
2572     Type:~\tl_to_str:n{#6}^^J
2573     Returns:~\tl_to_str:n{#7}
2574   }
2575   \%prop_gput:cnx{c_stex_module_\l_stex_current_module_str _symbols_prop}
2576   %{#2}{\exp_not:n{#1}{#2}{#3}{#4}{#5}{#6}}{#7}\exp_not:n{#8}
2577   \prop_gput:cnn{c_stex_module_\l_stex_current_module_str _symbols_prop}
2578   %{#2}{#1}{#2}{#3}{#4}{#5}{#6}{#7}{#8}
2579   \tl_if_empty:nF{#1} {
2580     \stex_execute_in_module:n {
2581       \__stex_modules_activate_sym:n {#2}
2582     }
2583   }
2584 }
2585
2586 \cs_new_protected:Nn \__stex_modules_activate_sym:n {
2587   \prop_map_inline:cn{c_stex_module_\l_stex_current_module_str _symbols_prop} {
2588     \str_if_eq:nnT{#1}{##1} {
2589       \__stex_modules_activate_i:nnnnnnn ##2
2590     }
2591   }

```

```

2592 }
2593 \cs_new_protected:Nn \__stex_modules_activate_i:nnnnnnnn {
2594   \stex_debug:nn{activating}{#1:\l_stex_current_module_str^^J
2595     \tl_to_str:n{[#2]{#3}{#4}{#5}{#6}{#7}{#8}}
2596   }
2597   \cs_set:cpx{#1} {
2598     \stex_invoke_symbol:nnnnnnnN
2599     {\l_stex_current_module_str}
2600     \exp_not:n{[#2]{#3}{#4}{#5}{#6}{#7}{#8}}
2601   }
2602 \stex_debug:nn{activating}{done}
2603 \prop_map_break:
2604 }
```

(End definition for `\stex_module_add_symbol:nnnnnnN`. This function is documented on page ??.)

```

\stex_module_add_notation:nnnn #1 : URI
\stex_module_add_notation:eoeeoo #2 : variant
\stex_set_notation_macro:nnnnn #3 : arity
#4 : macro body
#5 : op

2605 \cs_new_protected:Nn \stex_module_add_notation:nnnnn {
2606   \stex_debug:nn{notations}{Adding~notation:^^J
2607     #1-\c_hash_str#2~#3^^J
2608     to-\l_stex_current_module_str
2609   }
2610   \prop_gput:cnn{c_stex_module_\l_stex_current_module_str _notations_prop}
2611   {#1!#2}{#1}{#2}{#3}{#4}{#5}
2612   \stex_execute_in_module:n {
2613     \__stex_modules_activate_not:nn{#1}{#2}
2614   }
2615 }
2616 \cs_generate_variant:Nn \stex_module_add_notation:nnnnn {eoeeoo}
2617
2618
2619 \cs_new_protected:Nn \__stex_modules_activate_not:nn {
2620   \prop_map_inline:cn{c_stex_module_\l_stex_current_module_str _notations_prop} {
2621     \str_if_eq:nnT{#1!#2}{#1} {
2622       \prop_map_break:n{\stex_set_notation_macro:nnnnn ##2 }
2623     }
2624   }
2625 }
```

(End definition for `\stex_module_add_notation:nnnnn` and `\stex_set_notation_macro:nnnnn`. These functions are documented on page 120.)

```

\stex_set_notation_macro:nnnnn
\stex_set_notation_macro:eoexo
2626 \cs_new_protected:Nn \stex_set_notation_macro:nnnnn {
2627   \tl_set:cn {\l_stex_notation_#1#2_cs}{#4}
2628   \cs_if_exist:cF{\l_stex_notation_#1__cs} {
2629     \tl_set:cn {\l_stex_notation_#1__cs}{#4}
2630   }
2631   \tl_if_empty:nF{#5} {
2632     \tl_set:cn{\l_stex_notation_#1_op_#2_cs}{#5}
```

```

2633     \cs_if_exist:cF{l_stex_notation_#1_op__cs} {
2634         \cs_set_eq:cc {l_stex_notation_#1_op__cs}{l_stex_notation_#1_op_#2_cs}
2635     }
2636 }
2637 }
2638 \cs_generate_variant:Nn \stex_set_notation_macro:nnnnn {eoexo}

```

(End definition for `\stex_set_notation_macro:nnnnn`. This function is documented on page 121.)

`\stex_activate_module:n`

```

\stex_activate_module:o 2639 \cs_new_protected:Nn \stex_activate_module:n {
\stex_activate_module:x 2640     \seq_if_in:NnF \l_stex_all_modules_seq { #1 } {
2641         \stex_debug:nn{modules}{Activating-module~#1^J\expandafter\meaning\csname c_stex_module
2642         \seq_put_right:Nn \l_stex_all_modules_seq { #1 }
2643         \stex_pseudogroup:nn{
2644             \str_set:Nn \l_stex_current_module_str {#1}
2645             \use:c{ c_stex_module_#1_code }
2646         }{
2647             \stex_pseudogroup_restore:N \l_stex_current_module_str
2648         }
2649     }
2650 }
2651 \cs_generate_variant:Nn \stex_activate_module:n {o,x}

```

(End definition for `\stex_activate_module:n`. This function is documented on page 117.)

Iterating:

```
2652 <@=stex_iterate>
```

`\stex_iterate_symbols:n`

```

2653 \cs_new_protected:Nn \stex_iterate_symbols:n {
2654     \stex_pseudogroup_with:nn{\_\stex_iterate_sym_cs:nnnnnnnnN\stex_iterate_break:\stex_iterat
2655     \cs_set:Npn \_\stex_iterate_sym_cs:nnnnnnnnN
2656     ##1 ##2 ##3 ##4 ##5 ##6 ##7 ##8 ##9 { #1 }
2657     \cs_set:Npn \stex_iterate_break: {
2658         \prop_map_break:n{\seq_map_break:}
2659     }
2660     \cs_set:Npn \stex_iterate_break:n ##1 {
2661         \prop_map_break:n{\seq_map_break:n{##1}}
2662     }
2663     \seq_map_inline:Nn \l_stex_all_modules_seq {
2664         \prop_map_inline:cn{c_stex_module_#1_symbols_prop} {
2665             \_\stex_iterate_sym_cs:nnnnnnnnN {##1} ####2
2666         }
2667     }
2668 }
2669 }

```

(End definition for `\stex_iterate_symbols:n`. This function is documented on page 118.)

`\stex_iterate_symbols:nn`

```

2670 \cs_new_protected:Nn \stex_iterate_symbols:nn {
2671     \seq_clear:N \l_stex_iterate_mods_seq
2672     \stex_pseudogroup_with:nn{\_\stex_iterate_sym_cs:nnnnnnnnN} {
2673         \cs_set:Npn \_\stex_iterate_sym_cs:nnnnnnnnN

```

```

2674     ##1 ##2 ##3 ##4 ##5 ##6 ##7 ##8 ##9 { #2 }
2675     \clist_map_function:nN {#1} \__stex_iterate_it_decl_i:n
2676   }
2677 }
2678
2679 \cs_new_protected:Nn \__stex_iterate_it_decl_i:n {
2680   \seq_if_in:NnF \l__stex_iterate_mods_seq {#1} {
2681     \seq_put_left:Nn \l__stex_iterate_mods_seq {#1}
2682     \prop_map_inline:cn{c_stex_module_#1_morphisms_prop} {
2683       \__stex_iterate_it_decl_check:nnnn ##2
2684     }
2685     \prop_map_inline:cn{c_stex_module_#1_symbols_prop} {
2686       \__stex_iterate_sym_cs:nnnnnnnn {#1} ##2
2687     }
2688   }
2689 }
2690 \cs_new_protected:Nn \__stex_iterate_it_decl_check:nnnn {
2691   \tl_if_empty:nT{#1}{%
2692     \__stex_iterate_it_decl_i:n {#2}
2693   }
2694 }

```

(End definition for `\stex_iterate_symbols:nn`. This function is documented on page 118.)

`\stex_iterate_notations:nn`

```

2695 \cs_new_protected:Nn \stex_iterate_notations:nn {
2696   \seq_clear:N \l__stex_iterate_mods_seq
2697   \stex_pseudogroup_with:nnf{\l__stex_iterate_not_cs:nnnnn}{%
2698     \cs_set:Npn \__stex_iterate_not_cs:nnnnn
2699     ##1 ##2 ##3 ##4 ##5 { #2 }
2700     \clist_map_function:nN {#1} \__stex_iterate_it_not_i:n
2701   }
2702 }
2703
2704 \cs_new_protected:Nn \__stex_iterate_it_not_i:n {
2705   \seq_if_in:NnF \l__stex_iterate_mods_seq {#1} {
2706     \seq_put_left:Nn \l__stex_iterate_mods_seq {#1}
2707     \prop_map_inline:cn{c_stex_module_#1_notations_prop} {
2708       \__stex_iterate_not_cs:nnnnn ##2
2709     }
2710     \prop_map_inline:cn{c_stex_module_#1_morphisms_prop} {
2711       \__stex_iterate_it_not_check:nnnn ##2
2712     }
2713   }
2714 }
2715 \cs_new_protected:Nn \__stex_iterate_it_not_check:nnnn {
2716   \tl_if_empty:nT{#1}{%
2717     \__stex_iterate_it_not_i:n {#2}
2718   }
2719 }

```

(End definition for `\stex_iterate_notations:nn`. This function is documented on page 121.)

`\stex_iterate_morphisms:nn`

```

2720 \cs_new_protected:Nn \stex_iterate_morphisms:nn {
2721   \seq_clear:N \l__stex_iterate_mods_seq
2722   \bool_set_true:N \l__stex_iterate_continue_bool
2723   \cs_set:Npn \__stex_iterate_morphism_cs:nnnn ##1 ##2 ##3 ##4 ##5 {
2724     #2
2725     \bool_if:NT \l__stex_iterate_continue_bool {
2726       \str_if_eq:nnTF{##1}{##2} {
2727         \tl_put_right:Nn \l__stex_iterate_todo_tl {
2728           \__stex_iterate_morphism:nn{##5}{##2}
2729         }
2730       }{
2731         \tl_put_right:Nn \l__stex_iterate_todo_tl {
2732           \__stex_iterate_morphism:nn{##5 / ##1}{##2}
2733         }
2734       }
2735     }
2736   }
2737   \cs_set:Npn \stex_iterate_break:n ##1 {
2738     \bool_set_false:N \l__stex_iterate_continue_bool
2739     \prop_map_break:n{##1}
2740   }
2741   \__stex_iterate_morphism:nn{}{##1}
2742 }
2743
2744 \cs_new_protected:Nn \__stex_iterate_iterate_morphism:nn {
2745   \tl_clear:N \l__stex_iterate_todo_tl
2746   \seq_if_in:NnF \l__stex_iterate_mods_seq {#1 #2} {
2747     \seq_put_right:Nn \l__stex_iterate_mods_seq {#1 #2}
2748     \prop_map_inline:cn{c_stex_module_#2_morphisms_prop} {
2749       \__stex_iterate_morphism_cs:nnnn ##2 {##1}
2750       % TODO
2751       % ##1: name or [mpath]
2752       % ##2 = {####1}{####2}{####3}{####4}
2753       % ####1 = name
2754       % ####2 = mpath
2755       % ####3 = type
2756       % ####4 = {origname}{newname}*
2757     }
2758     \bool_if:NT \l__stex_iterate_continue_bool \l__stex_iterate_todo_tl
2759   }
2760 }

```

(End definition for `\stex_iterate_morphisms:nn`. This function is documented on page ??.)

13.6.2 Structural Features

```

2761 <@=stex_features>
2762
\stex_structural_feature_module:nn
\stex_structural_feature_module_end:
2763 \cs_new_protected:Nn \stex_structural_feature_module:nn {
2764   \stex_if_do_html:TF {
2765     \exp_args:Nne \begin{stex_annotation_env} {
2766       \shtml:feature-#2={
2767         \l_stex_current_module_str/#1}
2768       \str_if_empty:NF \l_stex_macroname_str {,

```

```

2768         shtml:macroname={\l_stex_macroname_str}
2769     }
2770   }
2771   \stex_annotation_invisible:n{}
2772 }\group_begin:
2773 \stex_module_setup:n {#1-module}
2774 }
2775
2776 \cs_new_protected:Nn \stex_structural_feature_module_end: {
2777   \tl_gset_eq:NN \g_stex_last_feature_str \l_stex_current_module_str
2778   \stex_close_module:
2779   \stex_if_do_html:TF{
2780     \end{stex_annotation_env}
2781   }\group_end:
2782 }

```

(End definition for \stex_structural_feature_module:nn and \stex_structural_feature_module_end:. These functions are documented on page 123.)

\stex_structural_feature_morphism:nnn

\stex_structural_feature_morphism_end:

```

2783 \bool_new:N \l__stex_features_implicit_bool
2784 \cs_new_protected:Nn \stex_structural_feature_morphism:nnnnn {
2785   \str_clear:N \l_stex_current_domain_str
2786   \tl_if_empty:nT{#3} {
2787     \stex_get_mathstructure:n#4
2788     \str_set_eq:NN \l_stex_current_domain_str \l_stex_get_structure_module_str
2789   }
2790   \str_if_empty:NT \l_stex_current_domain_str {
2791     \stex_import_module_uri:nn { #3 }{ #4 }
2792   }\group_begin:
2793   \stex_import_require_module:ooo
2794     \l_stex_import_archive_str
2795     \l_stex_import_path_str
2796     \l_stex_import_name_str
2797   \exp_args:Nnx \use:nn \group_end: {
2798     \str_set:Nn \exp_not:N\l_stex_current_domain_str {\l_stex_import_ns_str}
2799   }
2800 }
2801 \tl_if_empty:nTF{#1} {
2802   \bool_set_true:N \l__stex_features_implicit_bool
2803   \str_set:Nx \l_tmpa_str {[ \l_stex_current_domain_str ] }
2804 }{
2805   \bool_set_false:N \l__stex_features_implicit_bool
2806   \str_set:Nn \l_tmpa_str {#1}
2807 }
2808
2809 \stex_if_do_html:TF {
2810   \begin{stex_annotation_env} {
2811     shtml:feature-#2={\l_stex_current_module_str?\l_tmpa_str},
2812     shtml:domain={\l_stex_current_domain_str}
2813     #5
2814   }
2815   \stex_annotation_invisible:n{}
2816 }\group_begin:

```

```

2817 \str_set:Nn \l__stex_features_feature_str {#2}
2818 \str_set_eq:NN \l_stex_feature_name_str \l_tmpa_str
2819 \__stex_features_setup:
2820 \__stex_features_reactivate:
2821 %^A\stex_activate_module:o \l_stex_current_domain_str
2822 \exp_args:Ne \stex_metagroup_new:n {\l_stex_current_module_str / \l_stex_feature_name_str}
2823 }
2824
2825 \cs_new_protected:Nn \__stex_features_do_for_list: {
2826   \seq_clear:N \l_stex_fors_seq
2827   \clist_map_inline:Nn \l_stex_key_for_clist {
2828     \exp_args:Ne\stex_get_in_morphism:n{\tl_to_str:n{##1}}
2829     \seq_put_right:Nx \l_stex_fors_seq
2830     {\l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str}
2831   }
2832 }
2833
2834 \cs_new_protected:Nn \__stex_features_add_definiens:nn {
2835   \__stex_features_set_definiens_macros: #1\__stex_features_break:
2836   \stex_assign_do:n{#2}
2837   #2
2838 }
2839 \cs_new_protected:Npn \__stex_features_set_definiens_macros: #1?#2?#3\__stex_features_break:
2840   \str_set:Nn \l_stex_get_symbol_mod_str {#1?#2}
2841   \str_set:Nn \l_stex_get_symbol_name_str {#3}
2842   \exp_args:Nne\use:nn{\__stex_features_set_definiens_macros_i:nnnnnnn}{%
2843     \prop_item:Nn \l_stex_morphism_symbols_prop {[#1?#2]/[#3]}
2844   }
2845 }
2846 \cs_new_protected:Nn \__stex_features_set_definiens_macros_i:nnnnnnn {
2847   \tl_set:Nn \l_stex_get_symbol_def_tl{#4}
2848 }
2849
2850 \cs_new_protected:Nn \stex_structural_feature_morphism_end: {
2851   \str_gset_eq:NN \l_stex_feature_name_str \l_stex_feature_name_str
2852   \str_gset_eq:NN \l_stex_current_domain_str \l_stex_current_domain_str
2853   \seq_gset_eq:NN \l_stex_morphism_symbols_prop \l_stex_morphism_symbols_prop
2854   \seq_gset_eq:NN \l_stex_morphism_renames_prop \l_stex_morphism_renames_prop
2855   \seq_gset_eq:NN \l_stex_morphism_morphisms_seq \l_stex_morphism_morphisms_seq
2856   \__stex_features_do_elaboration:
2857   \stex_if_do_html:TF{
2858     \end{stex_annotation_env}
2859   }\group_end:
2860 }
2861
2862 \cs_new_protected:Nn \__stex_features_setup: {
2863   \prop_clear:N \l_stex_morphism_symbols_prop
2864   \prop_clear:N \l_stex_morphism_renames_prop
2865   \seq_clear:N \l_stex_morphism_morphisms_seq
2866   \__stex_features_do_decls:
2867   \exp_args:No \__stex_features_do_morphisms:n \l_stex_current_domain_str
2868 }
2869
2870 \cs_new_protected:Nn \__stex_features_rename_all: {

```

```

2871 }
2872 }
2873
2874 \cs_new:Npn \__stex_features_clean:nw [#1] / #2 \stex_end: {
2875     [#1]/[#2]
2876 }
2877
2878 \cs_new_protected:Nn \__stex_features_do_decls: {
2879     \exp_args:No \stex_iterate_symbols:nn \l_stex_current_domain_str {
2880         \stex_if_starts_with:nNTF{##3}[
2881             \exp_args:NNe \prop_put:Nnn \l_stex_morphism_symbols_prop {
2882                 \__stex_features_clean:nw ##3 \stex_end:
2883             }
2884         }{
2885             \prop_put:Nnn \l_stex_morphism_symbols_prop
2886             {[##1]/[##3]}
2887         }{
2888             {##2}{##4}{##5}{##6}{##7}{##8}##9
2889         }
2890     }
2891 }
2892
2893 \cs_new_protected:Nn \stex_structural_feature_morphism_check_total: {
2894     \prop_map_inline:Nn \l_stex_morphism_symbols_prop {
2895         \__stex_features_total_check: ##1 ##2
2896     }
2897 }
2898
2899 \cs_new_protected:Npn \__stex_features_total_check: [#1]/[#2] #3 #4 #5 #6 #7 #8 #9 {
2900     \tl_if_empty:nT{##6} {
2901         \msg_error:nnxx{\stex}{error/needsdefiniens}{##1##2}{total-morphism}
2902     }
2903 }
2904
2905 \cs_new:Npn \__stex_features_split_qm:w #1 ? #2 ? #3 { #3 }
2906 \cs_new_protected:Nn \__stex_features_do_elaboration: {
2907     \stex_debug:nn{morphisms} {
2908         Elaborating:^^J\prop_to_keyval:N \l_stex_morphism_symbols_prop
2909         ^^J
2910         Renamings:^^J
2911         \prop_to_keyval:N \l_stex_morphism_renames_prop
2912     }
2913     \prop_map_inline:Nn \l_stex_morphism_symbols_prop {
2914         \__stex_features_elab_check: ##1 ##2
2915     }
2916     \exp_args:No\stex_iterate_notations:nn\l_stex_current_domain_str{
2917         \prop_get:NnNTF \l_stex_morphism_renames_prop {##1}\l__stex_features_tmp {
2918             \exp_args:Ne \stex_module_add_notation:nnnnn
2919             {\l_stex_current_module_str ? \exp_after:wN \use_i:nn \l__stex_features_tmp}
2920         }{
2921             \exp_args:Ne \stex_module_add_notation:nnnnn
2922             {\l_stex_current_module_str ? \l_stex_feature_name_str
2923             / \__stex_features_split_qm:w ##1}
2924         }##2}##3}##4}##5}

```

```

2925   }
2926   \stex_module_add_morphism:ooox
2927     \l_stex_feature_name_str
2928     \l_stex_current_domain_str
2929     \l_stex_features_feature_str
2930     {\prop_map_function:NN \l_stex_morphism_renames_prop \_\_stex_features_rename:nn}
2931   }
2932 
2933 \cs_new:Nn \_\_stex_features_rename:nn{
2934   {#1}{\use_i:nn#2}
2935 }
2936 
2937 \cs_new_protected:Npn \_\_stex_features_elab_check: [#1]/[#2] #3 {
2938   \prop_get:NnNTF \l_stex_morphism_renames_prop {#1?#2} \l_stex_features_tmp {
2939     \stex_debug:nn{morphisms}{Generating~\l_stex_features_tmp}
2940     \exp_after:wN \stex_module_add_symbol:nnnnnnnN \l_stex_features_tmp
2941   }{
2942     \bool_if:NTF \l_stex_features_implicit_bool {
2943       \stex_debug:nn{morphisms}{Generating~\l_stex_feature_name_str / #2}
2944       \exp_args:Nno \stex_module_add_symbol:nnnnnnnN {#3}{\l_stex_feature_name_str / #2}
2945     }{
2946       \stex_debug:nn{morphisms}{Generating~\l_stex_feature_name_str / #2}
2947       \exp_args:Nno \stex_module_add_symbol:nnnnnnnN {}{\l_stex_feature_name_str / #2}
2948     }
2949   }
2950 }
2951 
2952 \cs_new_protected:Nn \_\_stex_features_do_morphisms:n {
2953   \prop_map_inline:cn {c_stex_module_#1_morphisms_prop} {
2954     \_\_stex_features_do_morph:nnnn ##2
2955   }
2956 }
2957 
2958 \cs_new_protected:Nn \_\_stex_features_do_morph:nnnn {
2959   \tl_if_empty:nF{#3} {
2960     \seq_put_right:Nn \l_stex_morphism_morphisms_seq {{#1}{#2}{#3}}
2961   }
2962   \_\_stex_features_do_morphisms:n{#2}
2963 }
2964 
2965 \cs_new_protected:Npn \_\_stex_features_reactivate: {
2966   \stex_deactivate_macro:Nn \symdecl {module~environments}
2967   \stex_deactivate_macro:Nn \textsymdecl {module~environments}
2968   \stex_deactivate_macro:Nn \symdef {module~environments}
2969   \stex_deactivate_macro:Nn \notation {module~environments}
2970   \stex_deactivate_macro:Nn \importmodule {module~environments}
2971   \stex_deactivate_macro:Nn \requiremodule {module~environments}
2972   \stex_deactivate_macro:Nn \smodule {outside-of-morphisms}
2973   \stex_reactivate_macro:N \assign
2974   \stex_reactivate_macro:N \assignMorphism
2975   \stex_reactivate_macro:N \renamedecl
2976   \cs_set_eq:NN \stex_do_for_list: \_\_stex_features_do_for_list:
2977   \cs_set_eq:NN \stex_add_definiens:nn \_\_stex_features_add_definiens:nn
2978 }

```

(End definition for `\stex_structural_feature_morphism:nnn` and `\stex_structural_feature_morphism_end:`. These functions are documented on page ??.)

```
\stex_get_in_morphism:n
2979 \cs_new_protected:Nn \stex_get_in_morphism:n {
2980   \str_clear:N \l_stex_get_symbol_name_str
2981   \prop_map_inline:Nn \l_stex_morphism_symbols_prop {
2982     \exp_args:Nx \__stex_features_get_check:nnnn{\tl_to_str:n{#1}}##1##2
2983   }
2984   \str_if_empty:NT \l_stex_get_symbol_name_str {
2985     \prop_map_inline:Nn \l_stex_morphism_renames_prop {
2986       \__stex_features_renamed_check:nnnnn{#1}##1##2
2987     }
2988     \str_if_empty:NT \l_stex_get_symbol_name_str {
2989       \msg_error:nnxx{stex}{error/unknownsymbolin}{#1}{
2990         morphism~\l_stex_feature_name_str
2991       }
2992     }
2993   }
2994 }
2995
2996 \cs_new_protected:Npn \__stex_features_renamed_check:nnnnn #1#2?#3?#4=#5#6 {
2997   \str_if_eq:nnTF{#1}{#5} {
2998     \exp_args:Nnx \use:nn{\__stex_features_check_break:nnnnnnnn{#2?#3}{#4}}{
2999       \prop_item:Nn \l_stex_morphism_symbols_prop {[#2?#3]/[#4]}
3000     }
3001   }{
3002     \str_if_eq:nnT{#1}{#6} {
3003       \exp_args:Nnx \use:nn{\__stex_features_check_break:nnnnnnnn{#2?#3}{#4}}{
3004         \prop_item:Nn \l_stex_morphism_symbols_prop {[#2?#3]/[#4]}
3005       }
3006     }
3007   }
3008 }
3009
3010 \cs_new_protected:Npn \__stex_features_get_check:nnnn #1[#2]/[#3]#4 {
3011   \str_if_eq:nnTF{#1}{#3} {
3012     \__stex_features_check_break:nnnnnnnn{#2}{#3}{#4}
3013   }{
3014     \str_if_eq:nnTF{#1}{#4} {
3015       \__stex_features_check_break:nnnnnnnn{#2}{#3}{#4}
3016     }{
3017       \use_none:nnnnn
3018     }
3019   }
3020 }
3021
3022 \cs_new_protected:Nn \__stex_features_check_break:nnnnnnnn {
3023   \prop_map_break:n {
3024     \str_set:Nn \l_stex_get_symbol_mod_str{#1}
3025     \str_set:Nn \l_stex_get_symbol_name_str{#2}
3026     \str_set:Nn \l_stex_get_symbol_macro_str{#3}
3027     \int_set:Nn \l_stex_get_symbol_arity_int {#4}
3028     \tl_set:Nn \l_stex_get_symbol_args_tl {#5}
```

```

3029     \tl_set:Nn \l_stex_get_symbol_def_tl {#6}
3030     \tl_set:Nn \l_stex_get_symbol_type_tl {#7}
3031     \tl_set:Nn \l_stex_get_symbol_return_tl {#8}
3032     \tl_set:Nn \l_stex_get_symbol_invoke_cs {#9}
3033 }
3034 }
```

(End definition for `\stex_get_in_morphism:n`. This function is documented on page 126.)

13.7 Inheritance

13.7.1 `\importmodule/\\usemodule`

```

3035 <@=stex_importmodule>
\usemodule
3036 \stex_new_stylable_cmd:nnnn {usemodule} { 0{} m } {
3037   \stex_import_module_uri:nn { #1 }{ #2 }
3038   \stex_import_require_module:ooo
3039   \l_stex_import_archive_str
3040   \l_stex_import_path_str
3041   \l_stex_import_name_str
3042   \stex_if_do_html:T {
3043     \hbox{\stex_annotation_invisible:nn
3044       {shtml:usemodule=\l_stex_import_ns_str} {}}
3045   }
3046   \stex_if_smsmode:F{
3047     \group_begin:
3048     \tl_set_eq:NN \thismoduleuri \l_stex_import_ns_str
3049     \tl_set_eq:NN \thismodulename \l_stex_import_name_str
3050     \tl_clear:N \thisstyle
3051     \stex_style_apply:
3052     \group_end:
3053   }
3054 }
```

(End definition for `\usemodule`. This function is documented on page 88.)

`\stex_import_module_uri:nn`

```

3055 \cs_new_protected:Nn \stex_import_module_uri:nn {
3056   \stex_debug:nn{importmodule}{URI:~>#1<->#2<}
3057   \exp_args:NNnx \seq_set_split:Nnn \__stex_importmodule_seq ? { \tl_to_str:n{ #2 } }
3058   \seq_pop_right:NN \__stex_importmodule_seq \l_stex_import_name_str
3059   \str_set:Nx \l_stex_import_path_str { \seq_use:Nn \__stex_importmodule_seq ? }
3060   \tl_if_empty:nTF { #1 } {
3061     \stex_debug:nn{importmodule}{No-archive}
3062     \prop_if_exist:NTF \l_stex_current_archive_prop {
3063       \stex_debug:nn{importmodule}{Picking~current~archive}
3064       \str_set:Nx \l_stex_import_archive_str {
3065         \prop_item:Nn \l_stex_current_archive_prop { id }
3066       }
3067     }{
3068       \str_clear:N \l_stex_import_archive_str
3069       \str_set:Nn \l_stex_import_uri_str {file:}
```

```

3070     \str_if_empty:NTF \l_stex_import_path_str {
3071         \stex_debug:nn{importmodule}{Empty~Path}
3072         \stex_file_split_off_ext:NN \l__stex_importmodule_path_seq \g_stex_current_file
3073         \stex_file_split_off_lang:NN \l__stex_importmodule_path_seq \l__stex_importmodule_pa
3074         \str_set:Nx \l_stex_import_path_str {
3075             \stex_file_use:N \l__stex_importmodule_path_seq
3076         }
3077     }{
3078         \stex_debug:nn{importmodule}{Resolving~path~\l_stex_import_path_str~relative~to~\ste
3079         \stex_file_resolve:Nx \l__stex_importmodule_path_seq { \stex_file_use:N \g_stex_current_f
3080         \str_set:Nx \l_stex_import_path_str {
3081             \stex_file_use:N \l__stex_importmodule_path_seq
3082         }
3083         \stex_debug:nn{importmodule}{...yields~\l_stex_import_path_str}
3084     }
3085 }
3086 }{
3087     \stex_debug:nn{importmodule}{Archive~#1}
3088     \str_set:Nx \l_stex_import_archive_str { #1 }
3089     \stex_require_archive:o \l_stex_import_archive_str
3090     \str_set:Nx \l_stex_import_uri_str { \prop_item:cnd{ c_stex_mathhub_ \l_stex_import_archi
3091 }
3092 }

```

(End definition for `\stex_import_module_uri:nn`. This function is documented on page 125.)

```

\stex_import_require_module:nnn
\stex_import_require_module:ooo
3093 \cs_new_protected:Npn \stex_import_require_module:nnn #1 {
3094     \tl_if_empty:nTF { #1 } {
3095         \str_clear:N \l__stex_importmodule_archive_str
3096         \str_set:Nn \l_stex_import_uri_str {file:{}}
3097         \__stex_importmodule_get_module:nnn {}
3098     }{
3099         \stex_require_archive:n { #1 }
3100         \str_set:Nx \l__stex_importmodule_archive_str {#1}
3101         \str_set:Nx \l_stex_import_uri_str { \prop_item:cnd{ c_stex_mathhub_ #1 _manifest_prop}{}
3102         \str_set:Nx \l__stex_importmodule_str { \stex_file_use:N \c_stex_mathhub_file / #1 / sou
3103         \exp_args:No \__stex_importmodule_get_module:nnn \l__stex_importmodule_str
3104     }
3105 }
3106 \cs_generate_variant:Nn \stex_import_require_module:nnn {ooo}
3107
3108 \cs_new_protected:Npn \stex_import_require_module_safe:nnn #1 {
3109     \tl_if_empty:nTF { #1 } {
3110         \str_clear:N \l__stex_importmodule_archive_str
3111         \str_set:Nn \l_stex_import_uri_str {file:{}}
3112         \__stex_importmodule_get_module_safe:nnn {}
3113     }{
3114         \stex_require_archive:n { #1 }
3115         \str_set:Nx \l__stex_importmodule_archive_str {#1}
3116         \str_set:Nx \l_stex_import_uri_str { \prop_item:cnd{ c_stex_mathhub_ #1 _manifest_prop}{}
3117         \str_set:Nx \l__stex_importmodule_str { \stex_file_use:N \c_stex_mathhub_file / #1 / sou
3118         \exp_args:No \__stex_importmodule_get_module_safe:nnn \l__stex_importmodule_str
3119     }

```

```

3120 }
3121
3122 \cs_new_protected:Nn \__stex_importmodule_get_module_uri:nnn {
3123   \tl_if_empty:nF {#2} {
3124     \str_set:Nx \l_stex_import_uri_str {\l_stex_import_uri_str / #2}
3125   }
3126   \stex_debug:nn{importmodule}{~>#1<^J>#2<^J>#3<^J>\l_stex_import_uri_str<^J
3127     Current~file:\stex_file_use:N \g_stex_current_file<^J
3128     Current~namespace:\stex_uri_use:N \l_stex_current_ns_uri
3129   }
3130   \stex_if_module_exists:nTF {\l_stex_import_uri_str?#3} {
3131     \str_set:Nx \l_stex_import_ns_str {\l_stex_import_uri_str?#3}
3132   }{
3133     \stex_if_module_exists:nTF{\stex_uri_use:N \l_stex_current_ns_uri ? #3} {
3134       \str_set:Nx \l_stex_import_ns_str {\stex_uri_use:N \l_stex_current_ns_uri ? #3}
3135     }{
3136       \__stex_importmodule_get_from_file:nnn{#1}{#2}{#3}
3137       \str_set:Nx \l_stex_import_ns_str {\l_stex_import_uri_str?#3}
3138     }
3139   }
3140 }
3141 \cs_new_protected:Nn \__stex_importmodule_get_module_uri_safe:nnn {
3142   \tl_if_empty:nF {#2} {
3143     \str_set:Nx \l_stex_import_uri_str {\l_stex_import_uri_str / #2}
3144   }
3145   \stex_debug:nn{importmodule}{~>#1<^J>#2<^J>#3<^J>\l_stex_import_uri_str<^J
3146     Current~file:\stex_file_use:N \g_stex_current_file<^J
3147     Current~namespace:\stex_uri_use:N \l_stex_current_ns_uri
3148   }
3149   \stex_if_module_exists:nTF {\l_stex_import_uri_str?#3} {
3150     \str_set:Nx \l_stex_import_ns_str {\l_stex_import_uri_str?#3}
3151   }{
3152     \stex_if_module_exists:nTF{\stex_uri_use:N \l_stex_current_ns_uri ? #3} {
3153       \str_set:Nx \l_stex_import_ns_str {\stex_uri_use:N \l_stex_current_ns_uri ? #3}
3154     }{
3155       \__stex_importmodule_get_from_file_safe:nnn{#1}{#2}{#3}
3156       \str_set:Nx \l_stex_import_ns_str {\l_stex_import_uri_str?#3}
3157     }
3158   }
3159 }
3160
3161 \cs_new_protected:Nn \__stex_importmodule_get_module:nnn {
3162   \stex_debug:nn{importmodule}{Requiring~>[#1]#2?#3<}
3163   \__stex_importmodule_get_module_uri:nnn{#1}{#2}{#3}
3164   \stex_activate_module:o \l_stex_import_ns_str
3165 }
3166
3167 \cs_new_protected:Nn \__stex_importmodule_get_module_safe:nnn {
3168   \stex_debug:nn{importmodule}{Requiring~>[#1]#2?#3<}
3169   \__stex_importmodule_get_module_uri_safe:nnn{#1}{#2}{#3}
3170 }
3171
3172 \cs_new_protected:Nn \__stex_importmodule_get_from_file:nnn {
3173   \stex_file_resolve:Nx \l__stex_importmodule_seq { \tl_if_empty:nF{ #1 }{ #1 / } #2 }

```

```

3174 \str_set:Nx \l__stex_importmodule_str {\stex_file_use:N \l__stex_importmodule_seq}
3175 \stex_debug:nn{imports}{Looking~for~\l_stex_import_uri_str?#3...}
3176 \__stex_importmodule_check_file:nn{ /#3.tex }{
3177   \__stex_importmodule_check_file:nn{/#3.\l_stex_current_language_str .tex} {
3178     \__stex_importmodule_check_file:nn{/#3.en.tex} {
3179       \__stex_importmodule_check_file:nn{.tex} {
3180         \__stex_importmodule_check_file:nn{.\l_stex_current_language_str .tex} {
3181           \__stex_importmodule_check_file:nn{.en.tex} {
3182             \msg_error:nnx{stex}{error/unknownmodule}{\l_stex_import_uri_str?#3}
3183           }
3184         }
3185       }
3186     }
3187   }
3188 }
3189 \stex_if_smsmode:TF{
3190   \exp_args:NNo \exp_args:Nnx \str_if_eq:nnTF{\l__stex_importmodule_str}{\stex_file_use:N
3191     \stex_debug:nn{imports}{Skipping~current~file}
3192   }{
3193     \__stex_importmodule_load_file:n{#3}
3194   }
3195 }{
3196   \__stex_importmodule_load_file:n{#3}
3197 }
3198 }
3199 \cs_new_protected:Nn \__stex_importmodule_get_from_file_safe:nnn {
3200   \stex_file_resolve:Nx \l__stex_importmodule_seq { \tl_if_empty:nF{ #1 }{ #1 / } #2 }
3201 \str_set:Nx \l__stex_importmodule_str {\stex_file_use:N \l__stex_importmodule_seq}
3202 \stex_debug:nn{imports}{Looking~for~\l_stex_import_uri_str?#3...}
3203 \__stex_importmodule_check_file:nn{ /#3.tex }{
3204   \__stex_importmodule_check_file:nn{/#3.\l_stex_current_language_str .tex} {
3205     \__stex_importmodule_check_file:nn{/#3.en.tex} {
3206       \__stex_importmodule_check_file:nn{.tex} {
3207         \__stex_importmodule_check_file:nn{.\l_stex_current_language_str .tex} {
3208           \__stex_importmodule_check_file:nn{.en.tex} {
3209             }
3210           }
3211         }
3212       }
3213     }
3214   }
3215 \stex_if_smsmode:TF{
3216   \exp_args:NNo \exp_args:Nnx \str_if_eq:nnTF{\l__stex_importmodule_str}{\stex_file_use:N
3217     \stex_debug:nn{imports}{Skipping~current~file}
3218   }{
3219     \IfFileExists{ \l__stex_importmodule_str }{
3220       \__stex_importmodule_load_file:n{#3}
3221     }{}
3222   }
3223 }{
3224   \IfFileExists{ \l__stex_importmodule_str }{
3225     \__stex_importmodule_load_file:n{#3}
3226   }{}
3227 }

```

```

3228 }
3229
3230 \cs_new_protected:Nn \__stex_importmodule_load_file:n {
3231   \stex_file_in_smsmode:on \l__stex_importmodule_str {
3232     \str_if_empty:NF \l__stex_importmodule_archive_str {
3233       \stex_set_current_archive:n \l__stex_importmodule_archive_str
3234     }
3235     \stex_debug:nn{modules}{Loading~\l__stex_importmodule_str}
3236   }
3237   \stex_if_module_exists:nF {\l_stex_import_uri_str?#1} {
3238     \msg_error:nnx{stex}{error/unknownmodule}{\l_stex_import_uri_str?#1}
3239   }
3240 }
3241
3242 \cs_new_protected:Npn \__stex_importmodule_check_file:nn #1 {
3243   \stex_debug:nn{imports}{Checking~\l__stex_importmodule_str #1}
3244   \IfFileExists{\l__stex_importmodule_str #1 }{
3245     \stex_debug:nn{imports}{Success}
3246     \str_set:Nx \l__stex_importmodule_str { \l__stex_importmodule_str #1 }
3247   }
3248 }

```

(End definition for `\stex_import_require_module:nnn`. This function is documented on page 125.)

\importmodule

```

3249 \stex_new_stylable_cmd:nnnn{importmodule} { 0{} m } {
3250   \__stex_importmodule_import_module:nn {#1}{#2}
3251   \stex_smsmode_do:
3252 {}}
3253 \stex_deactivate_macro:Nn \importmodule {module~environments}
3254
3255 \cs_new_protected:Nn \__stex_importmodule_import_module:nn {
3256   \stex_import_module_uri:nn { #1 }{ #2 }
3257   \stex_import_require_module:ooo
3258   \l_stex_import_archive_str
3259   \l_stex_import_path_str
3260   \l_stex_import_name_str
3261   \stex_execute_in_module:x{
3262     \stex_activate_module:n{\l_stex_import_ns_str}
3263   }
3264   \stex_module_add_morphism:nonn
3265   {}{\l_stex_import_ns_str}{import}{}
3266   \stex_if_do_html:T {
3267     \stex_annotation_invisible:nn
3268     {shtml:import=\l_stex_import_ns_str} {}
3269   }
3270   \stex_if_smsmode:F{
3271     \group_begin:
3272     \tl_set:Nn \thisarchive {#1}
3273     \tl_set_eq:NN \thismoduleuri \l_stex_import_ns_str
3274     \tl_set_eq:NN \thismodulename \l_stex_import_name_str
3275     \tl_clear:N \thisstyle
3276     \stex_style_apply:
3277     \group_end:

```

```

3278     }
3279 }
3280
3281 \cs_new_protected:Nn \__stex_importmodule_import_module_presms:nn {
3282   \stex_import_module_uri:nn { #1 }{ #2 }
3283   \tl_gput_right:Nx \g_stex_sms_import_code {
3284     \stex_import_require_module_safe:nnn
3285     {\l_stex_import_archive_str}
3286     {\l_stex_import_path_str}
3287     {\l_stex_import_name_str}
3288   }
3289 }
3290
3291 \stex_sms_allow_escape:N \importmodule
3292 \stex_every_module:n {\stex_reactivate_macro:N \importmodule}
3293 \stex_sms_allow_import:Nn \importmodule {
3294   \stex_reactivate_macro:N \importmodule
3295   \let \__stex_importmodule_import_module:nn \__stex_importmodule_import_module_presms:nn
3296 }
3297
3298 \stex_new_stylable_cmd:nnnn{requiremodule} { 0{} m } {
3299   \stex_import_module_uri:nn { #1 }{ #2 }
3300   \stex_import_require_module:ooo
3301   \l_stex_import_archive_str
3302   \l_stex_import_path_str
3303   \l_stex_import_name_str
3304   \stex_do_up_to_module:x{
3305     \stex_activate_module:n{\l_stex_import_ns_str}
3306   }
3307   \stex_if_do_html:T {
3308     \stex_annotation_invisible:nn
3309     {shtml:import=\l_stex_import_ns_str} {}
3310   }
3311   \stex_if_smsmode:F{
3312     \group_begin:
3313     \tl_set:Nn \thisarchive {#1}
3314     \tl_set_eq:NN \thismoduleuri \l_stex_import_ns_str
3315     \tl_set_eq:NN \thismodulenname \l_stex_import_name_str
3316     \tl_clear:N \thisstyle
3317     \stex_style_apply:
3318     \group_end:
3319   }
3320   \stex_smsmode_do:
3321 }{}
3322 \stex_deactivate_macro:Nn \requiremodule {module-environments}

```

(End definition for `\importmodule`. This function is documented on page 88.)

13.7.2 Theory Morphisms

```

3323 <@=stex_morphisms>
3324 \stex_new_stylable_cmd:nnnn {assign} { m m }{
3325   \stex_get_in_morphism:n{#1}
3326   \stex_assign_do:n{#2}

```

```

3327   \stex_smsmode_do:
3328 }{}
3329 \stex_sms_allow_escape:N\assign
3330
3331 \cs_new_protected:Nn \stex_assign_do:n{
3332   \stex_debug:nn{assign}{Assigning~\l_stex_get_symbol_name_str~to~\tl_to_str:n{#1}}
3333   \tl_if_empty:NF \l_stex_get_symbol_def_tl {
3334     \%msg_error:nxx{stex}{error/symbolalreadydefined}{\l_stex_get_symbol_name_str}%
3335     % morphism~\l_stex_feature_name_str
3336     %}
3337 }
3338 \stex_check_term:n{#1}
3339 \stex_debug:nn{HERE!}%
3340   \l_stex_get_symbol_mod_str?\l_stex_get_symbol_name_str^~J
3341   \tl_to_str:n{#1}
3342 }
3343 \stex_if_do_html:T{
3344   \stex_annotation_invisible:nn{shtml:assign={\l_stex_get_symbol_mod_str?\l_stex_get_symbol_
3345     \l_stex_annotation_force_break:n{
3346       \mode_if_math:T\hbox{\$ \stex_annotation:nn{shtml:definiens={}{}{#1}\$}}
3347     }
3348   }
3349 }
3350 \exp_args:Ne \stex_metagroup_do_in:nx{
3351   \l_stex_current_module_str / \l_stex_feature_name_str
3352 }{
3353   \prop_put:Nnn \exp_not:N \l_stex_morphism_symbols_prop
3354   {[ \l_stex_get_symbol_mod_str ] / [ \l_stex_get_symbol_name_str ]}
3355   {
3356     {\l_stex_get_symbol_macro_str}
3357     {\int_use:N \l_stex_get_symbol_arity_int}
3358     {\l_stex_get_symbol_args_tl}
3359     {\exp_not:n{#1}}
3360     {\exp_args:No\exp_not:n\l_stex_get_symbol_type_tl}
3361     {\exp_args:No\exp_not:n\l_stex_get_symbol_return_tl}
3362     {\l_stex_get_symbol_invoke_cs}
3363   }
3364 }
3365 }
3366
3367
3368 \stex_new_stylable_cmd:nnnn {renamedecl} { m 0{} m }{
3369   \stex_get_in_morphism:n{#1}
3370   \l_stex_renamedecl_do:nn{#2}{#3}
3371   \stex_smsmode_do:
3372 }{}
3373 \stex_sms_allow_escape:N\renamedecl
3374
3375 \cs_new_protected:Nn \l_stex_renamedecl_do:nn {
3376   \stex_debug:nn{renamedecl}{Renaming~\l_stex_get_symbol_name_str~to~[#1]{#2}}
3377   \stex_if_do_html:T{
3378     \exp_args:Ne \stex_annotation_invisible:nn{
3379       shtml:rename={\l_stex_get_symbol_mod_str?\l_stex_get_symbol_name_str},
3380       shtml:macroname={#2}

```

```

3381     \str_if_empty:nF{#1}{ ,shtml:to={#1} }
3382     }{}
3383   }
3384 \exp_args:Ne \stex_metagroup_do_in:nx{
3385   \l_stex_current_module_str / \l_stex_feature_name_str
3386 }{
3387   \prop_put:Nnn \exp_not:N \l_stex_morphism_renames_prop
3388   {\l_stex_get_symbol_mod_str?\l_stex_get_symbol_name_str}{##2} {
3389     \tl_if_empty:nTF{#1}{\l_stex_feature_name_str/\l_stex_get_symbol_name_str}{#1}
3390   }
3391 }
3392 }
3393
3394 \stex_new_stylable_cmd:nnnn {assignMorphism} { m m }{
3395   \str_clear:N \l__stex_morphisms_morphism_dom_str
3396   \stex_iterate_morphisms:nn \l_stex_current_domain_str{
3397     \stex_debug:nn{assignMorphism}{%
3398       Checking:~#1-vs:^^J##1^^J##2^^J##3^^J##4
3399     }
3400     \str_if_eq:nnTF{#1}{##1}{%
3401       \__stex_morphisms_do_morph_assign:nnn{##1}{##2}{##4}
3402     }{
3403       \stex_str_if_ends_with:nnT{##2}{#1}{%
3404         \__stex_morphisms_do_morph_assign:nnn{##1}{##2}{##4}
3405       }
3406     }
3407   }
3408   \str_if_empty:NT \l__stex_morphisms_morphism_dom_str {
3409     \msg_error:nnn{stex}{error/nomorphism}{#1}
3410   }
3411   \bool_set_false:N \l_tmpa_bool
3412   \stex_iterate_morphisms:nn \l_stex_current_module_str {
3413     \stex_debug:nn{assignMorphism}{%
3414       Checking:~#2-vs:^^J##1^^J##2^^J##3^^J##4
3415     }
3416     \str_if_eq:nnTF{#2}{##1}{%
3417       \stex_debug:nn{assignMorphism}{match!}
3418       \stex_iterate_break:n{%
3419         \stex_annotation_invisible:nn{%
3420           shtml:assignMorphismFrom={\l__stex_morphisms_morphism_dom_str}
3421           ahtml:assignMorphismTo={\l_stex_current_module_str?##1}
3422         }{}%
3423         \bool_set_true:N \l_tmpa_bool
3424       }
3425     }{
3426       \stex_str_if_ends_with:nnT{##2}{#2}{%
3427         \stex_debug:nn{assignMorphism}{match!}
3428         \stex_iterate_break:n{%
3429           \stex_annotation_invisible:nn{%
3430             shtml:assignMorphismFrom={\l__stex_morphisms_morphism_dom_str},
3431             shtml:assignMorphismTo={\l_stex_current_module_str?##1}
3432           }{}%
3433           \bool_set_true:N \l_tmpa_bool
3434         }
3435       }
3436     }
3437   }
3438 }
```

```

3435     }
3436   }
3437 }
3438 \bool_if:NF \l_tma_bool {
3439   \msg_error:nnn{stex}{error/nomorphism}{#2}
3440 }
3441 }{}
3442 \cs_new_protected:Nn \__stex_morphisms_do_morph_assign:n {
3443   \stex_iterate_break:n{
3444     \str_set:Nx \l__stex_morphisms_morphism_dom_str { \l_stex_current_domain_str ? #1 }
3445     \stex_debug:nn{assignMorphism}{match!}
3446     \stex_iterate_symbols:nn{#2}{
3447       \stex_debug:nn{assignMorphism}{removing-##1?##3}
3448       % TODO: non-trivial assignments
3449       \prop_remove:Nn \l_stex_morphism_symbols_prop {
3450         [##1]/[##3]
3451       }
3452     }
3453   }
3454 }
3455
3456 \stex_deactivate_macro:Nn \assign {morphism~environments}
3457 \stex_deactivate_macro:Nn \renamedecl {morphism~environments}
3458 \stex_deactivate_macro:Nn \assignMorphism {morphism~environments}
3459 \stex_new_stylable_env:nnnnnnn {copymodule}{m 0{} m}{

3460   \stex_structural_feature_morphism:nnnnn{#1}{morphism}{#2}{#3}{,shtml:total=false}

3461   \stex_if_smsmode:F {
3462     \tl_set:Nn \thiscopynname { #1 }
3463     \tl_set_eq:NN \thismoduleuri \l_stex_current_domain_str
3464     \stex_style_apply:
3465   }
3466   \stex_smsmode_do:
3467 }{
3468   \stex_if_smsmode:F {
3469     \stex_style_apply:
3470   }
3471   \stex_structural_feature_morphism_end:
3472 }{}{}{}

3473 \stex_deactivate_macro:Nn \copymodule {module~environments}
3474 \stex_every_module:n {
3475   \stex_reactivate_macro:N \copymodule
3476 }
3477 \stex_sms_allow_env:n{copymodule}
3478
3479 \stex_new_stylable_env:nnnnnnn {interpretmodule}{m 0{} m}{

3480   \stex_structural_feature_morphism:nnnnn{#1}{morphism}{#2}{#3}{,shtml:total=true}

3481   \stex_if_smsmode:F {
3482     \tl_set:Nn \thiscopynname { #1 }
3483     \tl_set_eq:NN \thismoduleuri \l_stex_current_domain_str
3484     \stex_style_apply:
3485   }
3486   \stex_smsmode_do:

```

```

3489 }{
3490   \stex_structural_feature_morphism_check_total:
3491   \stex_if_smsmode:F {
3492     \stex_style_apply:
3493   }
3494   \stex_structural_feature_morphism_end:
3495 }{}{}{}
3496 \stex_deactivate_macro:Nn \interpretmodule {module~environments}
3497 \stex_every_module:n {
3498   \stex_reactivate_macro:N \interpretmodule
3499 }
3500 \stex_sms_allow_env:n{\interpretmodule}
3501 \stex_new_stylable_env:nnnnnnn {realization}{0{} m}{
3502
3503   \stex_structural_feature_morphism:nnnnn{}{morphism}{#1}{#2}{,shtml:total=true}
3504   \%stex_execute_in_module:x{
3505     \% \stex_activate_module:n{\l_stex_current_domain_str}
3506   }
3507   \stex_if_smsmode:F {
3508     \tl_set:Nn \thiscopyname { #2 }
3509     \tl_set_eq:NN \thismoduleuri \l_stex_current_domain_str
3510     \stex_style_apply:
3511   }
3512   \stex_smsmode_do:
3513 }{
3514   \stex_structural_feature_morphism_check_total:
3515   \stex_if_smsmode:F {
3516     \stex_style_apply:
3517   }
3518   \stex_structural_feature_morphism_end:
3519 }{}{}{}
3520 \stex_deactivate_macro:Nn \realization {module~environments}
3521 \stex_every_module:n {
3522   \stex_reactivate_macro:N \realization
3523 }
3524 \stex_sms_allow_env:n{realization}

3525 \cs_new_protected:Nn \__stex_morphisms_parse_assign:n {
3526   \str_clear:N \l__stex_morphisms_name_str
3527   \str_clear:N \l__stex_morphisms_newname_str
3528   \tl_clear:N \l__stex_morphisms_ass_tl
3529   \exp_args:NNe \seq_set_split:Nnn \l__stex_morphisms_seq {\tl_to_str:n{@}} {#1}
3530   \int_compare:nNnTF {\seq_count:N \l__stex_morphisms_seq} = 1 {
3531     \seq_pop_left:NN \l__stex_morphisms_seq \l__stex_morphisms_next_tl
3532   }{
3533     \seq_pop_left:NN \l__stex_morphisms_seq \l__stex_morphisms_name_str
3534     \exp_args:NNo \str_set:Nn \l__stex_morphisms_name_str \l__stex_morphisms_name_str
3535     \tl_set:Nx \l__stex_morphisms_next_tl {\seq_use:Nn \l__stex_morphisms_seq @}
3536   }
3537   \exp_args:NNNo \seq_set_split:Nnn \l__stex_morphisms_seq = \l__stex_morphisms_next_tl
3538   \str_if_empty:NTF \l__stex_morphisms_name_str {
3539     \seq_pop_left:NN \l__stex_morphisms_seq \l__stex_morphisms_name_str
3540     \exp_args:NNo \str_set:Nn \l__stex_morphisms_name_str \l__stex_morphisms_name_str
3541     \tl_set:Nx \l__stex_morphisms_ass_tl {\seq_use:Nn \l__stex_morphisms_seq =}

```

```

3542 }{
3543   \seq_pop_left:NN \l__stex_morphisms_seq \l__stex_morphisms_newname_str
3544   \exp_args:NNo \str_set:Nn \l__stex_morphisms_newname_str \l__stex_morphisms_newname_str
3545   \tl_set:Nx \l__stex_morphisms_ass_tl {\seq_use:Nn \l__stex_morphisms_seq =}
3546 }
3547 \__stex_morphisms_do_parsed_assign:
3548 }
3549
3550 \cs_new_protected:Nn \__stex_morphisms_do_parsed_assign: {
3551   \exp_args:No \stex_get_in_morphism:n \l__stex_morphisms_name_str
3552   \str_if_empty:NF \l__stex_morphisms_newname_str {
3553     \exp_after:WN \__stex_morphisms_do_parsed_newname: \l__stex_morphisms_newname_str \__stex_
3554   }
3555   \tl_if_empty:NF \l__stex_morphisms_ass_tl {
3556     \exp_args:No \stex_assign_do:n \l__stex_morphisms_ass_tl
3557   }
3558 }
3559
3560 \cs_new_protected:Nn \__stex_morphisms_do_parsed_newname: {
3561   \peek_charcode:NTF [ {
3562     \__stex_morphisms_do_parsed_newname:w
3563   }{
3564     \__stex_morphisms_do_parsed_newname:w []
3565   }
3566 }
3567
3568 \cs_new_protected:Npn \__stex_morphisms_do_parsed_newname:w [#1] #2 \__stex_morphisms_end: {
3569   \stex_renamedecl_do:nn{#1}{#2}
3570 }
3571
3572 \stex_new_stylable_cmd:nnnn{copymod}{m 0{} m m}{
3573   \stex_structural_feature_morphism:nnnnn{#1}{morphism}{#2}{#3}{,shtml:total=false}
3574
3575   \clist_map_function:nN{#4}\__stex_morphisms_parse_assign:n
3576
3577   \stex_if_smsmode:F {
3578     \tl_set:Nn \thiscopyname { #1 }
3579     \tl_set_eq:NN \thismoduleuri \l_stex_current_domain_str
3580     \stex_style_apply:
3581   }
3582   \stex_structural_feature_morphism_end:
3583   \stex_smsmode_do:
3584 }{}
3585 \stex_deactivate_macro:Nn \copymod {module~environments}
3586 \stex_every_module:n {
3587   \stex_reactivate_macro:N \copymod
3588 }
3589 \stex_sms_allow_escape:N\copymod
3590
3591
3592 \stex_new_stylable_cmd:nnnn{interpretmod}{m 0{} m m}{
3593   \stex_structural_feature_morphism:nnnnn{#1}{morphism}{#2}{#3}{,shtml:total=true}
3594
3595   \clist_map_function:nN{#4}\__stex_morphisms_parse_assign:n

```

```

3596   \stex_if_smsmode:F {
3597     \tl_set:Nn \thiscopyname { #1 }
3598     \tl_set_eq:NN \thismoduleuri \l_stex_current_domain_str
3599     \stex_style_apply:
3600   }
3601   \stex_structural_feature_morphism_check_total:
3602   \stex_structural_feature_morphism_end:
3603   \stex_smsmode_do:
3604 }{}
3605 \stex_deactivate_macro:Nn \interpretmod {module~environments}
3606 \stex_every_module:n {
3607   \stex_reactivate_macro:N \interpretmod
3608 }
3609 \stex_sms_allow_escape:N\interpretmod
3610
3611
3612 \stex_new_stylable_cmd:nnnn{realize}{0{} m m}{
3613   \stex_structural_feature_morphism:nnnnn{}{morphism}{#1}{#2}{,shtml:total=true}
3614
3615   \clist_map_function:nN{#3}\_stex_morphisms_parse_assign:n
3616
3617   \stex_if_smsmode:F {
3618     \tl_set:Nn \thiscopyname { #1 }
3619     \tl_set_eq:NN \thismoduleuri \l_stex_current_domain_str
3620     \stex_style_apply:
3621   }
3622   \stex_structural_feature_morphism_check_total:
3623   \stex_structural_feature_morphism_end:
3624   \stex_smsmode_do:
3625 }{}
3626 \stex_deactivate_macro:Nn \realize {module~environments}
3627 \stex_every_module:n {
3628   \stex_reactivate_macro:N \realize
3629 }
3630 \stex_sms_allow_escape:N\realize

```

13.8 Symbols

13.8.1 Declarations

3632 `<@=stex_symdecl>`

Some setup:

```

\stex_if_check_terms_p:
\stex_if_check_terms:TF
3633 \stex_if_html_backend:TF {
3634   \prg_new_conditional:Nnn \stex_if_check_terms: {p, T, F, TF} {
3635     \prg_return_false:
3636   }
3637 }{
3638   \stex_get_env:Nn\__stex_symdecl_env_str{STEX_CHECKTERMS}
3639   \str_if_empty:NF\__stex_symdecl_env_str{
3640     \exp_args:No \str_if_eq:nnF \__stex_symdecl_env_str{false}{
3641       \bool_set_true:N \c_stex_check_terms_bool

```

```

3642     }
3643   }
3644   \bool_if:NTF \c_stex_check_terms_bool {
3645     \prg_new_if_conditional:Nnn \stex_if_check_terms: {p, T, F, TF} {
3646       \prg_return_true:
3647     }
3648   }{
3649     \prg_new_if_conditional:Nnn \stex_if_check_terms: {p, T, F, TF} {
3650       \prg_return_false:
3651     }
3652   }
3653 }
```

(End definition for `\stex_if_check_terms:TF`. This function is documented on page 119.)

`\stex_check_term:n`

```

3654 \stex_if_check_terms:TF{
3655   \cs_new_protected:Nn \stex_check_term:n {
3656     \hbox_set:Nn \l_tmpa_box {
3657       \group_begin:
3658         $#1$%
3659       \group_end:
3660     }
3661   }
3662 }{
3663   \cs_new_protected:Nn \stex_check_term:n {}
3664 }
```

(End definition for `\stex_check_term:n`. This function is documented on page 119.)

symdecl arguments:

```

3665 \stex_keys_define:nnnn{symargs}{
3666   \str_clear:N \l_stex_key_args_str
3667   \str_clear:N \l_stex_key_role_str
3668   \str_clear:N \l_stex_key_reorder_str
3669   \str_clear:N \l_stex_key_assoc_str
3670 }{
3671   args      .str_set:N  = \l_stex_key_args_str ,
3672   reorder   .str_set:N  = \l_stex_key_reorder_str ,
3673   assoc     .choices:nn  = {bin,binl,binr,pre,conj,pwconj}
3674   {\str_set:Nx \l_stex_key_assoc_str \l_keys_choice_tl},
3675   role      .str_set:N  = \l_stex_key_role_str
3676 }{}
3677
3678 \stex_keys_define:nnnn{decl}{
3679   \str_clear:N \l_stex_key_name_str
3680   \str_clear:N \l_stex_key_args_str
3681   \tl_clear:N \l_stex_key_type_tl
3682   \tl_clear:N \l_stex_key_def_tl
3683   \tl_clear:N \l_stex_key_return_tl
3684   \clist_clear:N \l_stex_key_argtypes_clist
3685 }{
3686   name      .str_set:N  = \l_stex_key_name_str ,
3687
3688   return    .tl_set:N    = \l_stex_key_return_tl ,
```

```

3689     argtypes .clist_set:N = \l_stex_key_argtypes_clist ,
3690
3691     type      .tl_set:N      = \l_stex_key_type_tl ,
3692     def       .tl_set:N      = \l_stex_key_def_tl ,
3693
3694     align     .code:n       = {},
3695     gfc      .code:n       = {}
3696 }{style,deprecate,symargs}
3697 % \_stex_do_deprecation:n{#2}

\symdecl
3698 \str_new:N \l_stex_macroname_str
3699 \stex_new_stylable_cmd:nnnn {symdecl} { s m 0{} } {
3700   \stex_keys_set:nn{decl}{#3}
3701   \IfBooleanTF #1 {
3702     \str_clear:N \l_stex_macroname_str
3703   }{
3704     \str_set:Nx \l_stex_macroname_str { #2 }
3705   }
3706 \stex_symdecl_top:n{#2}
3707
3708 \stex_if_smsmode:F{
3709   \group_begin:
3710   \tl_set:Nx \thisdecluri {\l_stex_current_module_str ? \l_stex_key_name_str}
3711   \tl_set_eq:NN \thisdeclname \l_stex_key_name_str
3712   \tl_set_eq:NN \thistype \l_stex_key_type_tl
3713   \tl_set_eq:NN \thisdefiniens \l_stex_key_def_tl
3714   \tl_set_eq:NN \thisargs \l_stex_key_args_str
3715   \tl_clear:N \thisstyle
3716   \stex_style_apply:
3717   \group_end:
3718 }
3719 \stex_smsmode_do:
3720 }{}
3721 \stex_deactivate_macro:Nn \symdecl {module~environments}
3722 \stex_every_module:n {\stex_reactivate_macro:N \symdecl}
3723 \stex_sms_allow_escape:N \symdecl

```

(End definition for `\symdecl`. This function is documented on page 82.)

```

\stex_symdecl_top:n
3724 \cs_new_protected:Nn \stex_symdecl_top:n {
3725   \str_if_empty:NT \l_stex_key_name_str {
3726     \str_set:Nx \l_stex_key_name_str { #1 }
3727   }
3728   \stex_symdecl_do:
3729   \stex_symdecl_check_terms:
3730   \__stex_symdecl_add_decl:
3731   \stex_if_do_html:T {
3732     \stex_symdecl_html:
3733   }
3734 }
3735
3736 \cs_new_protected:Nn \__stex_symdecl_add_decl: {

```

```

3737 \exp_args:Nnx \use:nn {\stex_module_add_symbol:nnnnnnnN}{
3738   {\l_stex_mroname_str}
3739   {\l_stex_key_name_str}
3740   {\int_use:N \l_stex_get_symbol_arity_int}
3741   {\l_stex_get_symbol_args_tl}
3742   {\tl_if_empty:NF \l_stex_key_def_tl{DEFED} }%{\exp_args:No \exp_not:n \l_stex_key_def_tl
3743   {}%{\exp_args:No \exp_not:n \l_stex_key_type_tl}
3744   {\exp_args:No \exp_not:n \l_stex_key_return_tl}
3745   \stex_invoke_symbol:
3746 }
3747 \exp_args:Ne \stex_ref_new_symbol:n
3748   {\l_stex_current_module_str?\l_stex_key_name_str}
3749 }
3750
3751 \cs_new:Nn \stex_return_args:nn {
3752   {\svar{ARGUMENT_#1}\stex_eat_exclamation_point:}
3753 }
3754
3755 \cs_new_protected:Nn \stex_symdecl_html: {
3756   \exp_args:Ne \stex_annotation_invisible:nn {
3757     \shtml:symdecl = {\l_stex_current_module_str ? \l_stex_key_name_str},
3758     \shtml:args = {\l_stex_key_args_str}
3759     \str_if_empty:NF \l_stex_mroname_str {
3760       \shtml:macroname={\l_stex_mroname_str}
3761     }
3762     \str_if_empty:NF \l_stex_key_assoc_str {
3763       \shtml:assoc_type={\l_stex_key_assoc_str}
3764     }
3765     \str_if_empty:NF \l_stex_key_reorder_str {
3766       \shtml:reorder_args={\l_stex_key_reorder_str}
3767     }
3768     \str_if_empty:NF \l_stex_key_role_str {
3769       \shtml:role={\l_stex_key_role_str}
3770     }
3771   }{\hbox\bgroup\stex_annotation_force_break:n{
3772     \bool_set_true:N \stex_in_invisible_html_bool
3773     \tl_if_empty:NF \l_stex_key_type_tl {
3774       $ \stex_annotation:nn{\shtml:type={}{}\l_stex_key_type_tl}$
3775     }
3776     \tl_if_empty:NF \l_stex_key_def_tl {
3777       $ \stex_annotation:nn{\shtml:definiens={}{}\l_stex_key_def_tl}$
3778     }
3779     \tl_if_empty:NF \l_stex_key_return_tl{
3780       \exp_args:Nno \use:n{
3781         \cs_generate_from_arg_count:NNnn \l_stex_symdecl_cs
3782         \cs_set:Npn \l_stex_get_symbol_arity_int} \l_stex_key_return_tl
3783         \tl_set:Nx \l_stex_symdecl_args_tl {\l_stex_map_args:N \stex_return_args:nn}
3784         $ \stex_annotation:nn{\shtml:return_type={}{}}
3785         \exp_after:wN \l_stex_symdecl_cs \l_stex_symdecl_args_tl!
3786       }$}
3787     }
3788     \clist_if_empty:NF \l_stex_key_argtypes_clist {
3789       \stex_annotation:nn{\shtml:argtypes={}{}\l_stex_annotation_force_break:n{
3790         \clist_map_inline:Nn \l_stex_key_argtypes_clist {

```

```

3791           $\stex_annotate:nn{shtml:type={}}{\##1}$
3792       }
3793   }
3794 }
3795 }\egroup
3796 }
```

(End definition for `\stex_symdecl_top:n`. This function is documented on page 120.)

\stex_symdecl_do: Requires the above keys and `\l_stex_mroname_str` to be set first

```

3797 \cs_new_protected:Nn \stex_symdecl_do: {
3798     \stex_do_deprecation:n \l_stex_key_name_str
3799     \stex_symdecl_parse_arity:
3800     \stex_symdecl_do_args:
3801 }
3802
3803 \int_new:N \l_stex_assoc_args_count
3804
3805 \cs_new_protected:Nn \stex_symdecl_parse_arity: {
3806     \int_zero:N \l_stex_get_symbol_arity_int
3807     \int_zero:N \l_stex_assoc_args_count
3808     \str_map_inline:Nn \l_stex_key_args_str {
3809         \str_case:nnF ##1 {
3810             0 { \str_map_break: }
3811             1 { \str_map_break:n{
3812                 \int_set:Nn \l_stex_get_symbol_arity_int {1}
3813                 \str_set:Nn \l_stex_key_args_str {i}
3814             } }
3815             2 { \str_map_break:n{
3816                 \int_set:Nn \l_stex_get_symbol_arity_int {2}
3817                 \str_set:Nn \l_stex_key_args_str {ii}
3818             } }
3819             3 { \str_map_break:n{
3820                 \int_set:Nn \l_stex_get_symbol_arity_int {3}
3821                 \str_set:Nn \l_stex_key_args_str {iii}
3822             } }
3823             4 { \str_map_break:n{
3824                 \int_set:Nn \l_stex_get_symbol_arity_int {4}
3825                 \str_set:Nn \l_stex_key_args_str {iiii}
3826             } }
3827             5 { \str_map_break:n{
3828                 \int_set:Nn \l_stex_get_symbol_arity_int {5}
3829                 \str_set:Nn \l_stex_key_args_str {iiiii}
3830             } }
3831             6 { \str_map_break:n{
3832                 \int_set:Nn \l_stex_get_symbol_arity_int {6}
3833                 \str_set:Nn \l_stex_key_args_str {iiiiii}
3834             } }
3835             7 { \str_map_break:n{
3836                 \int_set:Nn \l_stex_get_symbol_arity_int {7}
3837                 \str_set:Nn \l_stex_key_args_str {iiiiiii}
3838             } }
3839             8 { \str_map_break:n{
3840                 \int_set:Nn \l_stex_get_symbol_arity_int {8}
```

```

3841     \str_set:Nn \l_stex_key_args_str {iiiiiiii}
3842   } }
3843   9 { \str_map_break:n{
3844     \int_set:Nn \l_stex_get_symbol_arity_int {9}
3845     \str_set:Nn \l_stex_key_args_str {iiiiiiii}
3846   } }
3847   i {\int_incr:N \l_stex_get_symbol_arity_int}
3848   b {\int_incr:N \l_stex_get_symbol_arity_int}
3849   a {\int_incr:N \l_stex_get_symbol_arity_int \int_incr:N \l_stex_assoc_args_count}
3850   B {\int_incr:N \l_stex_get_symbol_arity_int \int_incr:N \l_stex_assoc_args_count}
3851 }{
3852   \msg_error:nnxx{stex}{error/wrongargs} {
3853     \l_stex_current_module_str ? \l_stex_key_name_str
3854   }{##1}
3855 }
3856 }
3857 }

3858 \cs_new_protected:Nn \__stex_symdecl_do_args: {
3859   \tl_clear:N \l_stex_get_symbol_args_tl
3860   \int_step_inline:nn \l_stex_get_symbol_arity_int {
3861     \tl_put_right:Nn \l_stex_get_symbol_args_tl {##1}
3862     \tl_put_right:Nx \l_stex_get_symbol_args_tl {
3863       \str_item:Nn \l_stex_key_args_str {##1}
3864     }
3865   }
3866 }
3867 }

(End definition for \stex_symdecl_do:. This function is documented on page 119.)
```

_stex_symdecl_check_terms:

```

3868 \cs_new_protected:Nn \_stex_symdecl_check_terms: {
3869   \stex_check_term:n{
3870     \stex_debug:nn{check_terms}{Checking~type...}
3871     \group_begin:\l_stex_key_type_tl\group_end:
3872     \stex_debug:nn{check_terms}{Checking~definiens...}
3873     \group_begin:\l_stex_key_def_tl\group_end:
3874     \stex_debug:nn{check_terms}{Checking~return...}
3875     \group_begin:\l_stex_key_return_tl!\group_end:
3876     \stex_debug:nn{check_terms}{Checking~argument-types...}
3877     \group_begin:\l_stex_key_argtypes_clist\group_end:
3878   }
3879 }
```

(End definition for _stex_symdecl_check_terms:. This function is documented on page 120.)

\textsymdecl

```

3880
3881 \stex_keys_define:nnnn{textsymdecl}{
3882   \str_clear:N \l_stex_key_name_str
3883   \tl_clear:N \l_stex_key_type_tl
3884   \tl_clear:N \l_stex_key_def_tl
3885 }{
3886   name      .str_set:N  = \l_stex_key_name_str ,
3887   type      .tl_set:N    = \l_stex_key_type_tl ,
```

```

3888     def      .tl_set:N    = \l_stex_key_def_tl
3889 }{style,deprecate}
3890
3891 \stex_new_stylable_cmd:nnnn {textsymdecl} {m 0{} m} {
3892   \stex_keys_set:nn{symdef}{}
3893   \stex_keys_set:nn{textsymdecl}{#2}
3894   \str_set:Nx \l_stex_mroname_str { #1 }
3895   \str_if_empty:NT \l_stex_key_name_str {
3896     \str_set:Nn \l_stex_key_name_str {#1}
3897   }%
3898   % \str_set:Nx \l_stex_key_name_str {\l_stex_key_name_str-sym}
3899   %
3900   \str_set:Nn \l_stex_key_role_str {textsymdecl}
3901
3902 \stex_symdecl_do:
3903 \_stex_symdecl_check_terms:
3904 \exp_args:Nnx \use:nn {\stex_module_add_symbol:nnnnnnN}{
3905   {\l_stex_mroname_str}
3906   {\l_stex_key_name_str}
3907   {O}{}
3908   {\tl_if_empty:NF \l_stex_key_def_tl{DEFED} }
3909   {}% type
3910   {\use:c{\#1name_nospace}}% return
3911   \stex_invoke_text_symbol:
3912 }
3913 \exp_args:Ne \stex_ref_new_symbol:n
3914   {\l_stex_current_module_str?\l_stex_key_name_str}
3915 \stex_if_do_html:T {
3916   \_stex_symdecl_html:
3917 }
3918
3919 \int_set:Nn \l_stex_get_symbol_arity_int 0
3920 \tl_clear:N \l_stex_key_op_tl
3921 \str_clear:N \l_stex_key_intent_str
3922 \str_clear:N \l_stex_key_prec_str
3923 \str_set_eq:NN \l_stex_get_symbol_mod_str \l_stex_current_module_str
3924 \str_set_eq:NN \l_stex_get_symbol_name_str \l_stex_key_name_str
3925 \stex_notation_parse:n{\hbox{#3}}
3926 \_stex_notation_add:
3927 \stex_if_do_html:T {
3928   \def\comp{\_comp}
3929   \_stex_notation_do_html:n{\l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str}
3930 }
3931 \stex_execute_in_module:x{
3932   \_stex_symdecl_set_textsymdecl_macro:nnn{#1}{\l_stex_current_module_str?\l_stex_key_name_str}
3933   \exp_not:n{#3}
3934 }
3935
3936 \stex_if_smsmode:F{
3937   \group_begin:
3938   \tl_set:Nx \thisdecluri {\l_stex_current_module_str ? \l_stex_key_name_str}
3939   \tl_set_eq:NN \thisdeclname \l_stex_key_name_str
3940   \tl_clear:N \thisstyle
3941   \stex_style_apply:

```

```

3942     \group_end:
3943   }
3944   \stex_smsmode_do:
3945 {}}
3946 \stex_deactivate_macro:Nn \textsymdecl {module-environments}
3947 \stex_every_module:n {\stex_reactivate_macro:N \textsymdecl}
3948 \stex_sms_allow_escape:N \textsymdecl
3949
3950 \cs_new_protected:Nn \_stex_symdecl_set_textsymdecl_macro:nnn {
3951   \cs_set_protected:cpn{#1name_nospace}{#3}
3952   \cs_set_protected:cpn{#1name} {
3953     \mode_if_vertical:T{\hbox_unpack:N\c_empty_box}
3954     \mode_if_math:T{\hbox{\let\xspace\relax #3}}
3955     \mode_if_math:F{\cs_if_exist:NT\xspace\xspace}
3956   }
3957 }
3958
3959 \cs_new_protected:Nn \stex_invoke_text_symbol: {
3960   \mode_if_vertical:T{\hbox_unpack:N\c_empty_box}
3961   \_stex_term_oms_or_omv:nnn{}{}\maincomp{\let\xspace\relax\l_stex_current_return_tl}
3962   \group_end:\mode_if_math:F{\cs_if_exist:NT\xspace\xspace}
3963 }

```

(End definition for `\textsymdecl`. This function is documented on page 83.)

`\stex_get_symbol:n`

```

3964 \cs_new_protected:Nn \stex_get_symbol:n {
3965   \stex_get_symbol:n{ #1 }
3966   \str_if_empty:NT \l_stex_get_symbol_name_str {
3967     \msg_error:nnn{stex}{error/unknownsymbol}{#1}
3968   }
3969 }
3970
3971 \cs_new_protected:Nn \_stex_get_symbol:n {
3972   \str_clear:N \l_stex_get_symbol_mod_str
3973   \str_clear:N \l_stex_get_symbol_name_str
3974   \cs_if_exist:cTF { #1 }{
3975     \cs_set_eq:Nc \l_stex_symdecl_cs { #1 }
3976     % command name
3977     \exp_args:Ne \tl_if_empty:nTF { \cs_argument_spec:N \l_stex_symdecl_cs }{
3978       % ...that takes no arguments
3979       \exp_args:Ne \cs_if_eq:NNTF { \tl_head:N \l_stex_symdecl_cs }
3980         \_stex_invoke_symbol:nnnnnnnn
3981         \_stex_symdecl_get_symbol_from_cs:
3982         {\l_stex_symdecl_get_symbol_from_string:n { #1 }}
3983     }{
3984       \_stex_symdecl_get_symbol_from_string:n { #1 }
3985     }
3986   }{
3987     \_stex_symdecl_get_symbol_from_string:n { #1 }
3988   }
3989 }
3990 \int_new:N \l_stex_get_symbol_arity_int

```

```

3992 \cs_new_protected:Nn \__stex_symdecl_get_symbol_from_cs: {
3993   \stex_debug:nn{symbols}{Getting~from~cs...}
3994   \stex_pseudogroup_with:nn{\__stex_invoke_symbol:nnnnnnnnN}{
3995     \cs_set:Npn \__stex_invoke_symbol:nnnnnnnnN ##1 ##2 ##3 ##4 ##5 ##6 ##7 ##8 {
3996       \str_set:Nn \l_stex_get_symbol_mod_str {##1}
3997       \str_set:Nn \l_stex_get_symbol_name_str {##2}
3998       \int_set:Nn \l_stex_get_symbol_arity_int {##3}
3999       \tl_set:Nn \l_stex_get_symbol_args_tl {##4}
4000       \tl_set:Nn \l_stex_get_symbol_def_tl {##5}
4001       \tl_set:Nn \l_stex_get_symbol_type_tl {##6}
4002       \tl_set:Nn \l_stex_get_symbol_return_tl {##7}
4003       \tl_set:Nn \l_stex_get_symbol_invoke_cs {##8}
4004     }
4005     \l__stex_symdecl_cs
4006   }
4007 }
4008
4009 \cs_new_protected:Nn \__stex_symdecl_get_symbol_from_string:n {
4010   \stex_debug:nn{symbols}{Getting~from~string~#1...}
4011   \seq_set_split:Nnn \l__stex_symdecl_seq ? {#1}
4012   \seq_pop_right:NN \l__stex_symdecl_seq \l__stex_symdecl_name
4013   \seq_if_empty:NTF \l__stex_symdecl_seq {
4014     \exp_args:No \__stex_symdecl_get_from_one_string:n {#1}
4015   }{
4016     \exp_args:NNe \exp_args:Nno \__stex_symdecl_get_symbol_from_modules:nn {
4017       \seq_use:Nn \l__stex_symdecl_seq ?
4018     } \l__stex_symdecl_name
4019   }
4020 }
4021
4022 \cs_new_protected:Nn \__stex_symdecl_sym_from_str_i:nnnn {
4023   \bool_lazy_any:nTF{
4024     {\str_if_eq_p:nn{#2}{#3}}
4025     {\str_if_eq_p:nn{#2}{#4}}
4026     {\stex_str_if_ends_with_p:nn{#4}{#2}}
4027   }{
4028     \__stex_symdecl_sym_i_finish:nnnnnnN{#1}{#4}
4029   }{
4030     \__stex_symdecl_sym_i_gobble:nnnnnn
4031   }
4032 }
4033 \cs_new_protected:Nn \__stex_symdecl_sym_i_gobble:nnnnnn {}
4034
4035 \cs_new_protected:Nn \__stex_symdecl_sym_i_finish:nnnnnnN {
4036   \prop_map_break:n{\seq_map_break:n{
4037     \str_set:Nn \l_stex_get_symbol_mod_str {#1}
4038     \str_set:Nn \l_stex_get_symbol_name_str {#2}
4039     \int_set:Nn \l_stex_get_symbol_arity_int {#3}
4040     \tl_set:Nn \l_stex_get_symbol_args_tl {#4}
4041     \tl_set:Nn \l_stex_get_symbol_def_tl {#5}
4042     \tl_set:Nn \l_stex_get_symbol_type_tl {#6}
4043     \tl_set:Nn \l_stex_get_symbol_return_tl {#7}
4044     \tl_set:Nn \l_stex_get_symbol_invoke_cs {#8}
4045   }}}

```

```

4046 }
4047
4048 \cs_new_protected:Nn \__stex_symdecl_get_symbol_from_modules:nn {
4049   \stex_debug:nn{symbols}{Getting~#2~in~#1...}
4050   \seq_map_inline:Nn \l_stex_all_modules_seq {
4051     \stex_str_if_ends_with:nNt{##1}{#1}{
4052       \prop_map_inline:cn{c_stex_module_##1_symbols_prop}{
4053         \__stex_symdecl_sym_from_str_i:nnnn{##1}{#2} ####2
4054       }
4055     }
4056   }
4057 }
4058
4059 \cs_new_protected:Nn \__stex_symdecl_get_from_one_string:n {
4060   \stex_debug:nn{symbols}{Getting~#1~anywhere...}
4061   \stex_iterate_symbols:n{
4062     \%stex_debug:nn{symbols}{>#1==##2~|~#1==##3<...}
4063     \bool_lazy_any:nT{
4064       {\str_if_eq_p:nn{##1}{##2}}
4065       {\str_if_eq_p:nn{##1}{##3}}
4066       {\stex_str_if_ends_with_p:nn{##3}{/##1}}
4067     }{
4068       \stex_iterate_break:n{
4069         \str_set:Nn \l_stex_get_symbol_mod_str {##1}
4070         \str_set:Nn \l_stex_get_symbol_name_str {##3}
4071         \int_set:Nn \l_stex_get_symbol_arity_int {##4}
4072         \tl_set:Nn \l_stex_get_symbol_args_t1 {##5}
4073         \tl_set:Nn \l_stex_get_symbol_def_t1 {##6}
4074         \tl_set:Nn \l_stex_get_symbol_type_t1 {##7}
4075         \tl_set:Nn \l_stex_get_symbol_return_t1 {##8}
4076         \tl_set:Nn \l_stex_get_symbol_invoke_cs {##9}
4077       }
4078     }
4079   }
4080 }

```

(End definition for `\stex_get_symbol:n`. This function is documented on page 119.)

13.8.2 Notations

```
4081 <@=stex_notations>
```

```

\__stex_map_args:N
\__stex_map_notation_args:N
4082 \cs_new:Nn \__stex_map_args:N {
4083   \tl_if_empty:NF \l_stex_get_symbol_args_t1 {
4084     \exp_after:wN \__stex_notations_map_args_i:w \exp_after:wN
4085     #1 \l_stex_get_symbol_args_t1 \__stex_notations_args_end:
4086   }
4087 }
4088 \cs_new:Npn \__stex_notations_map_args_i:w #1 #2 #3 #4 \__stex_notations_args_end: {
4089   #1 #2 #3
4090   \tl_if_empty:nF{#4} {
4091     \__stex_notations_map_args_i:w #1 #4 \__stex_notations_args_end:
4092   }
4093 }
```

```

4094 \cs_new:Nn \_stex_map_notation_args:N {
4095   \tl_if_empty:NF \l_stex_notation_args_tl {
4096     \exp_after:wN \__stex_notations_map_args_ii:w \exp_after:wN
4097     #1 \l_stex_get_symbol_args_tl \__stex_notations_args_end:
4098   }
4099 }
4100 }
4101 \cs_new:Npn \__stex_notations_map_args_ii:w #1 #2 #3 #4 #5 #6 \__stex_notations_args_end: {
4102   #1 #2 #3 #4 #5
4103   \tl_if_empty:nF{#6} {
4104     \__stex_notations_map_args_ii:w #1 #6 \__stex_notations_args_end:
4105   }
4106 }

```

(End definition for `_stex_map_args:N` and `_stex_map_notation_args:N`. These functions are documented on page ??.)

notation arguments:

```

4107 \stex_keys_define:nnnn{notation}{}
4108   \str_clear:N \l_stex_key_variant_str
4109   \str_clear:N \l_stex_key_prec_str
4110   \str_clear:N \l_stex_key_op_tl
4111   \str_clear:N \l_stex_key_intent_str
4112   \clist_clear:N \l_stex_key_intent_args_clist
4113 }{
4114   variant    .str_set_x:N = \l_stex_key_variant_str ,
4115   prec       .str_set_x:N = \l_stex_key_prec_str ,
4116   op         .tl_set:N      = \l_stex_key_op_tl ,
4117   intent     .str_set:N      = \l_stex_key_intent_str ,
4118   argnames   .clist_set:N = \l_stex_key_intent_args_clist ,
4119   unknown    .code:n       = {
4120     \str_if_empty:NTF \l_keys_key_str {
4121       \str_set:Nx \l_stex_key_variant_str {\l_keys_key_tl}
4122     }{
4123       \str_set_eq:NN \l_stex_key_variant_str \l_keys_key_str
4124     }
4125   }
4126 }{style}

```

\notation

```

4127 \stex_new_stylable_cmd:nnnn [notation] { s m O{} m} {
4128   \stex_keys_set:nn{notation}{#3}
4129   \stex_get_symbol:n{#2}
4130   \stex_notation_parse:n{#4}
4131   \stex_if_check_terms:T{ \_stex_notation_check: }
4132   \_stex_notation_add:
4133   \stex_if_do_html:T {
4134     \def\comp{\_comp}
4135     \_stex_notation_do_html:n{\l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str}
4136   }
4137 \IfBooleanTF{#1{
4138   \_stex_notation_set_default:n{
4139     \l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str
4140   }
4141 }{}}

```

```

4142 \stex_if_smsmode:F{
4143   \group_begin:
4144   \__stex_notations_styledefs:
4145   \stex_style_apply:
4146   \group_end:
4147 }
4148 \stex_smsmode_do:
4149 }{}
4150
4151 \cs_new_protected:Nn \__stex_notations_styledefs: {
4152   \str_set_eq:NN \thisnotationvariant \l_stex_key_variant_str
4153   \str_set:Nn \thisdeclname \l_stex_get_symbol_name_str
4154   \tl_set:Nx \thisdecluri {\l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str}
4155   \def\thisnotation{
4156     $
4157     \tl_set_eq:NN \l_stex_current_symbol_str \thisdecluri
4158     \exp_args:Nne \use:nn{\l_stex_notation_macrocode_cs} {
4159       \__stex_notation_make_args:
4160     }$
4161   }
4162 }
4163
4164 \stex_deactivate_macro:Nn \notation {module~environments}
4165 \stex_every_module:n {\stex_reactivate_macro:N \notation}
4166 \stex_sms_allow_escape:N \notation

```

(End definition for `\notation`. This function is documented on page 85.)

`\stex_notation_parse:n` requires the above keys, `\l_stex_get_symbol_arity_int`, and `\l_stex_get_symbol_args_tl`

```

4167 \cs_new_protected:Nn \stex_notation_parse:n {
4168   \tl_if_empty:NF \l_stex_key_op_tl {
4169     \tl_set:Nx \l_stex_key_op_tl { \exp_not:N \maincomp {
4170       \exp_args:No \exp_not:n \l_stex_key_op_tl
4171     } }
4172   }
4173   \seq_clear:N \l__stex_notations_precs_seq
4174   \tl_clear:N \l_stex_notation_args_tl
4175   \int_compare:nNnTF \l_stex_get_symbol_arity_int = 0 {
4176     \__stex_notations_const_precs:
4177     \tl_if_empty:NT \l_stex_key_op_tl {
4178       \tl_set:Nn \l_stex_key_op_tl { \maincomp{#1} }
4179     }
4180   }{
4181     \__stex_notations_fun_precs:
4182     \str_set:Nn \l__stex_notations_missing_str {#1}
4183     \tl_clear:N \l__stex_notations_missing_tl
4184     \stex_map_args:N \__stex_notations_add_missing_args:nn
4185     \tl_if_empty:NT \l_stex_key_op_tl {
4186       \hbox_set:Nn \l_tmpa_box {
4187         \str_set:Nn \l_stex_current_symbol_str {}
4188         \cs_set:Npn \l_tmpa cs ##1 ##2 ##3 ##4 ##5 ##6 ##7 ##8 ##9 { #1 }
4189         \cs_set:Npn \maincomp ##1 {
4190           \tl_gset:Nn \l_stex_key_op_tl { \maincomp{##1} }

```

```

4191      ##1
4192    }
4193    \cs_set:Npn \argsep ##1 ##2 {##1 ##2}
4194    \cs_set:Npn \argmap ##1 ##2 ##3 {##1 ##3}
4195    \cs_set:Npn \argarraymap ##1 ##2 ##3 ##4 {
4196      ##1 ##2
4197    }
4198    \stex_suppress_html:n{$\l_tmpa_n{abcdefghijklmnopqrstuvwxyz}$}
4199  }
4200 }
4201 }
4202 \exp_args:NNe
4203 \tl_set:Nn \l_stex_notation_macrocode_cs {
4204   \STEXInternalNotation
4205   { \l_stex_key_variant_str }
4206   { \l_stex_notations_oppref_t1 }
4207   { \l_stex_key_intent_str }
4208   { \l_stex_notation_args_t1 }
4209   {
4210     \int_compare:nNnTF \l_stex_get_symbol_arity_int = 0
4211     { \exp_not:n { \maincomp{ #1 } } }
4212     { \exp_not:n { #1 } \l_stex_notations_missing_t1 }
4213   }
4214 }
4215 \stex_debug:nn{notation}{Notation:~\meaning\l_stex_notation_macrocode_cs}
4216 }
4217
4218 \cs_new_protected:Nn \__stex_notations_const_precs: {
4219   \str_if_empty:NTF \l_stex_key_prec_str {
4220     \tl_set:No \l_stex_notations_oppref_t1 { \neginfprec }
4221   }{
4222     \str_if_eq:onTF \l_stex_key_prec_str {nobrackets} {
4223       \tl_set:No \l_stex_notations_oppref_t1 { \neginfprec }
4224     }{
4225       \tl_set_eq:NN \l_stex_notations_oppref_t1 \l_stex_key_prec_str
4226     }
4227   }
4228 }
4229
4230 \cs_new_protected:Nn \__stex_notations_fun_precs: {
4231   \str_if_empty:NTF \l_stex_key_prec_str {
4232     \tl_set:No \l_stex_notations_oppref_t1 { \neginfprec }
4233   }{
4234     \str_if_eq:onTF \l_stex_key_prec_str {nobrackets} {
4235       \tl_set:No \l_stex_notations_oppref_t1 { \neginfprec }
4236     }{
4237       \tl_set_eq:NN \l_stex_notations_oppref_t1 \l_stex_key_prec_str
4238     }
4239   }
4240 \str_if_empty:NTF \l_stex_key_prec_str {
4241   \tl_set:Nn \l_stex_notations_oppref_t1 { 0 }
4242   \int_step_inline:nn \l_stex_get_symbol_arity_int {
4243     \seq_put_right:Nn \l_stex_notations_precs_seq {0}
4244   }

```

```

4245 }{
4246   \str_if_eq:onTF \l_stex_key_prec_str {nobrackets} {
4247     \stex_debug:nn{notation}{No~brackets}
4248     \tl_set:No \l_stex_notations_oppref_tl { \neginfprec }
4249     \int_step_inline:nn \l_stex_get_symbol_arity_int {
4250       \exp_args:NNo \seq_put_right:Nn \l_stex_notations_precs_seq \infprec
4251     }
4252   }\l_stex_notations_parse_precs:
4253 }
4254 \l_stex_notations_do_argnames:
4255 }
4256
4257 \cs_new_protected:Nn \l_stex_notations_parse_precs: {
4258   \stex_debug:nn{notation}{parsing~precedence~\l_stex_key_prec_str}
4259   \seq_set_split:NnV \l_stex_notations_seq ; \l_stex_key_prec_str
4260   \seq_pop_left:NNTF \l_stex_notations_seq \l_stex_notations_str {
4261     \tl_set_eq:NN \l_stex_notations_oppref_tl \l_stex_notations_str
4262     \seq_pop_left:NNT \l_stex_notations_seq \l_stex_notations_str {
4263       \exp_args:NNo \seq_set_split:NnV \l_stex_notations_seq
4264         {\tl_to_str:n{x}} \l_stex_notations_str
4265     }
4266   }{
4267     \tl_set:No \l_stex_notations_oppref_tl { 0 }
4268   }
4269   \int_step_inline:nn \l_stex_get_symbol_arity_int {
4270     \seq_pop_left:NNTF \l_stex_notations_seq \l_stex_notations_str {
4271       \seq_put_right:No \l_stex_notations_precs_seq \l_stex_notations_str
4272     }{
4273       \seq_put_right:No \l_stex_notations_precs_seq \l_stex_notations_oppref_tl
4274     }
4275   }
4276 }
4277
4278 \cs_new_protected:Nn \l_stex_notations_do_argnames: {
4279   \tl_clear:N \l_stex_notation_args_tl
4280   \stex_map_args:N \l_stex_notations_do_argname:nn
4281 }
4282
4283 \cs_new_protected:Nn \l_stex_notations_do_argname:nn {
4284   \clist_if_empty:NTF \l_stex_key_intent_args_clist {
4285     \tl_put_right:Nx \l_stex_notation_args_tl {
4286       #1#2{\seq_item:Nn \l_stex_notations_precs_seq #1} {
4287         \str_if_empty:NF \l_stex_key_intent_str {\#1}
4288       }
4289     }
4290   }{
4291     \tl_put_right:Nx \l_stex_notation_args_tl {
4292       #1#2{\seq_item:Nn \l_stex_notations_precs_seq #1}
4293       {\c_dollar_str\clist_item:Nn \l_stex_key_intent_args_clist 1}
4294     }
4295     \clist_pop>NN \l_stex_key_intent_args_clist \l_tmpa_tl
4296   }
4297 }
4298

```

```

4299 \cs_new:Nn \__stex_notations_add_missing_args:nn {
4300   \exp_args:NNe \str_if_in:NnF \l__stex_notations_missing_str {\c_hash_str\c_hash_str#1}{}
4301   \tl_put_right:Nn \l__stex_notations_missing_tl{\STEXinvis{## #1}}
4302 }
4303 }

```

(End definition for `\stex_notation_parse:n`. This function is documented on page ??.)

```

\_stex_notation_check:
  \stex_notation_add:
    \stex_annotation_make_args:
      \stex_notation_do_html:n
        \stex_annotation_check:
          \stex_check_term:n{
            \str_set:Nn \l_stex_current_symbol_str {test}
            \cs_set:Npn \comp ##1 {##1}
            \stex_debug:nn{check_terms}{Checking~notation...}
            \exp_args:Nne \use:nn{\l_stex_notation_macrocode_cs}{}{
              \stex_annotation_make_args:
            }
          }
        }
      }
      \stex_annotation_add:
        \stex_module_add_notation:eoEOF{
          \l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str
          } \l_stex_key_variant_str
          {\int_use:N \l_stex_get_symbol_arity_int}
          \l_stex_notation_macrocode_cs
          \l_stex_key_op_tl
        }
      }
      \stex_annotation_do_html:n {
        \hbox{\stex_annotation_invisible:nn {
          \shtml:notation={#1},
          \shtml:notationfragment={\l_stex_key_variant_str},
          \shtml:precedence={\l__stex_notations_oppref_tl},
          \shtml:argprecs={\seq_use:Nn \l__stex_notations_precs_seq ,}
        }{
          \cs_set_protected:Npn \argsep ##1 ##2 {
            \stex_annotation:nn{\shtml:argsep={}}{
              ##1 ##2
            }
          }
          \cs_set_protected:Npn \argmap ##1 ##2 ##3 {
            \cs_set:Npn \__stex_notations_map_cs: #####1 { ##2 }
            \stex_annotation:nn{\shtml:argmap={}}{
              \__stex_notations_map_cs:{##1} ##3
            }
          }
          \cs_set_protected:Npn \maincomp {
            \do_comp:nNn {maincomp}\compemph@uri
          }
          \str_set:Nx \l_stex_current_symbol_str {#1}
          \stex_annotation:nn{\shtml:notationcomp={}}{
            \exp_args:Nne \use:nn {

```

```

4349         \l_stex_notation_macrocode_cs {}
4350     }{
4351         \_stex_map_args:N \__stex_notations_make_arg_html:nn
4352     }
4353 }
4354 $
4355 \tl_if_empty:NF \l_stex_key_op_tl {
4356     $
4357     \str_set:Nx \l_stex_current_symbol_str {\#1}
4358     \stex_annotation:nn{html:notationopcomp={}}{
4359         \l_stex_term_oms:nnn{\l_stex_key_variant_str}{}{\l_stex_key_op_tl}
4360     }
4361     $
4362 }
4363 }
4364 }
4365
4366 \cs_new:Nn \__stex_notations_make_arg_html:nn {
4367 % \str_case:nnF #2 {
4368 %     a {{
4369 %         \stex_annotation:nn{html:argnum=#1a}{x},
4370 %         \stex_annotation:nn{html:argnum=#1b}{x}
4371 %     }}
4372 %     B {{
4373 %         \stex_annotation:nn{html:argnum=#1a}{x},
4374 %         \stex_annotation:nn{html:argnum=#1b}{x}
4375 %     }}
4376 % }
4377 {
4378     \stex_annotation:nn{html:argnum=#1}{x}
4379 }
4380 %
4381 }
4382
4383 \cs_new:Nn \_stex_notation_make_args: {
4384     \_stex_map_notation_args:N \__stex_notations_make_arg:nnnn
4385 }
4386
4387
4388 \cs_new:Nn \__stex_notations_make_arg:nnnn {
4389 \str_case:nnF #2 {
4390     a {{
4391         a\c_math_subscript_token{#1,1},
4392         a\c_math_subscript_token{#1,2}
4393     }}
4394     B {{
4395         B\c_math_subscript_token{#1,1},
4396         B\c_math_subscript_token{#1,2}
4397     }}
4398 }
4399     \_stex_term_arg:nnnnn{#1}{#2}{#3}{#4}
4400     {{#2}\c_math_subscript_token{#1}}
4401 }
4402 }

```

(End definition for `_stex_notation_check`: and others. These functions are documented on page ??.)

```
\setnotation
\_stex_notation_set_default:n 4403 \cs_new_protected:Npn \setnotation #1 #2 {
 4404   \stex_get_symbol:n{#1}
 4405   \cs_if_exist:cTF{\l_stex_notation_
 4406     \l_stex_get_symbol_mod_str?\l_stex_get_symbol_name_str
 4407     _#2_cs
 4408   }{
 4409     \tl_set_eq:Nc \l_stex_notation_macrocode cs {\l_stex_notation_
 4410       \l_stex_get_symbol_mod_str?\l_stex_get_symbol_name_str
 4411       _#2_cs
 4412   }
 4413   \cs_if_exist:cTF{\l_stex_notation_
 4414     \l_stex_get_symbol_mod_str?\l_stex_get_symbol_name_str
 4415     _op_#2_cs
 4416   }{
 4417     \tl_set_eq:Nc \l_stex_key_op_tl {\l_stex_notation_
 4418       \l_stex_get_symbol_mod_str?\l_stex_get_symbol_name_str
 4419       _op_#2_cs
 4420   }
 4421   }{
 4422     \tl_clear:N \l_stex_key_op_tl
 4423   }
 4424   \_stex_notation_set_default:n{
 4425     \l_stex_get_symbol_mod_str?\l_stex_get_symbol_name_str
 4426   }
 4427   }{
 4428     \msg_error:nnxx{stex}{unknownnotation}{#2}{
 4429       \l_stex_get_symbol_mod_str?\l_stex_get_symbol_name_str
 4430     }
 4431   }
 4432 }
4433
4434 \cs_new_protected:Nn \_stex_notation_set_default:n{
 4435   \stex_module_add_notation:oeoo{#1}{}
 4436   {\int_use:N \l_stex_get_symbol_arity_int}
 4437   \l_stex_notation_macrocode cs
 4438   \l_stex_key_op_tl
 4439 }
```

(End definition for `\setnotation` and `_stex_notation_set_default:n`. These functions are documented on page 86.)

```
\varnotation
4440 \stex_new_stylable_cmd:nnnn {varnotation} { s m 0{} m} {
4441   \stex_keys_set:nn{notation}{#3}
4442   \stex_get_var:n{#2}
4443   \str_set_eq:NN \l_stex_key_name_str \l_stex_get_symbol_name_str
4444   \stex_notation_parse:n{#4}
4445   \stex_if_check_terms:T{ \l_stex_notation_check: }
4446   \_stex_vardecl_notation_macro:
4447   \IfBooleanTF{#1{
4448     \_stex_notation_set_default:n{\l_stex_get_symbol_name_str}
```

```

4449 }{}
4450 \group_begin:
4451 \tl_set_eq:NN \thisvarname \l_stex_get_symbol_name_str
4452 \tl_clear:N \thisstyle
4453 \str_set_eq:NN \thisnotationvariant \l_stex_key_variant_str
4454 \def\thisnotation{
4455   $ \let\l_stex_current_symbol_str \thisvarname
4456   \def\comp{\_varcomp}\exp_args:Nne \use:n{ \l_stex_notation_macrocode_{}}{%
4457     \l_stex_notation_make_args:
4458   }$%
4459 }
4460 \stex_style_apply:
4461 \group_end:
4462 }{}

```

(End definition for `\varnotation`. This function is documented on page 90.)

```

\symdef
4463 \stex_keys_define:nnnn{symdef}{}{}{decl,notation}
4464
4465 \cs_new_protected:Nn \l_stex_symdef_styledefs: {
4466   \tl_set:Nx \thisdecluri { \l_stex_current_module_str ? \l_stex_key_name_str }
4467   \tl_set_eq:NN \thisdeclname \l_stex_key_name_str
4468   \tl_set_eq:NN \thistype \l_stex_key_type_tl
4469   \tl_set_eq:NN \thisdefiniens \l_stex_key_def_tl
4470   \tl_set_eq:NN \thisargs \l_stex_key_args_str
4471   \tl_clear:N \thisstyle
4472   \str_set_eq:NN \thisnotationvariant \l_stex_key_variant_str
4473   \def\thisnotation{
4474     $ \let\l_stex_current_symbol_str \thisdecluri
4475     \def\comp{\_comp}\exp_args:Nne \use:n{ \l_stex_notation_macrocode_{}}{%
4476       \l_stex_notation_make_args:
4477     }$%
4478   }%
4479 }%
4480
4481 \stex_new_stylable_cmd:nnnn {symdef} { m 0{} m } {
4482   \stex_keys_set:nn{symdef}{#2}
4483   \str_set:Nx \l_stex_macroname_str { #1 }
4484   \stex_symdecl_top:n{#1}
4485   \stex_debug:nn{symdef}{Doing~\l_stex_current_module_str ? \l_stex_key_name_str}
4486   \str_set_eq:NN \l_stex_get_symbol_mod_str \l_stex_current_module_str
4487   \str_set_eq:NN \l_stex_get_symbol_name_str \l_stex_key_name_str
4488   \stex_notation_parse:n{#3}
4489   \stex_debug:nn{Here!}{\meaning\l_stex_notation_args_tl}
4490   \l_stex_notation_check:
4491   \l_stex_notation_add:
4492   \stex_if_do_html:T{
4493     \l_stex_notation_do_html:n{ \l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str }
4494   }
4495   \stex_if_smsmode:F{
4496     \group_begin:
4497     \l_stex_symdef_styledefs:
4498     \stex_style_apply:

```

```

4499     \group_end:
4500   }
4501   \stex_smsmode_do:
4502 {}}
4503
4504 \stex_deactivate_macro:Nn \symdef {module~environments}
4505 \stex_every_module:n {\stex_reactivate_macro:N \symdef}
4506 \stex_sms_allow_escape:N \symdef

```

(End definition for `\symdef`. This function is documented on page 83.)

`\stex_do_default_notation_op:`

```

4507 \cs_new_protected:Nn \stex_do_default_notation: {
4508   \stex_do_default_notation_op:
4509   \tl_if_empty:NTF \l_stex_current_args_tl {
4510     \tl_clear:N \l__stex_notations_args_tl
4511   }{
4512     \__stex_notations_make_name:
4513     \tl_set_eq:NN \l_stex_get_symbol_args_tl \l_stex_current_args_tl
4514     \tl_set:Nx \l__stex_notations_args_tl {
4515       \stex_map_args:N \__stex_notations_augment_arg:nn
4516     }
4517     \tl_put_right:Nn \l_stex_default_notation {\comp{}}
4518     \seq_clear:N \l_tmpa_seq
4519     \int_step_inline:nn \l_stex_current_arity_str {
4520       \seq_put_right:Nn \l_tmpa_seq {#### ##1}
4521     }
4522     \tl_put_right:Nx \l_stex_default_notation {
4523       \seq_use:Nn \l_tmpa_seq {\mathpunct{\comp{,}}}}
4524     }
4525     \tl_put_right:Nn \l_stex_default_notation {\comp{}}
4526   }
4527   \tl_set:Nx \l_stex_default_notation {\STEXInternalNotation{}{0}{}{\l__stex_notations_args_}
4528     \exp_args:No \exp_not:n \l_stex_default_notation
4529   }
4530 }
4531
4532 \cs_new:Nn \__stex_notations_augment_arg:nn {
4533   #1#2{0}{}
4534 }
4535
4536 \cs_new_protected:Nn \__stex_notations_make_name: {
4537   \exp_args:NNNo \seq_set_split:Nnn \l_tmpa_seq ? \l_stex_current_symbol_str
4538   \seq_pop_right:NN \l_tmpa_seq \l__stex_notations_name_str
4539   \exp_args:NNNo \seq_set_split:Nnn \l_tmpa_seq / \l__stex_notations_name_str
4540   \seq_pop_right:NN \l_tmpa_seq \l__stex_notations_name_str
4541 }
4542
4543 \cs_new_protected:Nn \stex_do_default_notation_op: {
4544   \__stex_notations_make_name:
4545   \tl_set:Nx \l_stex_default_notation {\exp_not:N \maincomp{ \exp_not:N \mathrm {\l__stex_no
4546 }

```

(End definition for `\stex_do_default_notation_op`. This function is documented on page ??.)

```

\STEXInternalNotation

4547 % 1: variant 2: operator precedence 3: intent 4: arguments 5: code 6: next
4548
4549 \cs_new_protected:Npn \STEXInternalNotation #1 #2 #3 #4 #5 #6 {
4550   \__stex_notations_process_notation:nnnnnn{#1}{#2}{#3}{#4}{#5}{#
4551     \l__stex_notations_code_tl
4552     #6
4553   }
4554 }

4555
4556 \cs_new_protected:Npn \__stex_notations_process_notation:nnnnnn #1 #2 #3 #4 {
4557   \tl_if_empty:nTF{#4} {
4558     \__stex_notations_simple:nnnnn{#1}{#2}{#3}
4559   }{
4560     \__stex_notations_complex:nnnnnn{#1}{#2}{#3}{#4}
4561   }
4562 }

4563
4564 \cs_new_protected:Nn \__stex_notations_simple:nnnnn {
4565   \stex_debug:nn{Notation~code}{\tl_to_str:n{#4}}
4566   \tl_set:Nn \l__stex_notations_code_tl {
4567     \cs_set:Npn \l__stex_notations_cs {
4568       \stex_maybe_brackets:nn{#2}{#
4569         \stex_term_oms_or_omv:nnn{#1}{#3}{#4}
4570       }
4571     }
4572     \l__stex_notations_cs
4573   }
4574   \stex_debug:nn{Here:Notation}{\meaning \l__stex_notations_code_tl }
4575   #5
4576 }

4577
4578 \cs_new_protected:Nn \__stex_notations_complex:nnnnnn {
4579   \stex_debug:nn{Notation~code}{\tl_to_str:n{#5}}
4580   \int_zero:N \l_tmpa_int
4581   \tl_set:Nn \l__stex_notations_pre_tl {\cs_set_eq:NN \stex_term_oma_or_omb:nnn \stex_term_
4582   \tl_set:Nn \l__stex_notations_code_tl {
4583     \cs_generate_from_arg_count:NNnn \l__stex_notations_cs \cs_set:Npn \l_tmpa_int
4584     {
4585       \stex_maybe_brackets:nn{#2}{#
4586         \stex_term_oma_or_omb:nnn{#1}{#3}{#
4587           \bool_set_false:N \l_stex_brackets_dones_bool
4588           #5
4589         }
4590       }
4591     }
4592     \l__stex_notations_cs
4593   }
4594   \tl_set:Nn \l__stex_notations_after_tl{
4595     \exp_args:NNo
4596     \tl_put_left:Nn \l__stex_notations_code_tl \l__stex_notations_pre_tl
4597     \tl_put_left:Nx \l__stex_notations_code_tl {
4598       \int_set:Nn \l_tmpa_int {\int_use:N \l_tmpa_int}
4599     }

```

```

4600   \stex_debug:nn{Here:Notation}{\meaning \l__stex_notations_code_tl }
4601   #6
4602 }
4603 \__stex_notations_parse_notation_args:nnnw #4 \__stex_notations_args_end:
4604 }
4605
4606 \cs_new_protected:Npn \__stex_notations_parse_notation_args:nnnw #1 #2 #3 #4 #5 \__stex_no-
4607   \tl_if_empty:nTF{#5}{%
4608     \__stex_notations_add_last:nnnnn{#1}{#2}{#3}{#4}{#5}%
4609   }{%
4610     \__stex_notations_add_next:nnnnnn{#1}{#2}{#3}{#4}{#5}{#6}%
4611   }%
4612 }
4613
4614 \cs_new_protected:Nn \__stex_notations_add_next:nnnnnn {
4615   \__stex_notations_add:nnnnn{#1}{#2}{#3}{#4}{#6}%
4616   \__stex_notations_parse_notation_args:nnnw #5 \__stex_notations_args_end:
4617 }
4618
4619 \cs_new_protected:Nn \__stex_notations_add_last:nnnnn {
4620   \__stex_notations_add:nnnnn{#1}{#2}{#3}{#4}{#5}%
4621   \l__stex_notations_after_tl
4622 }
4623
4624 \cs_new_protected:Nn \__stex_notations_add:nnnnn {
4625   \int_incr:N \l_tmpa_int
4626   \str_case:nn{#2}{%
4627     i {
4628       \tl_put_right:Nn \l__stex_notations_code_tl {
4629         {\_stex_term_arg:nnnnn{#1}{#2}{#3}{#4}{#5}}%
4630     }%
4631   }%
4632   b {
4633     \tl_set:Nn \l__stex_notations_pre_tl {
4634       \cs_set_eq:NN \_stex_term_oma_or_omb:nnn \_stex_term_omb:nnn
4635     }%
4636     \tl_put_right:Nn \l__stex_notations_code_tl {
4637       {\_stex_term_arg:nnnnn{#1}{#2}{#3}{#4}{#5}}%
4638     }%
4639   }%
4640   a {
4641     \tl_put_right:Nn \l__stex_notations_code_tl {
4642       {\_stex_term_arg_aB:nnnnn{#1}{#2}{#3}{#4}{#5}}%
4643     }%
4644   }%
4645   B {
4646     \tl_set:Nn \l__stex_notations_pre_tl {
4647       \cs_set_eq:NN \_stex_term_oma_or_omb:nnn \_stex_term_omb:nnn
4648     }%
4649     \tl_put_right:Nn \l__stex_notations_code_tl {
4650       {\_stex_term_arg_aB:nnnnn{#1}{#2}{#3}{#4}{#5}}%
4651     }%
4652   }%
4653 }

```

```
4654 }
```

(End definition for `\STEXInternalNotation`. This function is documented on page ??.)

a/B-mode argument handling

`\argsep`

```
4655 \cs_new_protected:Nn \__stex_notations_check_aB_arg:Nn {
4656   \exp_args:Ne \cs_if_eq:NNF {\tl_head:n{#2}}
4657   \__stex_term_arg_aB:nnnnn {
4658     \msg_error:nnx{\stex}{error/assocarg}{\tl_to_str:n{#1}}
4659   }
4660 }
4661
4662 \cs_new_protected:Npn \argsep #1 #2 {
4663   \__stex_notations_check_aB_arg:Nn\argsep{#1}
4664   \stex_pseudogroup_with:nn{\__stex_term_do_aB_clist:}{
4665     \tl_set:Nn \__stex_term_do_aB_clist: {
4666       \seq_use:Nn \l_stex_aB_args_seq {#2}
4667     }
4668     #1
4669   }
4670 }
```

(End definition for `\argsep`. This function is documented on page 87.)

`\argmap`

```
4671 \cs_new_protected:Npn \argmap #1 #2 #3 {
4672   \__stex_notations_check_aB_arg:Nn\argmap{#1}
4673   \stex_pseudogroup_with:nn{
4674     \__stex_term_do_aB_clist:
4675     \__stex_notations_map_cs:
4676   }{
4677     \cs_set:Npn \__stex_notations_map_cs: {##1 { #2 }
4678     \tl_set:Nn \__stex_term_do_aB_clist: {
4679       \seq_clear:N \l_tmpa_seq
4680       \seq_map_inline:Nn \l_stex_aB_args_seq {
4681         \tl_if_eq:nnTF{##1}{\ellipses}{
4682           \seq_put_right:Nn \l_tmpa_seq \ellipses
4683         }{
4684           \seq_put_right:Nx \l_tmpa_seq {
4685             \exp_after:wN \exp_not:n \exp_after:wN { \__stex_notations_map_cs: {##1} }
4686           }
4687         }
4688       \seq_set_eq:NN \l_stex_aB_args_seq \l_tmpa_seq
4689       \seq_use:Nn \l_stex_aB_args_seq {#3}
4690     }
4691   }
4692   #1
4693 }
4694 }
```

(End definition for `\argmap`. This function is documented on page 87.)

```

\argarraymap
4695 \int_new:N \l__stex_notations_clist_count_int
4696 \cs_new_protected:Npn \argarraymap #1 #2 #3 #4 {
4697   \__stex_notations_check_aB_arg:Nn\argarraymap{#1}
4698   \stex_pseudogroup_with:nn{
4699     \__stex_term_do_aB_clist:
4700     \__stex_notations_map_cs:
4701   }{
4702     \cs_set:Npn \__stex_notations_map_cs: ##1 { #3 }
4703     \int_set:Nn \l__stex_notations_clist_count_int {\exp_args:No\clist_count:n{\tl_to_str:n{#1}}
4704     \tl_set:Nn \l_stex_term_do_aB_clist: {
4705       \tl_clear:N \l_tmpa_tl
4706       \int_zero:N \l_tmpa_int
4707       \seq_map_inline:Nn \l_stex_aB_args_seq {
4708         \int_incr:N \l_tmpa_int
4709         \int_compare:nNnT \l_tmpa_int > \l__stex_notations_clist_count_int {
4710           \int_set:Nn \l_tmpa_int 1
4711         }
4712         \tl_put_right:Nx \l_tmpa_tl {
4713           \exp_after:wN \exp_not:n \exp_after:wN { \__stex_notations_map_cs: {##1} }
4714           \clist_item:nn{#4}\l_tmpa_int
4715         }
4716       }
4717       \seq_set_eq:NN \l_stex_aB_args_seq \l_tmpa_seq
4718       \begin{array}{#2}
4719         \l_tmpa_tl
4720       \end{array}
4721     }
4722     #1
4723   }
4724 }

```

(End definition for `\argarraymap`. This function is documented on page 87.)

13.8.3 Variables

```

4725 <@=stex_vars>
\vardef
4726 \tl_new:N \l_stex_variables_prop
4727 \bool_new:N \l__stex_vars_bind_bool
4728 \cs_new_protected:Nn \stex_variable:nnnnnnnN {}
4729 \stex_keys_define:nnnn{vardef} {
4730   \bool_set_false:N \l__stex_vars_bind_bool
4731 }
4732   bind .bool_set:N = \l__stex_vars_bind_bool
4733 }{symdef}
4734
4735 \stex_new_stylistable_cmd:nnnn {vardef} { m 0{} m} {
4736   \stex_keys_set:nn{vardef}{#2}
4737   \str_set:Nx \l_stex_macroname_str { #1 }
4738   \str_if_empty:NT \l_stex_key_name_str {
4739     \str_set:Nx \l_stex_key_name_str { #1 }
4740   }

```

```

4741 \stex_symdecl_do:
4742 \_stex_symdecl_check_terms:
4743 \__stex_vars_add:
4744 \__stex_vars_macro:
4745 \stex_if_do_html:T \__stex_vars_html:
4746
4747 \int_set:Nn \l_stex_get_symbol_arity_int {\l_stex_get_symbol_arity_int}
4748 \stex_debug:nn{vardef}{Doing~\l_stex_key_name_str}
4749 \tl_set_eq:NN \l_stex_get_symbol_return_tl \l_stex_key_return_tl
4750 \stex_notation_parse:n{#3}
4751 \stex_if_check_terms:T{ \_stex_notation_check: }
4752 \_stex_vardecl_notation_macro:
4753 \stex_if_do_html:T {
4754     \def\comp{\_varcomp}
4755     \_stex_notation_do_html:n \l_stex_key_name_str
4756 }
4757 \group_begin:
4758 \tl_set_eq:NN \thisvarname \l_stex_key_name_str
4759 \tl_clear:N \thisstyle
4760 \str_set_eq:NN\thisnotationvariant\l_stex_key_variant_str
4761 \def\thisnotation{
4762     $ \let\l_stex_current_symbol_str\thisvarname
4763     \def\comp{\_varcomp}\exp_args:Nne \use:nn{\l_stex_notation_mmacrocode_{}}{
4764         \_stex_notation_make_args:
4765     }$}
4766 }
4767 \stex_style_apply:
4768 \group_end:\ignorespaces
4769 }{}}
4770
4771
4772 \cs_new_protected:Nn \__stex_vars_add: {
4773     \exp_args:NNNo \exp_args:NNnx
4774     \prop_put:Nnn \l_stex_variables_prop \l_stex_key_name_str {
4775         {\l_stex_macroname_str}
4776         {\l_stex_key_name_str}
4777         {\int_use:N \l_stex_get_symbol_arity_int}
4778         {\l_stex_get_symbol_args_tl}
4779         {\exp_args:No \exp_not:n \l_stex_key_def_tl}
4780         {\exp_args:No \exp_not:n \l_stex_key_type_tl}
4781         {\exp_args:No \exp_not:n \l_stex_key_return_tl}
4782     \stex_invoke_symbol:
4783 }
4784 }
4785
4786 \cs_new_protected:Nn \__stex_vars_macro: {
4787     \tl_set:cx{\l_stex_macroname_str} {
4788         \_stex_invoke_variable:nnnnnnN
4789         {\l_stex_key_name_str}
4790         {\int_use:N \l_stex_get_symbol_arity_int}
4791         {\l_stex_get_symbol_args_tl}
4792         {\exp_args:No \exp_not:n \l_stex_key_def_tl}
4793         {\exp_args:No \exp_not:n \l_stex_key_type_tl}
4794         {\exp_args:No \exp_not:n \l_stex_key_return_tl}

```

```

4795     \stex_invoke_symbol:
4796 }
4797 }
4798
4799 \cs_new_protected:Nn \__stex_vars_html: {
4800     \stex_if_do_html:T {
4801         \hbox\bgroup\exp_args:Ne \stex_annotation_invisible:nn {
4802             shtml:vardef = {\l_stex_key_name_str},
4803             shtml:args = {\l_stex_key_args_str}
4804             \str_if_empty:NF \l_stex_mroname_str {},
4805                 shtml:macroname=\l_stex_mroname_str
4806             }
4807             \str_if_empty:NF \l_stex_key_assoc_str {},
4808                 shtml:assocotype=\l_stex_key_assoc_str
4809             }
4810             \str_if_empty:NF \l_stex_key_role_str {},
4811                 shtml:role=\l_stex_key_role_str
4812             }
4813             \str_if_empty:NF \l_stex_key_reorder_str {},
4814                 shtml:reorderargs=\l_stex_key_reorder_str
4815             }
4816             \bool_if:NT \l_stex_vars_bind_bool {},
4817                 shtml:bind={}
4818             }
4819 }
4820 \stex_annotation_force_break:n{
4821     \bool_set_true:N \stex_in_invisible_html_bool
4822     \tl_if_empty:NF \l_stex_key_type_tl {
4823         \stex_annotation:nn{shtml:type={}}{$\l_stex_key_type_tl$}
4824     }
4825     \tl_if_empty:NF \l_stex_key_def_tl {
4826         \stex_annotation:nn{shtml:definiens={}}{$\l_stex_key_def_tl$}
4827     }
4828     \tl_if_empty:NF \l_stex_key_return_tl{
4829         \exp_args:Nno \use:n{
4830             \cs_generate_from_arg_count:NNnn \l_stex_vars_cs
4831             \cs_set:Npn \l_stex_get_symbol_arity_int} \l_stex_key_return_tl
4832             \tl_set:Nx \l_stex_vars_args_tl {\l_stex_map_args:N \stex_return_args:nn}
4833             $\stex_annotation:nn{shtml:returntype={}}{%
4834                 \exp_after:wN \l_stex_vars_cs \l_stex_vars_args_tl!}$}
4835     }
4836     \tl_if_empty:NF \l_stex_key_argtypes_clist {
4837         \stex_annotation:nn{shtml:argtypes={}}{%
4838             \stex_annotation_force_break:n{
4839                 \clist_map_inline:Nn \l_stex_key_argtypes_clist {
4840                     $\stex_annotation:nn{shtml:type={}}{\#\#1}$}
4841                 }
4842             }
4843         }
4844     }
4845 }
4846 }\egroup
4847 }
4848 }

```

(End definition for `\vardef`. This function is documented on page 90.)

```
\_stex_vardecl_notation_macro:
4849 \cs_new_protected:Nn \_stex_vardecl_notation_macro: {
4850   \tl_set_eq:cN {l_stex_notation_
4851     \l_stex_key_name_str _ 
4852     \l_stex_key_variant_str _cs
4853   }\l_stex_notation_macrocode_cs
4854   \cs_if_exist:cF {l_stex_notation_\l_stex_key_name_str __cs} {
4855     \tl_set_eq:cN{l_stex_notation_\l_stex_key_name_str __cs}
4856       \l_stex_notation_macrocode_cs
4857   }
4858   \tl_if_empty:NF \l_stex_key_op_tl {
4859     \tl_set_eq:cN {l_stex_notation_\l_stex_key_name_str _op_
4860       \l_stex_key_variant_str _cs}\l_stex_key_op_tl
4861     \cs_if_exist:cF {l_stex_notation_\l_stex_key_name_str _op__cs} {
4862       \cs_set_eq:cN{l_stex_notation_\l_stex_key_name_str _op__cs}
4863       \l_stex_key_op_tl
4864     }
4865   }
4866 }
```

(End definition for `_stex_vardecl_notation_macro:`. This function is documented on page 120.)

```
\stex_get_symbol_or_var:n
\stex_get_var:n
4867 \cs_new_protected:Nn \__stex_vars_set_vars:nnnnnnN {
4868   \stex_debug:nn{symbols}{Variable~#1-found}
4869   \cs_set:Npn \stex_variable:nnnnnnN ##1 ##2 ##3 ##4 ##5 ##6 ##7 ##8 {}
4870   \str_clear:N \l_stex_get_symbol_mod_str
4871   \str_set:Nn \l_stex_get_symbol_name_str {#1}
4872   \int_set:Nn \l_stex_get_symbol_arity_int {#2}
4873   \tl_set:Nn \l_stex_get_symbol_args_tl {#3}
4874   \tl_set:Nn \l_stex_get_symbol_def_tl {#4}
4875   \tl_set:Nn \l_stex_get_symbol_type_tl {#5}
4876   \tl_set:Nn \l_stex_get_symbol_return_tl {#6}
4877   \tl_set:Nn \l_stex_get_symbol_invoke_cs {#7}
4878 }
4879
4880 \cs_new_protected:Nn \__stex_vars_get_var:n {
4881   \prop_map_inline:Nn \l_stex_variables_prop {
4882     \__stex_vars_check_var:nnnnnnnnN {#1} ##2
4883   }
4884 }
4885
4886 \cs_new_protected:Nn \__stex_vars_check_var:nnnnnnnnN {
4887   \str_if_eq:nnTF{#1}{#2} {
4888     \prop_map_break:n{\__stex_vars_set_vars:nnnnnnN {#3}{#4}{#5}{#6}{#7}{#8}{#9}}
4889   }{
4890     \str_if_eq:nnT{#1}{#3} {
4891       \prop_map_break:n{\__stex_vars_set_vars:nnnnnnN {#3}{#4}{#5}{#6}{#7}{#8}{#9}}
4892     }
4893   }
4894 }
4895
```

```

4896 \cs_new_protected:Nn \stex_get_var:n {
4897   \str_clear:N \l_stex_get_symbol_name_str
4898   \__stex_vars_get_var:n{#1}
4899   \str_if_empty:NT \l_stex_get_symbol_name_str {
5000     \msg_error:nnn{stex}{error/unknownsymbol}{#1}
5001   }
5002 }
5003
5004 \cs_new_protected:Nn \stex_get_symbol_or_var:n {
5005   \str_clear:N \l_stex_get_symbol_name_str
5006   \__stex_vars_get_var:n{#1}
5007   \str_if_empty:NT \l_stex_get_symbol_name_str {
5008     \stex_debug:nn{symbols}{No~variable~#1~found}
5009     \stex_get_symbol:n{#1}
5010   }
5011 }

```

(End definition for `\stex_get_symbol_or_var:n` and `\stex_get_var:n`. These functions are documented on page 120.)

\svar

```

4912 \NewDocumentCommand \svar {0{} m}{
4913   \group_begin:
4914   \tl_if_empty:nTF{#1} {
4915     \str_set:Nn \l_stex_current_symbol_str {#2}
4916   }{
4917     \str_set:Nn \l_stex_current_symbol_str {#1}
4918   }
4919   \bool_if:NTF \l_stex_allow_semantic_bool {
4920     \tl_clear:N \l_stex_current_term_tl
4921     \stex_term_omv:nnn{}{}{\l_varcomp{#2}}
4922   }{
4923     \msg_error:nnxx{stex}{error/notallowed}{Variable}{\l_stex_current_symbol_str}
4924   }
4925   \group_end:
4926 }

```

(End definition for `\svar`. This function is documented on page 90.)

13.8.4 Sequences

4927 ⟨@=stex_seqs⟩

\varseq

```

4928 \stex_new_stylable_cmd:nnnn {varseq}{m 0{} m m} {
4929   \stex_keys_set:nn{symdef}{#2}
4930   \str_set:Nx \l_stex_macroname_str { #1 }
4931   \str_if_empty:NT \l_stex_key_name_str {
4932     \str_set:Nx \l_stex_key_name_str { #1 }
4933   }
4934   \str_if_empty:NT \l_stex_key_args_str {
4935     \str_set:Nn \l_stex_key_args_str {1}
4936   }
4937   \stex_symdecl_do:
4938

```

```

4939 \tl_set_eq:NN \l_stex_get_symbol_return_tl \l_stex_key_return_tl
4940 \clist_set:Nn \l__stex_seqs_range_clist {#3}
4941 \tl_if_empty:NTF \l_stex_key_op_tl {
4942   \stex_notation_parse:n{#4}
4943   \tl_clear:N \l_stex_key_op_tl
4944 }{
4945   \stex_notation_parse:n{#4}
4946 }
4947 \stex_if_do_html:T \__stex_seqs_html:
4948 \stex_if_check_terms:T \__stex_seqs_check_terms:
4949 \__stex_seqs_add:
4950 \__stex_seqs_macro:
4951 \stex_if_check_terms:T \_stex_notation_check:
4952 \stex_vardecl_notation_macro:
4953 \group_begin:
4954 \tl_set_eq:NN \thisvarname \l_stex_key_name_str
4955 \tl_clear:N \thisstyle
4956 \str_set_eq:NN\thisnotationvariant\l_stex_key_variant_str
4957 \def\thisnotation{
4958   \$\let\l_stex_current_symbol_str\thisvarname
4959   \def\comp{\_varcomp}\exp_args:Nne \use:nn{\l_stex_notation_macrocode_cs{}}
4960   \__stex_seqs_make_args:
4961 }
4962 }
4963 \stex_style_apply:
4964 \group_end:\ignorespaces
4965 }{}

4966 \cs_new_protected:Nn \__stex_seqs_add: {
4967   \exp_args:NNNo \exp_args:NNnx
4968   \prop_put:Nnn \l_stex_variables_prop \l_stex_key_name_str {
4969     {\l_stex_mroname_str}
4970     {\l_stex_key_name_str}
4971     {\int_use:N \l_stex_get_symbol_arity_int}
4972     {\l_stex_get_symbol_args_tl}
4973     {\exp_args:No \exp_not:n \l_stex_key_def_tl}
4974     {\exp_args:No \exp_not:n \l_stex_seqs_range_clist}
4975     {\exp_args:No \exp_not:n \l_stex_key_return_tl}
4976     \stex_invoke_sequence:
4977   }
4978 }
4979 }

4980 \cs_new_protected:Nn \__stex_seqs_macro: {
4981   \tl_set:cx{\l_stex_mroname_str}{%
4982     \stex_invoke_variable:nnnnnnN
4983     {\l_stex_key_name_str}
4984     {\int_use:N \l_stex_get_symbol_arity_int}
4985     {\l_stex_get_symbol_args_tl}
4986     {\exp_args:No \exp_not:n \l_stex_key_def_tl}
4987     {\exp_args:No \exp_not:n \l_stex_seqs_range_clist}
4988     {\exp_args:No \exp_not:n \l_stex_key_return_tl}
4989     \stex_invoke_sequence:
4990   }
4991 }
4992 }

```

```

4993 \cs_new_protected:Nn \__stex_seqs_make_args: { \TODO }
4994 \cs_new_protected:Nn \__stex_seqs_check_terms: { \TODO }
4995
4996
4997 \cs_new_protected:Nn \__stex_seqs_html: {
4998     \exp_args:Ne \stex_annotation_invisible:nn {
4999         shtml:vareq = {\l_stex_key_name_str},
5000         shtml:args = {\l_stex_key_args_str}
5001         \str_if_empty:NF \l_stex_macroname_str {,
5002             shtml:macroname={\l_stex_macroname_str}
5003         }
5004         \str_if_empty:NF \l_stex_key_assoc_str {,
5005             shtml:assocotype={\l_stex_key_assoc_str}
5006         }
5007         \str_if_empty:NF \l_stex_key_role_str {,
5008             shtml:role={\l_stex_key_role_str}
5009         }
5010         \str_if_empty:NF \l_stex_key_reorder_str {,
5011             shtml:reorderargs={\l_stex_key_reorder_str}
5012         }
5013     }{\hbox\bgroup
5014         \stex_annotation_force_break:n{
5015             \tl_if_empty:NF \l_stex_key_type_tl {
5016                 \stex_annotation:nn{shtml:type={}{}{$\l_stex_key_type_tl$}}
5017             }
5018             \tl_if_empty:NF \l_stex_key_def_tl {
5019                 \stex_annotation:nn{shtml:definiens={}{}{$\l_stex_key_def_tl$}}
5020             }
5021             \tl_if_empty:NF \l_stex_key_return_tl{
5022                 \exp_args:Nno \use:n{
5023                     \cs_generate_from_arg_count:NNnn \l__stex_seqs_cs
5024                     \cs_set:Npn \l_stex_get_symbol_arity_int} \l_stex_key_return_tl
5025                     \tl_set:Nx \l__stex_seqs_args_tl {\l_stex_map_args:N \stex_return_args:nn}
5026                     \stex_annotation:nn{shtml:returntype={}{}{
5027                         $ \exp_after:wN \l__stex_seqs_cs \l__stex_seqs_args_tl!$}
5028                 }
5029             \tl_if_empty:NF \l_stex_key_argtypes_clist {
5030                 \stex_annotation:nn{shtml:argtypes={}{}{
5031                     \stex_annotation_force_break:n{
5032                         \clist_map_inline:Nn \l_stex_key_argtypes_clist {
5033                             \stex_annotation:nn{shtml:type={}{}{$\#\#1$}}
5034                         }
5035                     }
5036                 }
5037             }
5038         \egroup}
5039     }
5040 }
```

(End definition for `\vareq`. This function is documented on page 90.)

`\stex_invoke_sequence:`

```

5041 \cs_new_protected:Nn \stex_invoke_sequence: {
5042     \peek_charcode_remove:NTF ! {
```

```

5043     \peek_charcode:NTF [ \__stex_seqs_do_op:w { \__stex_seqs_do_op:w [] } ]
5044     }\__stex_seqs_do_first:
5045 }
5046
5047 \cs_new_protected:Npn \__stex_seqs_do_op:w [#1] {
5048     \cs_if_exist:cTF {l_stex_notation_\l_stex_current_symbol_str _op_#1_cs} {
5049         \stex_maybe_brackets:n{ \neginfprefc }{
5050             \stex_term_oms_or_omv:n{ \neginfprefc }{
5051                 {\use:c{l_stex_notation_\l_stex_current_symbol_str _op_#1_cs}}}
5052             }
5053             \group_end:
5054         }{
5055             \__stex_seqs_get_index_notation:n{ \neginfprefc }
5056             \peek_charcode:NTF [ \__stex_seqs_doop_range:w { \__stex_seqs_doop_range:w[] } ]
5057         }
5058 }
5059
5060 \cs_new_protected:Npn \__stex_seqs_doop_range:w [#1] {
5061     \bool_set_true:N \l_stex_allow_semantic_bool
5062     \clist_clear:N \l__stex_seqs_clist
5063     \clist_map_function:NN \l_stex_current_type_tl \__stex_seqs_doop_arg:n
5064         \stex_annotation:n{
5065             \shtml:term=OMV,
5066             \shtml:head={\l_stex_current_symbol_str},
5067             \shtml:notationid={}
5068         }{
5069             \l__stex_seqs_clist
5070         }
5071         \group_end:
5072     }
5073
5074 \cs_new_protected:Nn \__stex_seqs_doop_arg:n {
5075     \tl_if_eq:nnTF{ \ellipses }{
5076         \clist_put_right:Nn \l__stex_seqs_clist {
5077             \ellipses
5078         }
5079     }{
5080         \clist_put_right:Nn \l__stex_seqs_clist {
5081             \exp_args:No \str_if_eq:nnTF \l_stex_current_arity_str {1} {
5082                 \group_begin:
5083                     \l__stex_seqs_CS \group_end: { \ellipses }
5084             }{
5085                 \group_begin:
5086                     \l__stex_seqs_CS \group_end: #1
5087             }
5088         }
5089     }
5090 }
5091
5092 \cs_new_protected:Nn \__stex_seqs_get_index_notation:n {
5093     \cs_if_exist:cTF {l_stex_notation_\l_stex_current_symbol_str _#1_cs} {
5094         \cs_set_eq:Nc \l__stex_seqs_CS {l_stex_notation_\l_stex_current_symbol_str _#1_cs}
5095     }

```

```

5097     \stex_do_default_notation:
5098     \cs_set_eq:NN \l__stex_seqs_cs \l_stex_default_notation
5099   }
5100 }
5101
5102
5103 \cs_new:Nn \__stex_seqs_do_first_arg:n {{\exp_not:n{## #1}}}
5104
5105 \cs_new_protected:Nn \__stex_seqs_do_first: {
5106   \exp_args:Nnx \use:nn{
5107     \cs_generate_from_arg_count:NNnn \l__stex_seqs_cs \cs_set:Npn
5108     \l_stex_current_arity_str {{
5109       \tl_set:Nn \exp_not:N \l__stex_seqs_first_args_tl {
5110         \int_step_function:nN \l_stex_current_arity_str \__stex_seqs_do_first_arg:n
5111       }
5112       \exp_not:N \__stex_seqs_do_first_next:
5113     }}
5114   \l__stex_seqs_cs
5115 }
5116
5117 \cs_new_protected:Nn \__stex_seqs_do_first_next: {
5118   \peekCharCode_remove:NTF ! {
5119     \peekCharCode:NTF [ \__stex_seqs_do_one:w {\__stex_seqs_do_one:w []}
5120   }{
5121     \peekCharCode:NTF [ \__stex_seqs_do_all:w {\__stex_seqs_do_all:w []}
5122   }
5123 }
5124
5125 \cs_new_protected:Npn \__stex_seqs_do_one:w [#1] {
5126   \__stex_seqs_get_index_notation:n{#1}
5127   \stex_debug:nn{HERE~seq~one}{\meaning\l__stex_seqs_cs^{\meaning\l__stex_seqs_first_args_t1}}
5128   \exp_args:Nno\use:nn{\l__stex_seqs_cs\group_end:}\l__stex_seqs_first_args_t1
5129 }
5130
5131 \cs_new_protected:Npn \__stex_seqs_do_all:w [#1] {
5132   \stex_debug:nn{HERE~seq~all}{\meaning\l__stex_seqs_first_args_t1}
5133   \exp_args:Nno\use:nn{\l_stex_invoke_notation:w [#1]}\l__stex_seqs_first_args_t1
5134 }

```

(End definition for `\stex_invoke_sequence`. This function is documented on page ??.)

\seqmap

```

5135 \cs_new_protected:Npn \seqmap #1 #2 {
5136   \symuse{Metatheory?sequence-expression}{\seqmap{#1}{#2}}%\l_tmpa_t1 {#2}
5137 }

```

(End definition for `\seqmap`. This function is documented on page 91.)

13.8.5 Expressions

```
5138 (@@=stex_expr)
```

Various variables:

```

5139 \bool_new:N \l_stex_allow_semantic_bool
5140 \bool_set_true:N \l_stex_allow_semantic_bool

```

```

5141 \tl_new:N \l_stex_current_term_tl
5142 \tl_set:Nn \l_stex_every_symbol_tl {
5143   \bool_set_false:N \l_stex_allow_semantic_bool
5144 }

\_stex_next_symbol:n

5145 \tl_new:N \l__stex_expr_reset_tl
5146 \cs_new_protected:Nn \_stex_next_symbol:n {
5147   \tl_set:Nx \l_stex_every_symbol_tl {
5148     \tl_gset:Nn \exp_not:N \l__stex_expr_reset_tl {
5149       \tl_set:Nn \exp_not:N \l_stex_every_symbol_tl {
5150         \exp_args:No \exp_not:n \l_stex_every_symbol_tl
5151       }
5152       \tl_gset:Nn \exp_not:N \l__stex_expr_reset_tl {
5153         \exp_args:No \exp_not:n \l__stex_expr_reset_tl
5154       }
5155     }
5156     \tl_set:Nn \exp_not:N \l_stex_every_symbol_tl {
5157       \exp_args:No \exp_not:n \l_stex_every_symbol_tl
5158     }
5159     \exp_not:n{ \aftergroup \l__stex_expr_reset_tl }
5160     \exp_not:N \l_stex_every_symbol_tl
5161     \exp_not:n{ #1 }
5162   }
5163 }
5164 \cs_generate_variant:Nn \_stex_next_symbol:n {e}

(End definition for \_stex_next_symbol:n. This function is documented on page ??.)
```

\STEXinvisible

```

5165 \cs_new_protected:Npn \STEXinvisible #1 {
5166   \stex_annotation_invisible:n { #1 }
5167 }
```

(End definition for \STEXinvisible. This function is documented on page 76.)

Invoking Semantic Macros

```

\_stex_invoke_symbol:nnnnnnN

5168 \cs_new_protected:Nn \_stex_invoke_symbol:nnnnnnN {
5169   \bool_if:NTF \l_stex_allow_semantic_bool{
5170     \stex_if_html_backend:T{\ifvmode\indent\fi}
5171     \__stex_expr_setup:nnnnnnf\comp{\#1?\#2}{\#3}{\#4}{\#7}{\#6}
5172     \cs_set_eq:NN \_stex_term_oms_or_omv:nnn \_stex_term_oms:nnn
5173     \tl_put_right:Nn \l_stex_current_redo_tl{
5174       \cs_set_eq:NN \_stex_term_oms_or_omv:nnn \_stex_term_oms:nnn
5175     }
5176     #8
5177   }{
5178     \msg_error:nnxx{stex}{error/notallowed}{\#1?\#2}{\l_stex_current_symbol_str}
5179   }
5180 }
5181 \cs_generate_variant:Nn \_stex_invoke_symbol:nnnnnnN {ooxooooN}
5182
5183 \cs_new_protected:Nn \__stex_expr_setup:nnnnnn {
```

```

5184 \group_begin:
5185 \tl_clear:N \l_stex_return_notation_tl
5186 \tl_set:Nn \l_stex_current_redo_tl {
5187   \let \this \stex_current_this:
5188   \def\comp{\#1}
5189   \def\maincomp{\comp}
5190   \str_set:Nn \l_stex_current_symbol_str {\#2}
5191   \str_set:Nn \l_stex_current_arity_str{ #3 }
5192   \tl_set:Nn \l_stex_current_args_tl{ #4 }
5193   \tl_set:Nn \l_stex_current_return_tl{ #5 }
5194   \tl_set:Nn \l_stex_current_type_tl{ #6 }
5195   \tl_clear:N \l_stex_current_term_tl
5196 }
5197 \tl_put_right:Nx \l_stex_current_redo_tl {
5198   \exp_args:No \exp_not:n \l_stex_every_symbol_tl
5199 }
5200 \l_stex_current_redo_tl
5201 }

```

(End definition for `_stex_invoke_symbol:nnnnnnN`. This function is documented on page ??.)

```

\_stex_invoke_variable:nnnnnn
5202 \cs_new_protected:Nn \_stex_invoke_variable:nnnnnnN {
5203   \bool_if:NTF \l_stex_allow_semantic_bool{
5204     \stex_if_html_backend:T{\ifvmode\indent\fi}
5205     \__stex_expr_setup:nnnnnn{\_varcomp}{#1}{#2}{#3}{#6}{#5}
5206     \cs_set_eq:NN \_stex_term_oms_or_omv:nnn \_stex_term_omv:nnn
5207     \tl_put_right:Nn \l_stex_current_redo_tl {
5208       \cs_set_eq:NN \_stex_term_oms_or_omv:nnn \_stex_term_omv:nnn
5209     }
5210     #7
5211   }{
5212     \msg_error:nnxx{stex}{error/notallowed}{#1}{\l_stex_current_symbol_str}
5213   }
5214 }

```

(End definition for `_stex_invoke_variable:nnnnnn`. This function is documented on page ??.)

```

\symuse
5215 \cs_new_protected:Npn \symuse #1 {
5216   \stex_get_symbol:n{#1}
5217   \exp_args:Nno \use:n {\_stex_invoke_symbol:ooooooN
5218   \l_stex_get_symbol_mod_str
5219   \l_stex_get_symbol_name_str
5220   {\int_use:N \l_stex_get_symbol_arity_int}
5221   \l_stex_get_symbol_args_tl
5222   \l_stex_get_symbol_def_tl
5223   \l_stex_get_symbol_type_tl
5224   \l_stex_get_symbol_return_tl}
5225   \l_stex_get_symbol_invoke_cs
5226 }

```

(End definition for `\symuse`. This function is documented on page 84.)

\stex_invoke_symbol: Top-Level: Check whether text/math mode or custom notation, whether delimited by !, return code etc.

```

5227 \cs_new_protected:Nn \stex_invoke_symbol: {
5228   \stex_debug:nn{expressions}{Invoking-\l_stex_current_symbol_str}
5229   \mode_if_math:TF \__stex_expr_invoke_math: \__stex_expr_invoke_text:
5230 }
5231
5232 \cs_new_protected:Nn \__stex_expr_invoke_text: {
5233   \stex_debug:nn{expressions}{text-mode}
5234   \peek_charcode_remove:NTF ! \__stex_expr_invoke_op_custom:n \__stex_expr_invoke_custom:n
5235 }
5236
5237 \cs_new_protected:Nn \__stex_expr_invoke_math: {
5238   \stex_debug:nn{expressions}{math-mode}
5239   \peek_charcode_remove:NTF ! {
5240     % operator
5241     \peek_charcode_remove:NTF * \__stex_expr_invoke_op_custom:n {
5242       % op notation
5243       \peek_charcode:NTF [ \__stex_expr_invoke_op_notation:w {
5244         \__stex_expr_invoke_op_notation:w []
5245       }
5246     }
5247   }
5248   \peek_charcode_remove:NTF * \__stex_expr_invoke_custom:n {
5249     % normal
5250     \peek_charcode:NTF [ \__stex_invoke_notation:w {
5251       \__stex_invoke_notation:w []
5252     }
5253   }
5254 }
5255 }
```

Notations:

```

5256 \cs_new_protected:Npn \stex_invoke_notation:w [#1] {
5257   \stex_debug:nn{expressions}{using-notation~#1-for-\l_stex_current_symbol_str}
5258   \cs_if_exist:cTF{\l_stex_notation_\l_stex_current_symbol_str _#1_cs} {
5259     \tl_if_empty:NTF \l_stex_current_return_tl {
5260       \stex_debug:nn{expressions}{return-empty}
5261       \use:c{\l_stex_notation_\l_stex_current_symbol_str _#1_cs}{\group_end:\stex_eat_exclamation}
5262     }
5263     \stex_debug:nn{expressions}{return?}
5264     \exp_after:wN\exp_after:wN\exp_after:wN
5265     \__stex_expr_invoke_return_maybe:n
5266     \exp_after:wN\exp_after:wN\exp_after:wN
5267     {\cs:w \l_stex_notation_\l_stex_current_symbol_str _#1_cs \cs_end: {}}
5268   }
5269 }
5270 \stex_do_default_notation:
5271 \tl_if_empty:NTF \l_stex_current_return_tl {
5272   \l_stex_default_notation\group_end:\stex_eat_exclamation_point:
5273 }
5274   \exp_after:wN
5275   \__stex_expr_invoke_return_maybe:n
5276   \exp_after:wN
```

```

5277     {\l_stex_default_notation {}}
5278   }
5279 }
5280 }
5281
5282 \cs_new_protected:Npn \__stex_expr_invoke_op_notation:w [#1] {
5283   \stex_debug:nn{expressions}{op~notation~for~\l_stex_current_symbol_str}
5284   \cs_if_exist:cTF{\l_stex_notation_\l_stex_current_symbol_str _op_#1_cs}{
5285     \l_stex_maybe_brackets:nn{\neginfpref}{}
5286     \l_stex_term_oms_or_omv:nnn{#1}{}
5287     {\use:c{\l_stex_notation_\l_stex_current_symbol_str _op_#1_cs}}
5288   }
5289   \group_end:
5290 }{
5291   \int_compare:nNnTF \l_stex_current_arity_str = 0 {
5292     \tl_clear:N \l_stex_current_return_tl
5293     \l_stex_invoke_notation:w [#1]
5294   }{
5295     \l_stex_do_default_notation_op:
5296     \l_stex_maybe_brackets:nnf{\neginfpref}{}
5297     \l_stex_term_oms_or_omv:nnn{#1}{}
5298     {\l_stex_default_notation}
5299   }
5300   \group_end:
5301 }
5302 }
5303 }

```

Return:

```

5304 \cs_new_protected:Nn \__stex_expr_invoke_return_maybe:n {
5305   \tl_clear:N \l__stex_expr_return_args_tl
5306   \tl_set:Nn \l__stex_expr_return_this_tl {#1}
5307   \exp_args:Nnx \use:n {
5308     \cs_generate_from_arg_count:NNnn \__stex_expr_ret_cs
5309     \cs_set:Npn \l_stex_current_arity_str } {
5310       \int_step_function:nN \l_stex_current_arity_str \__stex_expr_return_arg:n
5311       \__stex_expr_invoke_return_next:
5312     }
5313     \__stex_expr_ret_cs
5314   }
5315
5316 \cs_new:Nn \__stex_expr_return_arg:n {
5317   \tl_put_right:Nn \exp_not:N \l__stex_expr_return_args_tl {{#### #1}}
5318 }
5319
5320 \cs_new_protected:Nn \__stex_expr_invoke_return_next: {
5321   \peek_charcode_remove:NTF ! {
5322     \exp_after:wn \l__stex_expr_return_this_tl \l__stex_expr_return_args_tl \group_end:
5323   }\__stex_expr_invoke_return:
5324 }
5325
5326 \cs_new_protected:Nn \__stex_expr_invoke_return: {
5327   \tl_set:Nx \l__stex_expr_return_this_tl {
5328     \__stex_expr_return_notation:n {

```

```

5329     \exp_after:wN \exp_after:wN \exp_after:wN
5330     \exp_not:n \exp_after:wN \exp_after:wN \exp_after:wN {
5331         \exp_after:wN \l__stex_expr_return_this_tl \l__stex_expr_return_args_tl
5332     }
5333 }
5334 }
5335 \stex_debug:nn{return}{Notation:~\meaning\l__stex_expr_return_this_tl}
5336 \tl_put_left:Nx \l__stex_expr_return_this_tl {
5337     \group_begin:\exp_args:No \exp_not:n \l_stex_current_redo_tl
5338 }
5339 \exp_args:Nnx \use:n {
5340     \cs_generate_from_arg_count:NNnn \__stex_expr_ret_cs
5341     \cs_set:Npn \l_stex_current_arity_str } {
5342         \exp_args:No \exp_not:n \l_stex_current_return_tl
5343     }
5344 \stex_debug:nn{return}{
5345     \meaning\__stex_expr_ret_cs^~J
5346     \meaning\l__stex_expr_return_this_tl^~J
5347     \exp_args:No \exp_not:n \l__stex_expr_return_args_tl^~J
5348 }
5349 \exp_args:Nnx \use:nn {
5350     \exp_after:wN \group_end: \__stex_expr_ret_cs
5351 }{
5352     \exp_args:No \exp_not:n \l__stex_expr_return_args_tl
5353     {
5354         \exp_args:No \exp_not:n \l__stex_expr_return_this_tl
5355         \group_end:
5356     }
5357 }
5358 }
5359
5360
5361 \cs_new_protected:Nn \__stex_expr_return_notation:n {
5362     \tl_if_empty:NTF \l_stex_return_notation_tl { #1 }{
5363         \l_stex_return_notation_tl
5364     }
5365 }
5366

```

Custom Notations:

```

5367 \cs_new_protected:Nn \__stex_expr_invoke_op_custom:n {
5368     \stex_debug:nn{expressions}{custom~op}
5369     \bool_set_true:N \l_stex_allow_semantic_bool
5370     \stex_term_oms_or_omv:nnn{}{}{\maincomp{#1}}
5371     \group_end:
5372 }
5373
5374 \int_new:N \l__stex_expr_arg_counter_int
5375 \cs_new_protected:Nn \__stex_expr_invoke_custom:n {
5376     \stex_debug:nn{custom}{custom~notation~for~\l_stex_current_symbol_str}
5377     \stex_pseudogroup:nn{
5378         \bool_set_true:N \l_stex_allow_semantic_bool
5379         \prop_gclear:N \l__stex_expr_customs_prop
5380         \seq_gclear:N \l__stex_expr_customs_seq

```

```

5381 \int_gzero:N \l__stex_expr_arg_counter_int
5382 \tl_if_empty:NF \l_stex_current_args_tl {
5383     \exp_after:wN \__stex_expr_add_prop_arg:nw \l_stex_current_args_tl \_stex_args_end:
5384     \cs_set_eq:NN \arg \__stex_expr_arg:n
5385 }
5386 \tl_set_eq:NN \l_stex_get_symbol_args_tl \l_stex_current_args_tl
5387 \cs_set_eq:NN \__stex_expr_do_ab_next:nnn \_stex_term_oma:nnn
5388 \_stex_map_args:N \__stex_expr_check_b:nn
5389 \__stex_expr_do_ab_next:nnn{}{}{#1}
5390 }{
5391     \prop_if_exist:NT \l__stex_expr_customs_prop {
5392         \prop_gset_from_keyval:Nn \exp_not:N \l__stex_expr_customs_prop {
5393             \prop_to_keyval:N \l__stex_expr_customs_prop
5394         }
5395     }
5396     \int_gset:Nn \l__stex_expr_arg_counter_int { \int_use:N \l__stex_expr_arg_counter_int }
5397     \seq_if_exist:NT \l__stex_expr_customs_seq {
5398         \seq_gset_split:Nnn \exp_not:N \l__stex_expr_customs_seq , {
5399             \seq_use:Nn \l__stex_expr_customs_seq ,
5400         }
5401     }
5402 }
5403 % TODO check that all arguments are present
5404 \group_end:
5405 }
5406
5407 \cs_new_protected:Npn \__stex_expr_add_prop_arg:nw #1 #2 #3\stex_args_end: {
5408     \prop_gput:Nnn \l__stex_expr_customs_prop {#1} {}
5409     \seq_gput_right:Nn \l__stex_expr_customs_seq {#2}
5410     \tl_if_empty:nF{#3}{\__stex_expr_add_prop_arg:nw #3 \stex_args_end:}
5411 }
5412
5413 \cs_new:Nn \__stex_expr_check_b:nn {
5414     \str_case:nn #2 {
5415         b {\cs_set_eq:NN \__stex_expr_do_ab_next:nnn \_stex_term_omb:nnn}
5416         B {\cs_set_eq:NN \__stex_expr_do_ab_next:nnn \_stex_term_omb:nnn}
5417     }
5418 }
5419
5420 \NewDocumentCommand \__stex_expr_arg:n { s O{} m } {
5421     \IfBooleanTF #1 {
5422         \stex_annotation_invisible:n{
5423             \__stex_expr_inner:nn{#2}{#3}
5424         }
5425     }{
5426         \__stex_expr_inner:nn{#2}{#3}
5427     }
5428 }
5429
5430 \cs_new_protected:Nn \__stex_expr_arg_inner:nn {
5431     \tl_if_empty:nTF{#1}{
5432         \int_gincr:N \l__stex_expr_arg_counter_int
5433         \exp_args:Ne \__stex_expr_check:nTF{ \int_use:N \l__stex_expr_arg_counter_int }{
5434             \__stex_expr_arg_do:oon \l_tmpa_tl \l_tmpb_tl

```

```

5435 }{
5436   \__stex_expr_arg_inner:nn{}
5437 }{ #2 }
5438 }{
5439   \__stex_expr_check:nTF {#1}{
5440     \__stex_expr_arg_do:oon \l_tmpa_tl \l_tmpb_tl { #2 }
5441 }{
5442   \exp_args:No \str_case:nnTF \l_tmpb_tl {
5443     {a}){
5444       \exp_args:NNnx \prop_gput:Nnn \l__stex_expr_customs_prop {#1}{
5445         \l_tmpa_tl X
5446       }
5447       \tl_set:Nx \l_tmpa_tl { #1 \int_eval:n {\tl_count:N \l_tmpa_tl + 1} }
5448     }
5449     {B}){
5450       \exp_args:NNnx \prop_gput:Nnn \l__stex_expr_customs_prop {#1}{
5451         \l_tmpa_tl X
5452       }
5453       \tl_set:Nx \l_tmpa_tl { #1 \int_eval:n {\tl_count:N \l_tmpa_tl + 1} }
5454     }
5455   }{
5456     \__stex_expr_arg_do:oon \l_tmpa_tl \l_tmpb_tl { #2 }
5457   }{
5458     \msg_error:nnxx{stex}{error/invalidarg}{#1}{\l_stex_current_symbol_str}
5459   }
5460 }
5461 }
5462 }
5463
5464 \prg_new_if:nTF \__stex_expr_check:n {TF} {
5465   \exp_args:NN \prop_get:NnTF \l__stex_expr_customs_prop {#1} \l_tmpa_tl {
5466     \tl_set:Nx \l_tmpb_tl {\seq_item:Nn \l__stex_expr_customs_seq {#1} }
5467     \tl_if_empty:NTF \l_tmpa_tl {
5468       \exp_args:NN \prop_gput:Nnn \l__stex_expr_customs_prop
5469         { #1 }{X}
5470       \exp_args:No \str_case:nnF \l_tmpb_tl {
5471         {a}){
5472           \tl_set:Nx \l_tmpa_tl{ #1 1 }
5473         }
5474         {B}){
5475           \tl_set:Nx \l_tmpa_tl{ #1 1 }
5476         }
5477       }{
5478         \tl_set:Nx \l_tmpa_tl{ #1 }
5479       }
5480       \prg_return_true:
5481     }{
5482       \prg_return_false:
5483     }
5484   }{
5485     \msg_error:nnxx{stex}{error/invalidarg}{#1}{\l_stex_current_symbol_str}
5486     \prg_return_false:
5487   }
5488 }

```

```

5489 % #1 argnum #2 argmode #3 code
5490 \cs_new_protected:Nn \__stex_expr_arg_do:nnn {
5491   \stex_debug:nn{custom}{Doing~argument~#1~of~mode~#2:~\tl_to_str:n{#3}}
5492   \group_begin:
5493     \bool_set_true:N \l_stex_allow_semantic_bool
5494     \stex_term_arg:nnn {#2}{#1}{#3}
5495   \group_end:
5496 }
5497 }
5498 \cs_generate_variant:Nn \__stex_expr_arg_do:nnn {oon}

```

(End definition for `\stex_invoke_symbol`. This function is documented on page 126.)

Argument Handling and Annotating

```

\stex_term_arg:nnnn
\stex_term_arg:nnn
5499 % 1: argnum 2: argmode 3: precedence 4: argname 5: code
5500 \cs_new_protected:Nn \stex_term_arg:nnnnn {
5501   \group_begin:
5502     \str_clear:N \l_stex_current_symbol_str
5503     \tl_clear:N \l_stex_current_term_tl
5504     \int_set:Nn \l_stex_notation_downprec { #3 }
5505     \bool_set_true:N \l_stex_allow_semantic_bool
5506     \stex_term_arg:nnn {#2}{#1} {
5507       \tl_if_empty:nTF{#4} {
5508         #5
5509       }{
5510         \stex_annotation:nn{mml:arg={#4}}{#5}
5511       }
5512     }
5513   \group_end:
5514 }
5515
5516 \cs_new_protected:Nn \stex_term_arg:nnn {
5517   \stex_annotation:nn{ shtml:arg={#2}, shtml:argmode={#1}}{
5518     \stex_annotation_force_break:n{ #3 }
5519   }
5520 }

```

(End definition for `\stex_term_arg:nnnn` and `\stex_term_arg:nnn`. These functions are documented on page ??.)

```

\stex_term_arg_aB:nnnnn
5521 \tl_set:Nn \__stex_expr_do_aB_clist: {
5522   \seq_use:Nn \l_stex_aB_args_seq {
5523     \mathpunct{\comp{,}}
5524   }
5525 }
5526 \tl_set_eq:NN \stex_term_do_aB_clist: \__stex_expr_do_aB_clist:
5527
5528 \int_new:N \l_stex_expr_count_int
5529 \cs_new_protected:Nn \stex_term_arg_aB:nnnnn {
5530   \tl_if_empty:nTF{#5} {
5531     \stex_term_arg:nnnnn{#1}{#2}{#3}{#4}{}
5532   }

```

```

5533 \seq_clear:N \l_stex_aB_args_seq
5534 \int_zero:N \l_stex_expr_count_int
5535 \clist_map_inline:nn{#5} {
5536   \_stex_expr_aB_arg:nnnnn{##1}{#1}{#2}{#3}{#4}
5537 }
5538 \_stex_term_do_aB_clist:
5539 }
5540 }

5541 % 1: code 2: argnum 3: argmode 4: precedence 5: argname
5542 \cs_new_protected:Npn \_stex_expr_aB_arg:nnnnn #1 {
5543   \int_incr:N \l_stex_expr_count_int
5544   \_stex_expr_is_varseq:nTF{#1} {
5545     \exp_after:wN \exp_after:wN \exp_after:wN
5546     \_stex_expr_assoc_seq:nnnnnnn
5547     \exp_after:wN
5548     \_stex_expr_gobble:nnnnnnnn #1 \_stex_expr_end:
5549   }{
5550     \_stex_expr_is_seqmap:nTF{#1} {
5551       \exp_args:NNe \use:nn \_stex_expr_do_seqmap:nnnnnn {\tl_tail:n{#1}}
5552     }{
5553       \_stex_expr_aB_simple_arg:nnnnn{#1}
5554     }
5555   }
5556 }
5557 }

5558 \cs_new:Npn \_stex_expr_gobble:nnnnnnnn #1 #2 #3 #4 #5 #6 #7 #8 #9 \_stex_expr_end: {
5559   {#2} #3 {#6}
5560 }
5561 }

5562 \cs_new_protected:Nn \_stex_expr_aB_simple_arg:nnnnn{
5563   \seq_put_right:Nx \l_stex_aB_args_seq {
5564     \_stex_term_arg:nnnnn{#2}\int_use:N\l_stex_expr_count_int}{#3}{#4}{#5}{#6}
5565     \exp_not:n{
5566       \tl_set_eq:NN \_stex_term_do_aB_clist: \_stex_expr_do_aB_clist:
5567       #1
5568     }
5569   }
5570 }
5571 }
5572 }

5573 \cs_new_protected:Nn \_stex_is_sequentialized:n {
5574   \group_begin: #1 \group_end:
5575 }
5576 }

Conditionals: Is the argument a sequence variable or a \seqmap?

5577 \prg_new_conditional:Nnn \_stex_expr_is_varseq:n {TF} {
5578   \int_compare:nNnTF {\tl_count:n{#1}} = 1 {
5579     \exp_args:Ne \cs_if_eq:NNTF {\exp_args:No \tl_head:n{#1}}
5580     \_stex_invoke_variable:nnnnnn {
5581       \exp_args:Ne \cs_if_eq:NNTF {\exp_args:No \tl_item:nn{#1}{8}}
5582         \stex_invoke_sequence:
5583         \prg_return_true:\prg_return_false:
5584     } \prg_return_false:
5585   } \prg_return_false:

```

```

5585     }\prg_return_false:
5586 }
5587
5588 \prg_new_conditional:Nnn \__stex_expr_is_seqmap:n {TF} {
5589     \int_compare:nNnTF {\tl_count:n{#1}} = 3 {
5590         \exp_args:Ne \tl_if_eq:nnTF {\tl_head:n{#1}} {\seqmap}
5591         \prg_return_true:\prg_return_false:
5592     }\prg_return_false:
5593 }

```

Sequence variable:

```

5594 % 1: name 2: arity 3: clist 4: argnum 5: argmode 6: precedence 7: argname
5595 \cs_new_protected:Nn \__stex_expr_assoc_seq:nnnnnnn {
5596     \group_begin:
5597         \seq_clear:N \l_stex_aB_args_seq
5598         \__stex_expr_assoc_make_seq:nnn{#1}{#3}{#2}
5599 \exp_args:NNe \use:nn \group_end: {
5600     \seq_put_right:Nn \exp_not:N \l_stex_aB_args_seq {
5601         \stex_is_sequentialized:n{
5602             \stex_term_arg:nnnn{#4}\int_use:N\l_stex_expr_count_int}{#5}{#6}{#7}{#8}{#9}{#10}{#11}{#12}{#13}{#14}{#15}{#16}{#17}{#18}{#19}{#20}{#21}{#22}{#23}{#24}{#25}{#26}{#27}{#28}{#29}{#30}{#31}{#32}{#33}{#34}{#35}{#36}{#37}{#38}{#39}{#40}{#41}{#42}{#43}{#44}{#45}{#46}{#47}{#48}{#49}{#50}{#51}{#52}{#53}{#54}{#55}{#56}{#57}{#58}{#59}{#60}{#61}{#62}{#63}{#64}{#65}{#66}{#67}{#68}{#69}{#70}{#71}{#72}{#73}{#74}{#75}{#76}{#77}{#78}{#79}{#80}{#81}{#82}{#83}{#84}{#85}{#86}{#87}{#88}{#89}{#90}{#91}{#92}{#93}{#94}{#95}{#96}{#97}{#98}{#99}{#100}{#101}{#102}{#103}{#104}{#105}{#106}{#107}{#108}{#109}{#110}{#111}{#112}{#113}{#114}{#115}{#116}{#117}{#118}{#119}{#120}{#121}{#122}{#123}{#124}{#125}{#126}{#127}{#128}{#129}{#130}{#131}{#132}{#133}{#134}{#135}{#136}{#137}{#138}{#139}{#140}{#141}{#142}{#143}{#144}{#145}{#146}{#147}{#148}{#149}{#150}{#151}{#152}{#153}{#154}{#155}{#156}{#157}{#158}{#159}{#160}{#161}{#162}{#163}{#164}{#165}{#166}{#167}{#168}{#169}{#170}{#171}{#172}{#173}{#174}{#175}{#176}{#177}{#178}{#179}{#180}{#181}{#182}{#183}{#184}{#185}{#186}{#187}{#188}{#189}{#190}{#191}{#192}{#193}{#194}{#195}{#196}{#197}{#198}{#199}{#200}{#201}{#202}{#203}{#204}{#205}{#206}{#207}{#208}{#209}{#210}{#211}{#212}{#213}{#214}{#215}{#216}{#217}{#218}{#219}{#220}{#221}{#222}{#223}{#224}{#225}{#226}{#227}{#228}{#229}{#230}{#231}{#232}{#233}{#234}{#235}{#236}{#237}{#238}{#239}{#240}{#241}{#242}{#243}{#244}{#245}{#246}{#247}{#248}{#249}{#250}{#251}{#252}{#253}{#254}{#255}{#256}{#257}{#258}{#259}{#260}{#261}{#262}{#263}{#264}{#265}{#266}{#267}{#268}{#269}{#270}{#271}{#272}{#273}{#274}{#275}{#276}{#277}{#278}{#279}{#280}{#281}{#282}{#283}{#284}{#285}{#286}{#287}{#288}{#289}{#290}{#291}{#292}{#293}{#294}{#295}{#296}{#297}{#298}{#299}{#300}{#301}{#302}{#303}{#304}{#305}{#306}{#307}{#308}{#309}{#310}{#311}{#312}{#313}{#314}{#315}{#316}{#317}{#318}{#319}{#320}{#321}{#322}{#323}{#324}{#325}{#326}{#327}{#328}{#329}{#330}{#331}{#332}{#333}{#334}{#335}{#336}{#337}{#338}{#339}{#340}{#341}{#342}{#343}{#344}{#345}{#346}{#347}{#348}{#349}{#350}{#351}{#352}{#353}{#354}{#355}{#356}{#357}{#358}{#359}{#360}{#361}{#362}{#363}{#364}{#365}{#366}{#367}{#368}{#369}{#370}{#371}{#372}{#373}{#374}{#375}{#376}{#377}{#378}{#379}{#380}{#381}{#382}{#383}{#384}{#385}{#386}{#387}{#388}{#389}{#390}{#391}{#392}{#393}{#394}{#395}{#396}{#397}{#398}{#399}{#400}{#401}{#402}{#403}{#404}{#405}{#406}{#407}{#408}{#409}{#410}{#411}{#412}{#413}{#414}{#415}{#416}{#417}{#418}{#419}{#420}{#421}{#422}{#423}{#424}{#425}{#426}{#427}{#428}{#429}{#430}{#431}{#432}{#433}{#434}{#435}{#436}{#437}{#438}{#439}{#440}{#441}{#442}{#443}{#444}{#445}{#446}{#447}{#448}{#449}{#450}{#451}{#452}{#453}{#454}{#455}{#456}{#457}{#458}{#459}{#460}{#461}{#462}{#463}{#464}{#465}{#466}{#467}{#468}{#469}{#470}{#471}{#472}{#473}{#474}{#475}{#476}{#477}{#478}{#479}{#480}{#481}{#482}{#483}{#484}{#485}{#486}{#487}{#488}{#489}{#490}{#491}{#492}{#493}{#494}{#495}{#496}{#497}{#498}{#499}{#500}{#501}{#502}{#503}{#504}{#505}{#506}{#507}{#508}{#509}{#510}{#511}{#512}{#513}{#514}{#515}{#516}{#517}{#518}{#519}{#520}{#521}{#522}{#523}{#524}{#525}{#526}{#527}{#528}{#529}{#530}{#531}{#532}{#533}{#534}{#535}{#536}{#537}{#538}{#539}{#540}{#541}{#542}{#543}{#544}{#545}{#546}{#547}{#548}{#549}{#550}{#551}{#552}{#553}{#554}{#555}{#556}{#557}{#558}{#559}{#560}{#561}{#562}{#563}{#564}{#565}{#566}{#567}{#568}{#569}{#5610}{#5611}{#5612}{#5613}{#5614}{#5615}{#5616}{#5617}{#5618}{#5619}{#5620}{#5621}{#5622}{#5623}{#5624}{#5625}{#5626}{#5627}{#5628}{#5629}{#5630}{#5631}{#5632}{#5633}{#5634}{#5635}{#5636}

```

```

5637 }{
5638   \int_compare:nNnTF {#3} = 1 {
5639     \tl_set:Nn \l__stex_expr_iarg_tl { {##1} }
5640   }{
5641     \tl_set:Nn \l__stex_expr_iarg_tl { ##1 }
5642   }
5643   \seq_put_right:Nx \l_stex_aB_args_seq {
5644     \group_begin:
5645     \exp_not:n {
5646       \tl_set_eq:NN \stex_term_do_aB_clist: \stex_expr_do_aB_clist:
5647       \def\comp{\_varcomp}
5648       \str_set:Nn \l_stex_current_symbol_str{#1}
5649     }
5650     \exp_after:wN \exp_after:wN \exp_after:wN \exp_not:n
5651     \exp_after:wN \exp_after:wN \exp_after:wN {
5652       \exp_after:wN \l__stex_expr_cs \exp_after:wN \group_end: \l__stex_expr_iarg_tl
5653     }
5654   }
5655 }
5656 }
5657 }

5658 \seqmap:
5659 % 1: fun 2: clist 3: argnum 4: argmode 5: precedence 6: argname
5660 \cs_new_protected:Nn \stex_expr_do_seqmap:nnnnnn {
5661   \group_begin:
5662     \cs_set:Npn \l_tmpa_cs ##1 {#1}
5663     \seq_clear:N \l_stex_aB_args_seq
5664     \clist_map_inline:nn{#2} {
5665       \stex_expr_is_varseq:nTF{##1} {
5666         \exp_after:wN
5667         \stex_expr_varseq_in_map:nnnnnnnn ##1
5668       }
5669     }
5670   }
5671   \seq_clear:N \l__stex_expr_old_seq
5672   \seq_map_inline:Nn \l_stex_aB_args_seq {
5673     \tl_if_eq:nnTF{##1}{\ellipses} {
5674       \seq_put_right:Nn \l__stex_expr_old_seq {##1}
5675     }
5676     % TODO \stex_is_sequentialized:n
5677   {
5678     \exp_args:NNo \seq_put_right:Nn \l__stex_expr_old_seq {
5679       \l_tmpa_cs {##1}
5680     }
5681   }
5682 }
5683 \seq_set_eq:NN \l_stex_aB_args_seq \l__stex_expr_old_seq
5684 \exp_args:NNe \use:nn \group_end: {
5685   \seq_put_right:Nn \exp_not:N \l_stex_aB_args_seq {
5686     \stex_is_sequentialized:n{
5687       \stex_term_arg:nnnnn{#4}\int_use:N\l__stex_expr_count_int}{#4}{#5}{#6} {
5688         \bool_set_true:N \l_stex_allow_semantic_bool

```

```

5689     \str_set:Nn \exp_not:N \l_stex_current_symbol_str
5690         {\l_stex_current_symbol_str}
5691     \tl_set:Nn \exp_not:N \l_stex_current_term_tl {
5692         \symuse{Metatheory?sequence~map}
5693         {\exp_args:No \exp_not:n \l_tmpa_tl}
5694         {\_stex_term_do_aB_clist:}
5695     }
5696     \__stex_expr_do_headterm:nnn{}{
5697         \_stex_term_do_aB_clist:
5698     }
5699 }
5700 }
5701 }
5702 }
5703 }

5704 \cs_new_protected:Nn \__stex_expr_varseq_in_map:nnnnnnnn {
5705     \__stex_expr_assoc_make_seq:nnn{#2}{#6}{#3}
5706 }
5707 }
```

(End definition for `_stex_term_arg_aB:nnnnn`. This function is documented on page ??.)

Term HTML Annotations

```

\stex_term_oms_or_omv:nnn
\stex_term_oms:nnn
\stex_term_omv:nnn
5708 \cs_new_protected:Nn \stex_eat_exclamation_point: {
5709     \peek_charcode_remove:NT ! {
5710         \stex_eat_exclamation_point:
5711     }
5712 }
5713
5714 \bool_new:N \stex_in_invisible_html_bool
5715 \bool_set_false:N \stex_in_invisible_html_bool
5716 \stex_if_html_backend:TF {
5717     % 1: variant 2: intent 3: code
5718     \cs_new_protected:Nn \stex_term_oms:nnn {
5719         \tl_if_empty:NTF \l_stex_current_term_tl {
5720             \stex_annotation:nn{
5721                 shtml:term=OMID,
5722                 shtml:head={\l_stex_current_symbol_str},
5723                 shtml:notationid={#1},
5724             }{
5725                 \stex_annotation_force_break:n{#3}
5726             }
5727         }{
5728             \__stex_expr_do_headterm:nnn{#1}{#3}
5729         }
5730     }
5731     \cs_new_protected:Nn \stex_term_omv:nnn {
5732         \tl_if_empty:NTF \l_stex_current_term_tl {
5733             \stex_annotation:nn{
5734                 shtml:term=OMV,
5735                 shtml:head={\l_stex_current_symbol_str},
5736                 shtml:notationid={#1}
```

```

5737     }{
5738         \_stex_annotation_force_break:n{#3}
5739     }
5740     }{
5741         \_\_stex\_expr\_do\_headterm:nn{#1}{#3}
5742     }
5743 }
5744 \cs_new_protected:Nn \_\_stex\_expr\_do\_headterm:nn {
5745     \bool_if:NTF \stex_in_invisible_html_bool {
5746         \bool_set_true:N \l_stex_allow_semantic_bool
5747         \ensuremath{\l_stex_current_term_tl}
5748     }
5749     }{
5750         \stex_annotation:nn{
5751             shtml:term=complex,
5752             shtml:head={\l_stex_current_symbol_str},
5753             shtml:notationid={#1}
5754         }{
5755             \_stex_annotation_force_break:n{
5756                 \stex_annotation_invisible:nn{shtml:headterm={}){
5757                     \bool_set_true:N \l_stex_allow_semantic_bool
5758                     \ensuremath{\l_stex_current_term_tl}
5759                 }
5760             }
5761         }
5762         #2
5763     }
5764 }
5765 }
5766 }{
5767     \cs_new_protected:Nn \_stex_term_oms:nnn {#3}
5768     \cs_new_protected:Nn \_stex_term_omv:nnn {#3}
5769     \cs_new_protected:Nn \_\_stex_expr_do_headterm:nn { #2 }
5770 }
5771 \cs_set_eq:NN \_stex_term_oms_or_omv:nnn \_stex_term_oms:nnn

```

(End definition for `_stex_term_oms_or_omv:nnn`, `_stex_term_oms:nnn`, and `_stex_term_omv:nnn`.
These functions are documented on page ??.)

```

\_stex_term_oma:nnn
5772 \stex_if_html_backend:TF {
5773     \cs_new_protected:Nn \_stex_term_oma:nnn {
5774         \tl_if_empty:NTF \l_stex_current_term_tl {
5775             \stex_annotation:nn{
5776                 shtml:term=OMA,
5777                 shtml:head={\l_stex_current_symbol_str},
5778                 shtml:notationid={#1}
5779             }{
5780                 \_stex_annotation_force_break:n{#3}
5781             }
5782         }{
5783             \stex_annotation:nn{
5784                 shtml:term=OMA,
5785                 shtml:head={\l_stex_current_symbol_str},

```

```

5786         shtml:notationid={#1}
5787     }{
5788         \_stex_annotation_force_break:n{
5789             \stex_annotation_invisible:nn{shtml:headterm={}{{{
5790                 \bool_set_true:N \l_stex_allow_semantic_bool
5791                 \l_stex_current_term_tl
5792             }}}
5793             #3
5794         }
5795     }
5796 }
5797 }
5798 }{
5799     \cs_new_protected:Nn \_stex_term_oma:nnn {#3}
5800 }

```

(End definition for `_stex_term_oma:nnn`. This function is documented on page ??.)

```

\_stex_term_omb:nnn
5801 \stex_if_html_backend:TF {
5802     \cs_new_protected:Nn \_stex_term_omb:nnn {
5803         \tl_if_empty:NTF \l_stex_current_term_tl {
5804             \stex_annotation:nn{
5805                 shtml:term=OMBIND,
5806                 shtml:head={\l_stex_current_symbol_str},
5807                 shtml:notationid={#1}
5808             }{
5809                 \_stex_annotation_force_break:n{#3}
5810             }
5811         }{
5812             \stex_annotation:nn{
5813                 shtml:term=OMBIND,
5814                 shtml:head={\l_stex_current_symbol_str},
5815                 shtml:notationid={#1}
5816             }{
5817                 \_stex_annotation_force_break:n{
5818                     \stex_annotation_invisible:nn{shtml:headterm={}{{{
5819                         \bool_set_true:N \l_stex_allow_semantic_bool
5820                         \l_stex_current_term_tl
5821                     }}}
5822                     #3
5823                 }
5824             }
5825         }
5826     }{
5827         \cs_new_protected:Nn \_stex_term_omb:nnn { #3 }
5828     }
5829 }

```

(End definition for `_stex_term_omb:nnn`. This function is documented on page ??.)

Automated Bracketing

`\infprec`
`\neginfprec`

```

5830 \tl_const:Nx \infprec {\int_use:N \c_max_int}
5831 \tl_const:Nx \neginfprec {-\int_use:N \c_max_int}

```

(End definition for `\infprec` and `\neginfprec`. These functions are documented on page 86.)

`\dobrackets`

```

5832 \int_new:N \l_stex_notation_downprec
5833 \int_set:Nn \l_stex_notation_downprec \infprec
5834 \tl_set:Nn \l__stex_expr_left_bracket_str (
5835 \tl_set:Nn \l__stex_expr_right_bracket_str )
5836 \bool_new:N \l_stex_brackets_dones_bool
5837
5838 \cs_new_protected:Nn \stex_maybe_brackets:nn {
5839     \bool_if:NTF \l_stex_brackets_dones_bool {
5840         \bool_set_false:N \l_stex_brackets_dones_bool
5841         #2
5842     } {
5843         \stex_debug:nn{brackets}{#1}\int_eval:n \l_stex_notation_downprec?
5844         \int_compare:nNnTF { #1 } > \l_stex_notation_downprec {
5845             \%bool_if:NTF \l_stex_inpararray_bool { #2 }{
5846                 \dobrackets {
5847                     #2
5848                 }
5849             %}
5850         }{
5851             #2
5852         }
5853     }
5854 }
5855
5856 \%RequirePackage{scalerel}
5857 \cs_new_protected:Npn \dobrackets #1 {
5858     \%ThisStyle{\if D\m@switch
5859     % \exp_args:Nnx \use:nn
5860     % { \exp_after:wN \left\l_{} \stex_expr_left_bracket_str #1 }
5861     % { \exp_not:N\right\l_{} \stex_expr_right_bracket_str }
5862     % \else
5863     \group_begin:
5864     \%stex_pseudogroup_with:nn{\l_stex_brackets_dones_bool\l_stex_notation_downprec} {
5865         \bool_set_true:N \l_stex_brackets_dones_bool
5866         \%int_set:Nn \l_stex_notation_downprec \infprec
5867         \mathopen{\cs_if_exist:NT\l_stex_current_symbol_str\comp
5868             \l__stex_expr_left_bracket_str
5869         }
5870         #1
5871     \group_end:{}}
5872     \mathclose{\cs_if_exist:NT\l_stex_current_symbol_str\comp
5873             \l__stex_expr_right_bracket_str
5874     }
5875 \%fi}
5876 }

```

(End definition for `\dobrackets`. This function is documented on page ??.)

\withbrackets

```
5877 \cs_new_protected:Npn \withbrackets #1 #2 #3 {
5878   \stex_pseudogroup_with:nn{\l__stex_expr_left_bracket_str\l__stex_expr_right_bracket_str}{}
5879   \tl_set:Nn \l__stex_expr_left_bracket_str { #1 }
5880   \tl_set:Nn \l__stex_expr_right_bracket_str { #2 }
5881   #3
5882 }
5883 }
```

(End definition for \withbrackets. This function is documented on page 87.)

\dowithbrackets

```
5884 \cs_new_protected:Npn \dowithbrackets #1 #2 #3 {
5885   \withbrackets{#1}{#2}{\dobrackets{#3}}
5886 }
```

(End definition for \dowithbrackets. This function is documented on page ??.)

Symname and Variants

```
\symname
\sn      5887 \def\maincomp{\comp}
\sns
\Symname 5888 \stex_keys_define:nnnn{symname}{
\Sn      5889   \tl_clear:N \l_stex_key_pre_tl
\Sns     5890   \tl_clear:N \l_stex_key_post_tl
\symref   5891   \%tl_clear:N \l_stex_key_proot_tl
\sr      5892 }{
\varref   5893   \sr
\varname  5894   pre    .tl_set:N = \l_stex_key_pre_tl ,
\Varname  5895   post   .tl_set:N = \l_stex_key_post_tl ,
5896   root    .code:n  = {}%.tl_set:N = \l_stex_key_root_tl
5897 }{}}

5898 \NewDocumentCommand \symref { O{} m m } {
5899   \group_begin:
5900   \stex_keys_set:nn{symname}{#1}
5901   \stex_get_symbol:n{#2}
5902   \__stex_expr_do_ref:nNn{#3}\symrefemph@uri\_stex_term_oms:nnn
5903 }
5904 \let\sr\symref
5905
5906 \NewDocumentCommand \symname { O{} m } {
5907   \group_begin:
5908   \stex_keys_set:nn{symname}{#1}
5909   \stex_get_symbol:n{#2}
5910   \__stex_expr_do_ref:nNn{
5911     \l_stex_key_pre_tl\l_stex_get_symbol_name_str\l_stex_key_post_tl
5912   }\symrefemph@uri\_stex_term_oms:nnn
5913 }
5914 \let\sn\symname
5915 \protected\def\sns{\symname[post=s]}
5916
5917 \NewDocumentCommand \Symname { O{} m } {
5918   \group_begin:
```

```

5920 \stex_keys_set:nn{symname}{#1}
5921 \stex_get_symbol:n{#2}
5922 \__stex_expr_do_ref:nNn{
5923   \l_stex_key_pre_tl\exp_after:wN\_stex_capitalize:n\l_stex_get_symbol_name_str\l_stex_key
5924 } \symrefemph@uri\_stex_term_oms:nnn
5925 }
5926 \cs_new_protected:Nn \_stex_capitalize:n {
5927   \uppercase{#1}
5928 }
5929 \let\Sn\Symname
5930 \protected\def\Sns{\Symname[post=s]}
5931
5932 \cs_new:Npn \_stex_split_slash: #1/#2/#3\_stex_args_end: {
5933   \tl_if_empty:nTF{#3} {
5934     #2
5935   }{
5936     \_stex_split_slash: #2 / #3 \_stex_args_end:
5937   }
5938 }
5939
5940 \NewDocumentCommand \varref { O{} m m} {
5941   \group_begin:
5942   \stex_keys_set:nn{symname}{#1}
5943   \stex_get_var:n{#2}
5944   \__stex_expr_do_ref:nNn{#3}\varempath@uri{
5945     \str_set_eq:NN \l_stex_current_symbol_str\l_stex_get_symbol_name_str
5946     \def\comp{\_varcomp}
5947     \_stex_term_omv:nnn
5948   }
5949 }
5950
5951 \NewDocumentCommand \varname { O{} m} {
5952   \group_begin:
5953   \stex_keys_set:nn{symname}{#1}
5954   \stex_get_var:n{#2}
5955   \__stex_expr_do_ref:nNn{
5956     \l_stex_key_pre_tl\l_stex_get_symbol_name_str\l_stex_key_post_tl
5957   }\varempath@uri{
5958     \str_set_eq:NN \l_stex_current_symbol_str\l_stex_get_symbol_name_str
5959     \def\comp{\_varcomp}
5960     \_stex_term_omv:nnn
5961   }
5962 }
5963
5964 \NewDocumentCommand \Varname { O{} m} {
5965   \group_begin:
5966   \stex_keys_set:nn{symname}{#1}
5967   \stex_get_var:n{#2}
5968   \__stex_expr_do_ref:nNn{
5969     \l_stex_key_pre_tl\exp_after:wN\_stex_capitalize:n\l_stex_get_symbol_name_str\l_stex_key
5970   }\varempath@uri{
5971     \str_set_eq:NN \l_stex_current_symbol_str\l_stex_get_symbol_name_str
5972     \def\comp{\_varcomp}
5973     \_stex_term_omv:nnn

```

```
5974 }
5975 }
5976
5977
5978 \cs_new_protected:Nn \__stex_expr_do_ref:nNn {
5979   \stex_if_html_backend:T{\ifvmode\indent\fi}
5980   \bool_if:NTF \l_stex_allow_semantic_bool{
5981     \str_set:Nx\l_stex_current_symbol_str
5982       {\l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str}
5983     \str_if_in:NnT \l_stex_get_symbol_name_str / {
5984       \str_set:Nx \l_stex_get_symbol_name_str {
5985         \exp_after:wn \stex_split_slash: \l_stex_get_symbol_name_str
5986         /\_stex_args_end:
5987       }
5988     }
5989     \tl_clear:N \l_stex_current_term_tl
5990     \def\comp{\_comp}
5991     \let\compemph@uri#2
5992     #3{}{}{\comp{#1}}
5993   }{
5994     \msg_error:nnnx{stex}{error/notallowed}{#1}{\l_stex_current_symbol_str}
5995   }
5996   \group_end:
5997 }
```

(End definition for `\symname` and others. These functions are documented on page 84.)

Highlighting

```

5998  <@=stex_notationcomps>

      \comp
\compemph@uri
      \compemph
      \defemph
\defemph@uri
      \symrefemph
\symrefemph@uri
      \varempth
\varempth@uri

5999  \cs_new_protected:Nn \_do_comp:nNn {
6000    \stex_pseudogroup_with:nnf{\comp}{%
6001      \def\comp##1{##1}%
6002      \str_if_empty:NTF \l_stex_current_symbol_str {%
6003        #3%
6004      }{%
6005        \stex_if_html_backend:TF {%
6006          \stex_annotation:nn { shtml:#1 = \l_stex_current_symbol_str}{ #3 }%
6007        }{%
6008          \exp_args:Nno #2 { #3 } \l_stex_current_symbol_str%
6009        }%
6010      }%
6011    }%
6012  }%
6013
6014  \cs_new_protected:Npn \_comp {
6015    \_do_comp:nNn {comp}\compemph@uri
6016  }%
6017
6018  \cs_new_protected:Npn \_varcomp {
6019    \_do_comp:nNn {varcomp}\varempth@uri
6020  }%
6021

```

```

6022 \cs_new_protected:Npn \_defcomp {
6023     \do_comp:nNn {definiendum}\defemph@uri
6024 }
6025
6026 \cs_set_protected:Npn \comp {}
6027
6028 \cs_new_protected:Npn \compemph@uri #1 #2 {
6029     \compemph{#1}
6030 }
6031
6032 \cs_new_protected:Npn \compemph #1 {
6033     #1
6034 }
6035
6036 \cs_new_protected:Npn \defemph@uri #1 #2 {
6037     \defemph{#1}
6038 }
6039
6040 \cs_new_protected:Npn \defemph #1 {
6041     \ifmmode\else\expandafter\textbf\fi{#1}
6042 }
6043
6044 \cs_new_protected:Npn \symrefemph@uri #1 #2 {
6045     \symrefemph{#1}
6046 }
6047
6048 \cs_new_protected:Npn \symrefemph #1 {
6049     \emph{#1}
6050 }
6051
6052 \cs_new_protected:Npn \varemph@uri #1 #2 {
6053     \varemph{#1}
6054 }
6055
6056 \cs_new_protected:Npn \varemph #1 {
6057     #1
6058 }

```

(End definition for `\comp` and others. These functions are documented on page 85.)

13.9 Mathematical Structures

```

6059 <@@=stex_structures>
\this
6060 \cs_new_protected:Npn \stex_current_this: {
6061     \bool_set_true:N \l_stex_allow_semantic_bool
6062     \tl_if_empty:NTF \l_stex_current_this_tl {{}}{
6063         \str_set:Nx \l_stex_current_symbol_str {
6064             \l_stex_current_module_str ? \l__stex_structures_name_str
6065         }
6066         \maincomp{\l_stex_current_this_tl}
6067     }
6068 }

```

```

6069 }
6070 \let \this \stex_current_this:
(End definition for \this. This function is documented on page 91.)
mathstructure (env.)
6071 \stex_new_stylable_env:nnnnnnn {mathstructure}{m 0{}}
6072   \__stex_structures_begin:nn{#1}{#2}
6073   \stex_smsmode_do:
6074 }{
6075   \stex_structural_feature_module_end:
6076   \__stex_structures_do_externals:
6077 }{}{}{}
6078
6079 \stex_keys_define:nnnn{mathstructure}{
6080   \tl_clear:N \l_stex_current_this_tl
6081   \str_clear:N \l__stex_structures_name_str
6082 }{
6083   this .tl_set:N = \l_stex_current_this_tl ,
6084   unknown .code:n = {
6085     \str_if_empty:NTF \l_keys_key_str {
6086       \str_set:Nx \l__stex_structures_name_str {\l_keys_key_tl}
6087     }{
6088       \str_set_eq:NN \l__stex_structures_name_str \l_keys_key_str
6089     }
6090   }
6091 }{}{
6092 \cs_new_protected:Nn \__stex_structures_begin:nn {
6093   \stex_keys_set:nn {mathstructure}{#2}
6094   \str_if_empty:NT \l__stex_structures_name_str {
6095     \str_set:Nn \l__stex_structures_name_str {#1}
6096   }
6097   \def\comp{\_comp}
6098
6099 \exp_args:Nne \use:nn { \stex_module_add_symbol:nnnnnnnN }
6100   { #1{\l__stex_structures_name_str}{0}{}{defed}{{
6101     \l_stex_current_module_str / \l__stex_structures_name_str-module
6102   }}}
6103   {} \stex_invoke_structure:
6104   \str_set:Nx \l_stex_macroname_str {#1}
6105   \stex_execute_in_module:xf{
6106     \seq_clear:c{\l_stex_structure_macros_\l_stex_current_module_str / \l__stex_structures_name_str}
6107     \seq_put_right:cn{\l_stex_structure_macros_\l_stex_current_module_str / \l__stex_structures_name_str}{#1}
6108   }
6109 }{
6110 \exp_args:No \stex_structural_feature_module:nn
6111   {\l__stex_structures_name_str}{structure}
6112 }
6113
6114 \stex_sms_allow_env:n{mathstructure}
6115 \stex_deactivate_macro:Nn \mathstructure {module-environments}
6116 \stex_every_module:n {\stex_reactivate_macro:N \mathstructure}
6117
6118 \cs_new_protected:Nn \__stex_structures_do_externals: {

```

```

6119 \tl_set:Nn \l__stex_structures_replace_this_tl {####1}
6120 \exp_args:No \stex_iterate_symbols:n{g_stex_last_feature_str}{
6121   \__stex_structures_external_decl:nnnn{##5}{##4}{##3}{##8}
6122 }
6123 }
6124
6125 \cs_new_protected:Nn \__stex_structures_external_decl:nnnn {
6126   \%stex_debug:nn{structure}{%
6127     % Generating~external~declaration~\l__stex_structures_name_str/#3-in-
6128     % \l_stex_current_module_str^~J
6129     % \tl_to_str:n{#1}^~J\tl_to_str:n{#2}^~J\tl_to_str:n{#4}
6130     %}
6131   \%tl_set:Nn \l_stex_get_symbol_args_tl {#1}
6132   \%exp_args:Nnx \use:nn {\stex_module_add_symbol:nnnnnnN} {
6133     {}{\l__stex_structures_name_str/#3}{\int_eval:n{#2 + 1}}
6134     {ii\tl_if_empty:nF{#1}\stex_map_args:N \__stex_structures_shift_argls:nn}
6135     {defed}{typed}
6136     }{#4}\stex_invoke_outer_field:
6137 }
6138
6139 \cs_new:Nn \__stex_structures_shift_argls:nn {
6140   \int_eval:n{#1+1}#2
6141 }

```

\stex_get_mathstructure:n

```

6142 \cs_new_protected:Nn \stex_get_mathstructure:n {
6143   \_stex_get_mathstructure:n{#1}
6144   \str_if_empty:NT \l_stex_get_structure_module_str {
6145     \msg_error:nnn{stex}{error/unknownstructure}{#1}
6146   }
6147 }
6148 \cs_new_protected:Nn \_stex_get_mathstructure:n {
6149   \str_clear:N \l_stex_get_structure_module_str
6150   \_stex_get_symbol:n{#1}
6151   \str_if_empty:NF \l_stex_get_symbol_name_str {
6152     \exp_args:No \tl_if_eq:NNT \l_stex_get_symbol_invoke_cs \stex_invoke_structure: {
6153       \str_set_eq:NN \l_stex_get_structure_module_str \l_stex_get_symbol_type_tl
6154     }
6155   }
6156 }

```

(End definition for \stex_get_mathstructure:n. This function is documented on page ??.)

extstructure (env.)

```

6157 \stex_new_stylable_env:nnnnnnn {extstructure}{m 0{} m}{%
6158   \seq_clear:N \l__stex_structures_imports_seq
6159   \clist_map_inline:nn{#3}{%
6160     \stex_get_mathstructure:n{##1}
6161     \clist_map_inline:Nn \l_stex_get_symbol_type_tl {
6162       \exp_args:Ne \stex_if_module_exists:nT{\tl_to_str:n{####1}}{%
6163         \seq_put_right:Nn \l__stex_structures_imports_seq{####1}
6164       }
6165     }
6166   \stex_execute_in_module:x{%

```

```

6167     \seq_put_right:cn{l_stex_structure_macros_\l_stex_get_structure_module_str _seq}{#1}
6168 }
6169 }
6170 \__stex_structures_begin:nn{#1}{#2}
6171 \seq_map_inline:Nn\l__stex_structures_imports_seq{
6172     \stex_if_do_html:T {
6173         \hbox{\stex_annotation_invisible:nn
6174             {shtml:import={##1}} {}}
6175     }
6176     \stex_module_add_morphism:nonn
6177         {}{##1}{import} {}
6178     \stex_execute_in_module:x{
6179         \stex_activate_module:n{##1}
6180     }
6181 }
6182 \stex_smsmode_do:
6183 }{
6184     \stex_structural_feature_module_end:
6185     \__stex_structures_do_externals:
6186 }{}{}{}
6187
6188 \stex_sms_allow_env:n{extstructure}
6189 \stex_deactivate_macro:Nn \extstructure {module~environments}
6190 \stex_every_module:n {
6191     \stex_reactivate_macro:N \extstructure
6192 }
6193
6194 \cs_new:Nn \__stex_structures_extend_structure_i:NnnnnnnnN {
6195     \exp_not:n{#1{#2}{#3}{#4}{#5}{defed}}{f\l__stex_structures_extmod_str,#7}\exp_not:n{#8}{#9}
6196 }
6197 \cs_new_protected:Nn \__stex_structures_extend_structure:nn {
6198     \stex_debug:nn{ext}{Extending~#1~by~#2}
6199     \str_set:Nn \l__stex_structures_extmod_str{#2}
6200     \tl_set:cx{#1} {
6201         \exp_after:wN \exp_after:wN \exp_after:wN
6202         \__stex_structures_extend_structure_i:NnnnnnnnN \cs:w #1 \cs_end:
6203     }
6204 }
6205
6206 \stex_new_stylable_env:nnnnnnn {extstructure*}{m} {
6207     \__stex_structures_new_extstruct_name:
6208     \seq_clear:N \l__stex_structures_imports_seq
6209     \stex_get_mathstructure:n{#1}
6210
6211     \clist_map_inline:Nn \l_stex_get_symbol_type_tl {
6212         \exp_args:Ne \stex_if_module_exists:nT{\tl_to_str:n{##1}}{
6213             \seq_put_right:Nn \l__stex_structures_imports_seq{##1}
6214         }
6215     }
6216
6217     \stex_execute_in_module:x{
6218         \seq_map_inline:cn{l_stex_structure_macros_\l_stex_get_structure_module_str _seq}{%
6219             \exp_not:N \tl_if_exist:cT{####1}{%
6220                 \__stex_structures_extend_structure:nn{####1}{\l_stex_current_module_str/\l__stex_st

```

```

6221     }
6222   }
6223 }
6224
6225 \exp_args:No \__stex_structures_begin:nn\l__stex_structures_exstruct_name_str{}
6226
6227 \seq_map_inline:Nn \l__stex_structures_imports_seq {
6228   \stex_if_do_html:T {
6229     \stex_annotation_invisible:nn
6230     {shtml:import= {\##1}} {}
6231   }
6232   \stex_module_add_morphism:nonn
6233   {}{\##1}{import}{}
6234   \stex_execute_in_module:x{
6235     \stex_activate_module:n{\##1}
6236   }
6237 }

6238
6239 \stex_smsmode_do:
6240 }{
6241   \prop_map_inline:cn{
6242     c_stex_module_ \l_stex_current_module_str _symbols_prop
6243   }{
6244     \__stex_structures_check_def:nnnnnnnn ##2
6245   }
6246   \stex_structural_feature_module_end:
6247   \__stex_structures_do_externals:
6248 }{}{}{}}}

6249
6250 \stex_sms_allow_env:n{extstructure*}
6251 \exp_after:wN \stex_deactivate_macro:Nn
6252   \cs:w extstructure*\cs_end: {module~environments}
6253 \stex_every_module:n {
6254   \exp_after:wN \stex_reactivate_macro:N \cs:w extstructure*\cs_end:
6255 }
6256
6257 \cs_new_protected:Nn \__stex_structures_check_def:nnnnnnnn {
6258   \tl_if_empty:nT{\#5} {
6259     \msg_error:nnnn{stex}{error/needsdefiniens}{\#2}{extstructure*}
6260   }
6261 }

6262 \stex_every_module:n{ \str_set:Nn \l__stex_structures_extname_count 0}
6263
6264 \cs_new_protected:Nn \__stex_structures_new_extstruct_name: {
6265   \stex_do_up_to_module:n {
6266     \str_set:Nx \l__stex_structures_extname_count {\int_eval:n{\l__stex_structures_extname_c
6267   }
6268   \str_set:Nx \l__stex_structures_exstruct_name_str {EXTSTRUCT_\l__stex_structures_extname_c
6269 }
6270 }

6271

```

Invoking structures:

```
6272 \cs_new_protected:Nn \stex_invoke_structure: {
```

```

6273 \tl_set:Nn \l__stex_structures_set_comp_tl {\__stex_structures_set_thiscomp:}
6274 \__stex_structures_invoke_top:n {}
6275 }
6276
6277 \cs_new_protected:Nn \__stex_structures_invoke_top:n {
6278     \stex_debug:nn{structure} {
6279         invoking~structure~{\l_stex_current_type_tl}<\tl_to_str:n{\#1}>
6280     }
6281     \peekCharCode:NTF [ {
6282         \__stex_structures_merge:nw{\#1}
6283     }{
6284         \__stex_structures_invocation_type:n {\#1}
6285         \tl_set:Nn \l__stex_structures_this_tl {}
6286         \peekCharCode_remove:NTF ! {
6287             \peekCharCode:NTF [ {
6288                 \__stex_structures_maybe_notation:w
6289             }{
6290                 \__stex_structures_maybe_notation:w []
6291             }
6292         }{
6293             \__stex_structures_invoke_this:n
6294         }
6295     }
6296 }
6297
6298 \cs_new_protected:Npn \__stex_structures_merge:nw #1 [ #2 ] {
6299     \exp_args:Ne \stex_if_starts_with:nnTF {\tl_to_str:n{\#2}}{comp} {
6300         \__stex_structures_set_customcomp: #2 \__stex_structures_end:
6301         \__stex_structures_invoke_top:n{\#1}
6302     }{
6303         \exp_args:Ne \stex_if_starts_with:nnTF {\tl_to_str:n{\#2}}{this} {
6304             \__stex_structures_set_thisnotation: #2 \__stex_structures_end:
6305             \__stex_structures_invoke_top:n{\#1}
6306         }{
6307             \tl_if_empty:nTF{\#1} {
6308                 \__stex_structures_invoke_top:n{\#2}
6309             }{
6310                 \tl_if_empty:nTF{\#2} {
6311                     \__stex_structures_invoke_top:n{\#1}
6312                 }{
6313                     \__stex_structures_invoke_top:n{\#1,\#2}
6314                 }
6315             }
6316         }
6317     }
6318 }
6319
6320 \cs_new_protected:Npn \__stex_structures_set_thisnotation: this= #1 \__stex_structures_end:
6321     \tl_set:Nn \l_stex_return_notation_tl { \comp{\#1} }
6322     \tl_set:Nn \l_stex_structures_set_comp_tl {}
6323 }
6324
6325 \cs_new_protected:Npn \__stex_structures_set_customcomp: comp= #1 \__stex_structures_end: {
6326     \tl_set:Nn \l_stex_structures_set_comp_tl {

```

```

6327     \__stex_structures_set_custom_comp:n{#1}
6328   }
6329   \tl_set:Nn \l_stex_return_notation_tl { \comp{} }
6330 }

The structure type:

6331 \cs_new_protected:Nn \__stex_structures_invokation_type:n {
6332   \__stex_structures_do_assign_list:n{#1}
6333   \clist_if_empty:NTF \l_stex_structures_fields_clist {
6334     \int_compare:nNnTF {\clist_count:N \l_stex_current_type_tl}
6335       = 1 {
6336         \tl_set:Nx \l_stex_structures_current_type_tl {
6337           \exp_args:No \exp_not:n \l_stex_current_redo_tl
6338           \stex_term_oms_or_omv:nnn{}{}{}
6339         }
6340       }{
6341         \exp_args:No \__stex_structures_make_type:n \l_stex_current_type_tl
6342       }
6343   }{
6344     \int_compare:nNnTF {\clist_count:N \l_stex_current_type_tl}
6345       = 1 {
6346         \__stex_structures_make_type:n {}
6347       }{
6348         \exp_args:No \__stex_structures_make_type:n \l_stex_current_type_tl
6349       }
6350   }
6351 }
6352
6353 \cs_new_protected:Nn \__stex_structures_do_assign_list:n {
6354   \clist_clear:N \l_stex_structures_fields_clist
6355   \tl_if_empty:nF {#1} {
6356     \keyval_parse:NNn\TODO\__stex_structures_do_assign:nn{#1}
6357   }
6358 }
6359
6360 \cs_new_protected:Nn \__stex_structures_do_assign:nn {
6361   \clist_put_right:Nn \l_stex_structures_fields_clist {{#1}{#2}}
6362 }
6363
6364 \cs_new_protected:Nn \__stex_structures_make_type:n {
6365   \tl_if_empty:nTF{#1} {
6366     \seq_clear:N \l_tmpa_seq
6367   }{
6368     \seq_set_split:Nnn \l_tmpa_seq ,{#1}
6369     \seq_pop_right:NN \l_tmpa_seq \l_tmpa_tl
6370     \seq_reverse:N \l_tmpa_seq
6371   }
6372   \tl_set:Nx \l_stex_structures_current_type_tl {
6373     \symuse{Metatheory?module~type~merge} {
6374       {
6375         \exp_args:No \exp_not:n \l_stex_current_redo_tl
6376         \stex_term_oms_or_omv:nnn{}{}{}
6377       }
6378       \seq_map_function:NN \l_tmpa_seq \__stex_structures_make_mod:n
6379       \clist_if_empty:NTF \l_stex_structures_fields_clist {

```

```

6380     ,\symuse{Metatheory?anonymous~record}{}
6381     \exp_args:Ne \tl_tail:n{
6382         \clist_map_function:NN \l_stex_structures_fields_clist \__stex_structures_make_
6383         }
6384     }
6385   }
6386 }
6387 }
6388 }
6389
6390 \cs_new:Nn \__stex_structures_make_mod:n {
6391   ,\symuse{Metatheory?module-type}{}
6392   \stex_annotation:nn{shtml:term=OMMOD,shtml:head={#1}{}}
6393 }
6394
6395
6396 \cs_new:Nn \__stex_structures_make_oml:n {
6397   \__stex_structures_make_oml:nn #1
6398 }
6399 \cs_new:Nn \__stex_structures_make_oml:nn {
6400   ,\stex_annotation:nn{
6401     shtml:term=OML,
6402     shtml:head={#1}
6403   }{
6404     \__stex_annotation_force_break:n{
6405       \stex_annotation:nn{shtml:definiens={}}{\exp_not:n{#2!}}
6406     }
6407   }
6408 }

```

Insert the structure type as a term:

```

6409 \cs_new:Nn \__stex_structures_current_type: {
6410   \%exp_args:No \exp_not:n \l_stex_current_redo_tl
6411   \tl_set:Nn \exp_not:N \l_stex_current_term_tl {
6412     \exp_args:No\exp_not:n\l_stex_structures_current_type_tl
6413   }
6414   \stex_term_oms_or_omv:nnn{}{}{}
6415 }

```

The structure type itself:

```

6416 \cs_new_protected:Npn \__stex_structures_maybe_notation:w [ #1 ] {
6417   \tl_set_eq:NN \l_stex_current_term_tl \l_stex_structures_current_type_tl
6418   \cs_if_exist:cTF{\l_stex_notation_\l_stex_current_symbol_str _#1_cs} {
6419     \use:c{\l_stex_notation_\l_stex_current_symbol_str _#1_cs}\group_end:
6420   }{
6421     \__stex_structures_make_prop:
6422     \__stex_structures_make_prop_assign:
6423     \__stex_structures_present_i:w [#1]
6424   }
6425 }
6426
6427 \cs_new_protected:Nn \__stex_structures_present: {
6428   \peek_charcode:NTF [ {
6429     \__stex_structures_present_i:w
6430   }{

```

```

6431     \__stex_structures_present:nn{}{}
6432   }
6433 }
6434
6435 \cs_new_protected:Npn \__stex_structures_present_i:w [#1] {
6436   \int_compare:nNnTF{\clist_count:n{#1}} = 1 {
6437     \__stex_structures_present:nn{}{#1}
6438   }{
6439     \peek_charcode:NTF [ {
6440       \__stex_structures_present_ii:nw{#1}
6441     }{
6442       \__stex_structures_present:nn{#1}{}
6443     }
6444   }
6445 }
6446
6447 %First: clist, second:notation-id
6448 \cs_new_protected:Npn \__stex_structures_present_ii:nw #1 [#2] {
6449   \__stex_structures_present:nn{#1}{#2}
6450 }
6451
6452 \cs_new_protected:Nn \__stex_structures_present:nn {
6453   \clist_clear:N \l__stex_structures_clist
6454   \tl_if_empty:nTF{#1} {
6455     \cs_set:Npn \l__stex_structures_cs ##1 ##2 ##3 {
6456       \tl_if_empty:nF{##2} {
6457         \__stex_structures_present_entry:nn {##1}{##3}
6458       }
6459     }
6460   }{
6461     \cs_set:Npn \l__stex_structures_cs ##1 ##2 ##3 {
6462       \exp_args:Ne \clist_if_in:nnT{\tl_to_str:n{#1}}{##1} {
6463         \__stex_structures_present_entry:nn {##1}{##3}
6464       }
6465     }
6466   }
6467   \prop_map_inline:Nn \l__stex_structures_prop {
6468     \l__stex_structures_cs {##1} ##2
6469   }
6470   \__stex_term_oms_or_omv:nnn{}{}{
6471     \exp_args:Nno \use:n{
6472       \bool_set_true:N \l_stex_allow_semantic_bool
6473       \symuse{Metatheory?mathematical-structure}{#2}
6474     }{\l__stex_structures_clist}
6475   }\group_end:
6476 }
6477
6478 \cs_new_protected:Nn \__stex_structures_present_entry:nn {
6479   \seq_if_in:NnTF \l__stex_structures_assigned_seq {#1} {
6480     \clist_put_right:Nn \l__stex_structures_clist {#2!}
6481   }{
6482     \exp_args:NNe \clist_put_right:Nn \l__stex_structures_clist {
6483       \__stex_next_symbol:n {
6484         \exp_args:Nno \exp_not:n \l__stex_structures_set_comp_tl

```

```

6485   \tl_set:Nn \exp_not:N \l__stex_structures_this_tl {
6486     \exp_args:No \exp_not:n \l__stex_structures_this_tl
6487   }
6488   \exp_not:n {
6489     \tl_set_eq:NN \this \l__stex_structures_this_tl
6490   }
6491   \tl_set:Nn \exp_not:N \l_stex_return_notation_tl {
6492     \exp_args:No \exp_not:n \l_stex_return_notation_tl
6493   }
6494   \exp_not:n{#2!}
6495 }
6496 }
6497 }
6498 }
6499
6500 \cs_new_protected:Npn \_thiscomp #1 #2 {
6501   {\tl_set:cn{\this}{{}}#1{#2}\c_math_subscript_token{
6502     \group_begin:
6503       \bool_set_true:N \l_stex_allow_semantic_bool
6504       \l__stex_structures_this_tl
6505     \group_end:
6506   }
6507 }
6508 }
6509
6510 \cs_new_protected:Nn \__stex_structures_set_thiscomp: {
6511   \exp_args:Ne \tl_if_eq:NNF {\tl_head:N \maincomp} \_thiscomp {
6512     \edef\maincomp {\_thiscomp{\comp}}
6513   }
6514 }
6515
6516 \cs_new_protected:Nn \__stex_structures_set_custom_comp:n {
6517   \exp_args:Ne \tl_if_eq:NNF {\tl_head:N \maincomp} \_customthiscomp {
6518     \cs_set_protected:Npx \_customthiscomp ##1 {
6519       \group_begin:
6520         \bool_set_true:N \l_stex_allow_semantic_bool
6521         \exp_not:n{
6522           \cs_set:Npn \l__stex_structures_comp_cs ##1 {
6523             #1
6524           }
6525           \def\maincomp
6526           }{\comp}
6527           \exp_not:N\l__stex_structures_comp_cs{\comp{##1}}
6528         \group_end:
6529       }
6530       \def\maincomp {\_customthiscomp}
6531     }
6532   }
6533
6534 this (of type structure):
6535 \cs_new_protected:Nn \__stex_structures_invoke_this:n {
6536   \peek_charcode_remove:NTF ! {
6537     \exp_args:Nne\use:nn{

```

```

6538     \group_end:\symuse{Metatheory?of~type}[invisible]{#1}
6539     }{
6540         {\_\_stex_structures_current_type:}
6541     }
6542     }{
6543         \_\_stex_structures_invoke_maybe_field:nn{#1}
6544     }
6545 }
6546
6547 \cs_new_protected:Nn \_\_stex_structures_invoke_maybe_field:nn {
6548     \_\_stex_structures_make_prop:
6549     \_\_stex_structures_set_this:n{#1}
6550     \tl_if_empty:nTF{#2}{

6551         \_\_stex_structures_make_prop_assign:
6552         \_\_stex_structures_present:
6553     }{
6554         \_\_stex_structures_invoke_field:n{#2}
6555     }
6556 }
6557
6558 \cs_new_protected:Nn \_\_stex_structures_set_this:n {
6559     \tl_if_empty:nTF{#1}{

6560         \%tl_put_right:Nn \l_stex_current_redo_tl {
6561         \%tl_clear:N \l__stex_structures_this_tl
6562         %}
6563     }{
6564         \tl_set:Nx \l__stex_structures_this_tl {{
6565             \bool_set_true:N \l_stex_allow_semantic_bool
6566             \tl_set:Nn \exp_not:N \this {
6567                 \exp_args:No \exp_not:n \this
6568             }
6569             \exp_not:n{#1}
6570         }}
6571         \tl_set_eq:NN \this \l__stex_structures_this_tl
6572         \%l_stex_return_notation_tl
6573     }
6574 }
6575
6576 \cs_new_protected:Nn \_\_stex_structures_get_field_name:n {
6577     \str_set:Nx \l__stex_structures_field_name_str {
6578         \exp_args:Nne \use:n { \exp_after:wN \use_i:nn \use:n}
6579         {\prop_item:Nn \l__stex_structures_prop {#1}}
6580     }
6581     \str_if_empty:NT \l__stex_structures_field_name_str {
6582         \str_set:Nn \l__stex_structures_field_name_str {#1}
6583     }
6584 }
6585
6586 \cs_new_protected:Nn \_\_stex_structures_invoke_field:n {
6587     \prop_if_in:NnTF \l_stex_structures_prop {#1}{

6588         \_\_stex_structures_get_field_name:n{#1}
6589         \tl_clear:N \l__stex_structures_more_nextsymbol_tl
6590         \%exp_args:NNe \seq_if_in:NnF \l__stex_structures_assigned_seq {\tl_to_str:n{#1}}{
6591             \tl_set:Nx \l__stex_structures_more_nextsymbol_tl {

```

```

6592   \tl_set:Nn \exp_not:N \l__stex_structures_this_tl {
6593     \exp_args:No \exp_not:n \l__stex_structures_this_tl
6594   }
6595   \exp_not:n {
6596     \tl_set_eq:NN \this \l__stex_structures_this_tl
6597   }
6598   \tl_set:Nn \exp_not:N \l_stex_return_notation_tl {
6599     \exp_args:No \exp_not:n \l_stex_return_notation_tl
6600   }
6601   \exp_args:No \exp_not:n \l__stex_structures_set_comp_tl
6602   }
6603 %}
6604 \exp_args:NNx \use:nn \group_end: {
6605   \l_stex_next_symbol:n {
6606     \exp_args:No \exp_not:n \l__stex_structures_redo_tl
6607     \tl_set:Nn \exp_not:N \l_stex_current_term_tl {
6608       \symuse{Metatheory?record~field}{%
6609         \symuse{Metatheory?of~type}{%
6610           \exp_args:No \exp_not:n \l__stex_structures_this_tl
6611         }{ \l__stex_structures_current_type: }
6612       }{
6613         \stex_annotation:nn{sthml:term=OML,sthml:head={\l__stex_structures_field_name_str}}
6614       }
6615     }
6616     \exp_args:No \exp_not:n \l__stex_structures_more_nextsymbol_tl
6617   }
6618   \exp_not:N \use_ii:nn
6619   \prop_item:Nn \l__stex_structures_prop {\#1}
6620 }
6621 }{
6622   \msg_error:nnn{stex}{error/unknownfield}{\#1}
6623 }
6624 }
6625
6626 \cs_new_protected:Nn \l__stex_structures_make_prop: {
6627   \prop_clear:N \l__stex_structures_prop
6628   \seq_clear:N \l__stex_structures_seq
6629   \seq_clear:N \l__stex_structures_assigned_seq
6630   \tl_clear:N \l__stex_structures_redo_tl
6631   \l__stex_structures_prop_do_decls:
6632   \l__stex_structures_prop_do_notations:
6633 }
6634
6635 \cs_new_protected:Nn \l__stex_structures_make_prop_assign: {
6636   \clist_if_empty:NF \l__stex_structures_fields_clist {
6637     \clist_map_inline:Nn \l__stex_structures_fields_clist {
6638       \l__stex_structures_make_prop_assign:nn ##1
6639     }
6640   }
6641 }
6642
6643 \cs_new_protected:Nn \l__stex_structures_make_prop_assign:nn {
6644   \prop_if_in:NnTF \l__stex_structures_prop {\#1} {
6645     \exp_args:NNe \seq_put_right:Nn \l__stex_structures_assigned_seq {\tl_to_str:n{\#1}}

```

```

6646   \exp_args:Nne \use:nn {\__stex_structures_make_prop_assign_replace:nnnn {#1}{#2}}
6647   {\prop_item:Nn \l_stex_structures_prop {#1}}
6648   }{
6649     \msg_error:nnn{stex}{error/unknownfieldass}{#1}
6650   }
6651 }
6652 \cs_new_protected:Nn \__stex_structures_make_prop_assign_replace:nnnn {
6653   \prop_put:Nnn \l_stex_structures_prop {#1}{#3}{#2}
6654   \tl_if_empty:nF{#3} {
6655     \tl_set:cn{#1}{#2}
6656     \tl_put_right:Nn \l_stex_structures_redo_tl {
6657       \tl_set:cn{#1}{#2}
6658     }
6659   }
6660 }
6661
6662 \cs_new_protected:Nn \__stex_structures_prop_do_decls: {
6663   \exp_args:No \stex_iterate_symbols:nn \l_stex_current_type_tl {
6664     \tl_if_empty:nTF{##2} {
6665       \__stex_structures_do_decl_nomacro:nnnnnnnn{##3}
6666     }{
6667       \__stex_structures_do_decl:nnnnnnnn{##2}
6668     }
6669     {##1}{##3}{##4}{##5}{##6}{##7}{##8}{##9}
6670   }
6671 }
6672
6673 \cs_new_protected:Nn \__stex_structures_do_decl_nomacro:nnnnnnnn {
6674   \prop_if_in:NnF \l_stex_structures_prop {#1} {
6675     \seq_put_left:Nx \l_stex_structures_seq {\tl_to_str:n{#2?#3}}
6676   \prop_put:Nnn \l_stex_structures_prop {#1}{#2}{#3}
6677   }{
6678     \stex_invoke_symbol:nnnnnnnN
6679     {#2}
6680     {#3}
6681     {#4}{#5}{#6}{#7}{#8}#9
6682   }
6683 }
6684 }
6685 }
6686
6687 \cs_new_protected:Nn \__stex_structures_do_decl:nnnnnnnn {
6688   \prop_if_in:NnF \l_stex_structures_prop {#1} {
6689     \seq_put_left:Nx \l_stex_structures_seq {\tl_to_str:n{#2?#3}}
6690   \prop_put:Nnn \l_stex_structures_prop {#1}{#2}{#3}
6691   }{
6692     \stex_invoke_symbol:nnnnnnnN
6693     {#2}
6694     {#3}
6695     {#4}{#5}{#6}{#7}{#8}#9
6696   }
6697 }
6698 }
6699 \%tl_set:cn{#1}{#2}

```

```

6700  %  \_stex_invoke_symbol:nnnnnnnN
6701  %  {#2}{#3}{#4}{#5}{#6}{#7}{#8}#9
6702  %}
6703  \%tl_put_right:Nn \l__stex_structures_redo_tl {
6704  %  \tl_set:cn{#1}{
6705  %    \_stex_invoke_symbol:nnnnnnnN
6706  %    {#2}{#3}{#4}{#5}{#6}{#7}{#8}#9
6707  %  }
6708  %}
6709  }
6710
6711 \cs_new_protected:Nn \__stex_structures_prop_do_notations: {
6712   \exp_args:No \stex_iterate_notations:nn\l_stex_current_type_tl{
6713     \exp_args:NNe \seq_if_in:NnT \l__stex_structures_seq {\tl_to_str:n{##1}}{
6714       \tl_put_right:Nn \l__stex_structures_redo_tl {
6715         \cs_if_exist:cF{\l_stex_notation_##1 _##2_cs}{
6716           \tl_set:cn{\l_stex_notation_##1 _##2_cs}{##4}
6717         }
6718         \cs_if_exist:cF{\l_stex_notation_##1 __cs}{
6719           \tl_set:cn{\l_stex_notation_##1 __cs}{##4}
6720         }
6721       }
6722       \cs_if_exist:cF{\l_stex_notation_##1 _##2_cs}{
6723         \tl_set:cn{\l_stex_notation_##1 _##2_cs}{##4}
6724       }
6725       \cs_if_exist:cF{\l_stex_notation_##1 __cs}{
6726         \tl_set:cn{\l_stex_notation_##1 __cs}{##4}
6727       }
6728       \tl_if_empty:nF{##5}{
6729         \tl_put_right:Nn \l__stex_structures_redo_tl {
6730           \cs_if_exist:cF{\l_stex_notation_##1 _op_##2_cs}{
6731             \tl_set:cn{\l_stex_notation_##1 _op_##2_cs}{##5}
6732           }
6733           \cs_if_exist:cF{\l_stex_notation_##1 _op__cs}{
6734             \tl_set:cn{\l_stex_notation_##1 _op__cs}{##5}
6735           }
6736         }
6737         \cs_if_exist:cF{\l_stex_notation_##1 _op##2_cs}{
6738           \tl_set:cn{\l_stex_notation_##1 _op##2_cs}{##5}
6739         }
6740         \cs_if_exist:cF{\l_stex_notation_##1 _op__cs}{
6741           \tl_set:cn{\l_stex_notation_##1 _op__cs}{##5}
6742         }
6743       }
6744     }
6745   }
6746 }

\usestructure
6747 \cs_new_protected:Npn \usestructure #1 {
6748   \stex_get_mathstructure:n{ #1 }
6749   \seq_clear:N \l__stex_structures_imports_seq
6750   \clist_map_inline:Nn \l_stex_get_symbol_type_tl {
6751     \exp_args:Ne \stex_if_module_exists:nT{\tl_to_str:n{##1}}{

```

```

6752     \seq_put_right:Nn \l__stex_structures_imports_seq{##1}
6753   }
6754 }
6755 \seq_map_inline:Nn \l__stex_structures_imports_seq {
6756   \stex_if_do_html:T {
6757     \hbox{\stex_annotation_invisible:nn
6758       {shtml:usemodule=##1} {}}
6759   }
6760   \stex_activate_module:n {##1}
6761 }
6762 }
```

(End definition for `\usestructure`. This function is documented on page 91.)

13.10 Statements

```

6763 <@=stex_statements>
6764
6765 \stex_keys_define:nnnn{statement}{
6766   \str_clear:N \l_stex_key_name_str
6767   \str_clear:N \l_stex_key_mroname_str
6768   \clist_clear:N \l_stex_key_for_clist
6769   \str_clear:N \l_stex_key_args_str
6770   \tl_clear:N \l_stex_key_type_tl
6771   \tl_clear:N \l_stex_key_def_tl
6772   \tl_clear:N \l_stex_key_return_tl
6773   \clist_clear:N \l_stex_key_argtypes_clist
6774 }{
6775   name .str_set:N = \l_stex_key_name_str ,
6776   for .clist_set:N = \l_stex_key_for_clist ,
6777   macro .str_set:N = \l_stex_key_mroname_str ,
6778   % start .str_set:N = \l_stex_key_title_str , % TODO remove
6779   type .tl_set:N = \l_stex_key_type_tl ,
6780   judgment .code:n = {},
6781   from .code:n= {}, % TODO remove
6782   to .code:n={} % TODO remove
6783 }{id,title,style,symargs}

\stex_new_statement:nn
6784 \cs_new_protected:Npn \stex_do_for_list: {
6785   \seq_clear:N \l_stex_fors_seq
6786   \clist_map_inline:Nn \l_stex_key_for_clist {
6787     \exp_args:N\stex_get_symbol:n{\tl_to_str:n{##1}}
6788     \seq_put_right:Nx \l_stex_fors_seq
6789     {\l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str}
6790   }
6791 }
6792
6793 \cs_new_protected:Nn \__stex_statements_setup:nn {
6794   \str_if_empty:NF \l_stex_key_mroname_str {
6795     \str_if_empty:NT \l_stex_key_name_str {
6796       \str_set_eq:NN \l_stex_key_name_str \l_stex_key_mroname_str
6797     }
6798 }
```

```

6799  \_stex_do_for_list:
6800  \str_if_empty:NF \l_stex_key_name_str {
6801    \__stex_statements_force_id:
6802    \seq_put_right:Nx \l_stex_fors_seq {
6803      \l_stex_current_module_str ? \l_stex_key_name_str
6804    }
6805    \str_set_eq:NN \l_stex_mroname_str \l_stex_key_mroname_str
6806    \str_set:Nn \l_stex_key_role_str {#2}
6807    \stex_symdecl_do:
6808    \exp_args:Nnx \use:nn {\stex_module_add_symbol:nnnnnnN} {
6809      {\l_stex_key_mroname_str}{\l_stex_key_name_str}
6810      {int_use:N \l_stex_get_symbol_arit}
6811      {\l_stex_get_symbol_args_t1}
6812      {#1}{}{}\stex_invoke_symbol:
6813    }
6814    \stex_if_do_html:T \_stex_symdecl_html:
6815  }
6816  \str_clear:N \l__stex_statements_uri_str
6817  \str_if_empty:NTF \l_stex_key_name_str {
6818    \stex_debug:nfn{statement}{no~name}
6819    \int_compare:nNnTF {\seq_count:N \l_stex_fors_seq} = 1 {
6820      \str_set:Nx \l__stex_statements_uri_str {\seq_item:Nn \l_stex_fors_seq 1}
6821      \stex_debug:nfn{statement}{for:~\l__stex_statements_uri_str}
6822    }{
6823      \stex_debug:nfn{statement}{no~for}
6824    }
6825  }{
6826    \str_set:Nx \l__stex_statements_uri_str {\l_stex_current_module_str ? \l_stex_key_name_s
6827    \stex_debug:nfn{statement}{name:~\l__stex_statements_uri_str}
6828  }
6829 }
6830
6831 \cs_new:Nn \__stex_statements_html_keyvals:n {
6832   shtml:#1={},
6833   shtml:inline={#2},
6834   \seq_if_empty:NF \l_stex_fors_seq {
6835     shtml:fors=\seq_use:Nn \l_stex_fors_seq ,
6836   }
6837   \str_if_empty:NF \l_stex_key_id_str {
6838     shtml:id=\stex_uri_use:N \l_stex_current_doc_uri ? \l_stex_key_id_str
6839   }
6840   \clist_if_empty:NF \l_stex_key_style_clist {
6841     shtml:styles=\l_stex_key_style_clist
6842   }
6843 }
6844
6845 \cs_new_protected:Nn \stex_new_statement:nnn {
6846   \stex_new_stylable_env:nnnnnnn {#1}{0{}}{
6847     \stex_keys_set:nn{statement}{##1}
6848     #3
6849
6850     \stex_if_smsmode:F {
6851       \exp_args:Nne \begin{stex_annotation_env} {
6852         \__stex_statements_html_keyvals:nn{#1}{false}

```

```

6853 }
6854 \tl_set_eq:NN \thistitle \l_stex_key_title_tl
6855 \str_set_eq:NN \thisname \l_stex_key_name_str
6856 \clist_set_eq:NN \thisfor \l_stex_key_for_str
6857 \stex_if_html_backend:TF {
6858     \noindent
6859     \stex_annotation:n{statementtitle={}}{\_stex_annotation_force_break:n\l_stex_key_}
6860 }
6861 \stex_style_apply:
6862 }
6863 \_stex_do_id:
6864 \stex_smsmode_do:
6865 }{
6866 \stex_if_smsmode:F {
6867     \stex_if_html_backend:F \stex_style_apply:
6868     \end{stex_annotation_env}
6869 }
6870 }{}{}{s}
6871 \stex_sms_allow_env:n{s#1}

6872 \tl_if_empty:nF{#2}{

6873     \exp_after:wN \NewDocumentCommand \cs:w inline#2\cs_end: { 0{} m}{%
6874         \group_begin:
6875             \stex_keys_set:nn{statement}{##1}
6876             #3
6877             \_stex_do_id:
6878             \stex_if_smsmode:F{
6879                 \exp_args:Ne \stex_annotation:n{\_stex_statements_html_keyvals:nn{#1}{true}}{%
6880                     \_stex_annotation_force_break:n{##2}
6881                 }
6882             }
6883         }
6884         \group_end:
6885         \stex_smsmode_do:
6886     }
6887     \exp_after:wN \stex_sms_allow_escape:N\cs:w inline#2\cs_end:
6888 }
6889 }

6890 \cs_new_protected:Nn \_stex_statements_setup_def: {
6891     \stex_if_smsmode:F{
6892         \seq_map_inline:Nn \l_stex_fors_seq {
6893             \stex_ref_new_sym_target:n{##1}
6894         }
6895     }
6896     \stex_reactivate_macro:N \definiendum
6897     \stex_reactivate_macro:N \defnotation
6898     \stex_reactivate_macro:N \definename
6899     \stex_reactivate_macro:N \Definename
6900     \stex_reactivate_macro:N \varbind
6901 }
6902 }

6903 \cs_new_protected:Nn \_stex_statements_force_id: {
6904     \str_if_empty:NT \l_stex_key_id_str {
6905         \_stex_ref_new_id:n{}
```

```

6907     \str_set_eq:NN \l_stex_key_id_str \l__stex_refs_str
6908 }
6909 }
6910
6911 \stex_new_statement:nnn{definition}{def}{
6912   \__stex_statements_force_id:
6913   \__stex_statements_setup:nn{}{}
6914   \__stex_statements_setup_def:
6915   \stex_reactivate_macro:N \definiens
6916 }
6917 \stex_new_statement:nnn{assertion}{ass}{
6918   \__stex_statements_setup:nn{}{assertion}
6919   \stex_if_smsmode:F{
6920     \seq_map_inline:Nn \l_stex_fors_seq {
6921       \stex_ref_new_sym_target:n{##1}
6922     }
6923   }
6924   \stex_reactivate_macro:N \varbind
6925   \stex_reactivate_macro:N \conclusion
6926   \stex_reactivate_macro:N \premise
6927   \stex_reactivate_macro:N \definiendum
6928   \stex_reactivate_macro:N \defnotation
6929   \stex_reactivate_macro:N \definename
6930   \stex_reactivate_macro:N \Definename
6931 }
6932 \stex_new_statement:nnn{example}{ex}{{\__stex_statements_setup:nn{}{example}}}
6933 \stex_new_statement:nnn{paragraph}{}{
6934   \clist_if_in:NnTF \l_stex_key_style_clist {symdoc}{
6935     \__stex_statements_force_id:
6936     \__stex_statements_setup:nn{}{}
6937     \__stex_statements_setup_def:
6938   }{
6939     \__stex_statements_setup:nn{}{}
6940   }
6941 }

```

(End definition for `\stex_new_statement:nn`. This function is documented on page ??.)

definiendum

```

6942 \cs_new_protected:Nn \__stex_statements_do_deref:nn {
6943   \stex_if_html_backend:T{\ifvmode\indent\fi}
6944   \group_begin:
6945   \stex_get_symbol:n{#1}
6946   \bool_if:NTF \l_stex_allow_semantic_bool{
6947     \str_set:Nx \l_stex_current_symbol_str
6948     {\l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str}
6949     \str_if_in:NnT \l_stex_get_symbol_name_str / {
6950       \str_set:Nx \l_stex_get_symbol_name_str {
6951         \exp_after:wN \_stex_split_slash: \l_stex_get_symbol_name_str
6952         /\_stex_args_end:
6953       }
6954     }
6955     \exp_args:No \stex_ref_new_sym_target:n \l_stex_current_symbol_str
6956     \def\comp{\_defcomp}

```

```

6957     \stex_annotate:nn{html:definiendum=\l_stex_current_symbol_str}{\comp{\#2}}
6958 }{
6959     \msg_error:nnxx{stex}{error/notallowed}{#1}{\l_stex_current_symbol_str}
6960 }
6961 \group_end:
6962 }
6963
6964 \NewDocumentCommand \defnotation{ m } {
6965     \stex_next_symbol:n { \def\comp{\_defcomp}}#1
6966 }
6967 \stex_deactivate_macro:Nn \defnotation {definition~environments}
6968
6969 \NewDocumentCommand \defniendum { O{} m m} {
6970     \stex_keys_set:nn{symname}{ #1 }
6971     \__stex_statements_do_deref:nn{#2}{#3}
6972 }
6973 \stex_deactivate_macro:Nn \defniendum {definition~environments}
6974
6975 \NewDocumentCommand \definame { O{} m } {
6976     \stex_keys_set:nn{symname}{#1}
6977     \__stex_statements_do_deref:nn{#2}{
6978         \l_stex_key_pre_tl\l_stex_get_symbol_name_str\l_stex_key_post_tl
6979     }
6980 }
6981 \stex_deactivate_macro:Nn \definame {definition~environments}
6982
6983 \NewDocumentCommand \Definame { O{} m } {
6984     \stex_keys_set:nn{symname}{#1}
6985     \__stex_statements_do_deref:nn{#2}{
6986         \l_stex_key_pre_tl\exp_after:wN\_stex_capitalize:n\l_stex_get_symbol_name_str\l_stex_key
6987     }
6988 }
6989 \stex_deactivate_macro:Nn \Definame {definition~environments}
6990
6991
6992 \NewDocumentCommand \defniens { O{} m }{
6993     \group_begin:
6994     \str_clear:N \l_stex_get_symbol_name_str
6995     \tl_if_empty:nF {#1} {
6996         \stex_get_symbol:n { #1 }
6997         \str_set:Nx \l__stex_statements_uri_str
6998             {\l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str}
6999     }
7000     \str_if_empty:NT \l__stex_statements_uri_str {
7001         \msg_error:nn{stex}{error/definiensfor}
7002     }
7003     \stex_debug:nn{definiens}{Checking~\l__stex_statements_uri_str}
7004
7005     \exp_args:No \_stex_add_definiens:nn \l__stex_statements_uri_str{#2}
7006
7007     \group_end:
7008     \stex_smsmode_do:
7009 }
7010 \stex_deactivate_macro:Nn \defniens {definition~environments}

```

```

7011 \stex_sms_allow_escape:N \definiens
7012
7013 \cs_new_protected:Nn \stex_add_definiens:nn {
7014     \exp_args:Nno \stex_str_if_starts_with:nnT{\#1} \l_stex_current_module_str {
7015         \prop_map_inline:cn{c_stex_module_\l_stex_current_module_str _symbols_prop}{%
7016             \stex_debug:nn{definiens}{\#1 == \l_stex_current_module_str?##1}
7017             \str_if_eq:not {\#1} {\l_stex_current_module_str?##1}{%
7018                 \prop_map_break:n{\_stex_add_definiens_inner:nnnnnnnn ##2}
7019             }
7020         }
7021     }
7022 \stex_if_smsmode:F{
7023     \stex_annotation:nn{ shtml:definiens={\#1}}{%
7024         #2 \%_stex_annotation_force_break:n{ #2 }
7025     }
7026 }
7027 }
7028
7029 \cs_new_protected:Nn \stex_add_definiens_inner:nnnnnnnn {
7030     \stex_debug:nn{definiens}{Adding-definiens-to~\l_stex_current_module_str?#2}
7031     \prop_gput:cnn{c_stex_module_\l_stex_current_module_str _symbols_prop}{%
7032         \#2}{\#1}{\#2}{\#3}{\#4}{defed}{\#6}{\#7}{\#8}}
7033 }
7034
7035 \NewDocumentCommand \varbind {m} {
7036     \clist_map_inline:nn {\#1} {
7037         \stex_get_var:n {\#\#1}
7038         \stex_if_do_html:T {
7039             \stex_annotation_invisible:nn {shtml:bind=\l_stex_get_symbol_name_str}{}
7040         }
7041     }
7042 }
7043 \stex_deactivate_macro:Nn \varbind {definition-or-assertion-environments}
7044
7045 \NewDocumentCommand \conclusion { O{} m} {
7046     \group_begin:
7047     \str_clear:N \l_stex_get_symbol_name_str
7048     \tl_if_empty:nF {\#1} {
7049         \stex_get_symbol:n { \#1 }
7050         \str_set:Nx \l__stex_statements_uri_str
7051             {\l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str}
7052     }
7053     \str_if_empty:NT \l__stex_statements_uri_str {
7054         \msg_error:nn{stex}{error/conclusionfor}
7055     }
7056     \stex_annotation:nn{ shtml:conclusion=\l__stex_statements_uri_str}{%
7057         #2 \%_stex_annotation_force_break:n{ #2 }
7058     }
7059     \group_end:
7060 }
7061 \stex_deactivate_macro:Nn \conclusion {assertion-environments}
7062
7063 \NewDocumentCommand \premise {O{} m} {
7064     \tl_if_empty:nF {\#1} {

```

```

7065     \stex_debug:nn{Here:}{Variable~#1}
7066     \exp_args:NNx\exp_args:Nnx\vardef{v#1}{#1}
7067   }
7068   \stex_annotate:nn{shtml:premise={#1}}{#2}
7069 }
7070 \stex_deactivate_macro:Nn \premise {assertion-environments}

```

(End definition for `definiendum`. This function is documented on page 95.)

13.11 Proofs

We first define some keys for the `sproof` environment.

```

7071 <@=stex_proof>
7072 \stex_keys_define:nnnn{ spf }{
7073   \tl_clear:N \l_stex_key_for_clist
7074   \tl_clear:N \l_stex_key_from_tl
7075   \tl_set_eq:NN \l_stex_key_proofend_tl \__stex_proof_proof_box_tl
7076   \tl_clear:N \l_stex_key_continues_tl
7077   \tl_clear:N \l_stex_key_term_tl
7078   \tl_clear:N \l_stex_key_functions_tl
7079   \tl_clear:N \l_stex_key_method_tl
7080   \bool_set_false:N \l_stex_key_hide_bool
7081 }
7082   for      .clist_set:N = \l_stex_key_for_clist ,
7083   from     .tl_set:N   = \l_stex_key_from_tl ,
7084   proofend .tl_set:N   = \l_stex_key_proofend_tl,
7085   continues .tl_set:N   = \l_stex_key_continues_tl,
7086   functions .tl_set:N   = \l_stex_key_functions_tl,
7087   term     .tl_set:N   = \l_stex_key_term_tl,
7088   method    .tl_set:N   = \l_stex_key_method_tl,
7089   hide      .bool_set:N = \l_stex_key_hide_bool
7090 }{id,style,title}
7091
7092 \bool_set_true:N \l__stex_proof_inc_counter_bool

```

For proofs, we will have to have deeply nested structures of enumerated list-like environments. However, L^AT_EX only allows `enumerate` environments up to nesting depth 4 and general list environments up to listing depth 6. This is not enough for us. Therefore we have decided to go along the route proposed by Leslie Lamport to use a single top-level list with dotted sequences of numbers to identify the position in the proof tree. Unfortunately, we could not use his `pf.sty` package directly, since it does not do automatic numbering, and we have to add keyword arguments all over the place, to accomodate semantic information.

```

7093 \intarray_new:Nn\l__stex_proof_counter_intarray{50}
7094 \cs_new_protected:Npn \__stex_proof_insert_number: {
7095   \int_set:Nn \l_tmpa_int {1}
7096   \bool_while_do:nn {
7097     \int_compare_p:nNn {
7098       \intarray_item:Nn \l__stex_proof_counter_intarray \l_tmpa_int
7099     } > 0
7100   }{
7101     \intarray_item:Nn \l__stex_proof_counter_intarray \l_tmpa_int .
7102     \int_incr:N \l_tmpa_int

```

```

7103     }
7104 }
7105 \cs_new_protected:Nn \__stex_proof_number_as_string:N {
7106     \str_clear:N #1
7107     \int_set:Nn \l_tmpa_int {1}
7108     \bool_while_do:nn {
7109         \int_compare_p:nNn {
7110             \intarray_item:Nn \l__stex_proof_counter_intarray \l_tmpa_int
7111         } > 0
7112     }{
7113         \str_put_right:Nx #1 {\intarray_item:Nn \l__stex_proof_counter_intarray \l_tmpa_int .}
7114         \int_incr:N \l_tmpa_int
7115     }
7116 }
7117
7118 \cs_new_protected:Npn \__stex_proof_inc_counter: {
7119     \int_set:Nn \l_tmpa_int {1}
7120     \bool_while_do:nn {
7121         \int_compare_p:nNn {
7122             \intarray_item:Nn \l__stex_proof_counter_intarray \l_tmpa_int
7123         } > 0
7124     }{
7125         \int_incr:N \l_tmpa_int
7126     }
7127     \int_compare:nNnF \l_tmpa_int = 1 {
7128         \int_decr:N \l_tmpa_int
7129     }
7130     \intarray_gset:Nnn \l__stex_proof_counter_intarray \l_tmpa_int {
7131         \intarray_item:Nn \l__stex_proof_counter_intarray \l_tmpa_int + 1
7132     }
7133 }
7134
7135 \cs_new_protected:Npn \__stex_proof_add_counter: {
7136     \int_set:Nn \l_tmpa_int {1}
7137     \bool_while_do:nn {
7138         \int_compare_p:nNn {
7139             \intarray_item:Nn \l__stex_proof_counter_intarray \l_tmpa_int
7140         } > 0
7141     }{
7142         \int_incr:N \l_tmpa_int
7143     }
7144     \intarray_gset:Nnn \l__stex_proof_counter_intarray \l_tmpa_int { 1 }
7145 }
7146
7147 \cs_new_protected:Npn \__stex_proof_remove_counter: {
7148     \int_set:Nn \l_tmpa_int {1}
7149     \bool_while_do:nn {
7150         \int_compare_p:nNn {
7151             \intarray_item:Nn \l__stex_proof_counter_intarray \l_tmpa_int
7152         } > 0
7153     }{
7154         \int_incr:N \l_tmpa_int
7155     }
7156     \int_decr:N \l_tmpa_int

```

```

7157   \intarray_gset:Nnn \l__stex_proof_counter_intarray \l_tmpa_int { 0 }
7158 }

spfsketch
7159 \newenvironment{spfsketchenv}{}{%
7160 \stex_new_styable_cmd:nnnn{spfsketch}{O{}} m}{\par
7161   \begin{spfsketchenv}
7162     \stex_keys_set:n{spf}{#1}
7163     \stex_do_for_list:
7164     \stex_do_id:
7165     \exp_args:Ne \stex_annotation:n{%
7166       shtml:proofsketch={%
7167         \seq_if_empty:NF \l_stex_fors_seq {%
7168           \seq_use:Nn \l_stex_fors_seq ,
7169         }%
7170       }%
7171     }{%
7172       \stex_style_apply:
7173       #2
7174     }%
7175   \end{spfsketchenv}
7176 }{%
7177   \noindent\emph{\spfsketchenvautorefname :}-
7178 }

```

(End definition for `spfsketch`. This function is documented on page ??.)

`\sproofend` This macro places a little box at the end of the line if there is space, or at the end of the next line if there isn't

```

7179 \tl_set:Nn \__stex_proof_box_tl {
7180   \ltx@ifpackageloaded{amssymb}{$\square$}{%
7181     \hbox{\vrule\vbox{\hrule width 6 pt\vskip 6pt\hrule}\vrule}
7182   }%
7183 }%
7184
7185 \tl_set:Nn \sproofend {
7186   \tl_if_empty:NF \l_stex_key_proofend_tl {%
7187     \hfil\null\nobreak\hfill\l_stex_key_proofend_tl\par\smallskip
7188   }%
7189 }

```

(End definition for `\sproofend`. This function is documented on page ??.)

`\stexcommentfont`

```

7190 \cs_new_protected:Npn \stexcommentfont {
7191   \small\itshape
7192 }

```

(End definition for `\stexcommentfont`. This function is documented on page ??.)

`sproof (env.)`

```

7193 \cs_new_protected:Nn \__stex_proof_start_list:n {
7194   \begin{list}{}{%
7195     \setlength\topsep{0pt}

```

```

7196     \setlength{\parsep}{0pt}
7197     \setlength{\rightmargin}{0pt}
7198 }\item[#1]
7199 }
7200 \cs_new_protected:Nn \__stex_proof_end_list: {
7201     \end{list}
7202 }
7203
7204 \cs_new_protected:Nn \__stex_proof_html: {
7205     \stex_annotation_invisible:n{\hbox{
7206         \tl_if_empty:NF \l_stex_key_term_tl {
7207             $ \stex_annotation:nn{shtml:proofterm={}}{\l_stex_key_term_tl}$
7208         }
7209         \tl_if_empty:NF \l_stex_key_method_tl {
7210             \stex_annotation:nn{shtml:proofmethod={}}{\l_stex_key_method_tl}
7211         }
7212     }})
7213 }
7214
7215 \cs_new_protected:Nn \__stex_proof_html_env:n {
7216     \exp_args:Nne \begin{stex_annotation_env}{
7217         shtml:#1=<
7218             \seq_if_empty:NF \l_stex_fors_seq {
7219                 \seq_use:Nn \l_stex_fors_seq ,
7220             }
7221         }
7222         \bool_if:NT \l_stex_key_hide_bool {
7223             shtml:proofhide=true
7224         }
7225     }
7226     \__stex_proof_html:
7227 }
7228
7229 \bool_set_false:N \l__stex_proof_in_spfblock_bool
7230 \cs_new_protected:Nn \__stex_proof_begin_proof:nn {\par
7231     \intarray_gzero:N \l_stex_proof_counter_intarray
7232     \intarray_gset:Nnn \l_stex_proof_counter_intarray 1 1
7233     \stex_keys_set:nn{spfsteps}{#1}
7234     \stex_do_for_list:
7235     \stex_if_do_html:T {
7236         \__stex_proof_html_env:n{proof}
7237     }
7238     \seq_map_inline:Nn \l_stex_fors_seq {
7239         \stex_debug:nn{definiens}{Adding-definiens-to-##1}
7240         \stex_add_definiens:nn {##1}{\STEXinvisibl{proven}}
7241     }
7242     \stex_style_apply:
7243     \stex_do_id:
7244     \stex_reactivate_macro:N \subproof
7245     \stex_reactivate_macro:N \spfstep
7246     \stex_reactivate_macro:N \conclude
7247     \stex_reactivate_macro:N \assumption
7248     \stex_reactivate_macro:N \eqstep
7249     \stex_reactivate_macro:N \yield

```

```

7250  \stex_reactivate_macro:N \spfblock
7251  \stex_reactivate_macro:N \spfjust
7252  \stex_annotate:nn{shtml:prooftitle={}}{#2}
7253  \stex_if_do_html:T{
7254      \begin{stex_annotate_env}{shtml:proofbody={}}
7255  }
7256 }
7257 \stex_new_stylable_env:nnnnnnn{proof}{0{} m}{
7258     \__stex_proof_begin_proof:nn{#1}{#2}
7259     \bool_set_true:N\l__stex_proof_in_spfblock_bool\__stex_proof_start_list:n{}
7260     \group_begin:\stexcommentfont
7261 }{
7262     \stex_style_apply:
7263     \stex_if_do_html:T{\end{stex_annotate_env}\end{stex_annotate_env}}
7264 }{
7265     \emph{\sproofautorefname :}~
7266 }{
7267     \sproofend
7268 }{s}
7269 \AddToHook{env/sproof/end}{
7270     \bool_if:NT\l__stex_proof_in_spfblock_bool {
7271         \group_end:\__stex_proof_end_list:
7272     }
7273 }
7274 \stex_new_stylable_env:nnnnnnn{proof*}{0{} }{
7275     \__stex_proof_begin_proof:nn{#1}{}
7276     \bool_set_false:N\l__stex_proof_in_spfblock_bool
7277 }{
7278     \stex_style_apply:
7279     \stex_if_do_html:T{\end{stex_annotate_env}\end{stex_annotate_env}}
7280 }{
7281     \emph{Proof:}~
7282 }{
7283     \sproofend
7284 }{s}

subproof (env.)
7286 \str_set_eq:NN \subproofautorefname \spfstepautorefname
7287 \stex_new_stylable_env:nnnnnnn{subproof}{s 0{} m}{\par
7288     \stex_keys_set:nn{spf}{#2}
7289     \stex_do_for_list:
7290     \stex_if_do_html:T {
7291         \__stex_proof_html_env:n{subproof}
7292     }
7293     \seq_map_inline:Nn \l_stex_fors_seq {
7294         \stex_debug:nn{definiens}{Adding-definiens-to~##1}
7295         \stex_add_definiens:nn {##1}{\STEXinvisible{proven}}
7296     }
7297     \IfBooleanTF #1 {
7298         \stex_style_apply:
7299         \str_if_empty:NF \l_stex_key_id_str {
7300             \__stex_proof_number_as_string:N \@currentlabel

```

```

7302     \str_set:Nx \@currentHref{subproof.\@currentlabel}
7303     \_stex_do_id:
7304 }
7305 \bool_set_false:N \l__stex_proof_in_spfblock_bool
7306 \stex_annotation:nn{shtml:prooftitle={}}{#3}
7307 }{
7308     \bool_if:NTF \l__stex_proof_in_spfblock_bool {
7309         \str_if_empty:NF \l_stex_key_id_str {
7310             \_stex_proof_number_as_string:N \@currentlabel
7311             \str_set:Nx \@currentHref{subproof.\@currentlabel}
7312             \_stex_do_id:
7313         }
7314         \__stex_proof_start_list:n\__stex_proof_insert_number:
7315             \stex_annotation:nn{shtml:prooftitle={}}{#3}
7316             \__stex_proof_add_counter:
7317                 \stex_style_apply:
7318 }{
7319     \stex_annotation:nn{shtml:prooftitle={}}{#3}
7320     \stex_style_apply:
7321     \_stex_do_id:
7322 }
7323 }
7324 \stex_if_do_html:T{
7325     \begin{stex_annotation_env}{shtml:proofbody={}}
7326 }
7327 \bool_if:NT \l__stex_proof_in_spfblock_bool {\group_begin:\stexcommentfont}
7328 }{
7329     \stex_style_apply:
7330     \bool_if:NT \l__stex_proof_in_spfblock_bool \__stex_proof_inc_counter:
7331     \stex_if_do_html:T{\end{stex_annotation_env}}
7332     \bool_if:NT\l__stex_proof_in_spfblock_bool \__stex_proof_end_list:
7333     \stex_if_do_html:T{\end{stex_annotation_env}}
7334     \aftergroup \__stex_proof_inblock_restore:
7335 }{}{}{}
7336 \AddToHook{env/subproof/before}{
7337     \bool_if:NT \l__stex_proof_in_spfblock_bool \group_end:
7338 }
7339 \AddToHook{env/subproof/end}{
7340     \bool_if:NT\l__stex_proof_in_spfblock_bool {
7341         \group_end:\__stex_proof_remove_counter:
7342         \%__stex_proof_end_list:
7343     }
7344 }
7345 \stex_deactivate_macro:Nn \subproof {sproof~environments}
7346
7347 \cs_new_protected:Nn \__stex_proof_inblock_restore: {
7348     \bool_if:NT\l__stex_proof_in_spfblock_bool {
7349         \group_begin:\stexcommentfont
7350     }
7351 }

\spfstep
\conclude
\assumption
    \have
\eqstep

```

```

7354 \clist_clear:N \l_stex_key_for_clist
7355   \str_clear:N \l_stex_key_name_str
7356 \tl_clear:N \l_stex_key_method_tl
7357 \tl_clear:N \l_stex_key_term_tl
7358 }{
7359   for      .clist_set:N = \l_stex_key_for_clist ,
7360   method    .tl_set:N     = \l_stex_key_method_tl,
7361   term      .tl_set:N     = \l_stex_key_term_tl,
7362   name      .str_set_x:N = \l_stex_key_name_str
7363 % todo: style=inline
7364 }{id,style,title}
7365
7366 \newenvironment{spfstepenv}{
7367   \str_set_eq:NN \spfstepenvautorefname \spfstepautorefname
7368 }{}
7369
7370 \cs_new_protected:Nn \__stex_proof_step_html:n {
7371   \stex_if_do_html:TF{
7372     \exp_args:Ne \stex_annotation:nn{
7373       shtml:spf#1={
7374         \seq_if_empty:NF \l_stex_fors_seq {
7375           \seq_use:Nn \l_stex_fors_seq ,
7376         }
7377       }
7378       \str_if_empty:NF \l_stex_key_name_str {
7379         shtml:stepname={\l_stex_key_name_str}
7380       }
7381     }{
7382       \__stex_proof_html:
7383       #2
7384     }
7385   }{ #2 }
7386 }
7387
7388 \cs_new_protected:Nn \__stex_proof_make_step_macro:Nnnnn {
7389   \NewDocumentCommand #1 {s O{} +m} {
7390     \bool_if:NT \l__stex_proof_in_spfblock_bool \group_end:
7391     \stex_keys_set:nn{spfsteps}{##2}
7392     \str_if_empty:NF \l_stex_key_name_str {
7393       \stex_debug:nn{Here:}{Variable~\l_stex_key_name_str}
7394       \exp_args:NNx\exp_args:Nnx\vardef{v\l_stex_key_name_str}{\l_stex_key_name_str}
7395     }
7396
7397     \begin{spfstepenv}
7398       \str_if_empty:NF \l_stex_key_id_str {
7399         \__stex_proof_number_as_string:N \@currentlabel
7400         \str_set:Nx \@currentHref{spfstep.\@currentlabel}
7401         \stex_do_id:
7402       }
7403
7404       \bool_if:NTF \l__stex_proof_in_spfblock_bool {
7405         \IfBooleanTF ##1 {
7406           \__stex_proof_step_html:nn{##2}{##3}
7407         }{

```

```

7408     \__stex_proof_step_html:nn{#2}{\__stex_proof_start_list:n{#3} ##3 \__stex_proof_end_
7409     #5
7410   }
7411   \end{spfstepenv}
7412   \group_begin:\stexcommentfont
7413 {
7414     \__stex_proof_step_html:nn{#2}{##3}
7415     \end{spfstepenv}
7416   }
7417 }
7418 \stex_deactivate_macro:Nn #1 {sproof~environments}
7419 }

7420
7421 \__stex_proof_make_step_macro:Nnnnn \assumption {assumption} \__stex_proof_insert_number: {}
7422 \__stex_proof_make_step_macro:Nnnnn \conclude {conclusion} {$\Rightarrow$} {} {}
7423 \__stex_proof_make_step_macro:Nnnnn \spfstep {step} \__stex_proof_insert_number: {} \__stex_
7424
7425 \NewDocumentCommand \eqstep {s m}{
7426   \bool_if:NTF \l__stex_proof_in_spfblock_bool {
7427     \group_end:
7428     \IfBooleanTF #1 {
7429       \__stex_proof_step_html:nn{eqstep}{$= #2$}
7430     }{
7431       \__stex_proof_step_html:nn{eqstep}{\__stex_proof_start_list:n{$=$} $#2$ \__stex_proof_
7432     }
7433     \group_begin:\stexcommentfont
7434   }{
7435     \__stex_proof_step_html:nn{eqstep}{$= #2$}
7436   }
7437 }
7438 \stex_deactivate_macro:Nn \eqstep {sproof~environments}
7439
7440 \NewDocumentCommand \yield {+m} {
7441   \stex_annotation:nn{shtml:proofterm={}}{ #1 }
7442 }
7443 \stex_deactivate_macro:Nn \yield {sproof~environments}
7444
7445 \NewDocumentEnvironment{spfblock}{}{
7446   \bool_set_false:N \l__stex_proof_in_spfblock_bool
7447 }{
7448   \aftergroup\__stex_proof_inblock_restore:
7449 }
7450 \stex_deactivate_macro:Nn \spfblock {sproof~environments}
7451 \AddToHook{env/spfblock/before} {
7452   \bool_if:NT \l__stex_proof_in_spfblock_bool \group_end:
7453 }
7454
7455 \newcommand\spfjust[1]{
7456   \stex_annotation:nn{spfjust={}}{ #1 }
7457 }
7458 \stex_deactivate_macro:Nn \spfjust {sproof~environments}

```

(End definition for `\spfstep` and others. These functions are documented on page ??.)

13.12 Metatheory

```

7460 <@@=stex_meta>
7461 \group_begin:
7462   \cs_set:Npn \__stex_modules_persist_module: {}
7463   \cs_set:Npn \stex_check_term:n #1 {}
7464   \cs_set:Npn \_stex_sref_do_aux:n #1 { #1 }
7465   \bool_set_false:N \_stex_html_do_output_bool
7466   \bool_set_false:N \c_stex_check_terms_bool
7467   \stex_uri_resolve:Nn \l_stex_current_ns_uri {http://mathhub.info/sTeX/meta}
7468   \stex_module_setup:n{Metatheory}
7469
7470   \symdef{of~type}[args=ii,invisible]{#1}
7471   \notation{of~type}[colon]{#1 \mathbin{\comp{}} #2}
7472
7473   \symdef{apply}[args=ia,prec=0;\infprec x\infprec]{#1\mathopen{\comp{}} #2 \mathclose{\comp{}}}
7474   \notation{apply}[lambda]{#1\mathrel{:\!}\argsep{#2}{\;}}
7475   \notation{apply}[infixop]{\argsep{#2}{\mathbin{#1}}}
7476   \notation{apply}[infixrel]{\argsep{#2}{\mathrel{#1}}}
7477
7478 % structures
7479   \symdef{module~type}[args=i,op=\mathtt{MOD}]{\mathopen{\comp{\mathtt{MOD}}}\mathclose{\comp{}}}
7480   \symdef{module~merge}[args=a,op=\oplus]{\argsep{#1}{\mathbin{\comp{\oplus}}}}
7481   \symdef{anonymous~record}[args=a]{\mathopen{\comp{[]}}\mathclose{\comp{}}}
7482   \symdef{record~field}[args=2]{#1\comp{.}#2}
7483   \symdecl*{record~type}
7484
7485   \symdecl{mathstruct}[name=mathematical~structure,args=a] % TODO
7486   \notation{mathstruct}[angle,prec=nobrackets]{\mathopen{\comp{\langle}}\mathclose{\comp{\rangle}}}
7487   \notation{mathstruct}[parens,prec=nobrackets]{\mathopen{\comp{()}}\mathclose{\comp{}}}
7488
7489 % sequences
7490   \symdef{ellipses}[ldots]{\ldots}
7491   \symdef{sequence~expression}[comma,args=a]{#1}
7492   \symdef{sequence~type}[args=1]{#1^{\mathbin{\ast}}}
7493   \symdef{sequence~map}[args=ia]{\comp{\mathrm{map}}\mathopen{\comp{()}}\mathclose{\mathbin{\mathopen{\comp{}}}}\mathclose{\comp{,}}}
7494   \symdef{sequence~map}[args=ia]{\comp{\mathrm{map}}\mathopen{\comp{()}}\mathclose{\mathbin{\mathopen{\comp{}}}}\mathclose{\comp{,}}}
7495   \symdef{sequence~map}[args=ia]{\comp{\mathrm{map}}\mathopen{\comp{()}}\mathclose{\mathbin{\mathopen{\comp{}}}}\mathclose{\comp{,}}}
7496   \symdef{sequence~map}[args=ia]{\comp{\mathrm{map}}\mathopen{\comp{()}}\mathclose{\mathbin{\mathopen{\comp{}}}}\mathclose{\comp{,}}}
7497   \symdef{sequence~map}[args=ia]{\comp{\mathrm{map}}\mathopen{\comp{()}}\mathclose{\mathbin{\mathopen{\comp{}}}}\mathclose{\comp{,}}}
7498   \symdef{sequence~map}[args=ia]{\comp{\mathrm{map}}\mathopen{\comp{()}}\mathclose{\mathbin{\mathopen{\comp{}}}}\mathclose{\comp{,}}}
7499   \symdef{sequence~map}[args=ia]{\comp{\mathrm{map}}\mathopen{\comp{()}}\mathclose{\mathbin{\mathopen{\comp{}}}}\mathclose{\comp{,}}}
7500   \symdef{sequence~map}[args=ia]{\comp{\mathrm{map}}\mathopen{\comp{()}}\mathclose{\mathbin{\mathopen{\comp{}}}}\mathclose{\comp{,}}}
7501
7502 \iffalse
7503 % binder (\forall, \Pi, \lambda etc.)
7504 \symdef{pibind}[name=dependent function type,prec=nobrackets,
7505   op=(\cdot\!\!\!:\!\!\!\to\!\!\!\cdot\!\!\!\cdot),args=Bi,assoc=pre]
7506   {\argmap{#1}{\mathopen{\comp{}}\mathclose{\comp{}}}{\mathbin{\comp{\to}}\mathclose{\comp{\to}}}{\mathbin{\comp{\to}}\mathclose{\comp{\to}}}}
7507   {\argmap{#1}{\mathopen{\comp{}}\mathclose{\comp{}}}{\mathbin{\comp{\to}}\mathclose{\comp{\to}}}{\mathbin{\comp{\to}}\mathclose{\comp{\to}}}}
7508   {\argmap{#1}{\mathopen{\comp{}}\mathclose{\comp{}}}{\mathbin{\comp{\to}}\mathclose{\comp{\to}}}{\mathbin{\comp{\to}}\mathclose{\comp{\to}}}}
7509   {\argmap{#1}{\mathopen{\comp{}}\mathclose{\comp{}}}{\mathbin{\comp{\to}}\mathclose{\comp{\to}}}{\mathbin{\comp{\to}}\mathclose{\comp{\to}}}}
7510   {\argmap{#1}{\mathopen{\comp{}}\mathclose{\comp{}}}{\mathbin{\comp{\to}}\mathclose{\comp{\to}}}{\mathbin{\comp{\to}}\mathclose{\comp{\to}}}}
7511

```

```

7512 \symdef{mapbind}[name=lambda, mapsto, prec=nobrackets, op=\mapsto, args=Bi, assoc=pre]
7513   { #1 \mathrel{\comp\mapsto} #2}
7514 \notation{mapbind}[lambda, prec=nobrackets, op=\lambda]
7515   {\comp\lambda #1 \mathop{\comp} #2}
7516 \fi
7517 \symdecl{bind}[args=Bi, assoc=pre]
7518 \notation{bind}[depfun, prec=nobrackets, op=(\cdot\cdot\cdot)\cdot; \cdot\cdot\cdot]
7519   {\mathopen{\comp} #1 \mathclose{\comp}\mathbin{\comp\cdot} \mathopen{\comp} \mathclose{\comp} #2}
7520 \notation{bind}[forall]\comp\forall #1.\cdot;#2
7521 \notation{bind}[Pi]\mathop{\comp\prod}\c_math_subscript_token{#1}#2
7522
7523 \symdef{implicit-bind}[args=Bi, assoc=pre]{\mathopen{\comp\{\}} #1 \mathclose{\comp\{\}}\c_math}
7524
7525 \symdecl*{integer-literal}
7526 \notation{integer-literal}{\mathbb{Z}}
7527
7528 \symdecl*{ordinal}
7529 \notation{ordinal}{\mathit{Ord}}
7530
7531 % propositions
7532 \symdef{prop}[name=proposition]{\mathit{Prop}}
7533 \symdef{judgment-holds}[args=i, role=judgment]{\comp\vdash ;#1}
7534
7535 % any object
7536 \symdef{object}{\mathit{Obj}}
7537
7538 % TODO DELETE
7539 \symdef{aseqdots}[args=a, prec=nobrackets]
7540   {#1\comp{\ldots}}%{##1\comp,##2}
7541 \symdef{aseqfromto}[args=ai, prec=nobrackets]
7542   {#1\comp{\ldots},#2}%{##1\comp,##2}
7543 \symdef{aseqfromtovia}[args=aii, prec=nobrackets]
7544   {#1\comp{\ldots},#2\comp{\ldots},#3}%{##1\comp,##2}
7545
7546
7547 \stex_close_module:
7548 \stex_uri_add_module:NNn \l_stex_metatheory_uri \l_stex_current_ns_uri {Metatheory}
7549 \global \let \l_stex_metatheory_uri \l_stex_metatheory_uri
7550 \global \let \c_stex_default_metatheory \l_stex_metatheory_uri
7551 \group_end:

```

13.13 MMT Interfaces

```

7552 <@=todo>
7553 \cs_new_protected:Npn \MSC #1 {}

\MMTinclude
7554 \stex_new_stylable_cmd:nnnn{MMTinclude}{m}{%
7555   \stex_annotation_invisible:nn{shtml:import={#1}}{}%
7556 }{}%
7557 \stex_deactivate_macro:Nn \MMTinclude {module-environments}%
7558 \stex_every_module:n {\stex_reactivate_macro:N \MMTinclude}

```

(End definition for \MMTinclude. This function is documented on page ??.)

```

\MMTrule
7559 \NewDocumentCommand \MMTrule {m m}{
7600   \tl_if_empty:nTF{#2}{\seq_clear:N \l_tmpa_seq}{%
7601     \seq_set_split:Nnn \l_tmpa_seq , {#2}
7602   }
7603   \int_zero:N \l_tmpa_int
7604   \stex_annotation_invisible:n{
7605     $
7606     \stex_annotation:nn{shtml:rule={scala://#1}}{%
7607       \stex_annotation_force_break:n{%
7608         \seq_if_empty:NF \l_tmpa_seq {%
7609           \seq_map_inline:Nn \l_tmpa_seq {%
7610             \int_incr:N \l_tmpa_int
7611             \stex_annotation:nn{%
7612               shtml:argmode=i,
7613               shtml:arg={\int_use:N \l_tmpa_int}
7614             }{ ##1 }
7615           }
7616         }
7617       }
7618     }$}
7619   }
7620 }
7621 \stex_deactivate_macro:Nn \MMTrule {module~environments}
7622 \stex_every_module:n{\stex_reactivate_macro:N \MMTrule}

```

(End definition for `\MMTrule`. This function is documented on page ??.)

`mmtinterface (env.)`

```

7583 \NewDocumentEnvironment { mmtinterface } { O{} m m } {
7584   \stex_module_setup_top_nosig:n { #3 }
7585   \str_set_eq:NN \l__todo_mmt_module_str \l_stex_current_module_str
7586   \str_clear:N \l_stex_current_module_str
7587   \stex_keys_set:nn { smodule }{ #1 }
7588   \stex_module_setup:n{ #2 }
7589   \str_set_eq:NN \l__todo_stex_module_str \l_stex_current_module_str
7590   \stex_debug:nn{mmt}{Interface~\l__todo_stex_module_str^~Jfor~\l__todo_mmt_module_str}
7591
7592 \stex_if_do_html:T {
7593   \exp_args:Nne \begin{stex_annotation_env} {
7594     shtml:theory={\l_stex_current_module_str},
7595     shtml:language={ \l_stex_current_language_str},
7596     shtml:signature={}
7597     \tl_if_empty:NF \l_stex_metatheory_uri {,
7598       shtml:metatheory={\stex_uri_use:N \l_stex_metatheory_uri}
7599     }
7600   }
7601   \stex_annotation_invisible:n{}
7602   \stex_annotation_invisible:nn
7603     {shtml:import=\l__todo_mmt_module_str} {}
7604 }
7605 \stex_module_add_code:x{
7606   \stex_activate_module:n{ \l__todo_mmt_module_str }
7607 }

```

```

7608 \stex_module_add_morphism:nonn
7609   {}{\l_todo_mmt_module_str}{import}{}}
7610 \stex_reactivate_macro:N \mmtdef
7611 \stex_smsmode_do:
7612 }{
7613   \str_set_eq:NN \l_stex_current_module_str \l_todo_mmt_module_str
7614   \stex_close_module:
7615   \str_set_eq:NN \l_stex_current_module_str \l_todo_stex_module_str
7616   \stex_close_module:
7617   \stex_if_do_html:T { \end{stex_annotation_env} }
7618 }
7619 \stex_sms_allow_env:n{mmtinterface}

\mmtdef

7620 \NewDocumentCommand \mmtdef {m O{} m} {
7621   \stex_keys_set:nn{symdef}{#2}
7622   \str_set:Nx \l_stex_macroname_str { #1 }
7623   \str_if_empty:NT \l_stex_key_name_str {
7624     \str_set:Nx \l_stex_key_name_str { #1 }
7625   }
7626   \stex_symdecl_do:
7627
7628   \str_set_eq:NN \l_stex_current_module_str \l_todo_mmt_module_str
7629   \cs_set_eq:NN \l_todo_old_metagroup_cd \stex_metagroup_do_in:nn
7630   \cs_set_protected:Npn \stex_metagroup_do_in:nn ##1 ##2 {##2}
7631   \exp_args:Nnx \use:nn {\stex_module_add_symbol:nnnnnnN} {
7632     {\l_stex_macroname_str}
7633     {\l_stex_key_name_str}
7634     {\int_use:N \l_stex_get_symbol_arity_int}
7635     {\l_stex_get_symbol_args_tl}
7636     {}
7637     {}
7638     {}
7639     \stex_invoke_symbol:
7640   }
7641   \cs_set_eq:NN \stex_metagroup_do_in:nn \l_todo_old_metagroup_cd
7642   \str_set_eq:NN \l_stex_current_module_str \l_todo_stex_module_str
7643
7644   \str_set_eq:NN \l_stex_get_symbol_mod_str \l_todo_mmt_module_str
7645   \str_set_eq:NN \l_stex_get_symbol_name_str \l_stex_key_name_str
7646   \stex_notation_parse:n{#3}
7647   \stex_notation_check:
7648   \stex_notation_add:
7649   \stex_if_do_html:T{
7650     \stex_notation_do_html:n{\l_stex_get_symbol_mod_str ? \l_stex_get_symbol_name_str}
7651   }
7652   \stex_smsmode_do:
7653 }
7654 \stex_deactivate_macro:Nn \mmtdef {mmtinterface~environments}
7655 \stex_sms_allow_escape:N \mmtdef

(End definition for \mmtdef. This function is documented on page ??.)

7656 \seq_if_empty:NT \g_stex_current_file {
7657   \seq_gset_eq:NN \g_stex_current_file \c_stex_main_file

```

```
7658 }
7659 \_stex_persist_read_now:
7660 \_stex_every_file:
7661 \cs_new_protected:Nn \__todo_newlabel:n {
7662   \exp_args:Ne\__todo_old_newlabel:{\tl_to_str:n{#1}}
7663 }
7664 \AtBeginDocument{
7665   \iow_now:Nn \@auxout {
7666     \ExplSyntaxOn
7667     \let\__todo_old_newlabel:\newlabel
7668     \let\newlabel\__todo_newlabel:n
7669     \ExplSyntaxOff
7670   }
7671 }
7672 
```

Chapter 14

Additional Packages

14.1 Implementation: The `notesslides` Package

14.1.1 Class and Package Options

We define some Package Options and switches for the `notesslides` class and activate them by passing them on to `beamer.cls` and `omdoc.cls` and the `notesslides` package. We pass the `nontheorem` option to the `statements` package when we are not in notes mode, since the `beamer` package has its own (overlay-aware) theorem environments.

```
7673 <*cls>
7674 @@=notesslides
7675 \ProvidesExplClass{notesslides}{2023/03/19}{3.3.0}{notesslides Class}
7676 \RequirePackage{13keys2e}
7677
7678 \str_const:Nn \c__notesslides_class_str {article}
7679
7680 \keys_define:nn{notesslides / cls}{
7681     class .str_set_x:N = \c__notesslides_class_str,
7682     notes .bool_set:N = \c__notesslides_notes_bool ,
7683     slides .code:n    = { \bool_set_false:N \c__notesslides_notes_bool },
7684     %docopt .str_set_x:N = \c__notesslides_docopt_str,
7685     unknown .code:n   = {
7686         \PassOptionsToClass{\CurrentOption}{beamer}
7687         \PassOptionsToClass{\CurrentOption}{\c__notesslides_class_str}
7688         \PassOptionsToPackage{\CurrentOption}{notesslides}
7689         \PassOptionsToPackage{\CurrentOption}{stex}
7690     }
7691 }
7692 \ProcessKeysOptions{ notesslides / cls }
7693
7694 \RequirePackage{stex}
7695 \stex_if_html_backend:T {
7696     \bool_set_true:N \c__notesslides_notes_bool
7697 }
7698
7699 \bool_if:NTF \c__notesslides_notes_bool {
7700     \PassOptionsToPackage{notes=true}{notesslides}
7701     \message{notesslides.cls:-Formatting-document-in-notes-mode}
```

```

7702 }{
7703   \PassOptionsToPackage{notes=false}{notesslides}
7704   \message{notesslides.cls:~Formatting~document~in~slides~mode}
7705 }
7706
7707 \bool_if:NTF \c_notesslides_notes_bool {
7708   \LoadClass{\c__notesslides_class_str}
7709 }
7710   \LoadClass[10pt,notheorems,xcolor={dvipsnames,svgnames}]{beamer}
7711   \%newcounter{Item}
7712   \%newcounter{paragraph}
7713   \%newcounter{ subparagraph}
7714   \%newcounter{Hfootnote}
7715 }
7716 \RequirePackage{notesslides}
7717 
```

now we do the same for the `notesslides` package.

```

7718 <*package>
7719 \ProvidesExplPackage{notesslides}{2023/03/19}{3.3.0}{notesslides Package}
7720 \RequirePackage{l3keys2e}
7721
7722 \keys_define:nn{notesslides / pkg}{
7723   notes          .bool_set:N  = \c_notesslides_notes_bool ,
7724   slides         .code:n    = { \bool_set_false:N \c_notesslides_notes_bool },
7725   sectocframes  .bool_set:N  = \c_notesslides_sectocframes_bool ,
7726   topsect        .str_set_x:N = \c_notesslides_topsect_str,
7727   unknown        .code:n    = {
7728     \PassOptionsToPackage{\CurrentOption}{stex}
7729     \PassOptionsToPackage{\CurrentOption}{tikzinput}
7730   }
7731 }
7732 \ProcessKeysOptions{ notesslides / pkg }
7733
7734 \RequirePackage{stex}
7735 \stex_if_html_backend:T {
7736   \bool_set_true:N\c_notesslides_notes_bool
7737 }
7738
7739 \cs_set:Npn \sectiontitleemph #1 {
7740   \textbf{\Large #1}
7741 }
7742
7743 \newif\ifnotes
7744 \bool_if:NTF \c_notesslides_notes_bool {
7745   \notestrue
7746   \PassOptionsToPackage{usenames,dvipsnames,svgnames}{xcolor}
7747   \RequirePackage[noamsthm,hyperref]{beamerarticle}
7748   \RequirePackage{mdframed}
7749   \str_if_empty:NTF \c_notesslides_topsect_str{
7750     \%setsectionlevel{section}
7751   } {
7752     \exp_args:No \setsectionlevel \c_notesslides_topsect_str
7753   }

```

```

7754 }{
7755   \notesfalse
7756
7757   \cs_new_protected:Nn \__notesslides_do_sectocframes: {
7758     \cs_set_protected:Nn \__notesslides_do_label:n {
7759       \str_case:nnF{##1} {
7760         {part} {
7761           \tl_set:Nx\l__notesslides_num{\the part}
7762           \tl_set:cx{@ @ label}{%
7763             \cs_if_exist:NTF\parttitlename{\exp_not:N\parttitlename}{\exp_not:N\partname}{-}}
7764         }
7765         {chapter} {
7766           \tl_set:Nx\l__notesslides_num{\the chapter}
7767           \tl_set:cx{@ @ label}{%
7768             \cs_if_exist:NTF\chapertitlename{\exp_not:N\chapertitlename}{\exp_not:N\chaptername}{-}}
7769         }
7770         {section} {
7771           \tl_set:Nx\l__notesslides_num{\cs_if_exist:NT\thechapter{\the chapter.}\thesection.}
7772           \tl_set:cx{@ @ label}{\l__notesslides_num\quad}
7773         }
7774         {subsection} {
7775           \tl_set:Nx\l__notesslides_num{\cs_if_exist:NT\thechapter{\the chapter.}\thesection.}
7776           \tl_set:cx{@ @ label}{\l__notesslides_num\quad}
7777         }
7778         {subsubsection} {
7779           \tl_set:Nx\l__notesslides_num{\cs_if_exist:NT\thechapter{\the chapter.}\thesection.}
7780           \tl_set:cx{@ @ label}{\l__notesslides_num\quad}
7781         }
7782         {paragraph} {
7783           \tl_set:Nx\l__notesslides_num{\cs_if_exist:NT\thechapter{\the chapter.}\thesection.}
7784           \tl_set:cx{@ @ label}{\l__notesslides_num\quad}
7785         }
7786       }{
7787         \tl_set:Nx\l__notesslides_num{\cs_if_exist:NT\thechapter{\the chapter.}\thesection.\t
7788         \tl_set:cx{@ @ label}{\l__notesslides_num\quad}
7789       }
7790     }
7791     \cs_set_protected:Nn \_sfragment_do_level:nn {
7792       \tl_if_exist:cT{c@##1}{\stepcounter{##1}}
7793       \addcontentsline{toc}{##1}{\protect\numberline{\use:c{the##1}}##2}
7794       \__notesslides_do_label:n{##1}
7795       \pdfbookmark[\int_use:N \l_stex_docheader_sect]{\l__notesslides_num##2}{##1.\l__note
7796       \begin{frame}[noframenumbering]
7797         \vfill\centering
7798         \sectiontitleemph{%
7799           \use:c{@ @ label} ##2
7800         }
7801       \end{frame}
7802       \int_incr:N \l_stex_docheader_sect
7803       \tl_set:Nn \stex_current_section_level{##1}
7804     }
7805   }
7806
7807   \AtBeginDocument{

```

```

7808 \str_if_empty:NTF \c_notesslides_topsect_str {
7809   \setsectionlevel{section}
7810 } {
7811   \exp_args:No \setsectionlevel \c_notesslides_topsect_str
7812   \exp_args:No \str_if_eq:nnTF \c_notesslides_topsect_str {chapter} {
7813     \__notesslides_define_chapter:
7814   }{
7815     \exp_args:No \str_if_eq:nnT \c_notesslides_topsect_str {part} {
7816       \__notesslides_define_chapter:
7817       \__notesslides_define_part:
7818     }
7819   }
7820 }
7821 }
7822
7823 \bool_if:NT \c_notesslides_sectocframes_bool {
7824   \__notesslides_do_sectocframes:
7825 }
7826 }

7827 \cs_new_protected:Nn \__notesslides_define_chapter: {
7828   \cs_if_exist:NF \chaptername {
7829     \cs_set_protected:Npn \chaptername {Chapter}
7830   }
7831   \cs_if_exist:NF \chapter {
7832     \cs_set_protected:Npn \chapter {INVALID}
7833   }
7834   \cs_if_exist:NF \c@chapter {
7835     \newcounter{chapter}\counterwithin*{section}{chapter}
7836   }
7837 }
7838 }

7839 \cs_new_protected:Nn \__notesslides_define_part: {
7840   \cs_if_exist:NF \partname {
7841     \cs_set_protected:Npn \partname {Part}
7842   }
7843   \cs_if_exist:NF \part {
7844     \cs_set_protected:Npn \part {INVALID}
7845   }
7846   \cs_if_exist:NF \c@part {
7847     \newcounter{part}\counterwithin*{chapter}{part}
7848   }
7849 }
7850 }

```

\prematurestop We initialize \afterprematurestop, and provide \prematurestop@endsfragment which looks up \sfragment@level and recursively ends enough {sfragment}s.

```

7851 \def \c_notesslides_document_str{document}
7852 \newcommand\afterprematurestop{}
7853 \def\prematurestop@endsfragment{
7854   \unless\ifx\@currenvir\c_notesslides_document_str
7855     \expandafter\expandafter\expandafter\end\expandafter\expandafter\expandafter{\expandafter
7856     \expandafter\prematurestop@endsfragment
7857   \fi
7858 }

```

```

7859 \providecommand\prematurestop{
7860   \stex_if_html_backend:F{
7861     \message{Stopping-sTeX-processing-prematurely}
7862     \prematurestop@endsfragment
7863   \afterprematurestop
7864   \end{document}
7865 }
7866 }

```

(End definition for `\prematurestop`. This function is documented on page 103.)

14.1.2 Notes and Slides

For the notes case, we also provide the `\usetheme` macro that would otherwise come from the the `beamer` class.

```

7867 \bool_if:NT \c_notesslides_notes_bool {
7868   \renewcommand\usetheme[2] [] {\usepackage[#1]{beamertheme#2}}
7869 }
7870 \NewDocumentCommand \libusetheme {O{} m} {
7871   \libusepackage[#1]{beamertheme#2}
7872 }

```

We define the sizes of slides in the notes. Somehow, we cannot get by with the same here.

```

7873 \newlength{\slidewidth}\setlength{\slidewidth}{13.5cm}
7874 \newlength{\slideheight}\setlength{\slideheight}{9cm}

```

We first set up the slide boxes in `notes` mode. We set up sizes and provide a box register for the frames and a counter for the slides.

```

7875 \ifnotes
7876
7877 \newlength{\slideframewidth}
7878 \setlength{\slideframewidth}{1.5pt}

```

`frame (env.)` We first define the keys.

```

7879 \cs_new_protected:Nn \__notesslides_do_yes_param:Nn {
7880   \exp_args:Nx \str_if_eq:nnTF { \str_uppercase:n{ #2 } }{ yes }{
7881     \bool_set_true:N #1
7882   }{
7883     \bool_set_false:N #1
7884   }
7885 }
7886
7887 \stex_keys_define:nnnn{notesslides / frame}{
7888   \str_clear:N \l__notesslides_frame_label_str
7889   \bool_set_true:N \l__notesslides_frame_allowframebreaks_bool
7890   \bool_set_true:N \l__notesslides_frame_allowdisplaybreaks_bool
7891   \bool_set_true:N \l__notesslides_frame_fragile_bool
7892   \bool_set_true:N \l__notesslides_frame_shrink_bool
7893   \bool_set_true:N \l__notesslides_frame_squeeze_bool
7894   \bool_set_true:N \l__notesslides_frame_t_bool
7895 }
7896   label .str_set_x:N = \l__notesslides_frame_label_str,
7897   allowframebreaks .code:n = {

```

```

7898     \__notesslides_do_yes_param:Nn \l__notesslides_frame_allowframebreaks_bool { #1 }
7899 },
7900 allowdisplaybreaks .code:n      = {
7901     \__notesslides_do_yes_param:Nn \l__notesslides_frame_allowdisplaybreaks_bool { #1 }
7902 },
7903 fragile          .code:n      = {
7904     \__notesslides_do_yes_param:Nn \l__notesslides_frame_fragile_bool { #1 }
7905 },
7906 shrink           .code:n      = {
7907     \__notesslides_do_yes_param:Nn \l__notesslides_frame_shrink_bool { #1 }
7908 },
7909 squeeze          .code:n      = {
7910     \__notesslides_do_yes_param:Nn \l__notesslides_frame_squeeze_bool { #1 }
7911 },
7912 t                .code:n      = {
7913     \__notesslides_do_yes_param:Nn \l__notesslides_frame_t_bool { #1 }
7914 },
7915 unknown         .code:n      = {}
7916 }{}
```

We redefine the `itemize` environment so that it looks more like the one in `beamer`.

```

7917 \cs_new_protected:Nn \__notesslides_setup_itemize: {
7918     \def\itemize@level{outer}
7919     \def\itemize@outer{outer}
7920     \def\itemize@inner{inner}
7921     \%newcommand\metakeys@show@keys[2]{\marginnote{{\scriptsize ##2}}}
7922     \ renewenvironment{itemize} {
7923         \ifx\itemize@level\itemize@outer
7924             \def\itemize@label{$\rhd$}
7925         \fi
7926         \ifx\itemize@level\itemize@inner
7927             \def\itemize@label{$\scriptstyle\rhd$}
7928         \fi
7929         \begin{list}
7930             {\itemize@label}
7931             {\setlength{\labelsep}{.3em}
7932                 \setlength{\labelwidth}{.5em}
7933                 \setlength{\leftmargin}{1.5em}
7934             }
7935             \edef\itemize@level{\itemize@inner}
7936         }{
7937             \end{list}
7938         }
7939     }
```

We create the box with the `mdframed` environment from the equinymous package.

```

7940 \stex_if_html_backend:TF {
7941     \cs_new_protected:Nn \__notesslides_frame_box_begin: {
7942         \vbox\bgroup
7943         \begin{stex_annotation_env}[shtml:frame={}]
7944             \mdf@patchamsthm\notesslidesfont
7945         }
7946     \cs_new_protected:Nn \__notesslides_frame_box_end: {
7947         %^A \notesslides@slidelabel
```

```

7948     \medskip\par\noindent\tiny\notesslidesfooter
7949     \end{stex_annotation_env}\egroup
7950   }
7951 }{
7952   \cs_new_protected:Nn \__notesslides_frame_box_begin: {
7953     \begin{mdframed}[
7954       linewidth=\slideframewidth,
7955       skipabove=1ex,
7956       skipbelow=1ex,
7957       userdefinedwidth=\slidewidth,
7958       align=center
7959     ]\notesslidesfont
7960   }
7961   \cs_new_protected:Nn \__notesslides_frame_box_end: {
7962     \medskip\par\noindent\tiny\notesslidesfooter%^^A\notesslides@slidelabel
7963     \end{mdframed}
7964   }
7965 }

```

We define the environment, read them, and construct the slide number and label.

```

7966 \renewenvironment{frame}[1][]{
7967   \stex_keys_set:nn{notesslides / frame}{#1}
7968   \stepcounter{framenumber}
7969   \renewcommand{\newpage}{\addtocounter{framenumber}{1}}
7970   \def\@currentlabel{\theframenumber}
7971   \str_if_empty:NF \l__notesslides_frame_label_str {
7972     \label{\l__notesslides_frame_label_str}
7973   }
7974   \__notesslides_setup_itemize:
7975   \__notesslides_frame_box_begin:
7976 }{
7977   \__notesslides_frame_box_end:
7978 }

```

Now, we need to redefine the frametitle (we are still in course notes mode).

```

\frametitle
7979 \renewcommand{\frametitle}[1]{
7980   \stexdoctitle { #1 }
7981   \notesslidestitlenameph{#1}\medskip
7982 }

```

(End definition for `\frametitle`. This function is documented on page ??.)

```

\pause
7983 \newcommand{\pause}{}

```

(End definition for `\pause`. This function is documented on page ??.)

We redefine the `columns` and `column` environments:

```

7984 \renewenvironment{columns}[1][]{
7985   \par\noindent
7986   \begin{minipage}
7987     \slidewidth\centering\leavevmode
7988 %   \stex_if_html_backend:T{

```

```

7989 %     \cs_if_exist:NT \rustex_if:T {
7990 %         \rustex_if:T {\par
7991 %             \rustex_direct_HTML:n{<table><tr><td>}
7992 %         }
7993 %     }
7994 % }
7995 }{
7996 % \stex_if_html_backend:T{
7997 %     \cs_if_exist:NT \rustex_if:T {
7998 %         \rustex_if:T {\par
7999 %             \rustex_direct_HTML:n{</td></tr></table>}
8000 %         }
8001 %     }
8002 % }
8003     \end{minipage}\par\noindent
8004 }
8005 \newsavebox\columnbox
8006 \renewenvironment<>{column}[2] [] {
8007     \begin{lrbox}{\columnbox}
8008 % \stex_if_html_backend:T{
8009 %     \cs_if_exist:NT \rustex_if:T {
8010 %         \rustex_if:T {\par
8011 %             \rustex_direct_HTML:n{</td><td>}
8012 %         }
8013 %     }
8014 % }
8015     \begin{minipage}{#2}
8016 }{
8017     \end{minipage}
8018 % \stex_if_html_backend:T{
8019 %     \cs_if_exist:NT \rustex_if:T {
8020 %         \rustex_if:T {\par
8021 %             \rustex_direct_HTML:n{</td><td>}
8022 %         }
8023 %     }
8024 % }
8025     \end{lrbox}\usebox\columnbox
8026 }
8027 \fi

```

14.1.3 Environment and Macro Patches

The `note` environment is used to leave out text in the `slides` mode. It does not have a counterpart in OMDoc. So for course notes, we define the `note` environment to be a no-operation otherwise we declare the `note` environment to produce no output.

```

8028 \bool_if:NTF \c_notesslides_notes_bool {
8029     \renewenvironment{note}{\ignorespaces}{}
8030 }{
8031     \renewenvironment{note}{\setbox \l_tmpa_box\vbox\bgroup\egroup}
8032 }

```

For other environments we introduce variants prefixed with `n`, which are excluded in `slides` mode.

```

8033 \cs_new_protected:Nn \__notesslides_notes_env:nnnn {
8034   \bool_if:NTF \c_notesslides_notes_bool {
8035     \newenvironment{#1}#2{#3}{#4}
8036   }{
8037     \newenvironment{#1}#2{
8038       \cs_set:Npn \__notesslides_eat: #####1 \end #####2 {
8039         \str_if_eq:nnTF{#1}{#####2} {
8040           \end{#1}
8041         }{
8042           \__notesslides_eat:
8043         }
8044       }
8045       \__notesslides_eat:
8046       \%setbox\l_tmpa_box\vbox\bgroup#3
8047     }{
8048       %#4\egroup
8049     }
8050   }
8051 }
8052 \__notesslides_notes_env:nnnn{nparagraph}{[1][]}{\begin{sparagraph}{#1}}{\end{sparagraph}}
8053 \__notesslides_notes_env:nnnn{nfragment}{[2][]}{\begin{sfragment}{#1}{#2}}{\end{sfragment}}
8054 \__notesslides_notes_env:nnnn{ndefinition}{[1][]}{\begin{sdefinition}{#1}}{\end{sdefinition}}
8055 \__notesslides_notes_env:nnnn{nassertion}{[1][]}{\begin{sassertion}{#1}}{\end{sassertion}}
8056 \__notesslides_notes_env:nnnn{nproof}{[2][]}{\begin{sproof}{#1}{#2}}{\end{sproof}}
8057 \__notesslides_notes_env:nnnn{nexample}{[1][]}{\begin{sexample}{#1}}{\end{sexample}}
8058 \__notesslides_notes_env:nnnn{nexample}{[1][]}{\begin{sexample}{#1}}{\end{sexample}}
8059
8060 \RequirePackage{graphicx}
8061
8062 \NewDocumentCommand\frameimage{s O{} m}{
8063   \IfBooleanTF #1 {
8064     \begin{frame}[plain]
8065   }{
8066     \begin{frame}
8067   }
8068   \bool_if:NTF \c_notesslides_notes_bool {
8069     \slidewidth=\dimexpr\slidewidth-(2\slideframewidth)\relax
8070   }{
8071     \slidewidth=\textwidth\relax
8072   }
8073   \def\Gin@ewidth{}\setkeys{Gin}{#2}
8074   \tl_if_empty:NTF \Gin@ewidth {
8075     \mhgraphics[width=\slidewidth,#2]{#3}
8076   }{
8077     \mhgraphics[#2]{#3}
8078   }
8079   \end{frame}
8080 }

```

hacking inputref:

\inputref*

```

8081 \cs_set_eq:NN \__notesslides_inputref:\inputref
8082 \cs_set_protected:Npn \inputref{@ifstar\ninputref\__notesslides_inputref:}

```

```

8083 \bool_if:NTF \c_notesslides_notes_bool {
8084   \newcommand\ninputref[2][]{%
8085     \__notesslides_inputref:[#1]{#2}%
8086   }%
8087 }{%
8088   \newcommand\ninputref[2]{}%
8089 }

```

(End definition for `\inputref*`. This function is documented on page 102.)

14.1.4 Styling Across Notes/Slides

```

8090 \def\notesslidestitlemph#1{%
8091   {\Large\bf\sf#1}%
8092   \vskip0.1\baselineskip
8093   \leaders\vrule width \textwidth
8094   \vskip0.4pt%
8095   \nointerlineskip
8096 }%
8097
8098 \def\notesslidesfooter{}%
8099
8100 \let\notesslidesfont\sffamily

```

14.1.5 Beamer Compatibility

All of this should be removed and made part of a template

```

8101
8102 \bool_if:NT \c_notesslides_notes_bool {%
8103   \def\author{\@dblarg\ns@author}%
8104   \long\def\ns@author[#1]#2{%
8105     \tl_if_empty:nTF{#1}{%
8106       \def\beamer@shortauthor{#2}%
8107     }{%
8108       \def\beamer@shortauthor{#1}%
8109     }%
8110   \def\@author{#2}%
8111 }%
8112 \def\title{\@dblarg\ns@title}%
8113 \long\def\ns@title[#1]#2{%
8114   \tl_if_empty:nTF{#1}{%
8115     \def\beamer@shorttitle{#2}%
8116   }{%
8117     \def\beamer@shorttitle{#1}%
8118   }%
8119   \def\@title{#2}%
8120   \stexdoctitle{#2}%
8121 }%
8122 \def\insertshortauthor{%
8123   \hbox\bgroup\def\\{}\cs_if_exist:NT\beamer@shortauthor\beamer@shortauthor\egroup
8124 }%
8125 \def\insertshorttitle{%
8126   \hbox\bgroup\def\\{}\cs_if_exist:NT\beamer@shorttitle\beamer@shorttitle\egroup
8127 }%
8128 \stex_if_html_backend:TF{%

```

```

8129     \def\insertframenumber{\stex_annotate:nn{shtml:framenumber={}}{}}
8130   }{
8131     \def\insertframenumber{\@arabic\c@framenumber}
8132   }
8133   \def\insertshortdate{\today}
8134 }

```

14.1.6 TODO Excursions

\excursion

The excursion macros are very simple, we define a new internal macro `\excursionref` and use it in `\excursion`, which is just an `\inputref` that checks if the new macro is defined before formatting the file in the argument.

```

8135 \gdef\printexcursions{}
8136 \newcommand\excursionref[2]{% label, text
8137   \bool_if:NT \c_notesslides_notes_bool {
8138     \begin{sparagraph}[title=Excursion]
8139       #2 \sref[fallback=the appendix]{#1}.
8140     \end{sparagraph}
8141   }
8142 }
8143 \newcommand\activate@excursion[2][]{%
8144   \tl_gput_right:Nn\printexcursions{\inputref[#1]{#2}}
8145 }
8146 \newcommand\excursion[4][]{% repos, label, path, text
8147   \bool_if:NT \c_notesslides_notes_bool {
8148     \activate@excursion[#1]{#3}
8149     \excursionref{#2}{#4}
8150   }
8151 }

```

(End definition for `\excursion`. This function is documented on page 104.)

\excursiongroup

```

8152 \keys_define:nn{notesslides / excursiongroup }{
8153   id      .str_set_x:N = \l__notesslides_excursion_id_str,
8154   intro    .tl_set:N    = \l__notesslides_excursion_intro_tl,
8155   archive  .str_set_x:N = \l__notesslides_excursion_mrepos_str
8156 }
8157 \cs_new_protected:Nn \__notesslides_excursion_args:n {
8158   \tl_clear:N \l__notesslides_excursion_intro_tl
8159   \str_clear:N \l__notesslides_excursion_id_str
8160   \str_clear:N \l__notesslides_excursion_mrepos_str
8161   \keys_set:nn {notesslides / excursiongroup }{ #1 }
8162 }
8163 \newcommand\excursiongroup[1][]{%
8164   \__notesslides_excursion_args:n{ #1 }
8165   \tl_if_empty:NF\printexcursions
8166   {\IfInputref{}{\begin{note}
8167     \begin{sfragment}{Excursions}% TODO pass on id
8168     \ifdefempty{\l__notesslides_excursion_intro_tl}{}{
8169       \exp_args:NNe \use:nn \inputref{[\l__notesslides_excursion_mrepos_str]}{
8170         \l__notesslides_excursion_intro_tl
8171       }
8172     }
8173   }

```

```

8173     \printexcursions%
8174     \end{sfragment}
8175     \end{note}}}
8176 }
8177 \ifcsname beameritemnestingprefix\endcsname\else\def\beameritemnestingprefix{}\fi
(End definition for \excursiongroup. This function is documented on page 104.)
8178 \prop_new:N \g__notesslides_variables_prop
8179 \cs_set_protected:Npn \setSGvar #1 #2 {
8200   \prop_gput:Nnn \g__notesslides_variables_prop {#1}{#2}
8201 }
8202 \cs_set_protected:Npn \useSGvar #1 {
8203   \prop_item:Nn \g__notesslides_variables_prop {#1}
8204 }
8205 \cs_set_protected:Npn \ifSGvar #1 #2 #3 {
8206   \prop_get:NnNF \g__notesslides_variables_prop {#1} \l__notesslides_tmp {
8207     \PackageError{document-structure}
8208     {The sTeX Global variable #1 is undefined}
8209     {set it with \protect\setSGvar}\TODO better error
8210   }
8211   \tl_if_eq:NnT \l__notesslides_tmp {#2}{ #3 }
8212 }
8193
8194
8195 </package>

```

14.2 Implementation: The problem Package

14.2.1 Package Options

The first step is to declare (a few) package options that handle whether certain information is printed or not. They all come with their own conditionals that are set by the options.

```

8196 <*package>
8197 <@@=problems>
8198 \ProvidesExplPackage{problem}{2023/03/19}{3.3.0}{Semantic Markup for Problems}
8199 \RequirePackage{l3keys2e}
8200
8201 \keys_define:nn { problem / pkg }{
8202   notes      .default:n    = { true },
8203   notes      .bool_set:N  = \c__problems_notes_bool,
8204   gnotes     .default:n    = { true },
8205   gnotes     .bool_set:N  = \c__problems_gnotes_bool,
8206   hints      .default:n    = { true },
8207   hints      .bool_set:N  = \c__problems_hints_bool,
8208   solutions   .default:n    = { true },
8209   solutions   .bool_set:N  = \c__problems_solutions_bool,
8210   pts        .default:n    = { true },
8211   pts        .bool_set:N  = \c__problems_pts_bool,
8212   min        .default:n    = { true },
8213   min        .bool_set:N  = \c__problems_min_bool,
8214   %boxed     .default:n    = { true },
8215   %boxed     .bool_set:N  = \c__problems_boxed_bool,

```

```

8216   test      .default:n    = { true },
8217   test      .bool_set:N   = \c__problems_test_bool,
8218   unknown    .code:n     = {
8219     \PassOptionsToPackage{\CurrentOption}{stex}
8220   }
8221 }
8222 \newif\ifsolutions
8223
8224 \ProcessKeysOptions{ problem / pkg }
8225 \bool_if:NTF \c__problems_solutions_bool {
8226   \solutionstrue
8227 }{
8228   \solutionsfalse
8229 }
8230 \RequirePackage{stex}

\problem@kw@* For multilinguality, we define internal macros for keywords that can be specialized in *.ldf files.
8231 \AddToHook{begindocument}{

  \ExplSyntaxOn\makeatletter
  \input{problem-english.ldf}
  \ltx@ifpackageloaded{babel}{

    \clist_set:Nx \l_tmpa_clist {\bbl@loaded}
    \exp_args:NNx \clist_if_in:NnT \l_tmpa_clist {\detokenize{ngerman}}{
      \input{problem-ngerman.ldf}
    }
    \exp_args:NNx \clist_if_in:NnT \l_tmpa_clist {\detokenize{finnish}}{
      \input{problem-finnish.ldf}
    }
    \exp_args:NNx \clist_if_in:NnT \l_tmpa_clist {\detokenize{french}}{
      \input{problem-french.ldf}
    }
    \exp_args:NNx \clist_if_in:NnT \l_tmpa_clist {\detokenize{russian}}{
      \input{problem-russian.ldf}
    }
  }{}}
  \makeatother\ExplSyntaxOff
8250 }

(End definition for \problem@kw@*. This function is documented on page ??.)

```

14.2.2 Problems and Solutions

We now prepare the KeyVal support for problems. The key macros just set appropriate internal macros.

```

8251 \stex_keys_define:nnnn{ problem }{
8252   \tl_set:Nn \l_stex_key_pts_tl 0
8253   \tl_set:Nn \l_stex_key_min_tl 0
8254   \str_clear:N \l_stex_key_name_str
8255   \str_clear:N \l_stex_key_mhrepos_str
8256 }{
8257   pts      .tl_set:N      = \l_stex_key_pts_tl,
8258   min      .tl_set:N      = \l_stex_key_min_tl,

```

```

8259   name .str_set:N = \l_stex_key_name_str,
8260   archive .str_set:N = \l_stex_key_mhrepos_str,
8261   creators .code:n = {}
8262   %imports .tl_set:N = \l__problems_prob_imports_tl,
8263   %refnum .int_set:N = \l__problems_prob_refnum_int,
8264 }{id,title,style,uses}

```

Then we set up a counter for problems.

```
\numberproblemsin
8265 \newcounter{sproblem}[section]
8266 \newcommand\numberproblemsin[1]{
8267   \@addtoreset{sproblem}{#1}
8268   \def\thesproblem{\arabic{#1}.\arabic{sproblem}}
8269 }
8270 \numberproblemsin{section}
8271 \%def\theplainsproblem{\arabic{sproblem}}
8272 \%def\thesproblem{\thesection.\theplainsproblem}
```

(End definition for `\numberproblemsin`. This function is documented on page ??.)

```
sproblem (env.)
8273 \newcounter{pts}
8274 \newcounter{min}
8275 \stex_new_stylable_env:nnnnnnn {problem} {0{}} {
8276   \cs_if_exist:NTF \l_problem_inputproblem_keys_tl {
8277     \tl_put_left:Nn \l_problem_inputproblem_keys_tl {#1,}
8278     \exp_args:Nno \stex_keys_set:nn{problem} {
8279       \l_problem_inputproblem_keys_tl
8280     }
8281   }{
8282     \stex_keys_set:nn{problem}{#1}
8283   }
8284   \refstepcounter{sproblem}
8285   \str_if_empty:NT \l_stex_key_name_str {
8286     \stex_file_split_off_lang:NN \l__problems_path_seq \g_stex_current_file
8287     \seq_get_right:NN \l__problems_path_seq \l_stex_key_name_str
8288   }
8289   \exp_args:No \stex_module_setup:n \l_stex_key_name_str
8290 \stex_if_do_html:T {
8291   \exp_args:Nne \begin{stex_annotation_env} {
8292     shtml:problem={\l_stex_current_module_str},
8293     shtml:language={ \l_stex_current_language_str},
8294     shtml:signature={\l_stex_key_sig_str}
8295     \tl_if_empty:N \l_stex_metatheory_uri {
8296       shtml:metatheory={\stex_uri_use:N \l_stex_metatheory_uri}
8297     }
8298   }
8299 }
8300 \stex_annotation_invisible:n{ }
8301 \tl_if_empty:N \l_stex_key_title_tl {
8302   \exp_args:No \stexdoctitle \l_stex_key_title_tl
8303 }
8304 }
```

```

8306 \stex_if_smsmode:F {
8307   \str_set_eq:NN \thismoduleuri \l_stex_current_module_str
8308   \tl_set_eq:NN \thismodulename \l_stex_key_name_str
8309   \tl_set_eq:NN \thistitle \l_stex_key_title_tl
8310   \stex_style_apply:
8311   \addtocounter{pts}{\l_stex_key_pts_tl}
8312   \addtocounter{min}{\l_stex_key_min_tl}
8313   \stex_do_id:
8314   \__problems_record_problem:
8315 }
8316 \stex_reactivate_macro:N \solution
8317 \stex_reactivate_macro:N \mcb
8318 \stex_reactivate_macro:N \fillinsol
8319 \stex_smsmode_do:
8320 }{
8321   \stex_close_module:
8322   \stex_if_smsmode:F \stex_style_apply:
8323   \stex_if_do_html:T{ \end{stex_annotation_env} }
8324 }{
8325   \par\noindent\problemheader
8326   \bool_if:NT \c__problems_pts_bool {
8327     \marginpar{\l_stex_key_pts_tl{}~\problem@kw@points\smallskip}
8328   }
8329   \bool_if:NT \c__problems_min_bool {
8330     \marginpar{\l_stex_key_min_tl{}~\problem@kw@minutes\smallskip}
8331   }
8332   \par
8333   \stex_ignore_spaces_and_pars:
8334 }{
8335   \par\bigskip
8336 % \bool_if:NT \c__problems_test_bool \pagebreak
8337 }{s}
8338 \stex_sms_allow_env:n{sproblem}
8339
8340 \tl_set:Nn \problemheader {
8341   \textbf{\sproblemname{\~}\thesproblem}
8342   \tl_if_empty:NF \thistitle {
8343     {\~}(\thistitle)
8344   }
8345 }
8346 }
8347
8348 \cs_new_protected:Nn \__problems_record_problem: {
8349   \exp_args:NNN \iow_now:Nn \@auxout {
8350     \problem@restore {\thesproblem}{\l_stex_key_pts_tl}{\l_stex_key_min_tl}
8351   }
8352 }
8353
8354 \cs_new_protected:Npn \problem@restore #1 #2 #3 {}

\includeproblem
8355 \stex_keys_define:nnnn{ includeproblem }{
8356   \str_clear:N \l_stex_key_mhrepos_str
8357 }

```

```

8358     archive .str_set:N    = \l_stex_key_mhrepos_str,
8359     unknown .code:n = {}
8360 }{}
8361
8362 \NewDocumentCommand\includeproblem{O{} m}{
8363     \group_begin:
8364     \tl_set:Nn \l_problem_inputproblem_keys_tl {#1}
8365     \stex_keys_set:nn{includeproblem}{#1}
8366     \exp_args:Nno \use:nn{\inputref[]}\l_stex_key_mhrepos_str{#2}
8367     \group_end:
8368 }
8369

```

(End definition for `\includeproblem`. This function is documented on page 110.)

`solution (env.)`

```

8370 \int_new:N \g_problem_id_counter
8371
8372 \cs_new_protected:Nn \__problems_solution_start:n {
8373     \str_set:Nn \l_stex_key_title_tl {#1}
8374     \str_set:Nn \l_stex_key_id_str {#1}
8375     \str_if_empty:NT \l_stex_key_id_str {
8376         \int_gincr:N \g_problem_id_counter
8377         \str_set:Nx \l_stex_key_id_str {
8378             SOLUTION_\int_use:N \g_problem_id_counter
8379         }
8380     }
8381     \stex_if_do_html:T{
8382         \begin{stex_annotation_env}[
8383             shtml:solution=\l_stex_key_id_str
8384         ]
8385     }
8386     \stex_style_apply:
8387 }
8388
8389 \stex_new_stylable_env:nnnnnnn { solution }{ 0{} }{
8390     \stex_if_do_html:TF{
8391         \__problems_solution_start:n{#1}
8392     }{
8393         \ifsolutions
8394             \__problems_solution_start:n{#1}
8395         \else
8396             \setbox\l_tmpa_box\vbox\bgroup
8397         \fi
8398     }
8399 }{
8400     \stex_if_do_html:TF{
8401         \stex_style_apply:
8402         \end{stex_annotation_env}
8403     }{
8404         \ifsolutions
8405             \stex_style_apply:
8406             \stex_if_do_html:T{
8407                 \end{stex_annotation_env}

```

```

8408     }
8409     \else
8410         \egroup
8411     \fi
8412 }
8413 }{
8414     \par\smallskip\hrule\smallskip
8415     \noindent\emph{Solution}\str_if_empty:NF \l_stex_key_title_tl{
8416         \{} \l_stex_key_title_tl
8417     \} :-
8418 }{
8419     \par\smallskip\hrule
8420 }{{
8421
8422 \stex_deactivate_macro:Nn \solution {sproblem~environments}

```

\startsolution

\stopsolution

```

8423 \cs_new_protected:Npn \startsolution{
8424     \global\solutionstrue
8425 }
8426 \cs_new_protected:Npn \stopsolution{
8427     \global\solutionsfalse
8428 }

```

(End definition for `\startsolution` and `\stopsolution`. These functions are documented on page 106.)

hint (env.)

```

8429 \cs_new_protected:Nn \__problems_hint_start:n {
8430     \str_set:Nn \l_stex_key_title_tl {\#1}
8431     \str_set:Nn \l_stex_key_id_str {\#1}
8432     \str_if_empty:NT \l_stex_key_id_str {
8433         \int_gincr:N \g_problem_id_counter
8434         \str_set:Nx \l_stex_key_id_str {
8435             HINT_\int_use:N \g_problem_id_counter
8436         }
8437     }
8438     \stex_if_do_html:T{
8439         \begin{stex_annotation_env}{}
8440             shtml:problemhint=\l_stex_key_id_str
8441         {}
8442     }
8443     \stex_style_apply:
8444 }
8445
8446 \stex_new_stylable_env:nnnnnnn { hint }{ 0{} }{
8447     \stex_if_do_html:TF{
8448         \__problems_hint_start:n{\#1}
8449 }{
8450     \bool_if:NTF \c__problems_hints_bool {
8451         \__problems_hint_start:n{\#1}
8452     }{
8453         \setbox\l_tmpa_box\vbox\bgroup
8454     }

```

```

8455     }
8456 }{
8457     \stex_if_do_html:TF{
8458         \stex_style_apply:
8459         \end{stex_annotation_env}
8460 }{
8461     \bool_if:NTF \c__problems_hints_bool {
8462         \stex_style_apply:
8463         \stex_if_do_html:T{
8464             \end{stex_annotation_env}
8465         }
8466     }{
8467         \egroup
8468     }
8469 }
8470 }{
8471     \par\smallskip\hrule\smallskip
8472     \noindent\emph{Hint}\str_if_empty:N \l_stex_key_title_tl{
8473         {~}\l_stex_key_title_tl
8474     } :~
8475 }{
8476     \par\smallskip\hrule
8477 }{}}

exnote (env.)
8478 \cs_new_protected:Nn \__problems_exnote_start:n {
8479     \str_set:Nn \l_stex_key_title_tl {\#1}
8480     \str_set:Nn \l_stex_key_id_str {\#1}
8481     \str_if_empty:NT \l_stex_key_id_str {
8482         \int_gincr:N \g_problem_id_counter
8483         \str_set:Nx \l_stex_key_id_str {
8484             EXNOTE_\int_use:N \g_problem_id_counter
8485         }
8486     }
8487     \stex_if_do_html:T{
8488         \begin{stex_annotation_env}[
8489             shtml:problemnote=\l_stex_key_id_str
8490         ]
8491     }
8492     \stex_style_apply:
8493 }
8494
8495 \stex_new_stylable_env:nnnnnnn { exnote }{ 0{} }{
8496     \stex_if_do_html:TF{
8497         \__problems_exnote_start:n{\#1}
8498 }{
8499     \bool_if:NTF \c__problems_notes_bool {
8500         \__problems_exnote_start:n{\#1}
8501     }{
8502         \setbox\l_tmpa_box\vbox\bgroup
8503     }
8504 }
8505 }{
8506     \stex_if_do_html:TF{

```

```

8507     \stex_style_apply:
8508     \end{stex_annotation_env}
8509 }{
8510     \bool_if:NTF \c__problems_notes_bool {
8511         \stex_style_apply:
8512         \stex_if_do_html:T{
8513             \end{stex_annotation_env}
8514         }
8515     }{
8516         \egroup
8517     }
8518 }
8519 }{
8520     \par\smallskip\hrule\smallskip
8521     \noindent\emph{Note}\str_if_empty:N \l_stex_key_title_tl{
8522         \l_stex_key_title_tl
8523     } :~}
8524 }{
8525     \par\smallskip\hrule
8526 }{}}

gnote (env.)
8527 \cs_new_protected:Nn \__problems_gnote_start:n {
8528     \str_set:Nn \l_stex_key_title_tl {\#1}
8529     \str_set:Nn \l_stex_key_id_str {\#1}
8530     \str_if_empty:NT \l_stex_key_id_str {
8531         \int_gincr:N \g_problem_id_counter
8532         \str_set:Nx \l_stex_key_id_str {
8533             GNOTE_\int_use:N \g_problem_id_counter
8534         }
8535     }
8536     \stex_if_do_html:T{
8537         \begin{stex_annotation_env} {
8538             \shtml:problemgnote=\l_stex_key_id_str
8539         }
8540     }
8541     \stex_style_apply:
8542 }
8543
8544 \stex_new_stylable_env:nnnnnnn { gnote }{ 0{} }{
8545     \stex_if_do_html:TF{
8546         \__problems_gnote_start:n{\#1}
8547 }{
8548     \bool_if:NTF \c__problems_gnotes_bool {
8549         \__problems_gnote_start:n{\#1}
8550     }{
8551         \setbox\l_tmpa_box\vbox\bgroup
8552     }
8553 }
8554 }{
8555     \stex_if_do_html:TF{
8556         \stex_style_apply:
8557         \end{stex_annotation_env}
8558 }{

```

```

8559     \bool_if:NTF \c__problems_gnotes_bool {
8560         \stex_style_apply:
8561         \stex_if_do_html:T{
8562             \end{stex_annotation_env}
8563         }
8564     }{
8565         \egroup
8566     }
8567 }
8568 }{
8569     \par\smallskip\hrule\smallskip
8570     \noindent\emph{Grading}\str_if_empty:N \l_stex_key_title_tl{
8571         \{} \l_stex_key_title_tl
8572     \} : \{
8573 }{
8574     \par\smallskip\hrule
8575 }{ }

```

The margin pars are reader-visible, so we need to translate

```

8576 \def\pts#1{
8577     \bool_if:NT \c__problems_pts_bool {
8578         \marginpar{\#1~\problem@kw@points}
8579     }
8580 }
8581 \def\min#1{
8582     \bool_if:NT \c__problems_min_bool {
8583         \marginpar{\#1~\problem@kw@minutes}
8584     }
8585 }

mcb (env.)
8586 \newenvironment{mcb}{\par
8587     \stex_if_do_html:T{
8588         \begin{stex_annotation_env}{shtml:multiple-choice-block={}}
8589     }
8590     \stex_deactivate_macro:Nn \mcb {sproblem~environments}
8591     \stex_deactivate_macro:Nn \solution {sproblem~environments}
8592     \stex_reactivate_macro:N \mcc
8593     \begin{enumerate}
8594 }{
8595     \end{enumerate}
8596     \stex_if_do_html:T{
8597         \end{stex_annotation_env}
8598     }
8599 }
8600 \stex_deactivate_macro:Nn \mcb {sproblem~environments}

we define the keys for the \mcc macro

8601 \cs_new_protected:Nn \__problems_do_yes_param:Nn {
8602     \exp_args:Nx \str_if_eq:nnTF { \str_lowercase:n{ #2 } }{ yes }{
8603         \bool_set_true:N #1
8604     }{
8605         \bool_set_false:N #1
8606     }

```

```

8607 }
8608 \stex_keys_define:nnnn{mcc}{
8609   \tl_clear:N \l_stex_key_feedback_tl
8610   \bool_set_false:N \l_stex_key_T_bool
8611   \tl_clear:N \l_stex_key_Ttext_tl
8612   \tl_clear:N \l_stex_key_Ftext_tl
8613 }{
8614   feedback .tl_set:N      = \l_stex_key_feedback_tl ,
8615   T        .default:n    = { false } ,
8616   T        .bool_set:N    = \l_stex_key_T_bool ,
8617   F        .default:n    = { false } ,
8618   F        .code:n       = {\bool_set_false:N \l_stex_key_T_bool} ,
8619   Ttext    .tl_set:N     = \l_stex_key_Ttext_tl ,
8620   Ftext    .tl_set:N     = \l_stex_key_Ftext_tl ,
8621 }{id}
8622

\mcc

8623 \tl_set:Nn \problem_mcc_box_tl {
8624   \ltx@ifpackageloaded{amssymb}{$\square$}){
8625     \hbox{\vrule\vbox{\hrule width 6 pt\vskip 6pt\hrule}\vrule}
8626   }
8627 }
8628 \newcommand\mcc[2][]{%
8629   \stex_keys_set:nn{mcc}{#1}\par
8630   \tl_set:Nn \l_tmpb_tl {~~~%
8631     \bool_if:NTF \l_stex_key_T_bool {
8632       \tl_if_empty:NTF \l_stex_key_Ttext_tl \problem@kw@correct \l_stex_key_Ttext_tl
8633     }{
8634       \tl_if_empty:NTF \l_stex_key_Ftext_tl \problem@kw@wrong \l_stex_key_Ftext_tl
8635     }
8636     \tl_if_empty:NF \l_stex_key_feedback_tl {
8637       \\\emph{\l_stex_key_feedback_tl}
8638     }
8639   }
8640   \tl_set:Nn \l_tmpa_tl {
8641     #2
8642     \stex_if_do_html:TF{
8643       \stex_annotation:nn{shtml:mcc-solution={}}{\l_tmpb_tl}
8644     }{
8645       \if solutions \l_tmpb_tl \fi
8646     }
8647   }
8648   \item[\problem_mcc_box_tl]{\l_tmpa_tl}%
8649   \stex_if_do_html:TF{
8650     \stex_annotation:nn{shtml:mcc= {
8651       \bool_if:NTF \l_stex_key_T_bool {true}{false}
8652     }}{\l_tmpa_tl}
8653   }{\l_tmpa_tl}
8654 }
8655 \stex_deactivate_macro:Nn \mcc {mcb~environments}

```

(End definition for `\mcc`. This function is documented on page [107](#).)

```

8656 \newcommand\fillinsol[2][]{%
8657   \quad
8658   \stex_if_do_html:TF{%
8659     \stex_annotation:n{<html>\fillinsol={}}{ \_stex_annotation_force_break:n{#2} }%
8660   }{%
8661     \ifsolutions
8662       \textcolor{red}{\fbox{#2}}
8663     \else
8664       \fbox{%
8665         \tl_if_empty:nTF{#1}{%
8666           \phantom{\huge{#2}}%
8667         }{%
8668           \hspace{#1}%
8669         }%
8670       }%
8671     \fi
8672   }%
8673   \quad
8674 }%
8675 \stex_deactivate_macro:Nn \fillinsol {sproblem~environments}%

```

(End definition for `\fillinsol`. This function is documented on page 109.)

```

8676 </package>

```

14.3 Implementation: The `hwexam` Package

14.3.1 Package Options

The first step is to declare (a few) package options that handle whether certain information is printed or not. Some come with their own conditionals that are set by the options, the rest is just passed on to the `problems` package.

```

8677 <*package>
8678 \ProvidesExplPackage{hwexam}{2023/03/19}{3.3.0}{homework assignments and exams}
8679 \RequirePackage{l3keys2e}
8680
8681 \keys_define:nn {hwexam / pkg}{%
8682   multiple .default:n = { false },
8683   multiple .bool_set:N = \c_hwexam_multiple_bool,
8684   unknown .code:n = {
8685     \PassOptionsToPackage{\CurrentOption}{problem}
8686   }
8687 }
8688 \ProcessKeysOptions{ hwexam /pkg }
8689 \RequirePackage{problem}

```

- `\hwexam_kw_*` For multilinguality, we define internal macros for keywords that can be specialized in `*.ldf` files.
- ```

8690 \AddToHook{begindocument}{%
8691 \ExplSyntaxOn\makeatletter
8692 \input{hwexam-english.ldf}
8693 \ltx@ifpackageloaded{babel}{%

```

```

8694 \clist_set:Nx \l_tmpa_clist {\bbl@loaded}
8695 \exp_args:NNx \clist_if_in:NnT \l_tmpa_clist {\detokenize{ngerman}}{
8696 \input{hwexam-ngerman.ldf}
8697 }
8698 \exp_args:NNx \clist_if_in:NnT \l_tmpa_clist {\detokenize{finnish}}{
8699 \input{hwexam-finnish.ldf}
8700 }
8701 \exp_args:NNx \clist_if_in:NnT \l_tmpa_clist {\detokenize{french}}{
8702 \input{hwexam-french.ldf}
8703 }
8704 \exp_args:NNx \clist_if_in:NnT \l_tmpa_clist {\detokenize{russian}}{
8705 \input{hwexam-russian.ldf}
8706 }
8707 }{}
8708 \makeatother\ExplSyntaxOff
8709 }

```

(End definition for `\hwexam_kw_*`. This function is documented on page ??.)

### 14.3.2 Assignments

Then we set up a counter for problems and make the problem counter inherited from `problem.sty` depend on it. Furthermore, we specialize the `\prob@label` macro to take the assignment counter into account.

```

assignment (env.)
8710 \stex_keys_define:nnnn{ assignment }{
8711 \tl_clear:N \l_stex_key_number_tl
8712 \tl_clear:N \l_stex_key_given_tl
8713 \tl_clear:N \l_stex_key_due_tl
8714 }{
8715 number .tl_set:N = \l_stex_key_number_tl,
8716 given .tl_set:N = \l_stex_key_given_tl,
8717 due .tl_set:N = \l_stex_key_due_tl,
8718 unknown .code:n = f}
8719 }{id,title,style}
8720
8721 \newcounter{assignment}
8722 \stex_new_stylable_env:nnnnnn {assignment}{0}{}{
8723 \cs_if_exist:NTF \l_hwexam_includeassignment_keys_tl {
8724 \tl_put_left:Nn \l_hwexam_includeassignment_keys_tl {#1,}
8725 \exp_args:Nno \stex_keys_set:nn{assignment}{}{
8726 \l_hwexam_includeassignment_keys_tl
8727 }
8728 }{
8729 \stex_keys_set:nn{assignment}{#1}
8730 }
8731 \tl_if_empty:NF \l_stex_key_number_tl {
8732 \global\setcounter{assignment}{\int_eval:n{\l_stex_key_number_tl-1}}
8733 }
8734 \global\refstepcounter{assignment}
8735 \setcounter{sproblem}{0}
8736 \def\thesproblem{\theassignment.\arabic{sproblem}}
8737 \stex_style_apply:

```

```

8738 _stex_do_id:
8739 }{
8740 \stex_style_apply:
8741 }{
8742 \par\begin{center}
8743 \textbf{\Large\assignmentautorefname~\theassignment}
8744 \tl_if_empty:NF \l_stex_key_title_tl {
8745 {\~}---\l_stex_key_title_tl
8746 }
8747 }\par\smallskip
8748 \textbf{
8749 \tl_if_empty:NF \l_stex_key_given_tl {
8750 \hwexam@kw@given:~\l_stex_key_given_tl\quad
8751 }
8752 \tl_if_empty:NF \l_stex_key_due_tl {
8753 \hwexam@kw@due:~\l_stex_key_due_tl\quad
8754 }
8755 }
8756 \end{center}
8757 \par\bigskip
8758 }{
8759 \par\pagebreak
8760 }{}}

\includeassignment
8761 \NewDocumentCommand\includeassignment{O{} m}{
8762 \group_begin:
8763 \tl_set:Nn \l_hwexam_includeassignment_keys_tl {#1}
8764 \stex_keys_set:nn{includeproblem}{#1}
8765 \exp_args:Nno \use:nn{\inputref[]}\l_stex_key_mhrepos_str]{#2}
8766 \group_end:
8767 }

```

(End definition for `\includeassignment`. This function is documented on page ??.)

Restoring information about problems:

```

8768 \prop_new:N \c_@@_problems_prop
8769 \tl_set:Nn \c_@@_total_mins_tl {0}
8770 \tl_set:Nn \c_@@_total_pts_tl {0}
8771 \int_new:N \c_@@_total_problems_int
8772 \cs_set_protected:Npn \problem@restore #1 #2 #3 {
8773 \int_gincr:N \c_@@_total_problems_int
8774 \prop_gput:Nnn \c_@@_problems_prop {#1}{#2}{#3}
8775 \tl_gset:Nx \c_@@_total_pts_tl { \int_eval:n { \c_@@_total_pts_tl + #2 } }
8776 \tl_gset:Nx \c_@@_total_mins_tl { \int_eval:n { \c_@@_total_mins_tl + #2 } }
8777 }

```

`\correction@table` This macro generates the correction table

```

8778 \newcommand\correction@table{
8779 \int_compare:nNnT \c_@@_total_problems_int = 0 {
8780 \int_incr:N \c_@@_total_problems_int
8781 \prop_put:Nnn \c_@@_problems_prop {\~}{\~}{\~}
8782 }
8783 \tl_clear:N \l_tmpa_tl
8784 \tl_clear:N \l_tmpb_tl

```

```

8785 \tl_clear:N \l_tmpc_tl
8786 \prop_map_inline:Nn \c_@@_problems_prop {
8787 \tl_put_right:Nn \l_tma_t1 { ##1 & }
8788 \tl_put_right:Nx \l_tmfp_t1 { \use_i:nn ##2 & }
8789 \tl_put_right:Nn \l_tmfp_t1 { & }
8790 }
8791 \resizebox{\textwidth}{!}{%
8792 \exp_args:Nne \begin{tabular}{|l|*\int_use:N \c_@@_total_problems_int}{c|}c||1|\hline
8793 &\exp_args:Ne \multicolumn{\int_eval:n{ \c_@@_total_problems_int + 1}}{c||}
8794 {\footnotesize\hwexam@kw@forgrading} &\hline
8795 \hwexam@kw@probs & \l_tma_t1 \hwexam@kw@sum & \hwexam@kw@grade\\ \hline
8796 \hwexam@kw@pts & \l_tmfp_t1 \c_@@_total_pts_t1 & \\ \hline
8797 \hwexam@kw@reached & \l_tmfp_t1 & \hline
8798 \end{tabular}}}

```

(End definition for `\correction@table`. This function is documented on page ??.)

### \testheading

```

8799 \def\hwexamheader{\input{hwexam-default.header}}
8800
8801 \def\hwexamminutes{
8802 \tl_if_empty:NTF \hwexam@duration {
8803 {\hwexam@min}~\hwexam@minutes@kw
8804 }{
8805 \hwexam@duration
8806 }
8807 }
8808
8809 \stex_keys_define:nnnn{ hwexam / testheading }{
8810 \tl_clear:N \hwexam@min
8811 \tl_clear:N \hwexam@duration
8812 \tl_clear:N \hwexam@reqpts
8813 \tl_clear:N \hwexam@tools
8814 }{
8815 min .tl_set:N = \hwexam@min,
8816 duration .tl_set:N = \hwexam@duration,
8817 reqpts .tl_set:N = \hwexam@reqpts,
8818 tools .tl_set:N = \hwexam@tools
8819 }{}}
8820
8821 \newenvironment{testheading}[1][]{%
8822 \stex_keys_set:nn { hwexam / testheading}{#1}
8823
8824 \tl_set_eq:NN \hwexam@totalpts \c_@@_total_pts_t1
8825 \tl_set_eq:NN \hwexam@totalmin \c_@@_total_mins_t1
8826 \tl_set:Nx \hwexam@checktime {\int_eval:n { \hwexam@min - \hwexam@totalmin }}}
8827
8828 \newif\if@bonuspoints
8829 \tl_if_empty:NTF \hwexam@reqpts {
8830 \@bonuspointsfalse
8831 }{
8832 \tl_set:Nx \hwexam@bonuspts {
8833 \int_eval:n{\hwexam@totalpts - \hwexam@reqpts}
8834 }

```

```

8835 \@bonuspointstrue
8836 }
8837
8838 \makeatletter\hwexamheader\makeatother
8839 }{
8840 \newpage
8841 }

```

(End definition for `\testheading`. This function is documented on page ??.)

#### `\testemptypage`

```

8842 \newcommand\testemptypage[1][]{%
8843 \bool_if:NT \c__problems_test_bool {\vfill\begin{center}\hwexam@kw@testemptypage\end{center}}
8844 }

```

(End definition for `\testemptypage`. This function is documented on page ??.)

#### `\testspace`

```

8845 \newcommand\testspace[1]{\bool_if:NT \c__problems_test_bool {\vspace*{#1}}}

```

(End definition for `\testspace`. This function is documented on page ??.)

#### `\testnewpage`

```

8846 \newcommand\testnewpage{\bool_if:NT \c__problems_test_bool {\newpage}}

```

(End definition for `\testnewpage`. This function is documented on page ??.)

```

8847 </package>

```

### 14.3.3 Leftovers

at some point, we may want to reactivate the logos font, then we use

here we define the logos that characterize the assignment

```

\font\bierfont=../assignments/bierglas
\font\denkerfont=../assignments/denker
\font\uhrfont=../assignments/uhr
\font\warnschildfont=../assignments/achtung

```

```

\newcommand\bierglas{{\bierfont\char65}}
\newcommand\denker{{\denkerfont\char65}}
\newcommand\uhr{{\uhrfont\char65}}
\newcommand\warnschild{{\warnschildfont\char 65}}
\newcommand\hardA{\warnschild}
\newcommand\longA{\uhr}
\newcommand\thinkA{\denker}
\newcommand\discussA{\bierglas}

```

## 14.4 Tikzinput Implementation

```
8848 <@=tikzinput>
8849 {*package}
8850
8851 %%%%%%%%%%%%%% tikzinput.dtx %%%%%%%%%%%%%%
8852
8853 \ProvidesExplPackage{tikzinput}{2023/03/19}{3.3.0}{tikzinput package}
8854 \RequirePackage{l3keys2e}
8855
8856 \keys_define:nn { tikzinput } {
8857 image .bool_set:N = \c_tikzinput_image_bool,
8858 image .default:n = false ,
8859 unknown .code:n = {}
8860 }
8861
8862 \ProcessKeysOptions { tikzinput }
8863
8864 \bool_if:NTF \c_tikzinput_image_bool {
8865 \RequirePackage{graphicx}
8866
8867 \providecommand\usetikzlibrary[]{}
8868 \newcommand\tikzinput[2][]{\includegraphics[#1]{#2}}
8869 }
8870 \RequirePackage{tikz}
8871 \RequirePackage{standalone}
8872
8873 \newcommand\tikzinput [2] [] {
8874 \setkeys{Gin}{#1}
8875 \ifx \Gin@ewidth \Gin@exclamation
8876 \ifx \Gin@eheight \Gin@exclamation
8877 \input { #2 }
8878 \else
8879 \resizebox{!}{\Gin@eheight }{
8880 \input { #2 }
8881 }
8882 \fi
8883 \else
8884 \ifx \Gin@eheight \Gin@exclamation
8885 \resizebox{ \Gin@ewidth }{!}{
8886 \input { #2 }
8887 }
8888 \else
8889 \resizebox{ \Gin@ewidth }{ \Gin@eheight }{
8890 \input { #2 }
8891 }
8892 \fi
8893 \fi
8894 }
8895
8896
8897 \newcommand\ctikzinput [2] [] {
8898 \begin{center}
8899 \tikzinput [#1] {#2}
8900 \end{center}
8901 }
```

```
8900 \end{center}
8901 }
8902 </package>
```

# Index

The italic numbers denote the pages where the corresponding entry is described, numbers underlined point to the definition, all others indicate the places where it is used.

| Symbols                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| \\$ .....                                                                 | 2076, 2079, 2083                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| \; .....                                                                  | <u>7474</u> , 7505, 7518, 7520, 7533                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| @@ commands:                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| \c_@@_problems_prop .....                                                 | 8768, 8774, 8781, 8786                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| \c_@@_total_mins_tl ..                                                    | 8769, 8776, 8825                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| \c_@@_total_problems_int ..                                               | <u>8771</u> , 8773, 8779, 8780, 8792, 8793                                                                                                                                                                                                                                                                                                                                                                                                                               |
| \c_@@_total_pts_tl .....                                                  | 8770, 8775, 8796, 8824                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| \\ .....                                                                  | 52, 76, 1054, 7763, 7768, 8123,<br>8126, 8637, 8794, 8795, 8796, 8797                                                                                                                                                                                                                                                                                                                                                                                                    |
| \{ .....                                                                  | 7523                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| \} .....                                                                  | 7523                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| \_ .....                                                                  | 43, 639, 7795, 8843                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| \_comp .....                                                              | 3928,<br>4134, 4475, 5171, 5990, 6014, 6098                                                                                                                                                                                                                                                                                                                                                                                                                              |
| \_customthiscomp .....                                                    | 6517, 6518, 6530                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| \_defcomp .....                                                           | 6022, 6956, 6965                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| \_stex_html_do_output_bool .....                                          | 278,<br>279, 282, 287, 291, 322, 325, 2137, 7465                                                                                                                                                                                                                                                                                                                                                                                                                         |
| \_thiscomp .....                                                          | 6500, 6511, 6512                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| \_varcomp .....                                                           | 4456, 4755, 4764, 4921, 4959,<br>5205, 5647, 5946, 5959, 5972, 6018                                                                                                                                                                                                                                                                                                                                                                                                      |
| \  .....                                                                  | 2075, 2078, 2082                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>A</b>                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| \activateexcursion .....                                                  | 104                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| \addbibresource .....                                                     | 75, 1949                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| \addcontentsline .....                                                    | 7793                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| \addmhbibresource .....                                                   | 75, <u>1943</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| \addtocounter .....                                                       | 7969, 8311, 8312                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| \AddToHook .....                                                          | 1036, 1039,<br>7269, 7336, 7339, 7451, 8231, 8690                                                                                                                                                                                                                                                                                                                                                                                                                        |
| \aftergroup .....                                                         | <u>138</u> , 5159, 7334, 7448                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| \afterprematurestop .....                                                 | 103, 7852, 7863                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| \apply .....                                                              | 83                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| \arabic .....                                                             | 8268, 8271, 8736                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| \arg .....                                                                | 46, 88, 5384                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| \argarraymap .....                                                        | 87, 4195, <u>4695</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| \argmap .....                                                             | 87, 4194, 4336, <u>4671</u> , 7506                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| \argsep .....                                                             | 40, 87, 4193,<br>4331, <u>4655</u> , 7474, 7475, 7476, 7482                                                                                                                                                                                                                                                                                                                                                                                                              |
| \assign .....                                                             | 64, <u>124</u> , 2973, 3329, 3456                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| assignment (env.) .....                                                   | <u>111</u> , <u>8710</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>B</b>                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| \assignmentautorefname .....                                              | 8743                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| \assignMorphism .....                                                     | <u>124</u> , 2974, 3458                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| \assumption .....                                                         | 7247, <u>7352</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| \ast .....                                                                | 7497                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| \AtBeginDocument .....                                                    | 1006,<br>1259, 1445, 1448, 1494, 7664, 7807                                                                                                                                                                                                                                                                                                                                                                                                                              |
| \AtEndDocument .....                                                      | 647, 1495                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| \AtEndOfFile .....                                                        | 2026, 2040, 2053                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| \author .....                                                             | 8103                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| \autoref .....                                                            | 79, 1639                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>B</b>                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| \backmatter .....                                                         | 1459, 1460, 1461                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| \baselineskip .....                                                       | 8092                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| \beameritemnestingprefix .....                                            | 8177                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| \begin ...                                                                | 91, <u>130</u> , <u>131</u> , <u>136</u> , <u>196</u> , 1302,<br>1382, 2037, 2050, 2068, 2217, 2239,<br>2256, 2506, 2764, 2810, 4718, 6851,<br>7161, 7194, 7216, 7254, 7325, 7397,<br>7593, 7796, 7929, 7943, 7953, 7986,<br>8007, 8015, 8053, 8054, 8055, 8056,<br>8057, 8058, 8064, 8066, 8138, 8166,<br>8167, 8293, 8382, 8439, 8488, 8537,<br>8588, 8593, 8742, 8792, 8843, 8898                                                                                     |
| \begingroup .....                                                         | 358, 1921                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| \bf .....                                                                 | 8091                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| \bgroup .....                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 3771, 4801, 5013, 7942, 8031, 8046,<br>8123, 8126, 8396, 8453, 8502, 8551 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| \bigskip .....                                                            | 8335, 8757                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| blindfragment (env.) .....                                                | 77                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| bool commands:                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| \bool_if:NTF .....                                                        | 196, 618, 670,<br><u>671</u> , <u>677</u> , 1144, 1154, 1156, 1215,<br>1236, 2120, 2375, 2725, 2758, 2942,<br>3438, 3644, 4816, 4919, 5169, 5203,<br>5745, 5839, 5845, 5980, 6946, 7222,<br>7270, 7308, 7327, 7330, 7332, 7337,<br>7340, 7348, 7390, 7404, 7426, 7452,<br>7699, 7707, 7744, 7823, 7867, 8028,<br>8034, 8068, 8083, 8102, 8137, 8147,<br>8225, 8326, 8329, 8336, 8450, 8461,<br>8499, 8510, 8548, 8559, 8577, 8582,<br>8631, 8651, 8843, 8845, 8846, 8864 |
| \bool_if:nTF .....                                                        | 282                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| \bool_if_exist:NTF .....                                                  | 255, 271                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

```

\bbool_lazy_any:nTF 4023, 4063
\bbool_lazy_any_p:n 773
\bbool_new:N 278, 2117,
2360, 2783, 4727, 5139, 5714, 5836
\bbool_not_p:n 772, 776
\bbool_set_false:N
..... 181, 287, 325, 1141, 1165,
2118, 2137, 2361, 2738, 2805, 3411,
4587, 4730, 5143, 5715, 5840, 7080,
7229, 7277, 7305, 7446, 7465, 7466,
7683, 7724, 7883, 8605, 8610, 8618
\bbool_set_true:N
..... 186, 257, 273, 279, 291,
322, 607, 613, 1138, 2136, 2722,
2802, 3423, 3433, 3641, 3772, 4821,
5061, 5140, 5369, 5378, 5494, 5505,
5603, 5688, 5746, 5757, 5790, 5819,
5865, 6061, 6472, 6503, 6520, 6565,
7092, 7259, 7696, 7736, 7881, 7889,
7890, 7891, 7892, 7893, 7894, 8603
\bbool_while_do:Nn 1139
\bbool_while_do:nn
..... 771, 1981, 7096, 7108, 7120, 7137, 7149
\l_tmpa_bool .. 3411, 3423, 3433, 3438
box commands:
\box_clear:N 2140
\c_empty_box 3953, 3960
\l_tmpa_box 2135, 2140, 3656, 4186,
8031, 8046, 8396, 8453, 8502, 8551
boxed 105

C
\catcode 43, 52, 358, 639, 1054,
1692, 2074, 2075, 2076, 2077, 2078,
2079, 2081, 2082, 2083, 2417, 2418
\cdot 7505, 7518
\centering 7797, 7987
\chapter 27, 77, 7832, 7833
\chaptername 7768, 7829, 7830
\chapertitlename 7768
\circ 54
\clearpage 1454, 1464, 1475, 1486
clist commands:
\clist_clear:N 93, 405, 3684, 4112,
5062, 6354, 6453, 6768, 6773, 7354
\clist_count:N 6334, 6344
\clist_count:n 4703, 6436
\clist_get:NN 461, 512
\clist_if_empty:NTF 180, 457,
508, 3788, 4284, 6333, 6379, 6636, 6840
\clist_if_in:NnTF
.... 65, 68, 99, 6934, 8236, 8239,
8242, 8245, 8695, 8698, 8701, 8704
\clist_if_in:nnTF 6462
\clist_item:Nn 4293
\clist_item:nn 4714
\clist_map_function:NN ... 5063, 6382
\clist_map_function:nN
..... 2675, 2700, 3575, 3595, 3616
\clist_map_inline:Nn
.. 94, 103, 183, 2827, 3790, 4839,
5032, 6161, 6211, 6637, 6750, 6786
\clist_map_inline:nn
..... 369, 418, 5535, 5634, 5663, 6159, 7036
\clist_pop:NN 4295
\clist_put_right:Nn
..... 95, 5076, 5080, 6361, 6480, 6482
\clist_set:Nn 37, 91, 4940, 8235, 8694
\clist_set_eq:NN 89, 6856
\l_tmpa_clist 8235, 8236, 8239, 8242,
8245, 8694, 8695, 8698, 8701, 8704
\clstinputmhlisting 78, 2025
\cmhgraphics 78, 2025
\cmhtikzinput 113, 2025
\columnbox 8005, 8007, 8025
\comp 32, 33, 36, 46, 85,
88, 98, 126, 3928, 4134, 4307, 4456,
4475, 4517, 4523, 4525, 4755, 4764,
4959, 5188, 5189, 5523, 5647, 5867,
5872, 5887, 5946, 5959, 5972, 5990,
5992, 5999, 6098, 6321, 6329, 6512,
6526, 6527, 6956, 6957, 6965, 7471,
7473, 7480, 7482, 7484, 7485, 7490,
7492, 7497, 7499, 7500, 7507, 7508,
7509, 7510, 7513, 7515, 7519, 7520,
7521, 7523, 7533, 7540, 7542, 7544
\compemph 98, 5999
\conclude 7246, 7352
\conclusion 50–52, 94, 96, 6925, 7045, 7061
\copymod 62, 63, 3585, 3587, 3589
\copymodule 3475, 3477
\counterwithin 7836, 7848
cs commands:
\cs:w 444, 447, 479, 640, 2150,
2379, 2380, 2381, 2388, 2392, 2398,
5267, 6202, 6252, 6254, 6874, 6887
\cs_argument_spec:N 3977
\cs_end: .. 444, 447, 479, 640, 2150,
2379, 2380, 2381, 2390, 2394, 2398,
5267, 6202, 6252, 6254, 6874, 6887
\cs_generate_from_arg_count:NNnn
..... 3781,
4583, 4830, 5023, 5107, 5308, 5340
\cs_generate_variant:Nn
..... 86, 156, 230, 243, 557, 581,
590, 602, 626, 686, 715, 870, 875,
879, 963, 1125, 1150, 1552, 1877,

```

2182, 2540, 2544, 2549, 2567, 2616,  
 2638, 2651, 3106, 5164, 5181, 5498  
`\cs_gset:Npn` ..... 2413  
`\cs_if_eq:NNTF` ..... 139,  
 885, 939, 1421, 2206, 2217, 2220,  
 2239, 2242, 3979, 4656, 5579, 5581  
`\cs_if_exist:NTF` .....  
 308, 1093, 1327, 1331, 1369, 1372,  
 1396, 1400, 1429, 1435, 1449, 1459,  
 1472, 1483, 1638, 1786, 1827, 1833,  
 1837, 2087, 2628, 2633, 3955, 3962,  
 3974, 4405, 4413, 4854, 4861, 5048,  
 5094, 5258, 5284, 5628, 5867, 5872,  
 6418, 6715, 6718, 6722, 6725, 6730,  
 6733, 6737, 6740, 7763, 7768, 7771,  
 7775, 7779, 7783, 7787, 7829, 7832,  
 7835, 7841, 7844, 7847, 7989, 7997,  
 8009, 8019, 8123, 8126, 8276, 8723  
`\cs_new:Nn` ..... 208,  
 431, 545, 551, 558, 567, 583, 592,  
 764, 884, 2191, 2374, 2422, 2933,  
 3751, 4082, 4095, 4299, 4366, 4383,  
 4388, 4532, 5103, 5316, 5413, 6139,  
 6194, 6390, 6396, 6399, 6409, 6831  
`\cs_new:Npn` 543, 620, 621, 629, 630,  
 880, 2874, 2905, 4088, 4101, 5559, 5932  
`\cs_new_nopar:Nn` ..... 365, 380  
`\cs_new_protected:Nn` ..... 42,  
 51, 59, 64, 74, 80, 83, 135, 157, 215,  
 226, 236, 245, 263, 285, 328, 334,  
 348, 354, 436, 443, 456, 470, 478,  
 497, 507, 522, 544, 623, 633, 645,  
 650, 669, 681, 692, 708, 717, 732,  
 790, 797, 827, 862, 872, 876, 898,  
 915, 928, 934, 938, 965, 969, 985,  
 1001, 1007, 1020, 1085, 1092, 1115,  
 1126, 1135, 1152, 1162, 1171, 1198,  
 1245, 1253, 1299, 1307, 1311, 1321,  
 1367, 1380, 1390, 1427, 1505, 1515,  
 1541, 1581, 1615, 1627, 1637, 1645,  
 1685, 1743, 1754, 1785, 1791, 1795,  
 1809, 1813, 1855, 1880, 1896, 1920,  
 1931, 1943, 1970, 1996, 2070, 2101,  
 2105, 2109, 2124, 2128, 2134, 2145,  
 2153, 2183, 2205, 2211, 2229, 2252,  
 2261, 2277, 2284, 2297, 2310, 2325,  
 2333, 2342, 2363, 2385, 2406, 2428,  
 2432, 2440, 2452, 2537, 2541, 2545,  
 2554, 2562, 2568, 2586, 2593, 2605,  
 2619, 2626, 2639, 2653, 2670, 2679,  
 2690, 2695, 2704, 2715, 2720, 2744,  
 2762, 2776, 2784, 2825, 2834, 2846,  
 2850, 2862, 2870, 2878, 2893, 2906,  
 2952, 2958, 2979, 3022, 3055, 3122,  
 3141, 3161, 3167, 3172, 3199, 3230,  
 3255, 3281, 3331, 3375, 3442, 3525,  
 3550, 3560, 3655, 3663, 3724, 3736,  
 3755, 3797, 3805, 3859, 3868, 3950,  
 3959, 3964, 3971, 3992, 4009, 4022,  
 4033, 4035, 4048, 4059, 4151, 4167,  
 4218, 4230, 4257, 4278, 4283, 4304,  
 4315, 4324, 4434, 4465, 4507, 4536,  
 4543, 4564, 4578, 4614, 4619, 4624,  
 4655, 4728, 4772, 4786, 4799, 4849,  
 4867, 4880, 4886, 4896, 4904, 4967,  
 4981, 4994, 4995, 4997, 5041, 5074,  
 5093, 5105, 5117, 5146, 5168, 5183,  
 5202, 5227, 5232, 5237, 5304, 5320,  
 5326, 5361, 5367, 5375, 5430, 5491,  
 5500, 5516, 5529, 5563, 5574, 5595,  
 5627, 5659, 5705, 5708, 5718, 5731,  
 5744, 5767, 5768, 5769, 5773, 5799,  
 5802, 5828, 5838, 5926, 5978, 5999,  
 6093, 6118, 6125, 6142, 6148, 6197,  
 6257, 6265, 6272, 6277, 6331, 6353,  
 6360, 6364, 6427, 6452, 6478, 6510,  
 6516, 6535, 6547, 6558, 6576, 6586,  
 6626, 6635, 6643, 6652, 6662, 6673,  
 6687, 6711, 6793, 6845, 6891, 6904,  
 6942, 7013, 7029, 7105, 7193, 7200,  
 7204, 7215, 7230, 7347, 7370, 7388,  
 7661, 7757, 7828, 7840, 7879, 7917,  
 7941, 7946, 7952, 7961, 8033, 8157,  
 8348, 8372, 8429, 8478, 8527, 8601  
`\cs_new_protected:Npn` .....  
 ... 205, 337, 340, 344, 345, 428,  
 688, 891, 894, 1241, 1325, 1394,  
 1410, 1496, 1498, 1826, 1832, 1836,  
 1851, 2086, 2197, 2280, 2356, 2839,  
 2899, 2937, 2965, 2996, 3010, 3093,  
 3108, 3242, 3568, 4403, 4549, 4556,  
 4606, 4662, 4671, 4696, 5047, 5060,  
 5125, 5131, 5135, 5165, 5215, 5256,  
 5282, 5407, 5543, 5857, 5877, 5884,  
 6014, 6018, 6022, 6028, 6032, 6036,  
 6040, 6044, 6048, 6052, 6056, 6060,  
 6298, 6320, 6325, 6416, 6435, 6448,  
 6500, 6747, 6784, 7094, 7118, 7135,  
 7147, 7190, 7553, 8354, 8423, 8426  
`\cs_parameter_spec:N` ..... 547, 561  
`\cs_prefix_spec:N` ..... 559  
`\cs_set:Npn` ..... 448, 483, 488,  
 636, 637, 819, 820, 821, 822, 943,  
 950, 1094, 1097, 1110, 2159, 2408,  
 2441, 2655, 2657, 2660, 2673, 2698,  
 2723, 2737, 3782, 3995, 4188, 4189,  
 4193, 4194, 4195, 4307, 4337, 4567,  
 4583, 4677, 4702, 4831, 4869, 5024,

|                                        |                                       |
|----------------------------------------|---------------------------------------|
| 5107, 5309, 5341, 5661, 6455, 6461,    | 47,                                   |
| 6522, 7462, 7463, 7464, 7739, 8038     | 57, 64, 94–96, 6915, 6992, 7010, 7011 |
| \cs_set:Npx . . . . .                  | 2597                                  |
| \cs_set_eq:NN . . . . .                | 40, 217, 221,                         |
| 813, 814, 815, 1261, 1268, 1386,       | 2634, 2976, 2977, 3975, 4581, 4634,   |
| 4647, 4862, 5095, 5098, 5172, 5174,    | 5206, 5208, 5384, 5387, 5415, 5416,   |
| 5629, 5632, 5771, 7629, 7641, 8081     | 5629, 5632, 5771, 7629, 7641, 8081    |
| \cs_set_protected:Nn . . . . .         | 810, 817, 1565, 7758, 7791            |
| \cs_set_protected:Npn . . . . .        | 1280, 1289, 3951, 3952, 4331, 4336,   |
| 4342, 6026, 7630, 7830, 7833, 7842,    | 7845, 8082, 8179, 8182, 8185, 8772    |
| \cs_set_protected:Npx . . . . .        | 6518                                  |
| \cs_undefine:N . . . . .               | 212, 222, 269, 1206                   |
| \l_tmpa_cs . . . . .                   | 4188, 4198, 5661, 5679                |
| \csname . . . . .                      | 267,                                  |
| 296, 355, 2072, 2073, 2074, 2075,      | 2076, 2081, 2082, 2083, 2378, 2641    |
| \ctikzinput . . . . .                  | 113, 8897                             |
| \CurrentFile . . . . .                 | 1023, 1025, 1027                      |
| \CurrentFilePath . . . . .             | 1023, 1024, 1027                      |
| \currentgrouplevel . . . . .           | 227, 249, 250, 251,                   |
| 253, 255, 257, 265, 267, 269, 271, 273 | 273                                   |
| \CurrentOption . . . . .               | 10, 7686, 7687,                       |
| 7688, 7689, 7728, 7729, 8219, 8685     | 8685                                  |
| \Currentsectionlevel . . . . .         | 77, 1289                              |
| \currentsectionlevel . . . . .         | 77, 1280                              |
| <b>D</b>                               |                                       |
| \DeclareOption . . . . .               | 10                                    |
| \def . . . . .                         | 86, 136,                              |
| 302, 306, 309, 311, 357, 560, 1243,    | 1247, 1264, 1269, 2042, 2045, 2056,   |
| 2060, 3928, 4134, 4155, 4454, 4456,    | 4473, 4475, 4755, 4762, 4764, 4957,   |
| 4959, 5188, 5189, 5647, 5887, 5916,    | 5930, 5946, 5959, 5972, 5990, 6001,   |
| 6098, 6525, 6530, 6956, 6965, 7851,    | 7853, 7918, 7919, 7920, 7924, 7927,   |
| 7970, 8073, 8090, 8098, 8103, 8104,    | 8106, 8108, 8110, 8112, 8113, 8115,   |
| 8117, 8119, 8122, 8123, 8125, 8126,    | 8129, 8131, 8133, 8177, 8268, 8271,   |
| 8272, 8576, 8581, 8736, 8799, 8801     | 8272, 8576, 8581, 8736, 8799, 8801    |
| \defemph . . . . .                     | 98, 5999                              |
| \Definame . . . . .                    | 95, 6900, 6930, 6983, 6989            |
| \definename . . . . .                  | 24, 36,                               |
| 45, 94, 95, 98, 6899, 6929, 6975, 6981 | \definiendum . . . . .                |
| 45, 94, 95, 98, 6897, 6927, 6969, 6973 | 24, 36,                               |
| definiendum . . . . .                  | 6942                                  |
| <b>E</b>                               |                                       |
| \edef . . . . .                        | 115, 2074, 2075, 2076, 6512, 7935     |
| \egroup . . . . .                      | 3795, 4846, 5039, 7949, 8031, 8048,   |
| 8123, 8126, 8410, 8467, 8516, 8565     | \elgroup . . . . .                    |
| \eject . . . . .                       | 8843                                  |
| \ellipses . . . . .                    | 90,                                   |
| 91, 4681, 4682, 5075, 5077, 5635, 5673 | \else . . . . .                       |
| \else . . . . .                        | 295, 307,                             |
| 1884, 1967, 2193, 5862, 6041, 8177,    | 1884, 1967, 2193, 5862, 6041, 8177,   |
| 8395, 8409, 8663, 8878, 8883, 8888     | 8395, 8409, 8663, 8878, 8883, 8888    |
| \emph . . . . .                        | 17, 19, 97, 6049, 7177, 7265,         |
| 7282, 8415, 8472, 8521, 8570, 8637     | 7282, 8415, 8472, 8521, 8570, 8637    |
| \end . . . . .                         | 131, 136, 1308, 1362, 2037, 2050,     |
| 2068, 2220, 2242, 2265, 2525, 2780,    | 2858, 4720, 6868, 7175, 7201, 7263,   |
| 7280, 7331, 7333, 7411, 7415, 7617,    | 7280, 7331, 7333, 7411, 7415, 7617,   |
| 7801, 7855, 7864, 7937, 7949, 7963,    | 7801, 7855, 7864, 7937, 7949, 7963,   |
| 8003, 8017, 8025, 8038, 8040, 8053,    | 8003, 8017, 8025, 8038, 8040, 8053,   |
| 8054, 8055, 8056, 8057, 8058, 8079,    | 8054, 8055, 8056, 8057, 8058, 8079,   |
| 8140, 8174, 8175, 8323, 8402, 8407,    | 8140, 8174, 8175, 8323, 8402, 8407,   |
| 8459, 8464, 8508, 8513, 8557, 8562,    | 8459, 8464, 8508, 8513, 8557, 8562,   |
| 8595, 8597, 8756, 8798, 8843, 8900     | 8595, 8597, 8756, 8798, 8843, 8900    |
| \endcsname . . . . .                   | 267, 295, 296,                        |
| 355, 2072, 2073, 2074, 2075, 2076,     | 355, 2072, 2073, 2074, 2075, 2076,    |
| 2081, 2082, 2083, 2378, 2641, 8177     | 2081, 2082, 2083, 2378, 2641, 8177    |
| \endgroup . . . . .                    | 360, 362, 1928                        |
| \endinput . . . . .                    | 1766, 2267                            |
| \ensuremath . . . . .                  | 5747, 5758                            |
| environments:                          |                                       |
| assignment . . . . .                   | 111, 8710                             |
| blindfragment . . . . .                | 77                                    |
| exnote . . . . .                       | 1, 8478                               |
| extstructure . . . . .                 | 91, 6157                              |
| extstructure* . . . . .                | 91                                    |
| frame . . . . .                        | 1, 7879                               |
| gnote . . . . .                        | 1, 8527                               |

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| hint . . . . .                | 1, <a href="#">8429</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| mathstructure . . . . .       | <a href="#">91</a> , <a href="#">6071</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| mcb . . . . .                 | 1, <a href="#">8586</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| mmtinterface . . . . .        | <a href="#">7583</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| nassertion . . . . .          | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| ndefinition . . . . .         | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| nexample . . . . .            | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| note . . . . .                | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| nparagraph . . . . .          | 1, <a href="#">1</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| nsproof . . . . .             | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| problem . . . . .             | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| sassertion . . . . .          | <a href="#">94</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| sdefinition . . . . .         | <a href="#">94</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| sexample . . . . .            | <a href="#">94</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| sfragment . . . . .           | 77                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| smodule . . . . .             | <a href="#">81</a> , <a href="#">2497</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| solution . . . . .            | 1, <a href="#">8370</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| sparagraph . . . . .          | <a href="#">94</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| sproblem . . . . .            | <a href="#">8273</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| sproof . . . . .              | <a href="#">96</a> , <a href="#">7193</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| stex_annotation_env . . . . . | 136                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| subproof . . . . .            | <a href="#">7286</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| testheading . . . . .         | 111                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| \eq . . . . .                 | 32, 42                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| \eqstep . . . . .             | <a href="#">7248</a> , <a href="#">7352</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| \equal . . . . .              | 31                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| \escapechar . . . . .         | 52, 1054                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| \everyeof . . . . .           | 2146                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| \excursion . . . . .          | <a href="#">104</a> , <a href="#">8135</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| \excursiongroup . . . . .     | <a href="#">104</a> , <a href="#">8152</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| \excursionref . . . . .       | <a href="#">104</a> , <a href="#">8136</a> , <a href="#">8149</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| exnote (env.) . . . . .       | 1, <a href="#">8478</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| exp commands:                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| \exp_after:wN . . . . .       | 355, 444, 447, 479, 546, 697, 886, 2148, 2192, 2193, 2194, 2334, 2379, 2380, 2381, 2388, 2392, 2396, 2397, 2919, 2940, 3553, 3785, 4084, 4097, 4685, 4713, 4834, 5027, 5264, 5266, 5274, 5276, 5322, 5329, 5330, 5331, 5350, 5383, 5546, 5548, 5650, 5651, 5652, 5665, 5860, 5923, 5969, 5985, 6201, 6251, 6254, 6578, 6874, 6887, 6951, 6986                                                                                                                                                                                                                                                                                        |
| \exp_args:N . . .             | 534, 539, 553, 554, 885, 939, 1027, 1100, 1127, 1649, 1798, 1810, 1822, 1838, 1841, 1844, 1846, 2328, 2822, 2828, 2918, 2921, 3350, 3378, 3384, 3747, 3756, 3913, 3977, 3979, 4656, 4801, 4998, 5433, 5579, 5581, 5590, 6162, 6212, 6299, 6303, 6381, 6462, 6511, 6517, 6751, 6787, 6880, 7165, 7372, 7662, 8793                                                                                                                                                                                                                                                                                                                     |
| \exp_args:NNe . . . . .       | .. 53, 197, 200, 594, 1072, 1077,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| \exp_args:Nno . . . . .       | 251, 253, 266, 378, 2409, 2944, 2947, 3780, 4016, 4829, 5022, 5128, 5133, 5217, 6008, 6471, 7014, 8278, 8366, 8725, 8765                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| \exp_args:Nnx . . . . .       | 54, 109, 121, 910, 997, 1893, 1941, 2110, 2129, 6604, 7066, 7394, 8236, 8239, 8242, 8245, 8695, 8698, 8701, 8704                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| \exp_args:Nnx . . . . .       | 246, 1316, 1590, 1658, 1893, 1941, 2797, 2998, 3003, 3190, 3216, 3737, 3904, 5106, 5307, 5339, 5349, 5859, 6132, 6808, 7066, 7394, 7631                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| \exp_args:No . . . . .        | 141, 161, 162, 163, 210, 301, 439, 606, 612, 750, 1025, 1111, 1211, 1263, 1271, 1293, 1316, 1529, 1714, 1719, 1724, 1756, 1761, 1763, 2064, 2349, 2446, 2501, 2538, 2867, 2879, 2916, 3103, 3118, 3360, 3361, 3551, 3556, 3640, 3742, 3743, 3744, 4014, 4170, 4528, 4703, 4779, 4780, 4781, 4792, 4793, 4794, 4974, 4975, 4976, 4987, 4988, 4989, 5081, 5150, 5153, 5157, 5198, 5337, 5342, 5347, 5352, 5354, 5442, 5470, 5579, 5581, 5608, 5693, 6110, 6120, 6152, 6225, 6337, 6341, 6348, 6375, 6410, 6412, 6484, 6486, 6492, 6567, 6593, 6599, 6601, 6606, 6610, 6616, 6663, 6712, 6955, 7005, 7752, 7811, 7812, 7815, 8290, 8303 |
| \exp_args:Nx . . . . .        | 248, 696, 751, 759, 1533, 1639, 1641, 2198, 2503, 2982, 7880, 8602                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| \exp_not:N            | 55, 210, 212, 560, 945, 952, 1110, 1221, 1224, 1946, 1999, 2146, 2192, 2402, 2798, 3353, 3387, 4169, 4545, 5109, 5112, 5148, 5149, 5152, 5156, 5160, 5317, 5392, 5398, 5600, 5604, 5607, 5685, 5689, 5691, 5861, 6219, 6411, 6485, 6491, 6527, 6566, 6592, 6598, 6607, 6618, 7763, 7768                                                                                                                                                                  |  |
| \exp_not:n            | 210, 543, 1111, 1316, 1529, 2396, 2423, 2446, 2576, 2600, 3359, 3360, 3361, 3742, 3743, 3744, 3933, 4170, 4211, 4212, 4528, 4685, 4713, 4779, 4780, 4781, 4792, 4793, 4794, 4974, 4975, 4976, 4987, 4988, 4989, 5103, 5150, 5153, 5157, 5159, 5161, 5198, 5330, 5337, 5342, 5347, 5352, 5354, 5566, 5608, 5645, 5650, 5693, 6195, 6337, 6375, 6405, 6410, 6412, 6484, 6486, 6488, 6492, 6495, 6521, 6567, 6569, 6593, 6595, 6599, 6601, 6606, 6610, 6616 |  |
| \expandafter          | . 296, 360, 2072, 2073, 2074, 2075, 2076, 2378, 2641, 6041, 7855, 7856                                                                                                                                                                                                                                                                                                                                                                                   |  |
| \ExplSyntaxOff        | 2115, 2555, 7669, 8249, 8708                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
| \ExplSyntaxOn         | 2114, 2551, 7666, 8232, 8691                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
| \extref               | 80, 1553                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |
| \extstructure (env.)  | 91, 6157                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |
| \extstructure         | 6189, 6191                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |
| \extstructure* (env.) | 91                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |
| <b>F</b>              |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| \fbox                 | 8662, 8664                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |
| \fi                   | 298, 313, 1888, 1903, 1967, 2194, 5170, 5204, 5875, 5979, 6041, 6943, 7516, 7857, 7925, 7928, 8027, 8177, 8397, 8411, 8645, 8671, 8882, 8892, 8893                                                                                                                                                                                                                                                                                                       |  |
| \fiboxed              | 100                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
| file commands:        |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| \file_if_exist:nTF    | 634, 651, 1164                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |
| \filepath             | 133, 134                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |
| \fillinsol            | 109, 8318, 8656                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| \first                | 132                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
| \fn                   | 54                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |
| \foo                  | 15, 54, 83, 136, 138                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |
| \fooname              | 15                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |
| \footnotesize         | 8794                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |
| \foral                | 46, 51                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |
| \forallall            | 46, 7503, 7509, 7520                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |
| \frame (env.)         | 1, 7879                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |
| \frameimage           | 103, 8062                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |
| \frameimages          | 100                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
| \frametitle           | 7979                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |
| <b>G</b>              |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| \frontmatter          | 1449, 1450, 1451                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |
| \fun                  | 45                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |
| \funspace             | 37                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |
| <b>H</b>              |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| \gdef                 | 8135                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |
| \given                | 111                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
| \global               | 1243, 1247, 1264, 1269, 2073, 7549, 7550, 8424, 8427, 8732, 8734                                                                                                                                                                                                                                                                                                                                                                                         |  |
| \gnote (env.)         | 1, 8527                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |
| \gnotes               | 105, 111                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |
| group commands:       |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| \group_begin:         | 42, 51, 635, 1053, 1692, 2157, 2416, 2453, 2772, 2792, 2816, 3047, 3271, 3312, 3657, 3709, 3871, 3873, 3875, 3877, 3937, 4143, 4450, 4496, 4758, 4913, 4953, 5082, 5086, 5184, 5337, 5493, 5501, 5575, 5596, 5644, 5660, 5863, 5900, 5908, 5919, 5941, 5952, 5965, 6502, 6519, 6875, 6944, 6993, 7046, 7260, 7327, 7349, 7412, 7433, 7461, 8363, 8762                                                                                                    |  |
| \group_end:           | 46, 54, 641, 1057, 1739, 2180, 2434, 2467, 2781, 2797, 2859, 3052, 3277, 3318, 3659, 3717, 3871, 3873, 3875, 3877, 3942, 3962, 4146, 4461, 4499, 4769, 4925, 4964, 5053, 5071, 5083, 5087, 5128, 5261, 5272, 5289, 5300, 5322, 5350, 5355, 5371, 5404, 5496, 5513, 5575, 5599, 5652, 5684, 5871, 5996, 6419, 6475, 6505, 6528, 6538, 6604, 6884, 6961, 7007, 7059, 7271, 7337, 7341, 7390, 7427, 7452, 7551, 8367, 8766                                  |  |
| \group_insert_after:N | 256, 272                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |
| <b>H</b>              |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| \have                 | 7352                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |
| \hbox                 | 1255, 3043, 3346, 3771, 3925, 3954, 4325, 4801, 5013, 6173, 6757, 7181, 7205, 8123, 8126, 8625                                                                                                                                                                                                                                                                                                                                                           |  |
| hbox commands:        |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| \hbox_set:Nn          | 3656, 4186                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |
| \hbox_unpack:N        | 3953, 3960                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |
| \HCode                | 308                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
| \hfil                 | 7187                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |
| \hfill                | 7187                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |
| \hint (env.)          | 1, 8429                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |
| \hints                | 105, 111                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |
| \hline                | 8792, 8794, 8795, 8796, 8797                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
| \href                 | 1833                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |
| \hrule                | 7181, 8414, 8419, 8471, 8476, 8520, 8525, 8569, 8574, 8625                                                                                                                                                                                                                                                                                                                                                                                               |  |
| \hspace               | 8668                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |

```

\HTML 15, 26
\huge 8666
hwexam commands:
 \l_hwexam_includeassignment_-
 keys_t1 8723, 8724, 8726, 8763
 \hwexam_kw_* 8690
 \c_hwexam_multiple_bool 8683
hwexam@kw@due commands:
 \hwexam@kw@due: 8753
hwexam@kw@given commands:
 \hwexam@kw@given: 8750
\hwexamheader 8799, 8838
\hwexamminutes 8801
\hyperref 1827, 1828

I
\id 118
\if 2192, 5858
\IfBooleanTF 3701, 4137,
 4447, 5421, 7298, 7405, 7428, 8063
\ifcsname 295, 8177
\ifdefempty 8168
\iffalse 7502
\IfFileExists 6, 20, 1719, 1902,
 1910, 1983, 1991, 3219, 3224, 3244
\IfInputref 27, 28, 78, 1960, 8166
\ifinputref 27, 78, 1878, 1967
\ifmmode 6041
\ifnotes 101, 7743, 7875
\ifSGvar 104, 8185
\ifsolutions
 . 106, 8222, 8393, 8404, 8645, 8661
\ifstexhtml 28, 76, 135, 295
\ifvmode 1903, 5170, 5204, 5979, 6943
\ifx 2072, 7854, 7923, 7926, 8875, 8876, 8884
\ignorespaces 4769, 4964, 8029
image 112
\imply 51
\importmodule 38, 49, 55, 88–90,
 125, 128, 130, 131, 138, 207, 2970, 3249
\includeassignment 8761
\includegraphics 78, 2035, 8868
\includeproblem 69, 110, 8355
\indent 5170, 5204, 5979, 6943
\infprec 85, 86, 4250, 5830, 5833, 5866, 7473
\inline* 95
\inlineass 50, 55, 58, 95
\inlinedef 50, 95
\inlineex 95
\input 27, 75, 130, 39, 81, 84, 317,
 1030, 1915, 2002, 8233, 8237, 8240,
 8243, 8246, 8692, 8696, 8699, 8702,
 8705, 8799, 8877, 8880, 8886, 8890
\inputassignment 111
\inputref 27, 28, 77, 78, 97, 1878,
 8081, 8082, 8144, 8169, 8366, 8765
\inputref* 102, 8081
\inputreffalse 1878, 1887
\inputreftrue 1885, 1922
\insertframenumber 8129, 8131
\insertshortauthor 8122
\insertshortdate 8133
\insertshorttitle 8125
\inset 45
int commands:
 \int_case:nn 1368
 \int_case:nnTF 1326, 1395, 1428
 \int_compare:nNnTF
 248, 2016, 2091, 3530, 4175, 4210,
 4709, 5291, 5578, 5589, 5638, 5844,
 6334, 6344, 6436, 6819, 7127, 8779
\int_compare_p:nNn
 . 7097, 7109, 7121, 7138, 7150
\int_decr:N 7128, 7156
\int_eval:n 265, 267, 269, 271, 273,
 5447, 5453, 5843, 6133, 6140, 6267,
 8732, 8775, 8776, 8793, 8826, 8833
\int_gincr:N 1507,
 5432, 8376, 8433, 8482, 8531, 8773
\int_gset:Nn 5396
\int_gzero:N 5381
\int_incr:N 1318, 1328,
 1332, 1356, 1370, 1373, 1376, 1397,
 1401, 1432, 1438, 3847, 3848, 3849,
 3850, 4625, 4708, 5544, 7102, 7114,
 7125, 7142, 7154, 7570, 7802, 8780
\int_new:N . 1276, 1503, 3803, 3991,
 4695, 5374, 5528, 5832, 8370, 8771
\int_set:Nn 1412, 1413, 1414, 1415,
 1416, 1417, 1419, 3027, 3812, 3816,
 3820, 3824, 3828, 3832, 3836, 3840,
 3844, 3919, 3998, 4039, 4071, 4598,
 4703, 4710, 4748, 4872, 5504, 5833,
 5866, 7095, 7107, 7119, 7136, 7148
\int_step_function:nN 5110, 5310
\int_step_inline:nn
 . 3861, 4242, 4249, 4269, 4519
\int_use:N 227, 1302,
 1382, 1422, 1442, 1508, 3357, 3740,
 4319, 4436, 4598, 4777, 4790, 4972,
 4985, 5220, 5396, 5433, 5565, 5602,
 5687, 5830, 5831, 6810, 7573, 7634,
 7795, 8378, 8435, 8484, 8533, 8792
\int_zero:N
 . 3806, 3807, 4580, 4706, 5534, 7563
\c_max_int 5830, 5831
\l_tmpa_int
 . 4580, 4583, 4598, 4625, 4706, 4708,

```

|                                                         |                                                   |
|---------------------------------------------------------|---------------------------------------------------|
| 4709, 4710, 4714, 7095, 7098, 7101,                     | <b>L</b>                                          |
| 7102, 7107, 7110, 7113, 7114, 7119,                     | \label ..... 79, 116, 127, 1533, 1810, 7972       |
| 7122, 7125, 7127, 7128, 7130, 7131,                     | \labelsep ..... 7931                              |
| 7136, 7139, 7142, 7144, 7148, 7151,                     | \labelwidth ..... 7932                            |
| 7154, 7156, 7157, 7563, 7570, 7573                      | \lambda ..... 7503, 7514, 7515                    |
| intarray commands:                                      |                                                   |
| \intarray_gset:Nnn ..... 7130, 7144, 7157, 7232         | \large ..... 7740, 8091, 8743                     |
| \intarray_gzero:N ..... 7231                            | \LaTeX ..... 23                                   |
| \intarray_item:Nn ..... 7098, 7101,                     | \latext ..... 23                                  |
| 7110, 7113, 7122, 7131, 7139, 7151                      | \ldots ..... 7495, 7540, 7542, 7544               |
| \intarray_new:Nn ..... 7093                             | \leaders ..... 8093                               |
| \interpretmod ..... 3606, 3610                          | \leavevmode ..... 7987                            |
| \interpretmodule ..... 3496, 3498                       | \left ..... 5860                                  |
| invokation commands:                                    |                                                   |
| \invokation_macro ..... 118, 120, 126                   | \leftmargin ..... 7933                            |
| ior commands:                                           |                                                   |
| \ior_close:N ..... 658, 664, 1058, 1189                 | \let ..... 355, 1450, 1451, 1460, 1461, 1722,     |
| \ior_map_inline:Nn ..... 1174                           | 2073, 2147, 2158, 2165, 2176, 2188,               |
| \ior_new:N ..... 1170                                   | 3295, 3954, 3961, 4455, 4474, 4763,               |
| \ior_open:Nn ..... 652, 660, 1172                       | 4958, 5187, 5905, 5915, 5929, 5991,               |
| \ior_open:NnTF ..... 1052                               | 6070, 7549, 7550, 7667, 7668, 8100                |
| \ior_str_get:NN ..... 1055                              | \libinput ..... 20, 75, 1970                      |
| \ior_str_map_inline:Nn ..... 654, 661                   | \libusepackage ..... 75, 76, 2014, 7871           |
| \g_tmpa_ior ..... 652, 654,                             | \libusethem ..... 7870                            |
| 658, 660, 661, 664, 1052, 1055, 1058                    | \libusetikzlibrary ..... 75, 113, 2070            |
| iow commands:                                           |                                                   |
| \iow_close:N ..... 647, 657, 1495                       | \LoadClass ..... 15, 7708, 7710                   |
| \iow_new:N ..... 616, 1493                              | \long ..... 136, 587, 8104, 8113                  |
| \iow_now:Nn ..... 624, 655, 662, 1521, 1792, 7665, 8349 | \lstinputlisting ..... 78, 2049                   |
| \iow_open:Nn ..... 646, 653, 1494                       | \lstinputmhlisting ..... 78, 2025                 |
| \g_tmpa_iow ..... 653, 655, 657                         |                                                   |
| \isassociative ..... 49                                 | <b>M</b>                                          |
| \iscommutative ..... 49                                 | \macro ..... 130–132, 137                         |
| \item ..... 7198, 8648                                  | \macroname ..... 32                               |
| \interpretmod ..... 3608                                | \magma ..... 53                                   |
| \itshape ..... 7191                                     | \maincomp ..... 32, 33, 36, 54, 85, 92,           |
|                                                         | 98, 3961, 4169, 4178, 4189, 4190,                 |
|                                                         | 4211, 4342, 4545, 5189, 5370, 5887,               |
|                                                         | 6066, 6511, 6512, 6517, 6525, 6530                |
|                                                         | \mainmatter ..... 1472, 1473, 1483, 1484          |
|                                                         | \makeatletter ..... 2112, 8232, 8691, 8838        |
|                                                         | \makeatother ..... 2113, 8249, 8708, 8838         |
|                                                         | \maketitle ..... 1268, 1269                       |
|                                                         | \mapsto ..... 7512, 7513                          |
|                                                         | \marginnote ..... 7921                            |
|                                                         | \marginpar ..... 8327, 8330, 8578, 8583           |
|                                                         | \mathbb ..... 7526                                |
|                                                         | \mathbin ..... 33, 7471, 7475, 7482, 7508, 7519   |
|                                                         | \mathclose ..... 33, 5872, 7473, 7480, 7484,      |
|                                                         | 7490, 7492, 7500, 7507, 7519, 7523                |
|                                                         | \mathhub ..... 73, 133, 165, 30, 1041             |
|                                                         | \mathop ..... 33, 7510, 7521                      |
|                                                         | \mathopen ..... 33, 5867, 7473, 7480, 7484,       |
|                                                         | 7490, 7492, 7499, 7507, 7519, 7523                |
|                                                         | \mathord ..... 33                                 |
|                                                         | \mathpunct ..... 33, 4523, 5523, 7499, 7509, 7515 |
| keyval commands:                                        |                                                   |
| \keyval_parse>NNn ..... 6356                            | \mathrel ..... 32, 33, 7476, 7513                 |

|                                                                                 |                                                                                                                                                                                                                                |
|---------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                 | N                                                                                                                                                                                                                              |
| \mathrm . . . . .                                                               | 4545, 7499                                                                                                                                                                                                                     |
| mathstructure (env.) . . . . .                                                  | 91, 6071                                                                                                                                                                                                                       |
| \mathstructure . . . . .                                                        | 6115, 6116                                                                                                                                                                                                                     |
| \mathtt . . . . .                                                               | 7479, 7480, 7529, 7532, 7536                                                                                                                                                                                                   |
| \mcb (env.) . . . . .                                                           | 1, 8586                                                                                                                                                                                                                        |
| \mcb . . . . .                                                                  | 8317, 8590, 8600                                                                                                                                                                                                               |
| \mcc . . . . .                                                                  | 67, 107, 8592, 8623                                                                                                                                                                                                            |
| \meaning . . . . .                                                              | 1023, 2378, 2641, 4215, 4489, 4574,<br>4600, 5127, 5132, 5335, 5345, 5346                                                                                                                                                      |
| \medskip . . . . .                                                              | 7948, 7962, 7981                                                                                                                                                                                                               |
| \meet . . . . .                                                                 | 63                                                                                                                                                                                                                             |
| \message . . . . .                                                              | 26, 7701, 7704, 7861                                                                                                                                                                                                           |
| \mhframeimage . . . . .                                                         | 103                                                                                                                                                                                                                            |
| \mhgraphics . . . . .                                                           | 78, 2025, 8075, 8077                                                                                                                                                                                                           |
| \mhinput . . . . .                                                              | 78, 1878                                                                                                                                                                                                                       |
| \mhtikzinput . . . . .                                                          | 113, 2025                                                                                                                                                                                                                      |
| \min . . . . .                                                                  | 111                                                                                                                                                                                                                            |
| \min . . . . .                                                                  | 8581                                                                                                                                                                                                                           |
| \min . . . . .                                                                  | 105, 111                                                                                                                                                                                                                       |
| \mmlarg . . . . .                                                               | 336                                                                                                                                                                                                                            |
| \mmlintent . . . . .                                                            | 336                                                                                                                                                                                                                            |
| \mmtdef . . . . .                                                               | 7610, 7620                                                                                                                                                                                                                     |
| \MMTinclude . . . . .                                                           | 7554                                                                                                                                                                                                                           |
| \mmtinterface (env.) . . . . .                                                  | 7583                                                                                                                                                                                                                           |
| \MMTrule . . . . .                                                              | 7559                                                                                                                                                                                                                           |
| \mname . . . . .                                                                | 82, 91                                                                                                                                                                                                                         |
| mode commands:                                                                  |                                                                                                                                                                                                                                |
| \mode_if_math:TF . . . . .                                                      | 3346, 3954, 3955, 3962, 5229                                                                                                                                                                                                   |
| \mode_if_vertical:TF . . . . .                                                  | 3953, 3960                                                                                                                                                                                                                     |
| \MSC . . . . .                                                                  | 7553                                                                                                                                                                                                                           |
| msg commands:                                                                   |                                                                                                                                                                                                                                |
| \msg_error: . . . . .                                                           | 137                                                                                                                                                                                                                            |
| \msg_error:nn . . . . .                                                         | 81, 1781, 7001, 7054                                                                                                                                                                                                           |
| \msg_error:nnn . . . . .                                                        | 84,<br>153, 192, 240, 811, 947, 954, 1972,<br>1975, 2088, 3182, 3238, 3409, 3439,<br>3967, 4658, 4900, 6145, 6622, 6649                                                                                                        |
| \msg_error:nnnn . . . . .                                                       | 351, 829, 834,<br>853, 888, 960, 1946, 1999, 2901,<br>2989, 3334, 3852, 4428, 4923, 5178,<br>5212, 5458, 5485, 5994, 6259, 6959                                                                                                |
| \msg_none:nn . . . . .                                                          | 78                                                                                                                                                                                                                             |
| \msg_redirect_module:nnn . . . . .                                              | 100                                                                                                                                                                                                                            |
| \msg_redirect_name:nnn . . . . .                                                | 104                                                                                                                                                                                                                            |
| \msg_set:nnn . . . . .                                                          | 75                                                                                                                                                                                                                             |
| \msg_warning:nn . . . . .                                                       | 1071                                                                                                                                                                                                                           |
| \msg_warning:nnn . . . . .                                                      | 1691, 1733                                                                                                                                                                                                                     |
| \msg_warning:nnnn . . . . .                                                     | 433, 1725                                                                                                                                                                                                                      |
| \mult . . . . .                                                                 | 40, 41, 86, 87                                                                                                                                                                                                                 |
| \multicolumn . . . . .                                                          | 8793                                                                                                                                                                                                                           |
| \multiple . . . . .                                                             | 111                                                                                                                                                                                                                            |
| nassertion (env.) . . . . .                                                     | 1                                                                                                                                                                                                                              |
| \Nat . . . . .                                                                  | 36                                                                                                                                                                                                                             |
| ndefinition (env.) . . . . .                                                    | 1                                                                                                                                                                                                                              |
| \neginfpref 41, 85, 86, 4220, 4223, 4232,<br>4235, 4248, 5049, 5285, 5296, 5830 |                                                                                                                                                                                                                                |
| \newcommand . . . . .                                                           | 444, 479,<br>1575, 1953, 1961, 1966, 2007, 2014,<br>2044, 2050, 2058, 2068, 7456, 7852,<br>7921, 7983, 8084, 8088, 8136, 8143,<br>8146, 8163, 8266, 8628, 8656, 8778,<br>8842, 8845, 8846, 8868, 8873, 8897                    |
| \newcounter ... 7711, 7712, 7713, 7714,<br>7836, 7848, 8265, 8273, 8274, 8721   |                                                                                                                                                                                                                                |
| \NewDocumentCommand . . . . .                                                   | 447, 1539, 1771, 1776, 1820,<br>1892, 1940, 2471, 2550, 4912, 5420,<br>5899, 5907, 5918, 5940, 5951, 5964,<br>6874, 6964, 6969, 6975, 6983, 6992,<br>7035, 7045, 7063, 7389, 7425, 7440,<br>7559, 7620, 7870, 8062, 8362, 8761 |
| \NewDocumentEnvironment . . . . .                                               | 482, 1348, 1357, 7445, 7583                                                                                                                                                                                                    |
| \newenvironment . . . . .                                                       | 1469, 1480,<br>7159, 7366, 8035, 8037, 8586, 8821                                                                                                                                                                              |
| \newif . . . . .                                                                | 296, 319, 1878, 7743, 8222, 8828                                                                                                                                                                                               |
| \newlabel . . . . .                                                             | 7667, 7668                                                                                                                                                                                                                     |
| \newlength . . . . .                                                            | 7873, 7874, 7877                                                                                                                                                                                                               |
| \newpage . . . . .                                                              | 7969, 8840, 8846                                                                                                                                                                                                               |
| \newsavebox . . . . .                                                           | 8005                                                                                                                                                                                                                           |
| nexample (env.) . . . . .                                                       | 1                                                                                                                                                                                                                              |
| \ninputref . . . . .                                                            | 8082, 8084, 8088                                                                                                                                                                                                               |
| \nobreak . . . . .                                                              | 7187                                                                                                                                                                                                                           |
| \noindent . . . . .                                                             | 1303,<br>1903, 6858, 7177, 7948, 7962, 7985,<br>8003, 8325, 8415, 8472, 8521, 8570                                                                                                                                             |
| \nointerlineskip . . . . .                                                      | 8095                                                                                                                                                                                                                           |
| \notation . . . . .                                                             | 32, 33, 41, 83, 85, 90, 121,<br>124, 130, 2969, 4127, 7471, 7474,<br>7475, 7476, 7489, 7491, 7509, 7510,<br>7514, 7518, 7520, 7521, 7526, 7529                                                                                 |
| note (env.) . . . . .                                                           | 1                                                                                                                                                                                                                              |
| notes . . . . .                                                                 | 100, 105, 111                                                                                                                                                                                                                  |
| \notesfalse . . . . .                                                           | 7755                                                                                                                                                                                                                           |
| notesslides commands:                                                           |                                                                                                                                                                                                                                |
| \c_notesslides_notes_bool . . . . .                                             | 7682, 7683, 7696, 7699, 7707,<br>7723, 7724, 7736, 7744, 7867, 8028,<br>8034, 8068, 8083, 8102, 8137, 8147                                                                                                                     |
| \c_notesslides_sectocframes_bool . . . . .                                      | 7725, 7823                                                                                                                                                                                                                     |
| \c_notesslides_topsect_str . . . . .                                            | 7726,<br>7749, 7752, 7808, 7811, 7812, 7815                                                                                                                                                                                    |

notesslides internal commands:

```

\c__notesslides_class_str
 7678, 7681, 7687, 7708
__notesslides_define_chapter: ...
 7813, 7816, 7828
__notesslides_define_part: ...
 7817, 7840
__notesslides_do_label:n 7758, 7794
__notesslides_do_sectocframes: ...
 7757, 7824
__notesslides_do_yes_param:Nn ...
 7879,
 7898, 7901, 7904, 7907, 7910, 7913
\c__notesslides_docopt_str ... 7684
\c__notesslides_document_str ...
 7851, 7854
__notesslides_eat: . 8038, 8042, 8045
__notesslides_excursion_args:n ...
 8157, 8164
\l__notesslides_excursion_id_str
 8153, 8159
\l__notesslides_excursion_intro_-
 tl 8154, 8158, 8168, 8170
\l__notesslides_excursion_-
 mhrepos_str 8155, 8160, 8169
\l__notesslides_frame_allowdisplaybreaks_-
 bool 7890, 7901
\l__notesslides_frame_allowframebreaks_-
 bool 7889, 7898
__notesslides_frame_box_begin: .
 7941, 7952, 7975
__notesslides_frame_box_end: ...
 7946, 7961, 7977
\l__notesslides_frame_fragile_-
 bool 7891, 7904
\l__notesslides_frame_label_str ...
 7888, 7896, 7971, 7972
\l__notesslides_frame_shrink_-
 bool 7892, 7907
\l__notesslides_frame_squeeze_-
 bool 7893, 7910
\l__notesslides_frame_t_bool ...
 7894, 7913
__notesslides_inputref: ...
 8081, 8082, 8085
__notesslides_notes_env:nnnn ...
 8033,
 8053, 8054, 8055, 8056, 8057, 8058
\l__notesslides_num ...
 7761, 7763, 7766,
 7768, 7771, 7772, 7775, 7776, 7779,
 7780, 7783, 7784, 7787, 7788, 7795
__notesslides_setup_itemize: ...
 7917, 7974

```

```

\l__notesslides_tmp
\g__notesslides_variables_prop ...
 8178, 8180, 8183, 8186
\notesslidesfont
__notesslidesfont
__notesslidestitleemph
__notesttrue
\nparagraph (env.)
__nparagraph (env.)
__nsproof (env.)
__nnull
__num
__number
__numberline
__numberproblemsin

```

**O**

```

\OMDoc
\omdoc
\oplus
 7481, 7482

```

**P**

```

\PackageError
\pagebreak
\pagenumbering ...
 1456, 1466, 1477, 1488
\par
 137, 359, 1301, 1305,
 1911, 7160, 7187, 7230, 7287, 7948,
 7962, 7985, 7990, 7998, 8003, 8010,
 8020, 8325, 8332, 8335, 8414, 8419,
 8471, 8476, 8520, 8525, 8569, 8574,
 8586, 8629, 8742, 8747, 8757, 8759
\paragraph
 27, 77
\parsep
\part
 27, 77, 7844, 7845
\partname
\parttitlename
\PassOptionsToClass
\PassOptionsToPackage
 10, 7688, 7689, 7700,
 7703, 7728, 7729, 7746, 8219, 8685
\pause
\PDF
\pdfbookmark
\pdfdest
\peek commands:

```

```

\peek_charcode:NTF
 3561, 5043, 5056, 5119, 5121,
 5243, 5250, 6281, 6287, 6428, 6439
\peek_charcode_remove:NTF
 5042, 5118, 5234, 5239,
 5241, 5248, 5321, 5709, 6286, 6536
\phantom
\pi
\plus
 39–41, 44, 85–87
\prematurestop
\premise
 51, 52, 96, 6926, 7063, 7070

```

prg commands:  
   \prg\_new\_conditional:Nnn .....  
     ..... 231, 281, 533,  
       538, 747, 757, 2119, 2529, 2533,  
       3634, 3645, 3649, 5464, 5577, 5588  
   \prg\_new\_protected\_conditional:Nnn  
     ..... 767  
   \prg\_return\_false: .. 233, 283, 536,  
     541, 748, 752, 758, 760, 783, 787,  
     2120, 2531, 2535, 3635, 3650, 5482,  
     5486, 5583, 5584, 5585, 5591, 5592  
   \prg\_return\_true: .. 233, 283,  
     536, 541, 750, 752, 760, 787, 2120,  
     2531, 2535, 3646, 5480, 5583, 5591  
   \printexcursion ..... 104  
   \printexcursions .. 8135, 8144, 8165, 8173  
 problem (env.) ..... 1  
 problem commands:  
   \g\_problem\_id\_counter .....  
     ..... 8370, 8376, 8378,  
       8433, 8435, 8482, 8484, 8531, 8533  
   \l\_problem\_inputproblem\_keys\_tl ..  
     ..... 8276, 8277, 8279, 8364  
   \problem\_mcc\_box\_tl ..... 8623, 8648  
   \problemheader ..... 8325, 8340  
 problems internal commands:  
   \c\_\_problems\_boxed\_bool ..... 8215  
   \\_\_problems\_do\_yes\_param:Nn .. 8601  
   \\_\_problems\_exnote\_start:n ..  
     ..... 8478, 8497, 8500  
   \\_\_problems\_gnote\_start:n ..  
     ..... 8527, 8546, 8549  
   \c\_\_problems\_gnotes\_bool ..  
     ..... 8205, 8548, 8559  
   \\_\_problems\_hint\_start:n ..  
     ..... 8429, 8448, 8451  
   \c\_\_problems\_hints\_bool ..  
     ..... 8207, 8450, 8461  
   \c\_\_problems\_min\_bool 8213, 8329, 8582  
   \c\_\_problems\_notes\_bool ..  
     ..... 8203, 8499, 8510  
   \l\_\_problems\_path\_seq ... 8286, 8287  
   \l\_\_problems\_prob\_imports\_tl .. 8262  
   \l\_\_problems\_prob\_refnum\_int .. 8263  
   \c\_\_problems\_pts\_bool 8211, 8326, 8577  
   \\_\_problems\_record\_problem: ..  
     ..... 8314, 8348  
   \\_\_problems\_solution\_start:n ..  
     ..... 8372, 8391, 8394  
   \c\_\_problems\_solutions\_bool ..  
     ..... 8209, 8225  
   \c\_\_problems\_test\_bool ..  
     ..... 8217, 8336, 8843, 8845, 8846  
   \ProcessKeysOptions .....  
     ..... 38, 7692, 7732, 8224, 8688, 8862  
   \ProcessOptions ..... 11  
   \prod ..... 7510, 7521  
   \prop ..... 42  
 prop commands:  
   \prop\_clear:N .. 1173, 2863, 2864, 6627  
   \prop\_const\_from\_keyval:Nn .. 109, 121  
   \prop\_gclear:N ..  
     ..... 2302, 2303, 2304, 2414, 5379  
   \prop\_get:NnN ..... 1207  
   \prop\_get:NnNTF ..  
     ..... 188, 902, 903, 1797, 1898,  
       1899, 1974, 2917, 2938, 5465, 8186  
   \prop\_gput:Nnn ..  
     ..... 2442, 2563, 2575, 2577, 2610, 5408,  
       5444, 5450, 5468, 7031, 8180, 8774  
   \prop\_gset\_eq:NN .. 1190, 1221, 1224  
   \prop\_gset\_from\_keyval:Nn ..  
     ..... 1193, 1218, 2407, 2409, 5392  
   \prop\_if\_exist:NTF ..  
     ..... 900, 1099, 1116, 1600,  
       1694, 1796, 1858, 1971, 3062, 5391  
   \prop\_if\_in:NnTF ..  
     ..... 137, 172, 804, 6587, 6644, 6674, 6688  
   \prop\_item:Nn ..  
     ..... 138, 920, 1100, 1213, 1618,  
       1697, 1860, 1863, 1872, 2032, 2046,  
       2061, 2843, 2999, 3004, 3065, 3090,  
       3101, 3116, 6579, 6619, 6647, 8183  
   \prop\_map\_break: ..... 2603  
   \prop\_map\_break:n 2622, 2658, 2661,  
     2739, 3023, 4036, 4888, 4891, 7018  
   \prop\_map\_function:NN .. 2400, 2930  
   \prop\_map\_inline:Nn .. 2410, 2587,  
     2620, 2664, 2682, 2685, 2707, 2710,  
     2748, 2894, 2913, 2953, 2981, 2985,  
     4052, 4881, 6241, 6467, 7015, 8786  
   \prop\_new:N ..... 8178, 8768  
   \prop\_put:Nnn .. 1181, 1182, 1183,  
     1184, 1185, 2881, 2885, 3353, 3387,  
     4774, 4969, 6653, 6676, 6690, 8781  
   \prop\_remove:Nn ..... 3449  
   \prop\_set\_eq:NN 1088, 1205, 1209, 1609  
   \prop\_to\_keyval:N ..  
     ... 1191, 1194, 1219, 2379, 2380,  
       2381, 2388, 2392, 2908, 2911, 5393  
   \protect ..... 7793, 8189  
   \protected ..... 118,  
     136, 357, 571, 572, 1269, 5916, 5930  
   \providecommand .. 2030, 2037, 7859, 8867  
   \ProvidesExplClass ..... 5, 7675  
   \ProvidesExplPackage ..  
     ..... 19, 7719, 8198, 8678, 8853

|                                  |                                                                                                                                                                           |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| \pts . . . . .                   | 8576                                                                                                                                                                      |
| pts . . . . .                    | 105, 111                                                                                                                                                                  |
|                                  |                                                                                                                                                                           |
| <b>Q</b>                         |                                                                                                                                                                           |
| \quad . . . . .                  | 7772, 7776, 7780,<br>7784, 7788, 8657, 8673, 8750, 8753                                                                                                                   |
| quark commands:                  |                                                                                                                                                                           |
| \quark_new:N . . . . .           | 2143, 2426                                                                                                                                                                |
| quark internal commands:         |                                                                                                                                                                           |
| \q__stex_smsmode_break . . . . . | 2143, 2146, 2206                                                                                                                                                          |
|                                  |                                                                                                                                                                           |
| <b>R</b>                         |                                                                                                                                                                           |
| \rangleangle . . . . .           | 7490                                                                                                                                                                      |
| \realization . . . . .           | 3520, 3522                                                                                                                                                                |
| \realize . . . . .               | 63, 64, 3627, 3629, 3631                                                                                                                                                  |
| \ref . . . . .                   | 79, 1641                                                                                                                                                                  |
| \refstepcounter . . . . .        | 8284, 8734                                                                                                                                                                |
| \relax . . . . .                 | 358, 639, 640, 1451, 1461,<br>1535, 1692, 2072, 2150, 2188, 2192,<br>2417, 2418, 3954, 3961, 8069, 8071                                                                   |
| \renamedecl . . . . .            | 64, 124, 2975, 3373, 3457                                                                                                                                                 |
| \renewcommand . . . . .          | 7868, 7969, 7979                                                                                                                                                          |
| \renewenvironment . . . . .      | 7922, 7966, 7984, 8006, 8029, 8031                                                                                                                                        |
| repo commands:                   |                                                                                                                                                                           |
| \repo_prop . . . . .             | 133, 134                                                                                                                                                                  |
| \reqpts . . . . .                | 111                                                                                                                                                                       |
| \requiremodule . . . . .         | 88, 89, 2971, 3322                                                                                                                                                        |
| \RequirePackage . . . . .        | 4, 13, 18, 23, 24, 146, 148, 197,<br>200, 5856, 7676, 7694, 7716, 7720,<br>7734, 7747, 7748, 8060, 8199, 8230,<br>8679, 8689, 8854, 8865, 8870, 8871                      |
| \resizebox . . . . .             | 8791, 8879, 8885, 8889                                                                                                                                                    |
| \rhd . . . . .                   | 7924, 7927                                                                                                                                                                |
| \right . . . .                   | 5861                                                                                                                                                                      |
| \Rightarrow . . . . .            | 7422                                                                                                                                                                      |
| \rightmargin . . . . .           | 7197                                                                                                                                                                      |
| rustex commands:                 |                                                                                                                                                                           |
| \rustex_direct_HTML:n . . . . .  | 7991, 7999, 8011, 8021                                                                                                                                                    |
| \rustex_if:TF . . . . .          | 7989, 7990,<br>7997, 7998, 8009, 8010, 8019, 8020                                                                                                                         |
| \rustexBREAK . . . . .           | 2116                                                                                                                                                                      |
|                                  |                                                                                                                                                                           |
| <b>S</b>                         |                                                                                                                                                                           |
| sassertion (env.) . . . . .      | 94                                                                                                                                                                        |
| \scriptsize . . . . .            | 7921                                                                                                                                                                      |
| \scriptstyle . . . . .           | 7927                                                                                                                                                                      |
| sdefinition (env.) . . . . .     | 94                                                                                                                                                                        |
| \second . . . . .                | 132                                                                                                                                                                       |
| \section . . . . .               | 26, 27, 77                                                                                                                                                                |
| \sectiontitleemph . . . . .      | 7739, 7798                                                                                                                                                                |
| sectocframes . . . . .           | 100                                                                                                                                                                       |
| \selectlanguage . . . . .        | 135, 141                                                                                                                                                                  |
| seq commands:                    |                                                                                                                                                                           |
| \seq_clear:N . . . . .           | 182, 682, 720,<br>1073, 1977, 2160, 2671, 2696, 2721,<br>2826, 2865, 4173, 4518, 4679, 5533,<br>5597, 5662, 5671, 6107, 6158, 6208,<br>6366, 6628, 6629, 6749, 6785, 7560 |
| \seq_count:N . . . . .           | 2016, 2091, 3530, 6819                                                                                                                                                    |
| \seq_gclear:N . . . . .          | 2154, 2155, 5380                                                                                                                                                          |
| \seq_gclear_new:N . . . . .      | 983, 984                                                                                                                                                                  |
| \seq_get:NN . . . . .            | 1014                                                                                                                                                                      |
| \seq_get_right>NN . . . . .      | 158, 8287                                                                                                                                                                 |
| \seq_gpop>NN . . . . .           | 1009                                                                                                                                                                      |
| \seq_gpush:Nn . . . . .          | 997                                                                                                                                                                       |
| \seq_gput_left:Nn . . . . .      | 1544, 1549                                                                                                                                                                |
| \seq_gput_right:Nn . . . . .     | 1547, 2110, 2129, 5409                                                                                                                                                    |
| \seq_gset_eq>NN . . . . .        | 996, 1012, 1016, 2853, 2854, 2855, 7657                                                                                                                                   |
| \seq_gset_split:Nnn . . . . .    | 5398                                                                                                                                                                      |
| \seq_if_empty:NTF . . . . .      | 169, 718, 736,<br>748, 758, 787, 833, 839, 844, 849,<br>1008, 1011, 1117, 1945, 1998, 4013,<br>6834, 7167, 7218, 7374, 7568, 7656                                         |
| \seq_if_empty_p:N . . . . .      | 774, 775, 1981                                                                                                                                                            |
| \seq_if_exist:NTF . . . . .      | 1589, 5397                                                                                                                                                                |
| \seq_if_in:NNTF . . . . .        | 1542,<br>1543, 1656, 1658, 2254, 2263, 2640,<br>2680, 2705, 2746, 6479, 6590, 6713                                                                                        |
| \seq_item:Nn . . . . .           | 749,<br>759, 2017, 2092, 4286, 4292, 5466, 6820                                                                                                                           |
| \seq_map_break: . . . . .        | 1591, 1595, 2658                                                                                                                                                          |
| \seq_map_break:n . . . . .       | 1595, 2661, 4036                                                                                                                                                          |
| \seq_map_function:NN . . . . .   | 722, 726, 6378                                                                                                                                                            |
| \seq_map_inline:Nn . . . . .     | 264, 917, 921, 1594,<br>1629, 1948, 2001, 2169, 2663, 4050,<br>4680, 4707, 5672, 6171, 6218, 6227,<br>6755, 6893, 6920, 7238, 7293, 7569                                  |
| \seq_new:N . . . . .             | 225, 1502, 1548, 2100, 2123, 2273                                                                                                                                         |
| \seq_pop>NN . . . . .            | 719                                                                                                                                                                       |
| \seq_pop_left>NN . . . . .       | 168, 702,<br>780, 781, 832, 837, 843, 848, 918,<br>922, 924, 1986, 3531, 3533, 3539, 3543                                                                                 |
| \seq_pop_left:NNTF . . . . .     | 1177, 4260, 4262, 4270                                                                                                                                                    |
| \seq_pop_right>NN . . . . .      | 160, 170,<br>737, 792, 794, 799, 801, 803, 1145,<br>2348, 3058, 4012, 4538, 4540, 6369                                                                                    |
| \seq_push:Nn . . . . .           | 725                                                                                                                                                                       |
| \seq_put_left:Nn . . . . .       | 703, 723, 2681, 2706, 6675, 6689                                                                                                                                          |

```

\seq_put_right:Nn 164, 190, 228, 740, 795,
805, 808, 980, 1984, 1987, 1992,
2307, 2337, 2350, 2642, 2747, 2829,
2960, 4243, 4250, 4271, 4273, 4520,
4682, 4684, 5564, 5600, 5636, 5643,
5668, 5674, 5678, 5685, 6108, 6163,
6167, 6213, 6645, 6752, 6788, 6802
\seq_reverse:N 6370
\seq_set_eq:NN . 728, 768, 769, 791,
798, 916, 979, 1978, 4689, 4717, 5683
\seq_set_split:Nnn 159,
683, 793, 800, 831, 836, 1137, 1176,
1979, 2347, 3057, 3529, 3537, 4011,
4259, 4263, 4537, 4539, 6368, 7561
\seq_use:Nn 195, 198, 201, 765, 795, 808,
836, 1179, 2352, 3059, 3535, 3541,
3545, 4017, 4329, 4523, 4666, 4690,
5399, 5522, 6835, 7168, 7219, 7375
\l_tmpa_seq 159,
160, 164, 168, 169, 170, 182, 190,
195, 198, 201, 4518, 4520, 4523,
4537, 4538, 4539, 4540, 4679, 4682,
4684, 4689, 4717, 6366, 6368, 6369,
6370, 6378, 7560, 7561, 7568, 7569
\seqmap 91, 5135, 5590
\setbox 130, 8031, 8046, 8396, 8453, 8502, 8551
\setcounter 8732, 8735
\setkeys 2034, 2048, 2063, 8073, 8874
\setlength 7195, 7196, 7197,
7873, 7874, 7878, 7931, 7932, 7933
\setlicensing 102
\setmetatheory 2452
\setnotation 33, 86, 4403
\setsectionlevel 27,
77, 116, 1410, 7750, 7752, 7809, 7811
\setSGvar 104, 8179, 8189
\setslidelogo 102
\setsource 102
\sexample (env.) 94
\sf 8091
\sfamily 8100
\sfragment (env.) 77
sfragment commands:
 \sfragment_do_level:nm 1299, 1311, 1327, 1331,
1335, 1336, 1337, 1338, 1339, 7791
 \sfragment_end: 1307, 1321, 1353
\skipfragment 77, 1394, 1398, 1402
\slideframewidth .. 7877, 7878, 7954, 8069
\slideheight 7874
\slides 100
\slidewidth 7873, 7957, 7987, 8069, 8071, 8075
\smacro 87, 88
\small 7191
\smallskip 7187, 8327, 8330, 8414, 8419, 8471,
8476, 8520, 8525, 8569, 8574, 8747
\smodule (env.) 81, 2497
\smodule 2972
\Sn 20, 84, 5887
\sn 20, 24, 84, 5887
\Sns 20, 84, 5887
\sns 20, 84, 5887
\solution (env.) 1, 8370
\solution 8316, 8422, 8591
\solutions 105, 111
\solutionsfalse 8228, 8427
\solutionstrue 8226, 8424
\source 132
\sparagraph (env.) 94
\spfblock 7250, 7450
\spfjust 7251, 7456, 7459
\spfsketch 7159
\spfsketchenautorefname 7177
\spfstep 7245, 7352
\spfstepautorefname 7286, 7367
\spfstepenvautorefname 7367
\spproblem (env.) 8273
\spproblemautorefname 8341
\spproof (env.) 96, 7193
\spproofautorefname 7265
\spproofend 7179, 7267, 7284
\spsquare 7180, 8624
\sr 20, 24, 83, 5887
\sref 79, 80, 94, 1553, 8139
\sreflabel 79, 81, 116, 1502
\srefsetin 79, 1575
\srefsym 84, 1820
\srefsymuri 84, 1851
\startssolutions 106, 8423
\stepcounter 1391, 7792, 7968
\sTeX 14, 15, 76
\stex 15, 24, 76
stex commands:
 \l_stex_aB_args_seq 4666, 4680, 4689, 4690, 4707, 4717,
5522, 5533, 5564, 5597, 5600, 5636,
5643, 5662, 5668, 5672, 5683, 5685
 \stex_activate_module:n 117, 2318, 2367,
2639, 2639, 2651, 2821, 3164, 3262,
3305, 3505, 6179, 6235, 6760, 7606
 \stex_add_definiens:nn 2977, 7005, 7013, 7240, 7295

```

```

\stex_add_definiens_inner:nnnnnnnn
 7018, 7029
\stex_add_module_notation:nnnnn 117
\l_stex_all_modules_seq
 117, 2160, 2273,
 2307, 2337, 2640, 2642, 2663, 4050
\l_stex_allow_semantic_bool
 4919, 5061, 5139, 5140, 5143, 5169,
 5203, 5369, 5378, 5494, 5505, 5603,
 5688, 5746, 5757, 5790, 5819, 5980,
 6061, 6472, 6503, 6520, 6565, 6946
\stex_annotation:nn
 338, 341, 1282, 1291, 1303,
 1745, 1962, 1963, 3346, 3774, 3777,
 3784, 3789, 3791, 4332, 4338, 4347,
 4358, 4369, 4370, 4373, 4374, 4378,
 4823, 4826, 4833, 4837, 4840, 5016,
 5019, 5026, 5030, 5033, 5064, 5510,
 5517, 5611, 5720, 5733, 5750, 5775,
 5783, 5804, 5812, 6006, 6392, 6400,
 6405, 6613, 6859, 6880, 6957, 7023,
 7056, 7068, 7165, 7207, 7210, 7252,
 7306, 7315, 7319, 7372, 7441, 7457,
 7566, 7571, 8129, 8643, 8650, 8659
\stex_annotation:nnn 135, 136
\stex_annotation_force_break:n ...
 327, 328, 334,
 1304, 3345, 3771, 3789, 4820, 4838,
 5014, 5031, 5518, 5616, 5725, 5738,
 5755, 5780, 5788, 5809, 5817, 6404,
 6859, 6881, 7024, 7057, 7567, 8659
\stex_annotation_invisible:n
 136, 329,
 331, 1361, 1383, 2514, 2771, 2815,
 5166, 5422, 7205, 7564, 7601, 8301
\stex_annotation_invisible:nn
 1255, 1422, 1430,
 1436, 1442, 1903, 1911, 3043, 3267,
 3308, 3344, 3378, 3419, 3429, 3756,
 4325, 4801, 4998, 5756, 5789, 5818,
 6173, 6229, 6757, 7039, 7555, 7602
\stex_annotation_invisible:nnn .. 136
\l_stex_argnames_seq 119
\stex_args_end: 5383,
 5407, 5410, 5932, 5936, 5986, 6952
\stex_assign_do:n
 2836, 3326, 3331, 3556
\l_stex_assoc_args_count
 119, 3803, 3807, 3849, 3850
\l_stex_brackets_dones_bool
 .. 4587, 5836, 5839, 5840, 5864, 5865
\stex_capitalize:n
 1293, 5923, 5926, 5969, 6986
\stex_check_term:n
 119, 120, 2159, 3338,
 3654, 3655, 3663, 3869, 4305, 7463
\c_stex_check_terms_bool
 33, 3641, 3644, 7466
\stex_close_module: 117, 2374, 2374,
 2523, 2778, 7547, 7614, 7616, 8321
\l_stex_current_archive 1085
\l_stex_current_archive_prop ...
 129, 134, 920, 930,
 935, 1088, 1099, 1100, 1109, 1198,
 1600, 1601, 1694, 1697, 1796, 1797,
 1858, 1860, 1863, 1898, 1899, 1971,
 1974, 2032, 2046, 2061, 3062, 3065
\l_stex_current_args_tt
 126, 4509, 4513, 5192, 5382, 5383, 5386
\l_stex_current_arity_str
 126, 4519, 5081, 5108,
 5110, 5191, 5291, 5309, 5310, 5341
\l_stex_current_doc_uri 134, 964,
 966, 967, 1512, 1517, 1519, 1523,
 1589, 1591, 1631, 1648, 1649, 6838
\l_stex_current_domain_str
 124, 2785, 2788, 2790,
 2798, 2803, 2812, 2821, 2852, 2867,
 2879, 2916, 2928, 3396, 3444, 3465,
 3485, 3505, 3509, 3579, 3599, 3620
\g_stex_current_file
 132–134, 158, 929, 931,
 936, 984, 987, 989, 991, 992, 993,
 996, 997, 1012, 1015, 1016, 1604,
 1702, 2326, 3072, 3078, 3079, 3127,
 3146, 3190, 3216, 7656, 7657, 8286
\l_stex_current_language_str ...
 134, 135, 134, 136, 171, 176, 2508,
 3177, 3180, 3204, 3207, 7595, 8295
\l_stex_current_module 118, 120
\l_stex_current_module_str
 117, 138,
 2161, 2272, 2289, 2306, 2307, 2322,
 2335, 2336, 2337, 2338, 2377, 2378,
 2379, 2380, 2381, 2387, 2389, 2393,
 2398, 2400, 2507, 2517, 2530, 2538,
 2542, 2563, 2569, 2575, 2577, 2587,
 2594, 2599, 2608, 2610, 2620, 2644,
 2647, 2766, 2777, 2811, 2822, 2919,
 2922, 3351, 3385, 3412, 3421, 3431,
 3710, 3748, 3757, 3853, 3914, 3923,
 3932, 3938, 4466, 4485, 4486, 6064,
 6102, 6107, 6108, 6128, 6220, 6242,
 6803, 6826, 7014, 7015, 7016, 7017,
 7030, 7031, 7585, 7586, 7589, 7594,
 7613, 7615, 7628, 7642, 8294, 8307
\l_stex_current_ns_uri 134,
```

970, 971, 2344, 2487, 3128, 3133,  
 3134, 3147, 3152, 3153, 7467, 7548  
 $\backslash l_{stex\_current\_redo\_tl}$  . . . . .  
 . . . . . 5173, 5186, 5197, 5200,  
 5207, 5337, 6337, 6375, 6410, 6560  
 $\backslash l_{stex\_current\_return\_tl}$  . . . . .  
 126, 3961, 5193, 5259, 5271, 5292, 5342  
 $\backslash stex\_current\_section\_level$  . . . . .  
 . . . . . 1278, 1284, 1293, 1319, 7803  
 $\backslash l_{stex\_current\_symbol\_str}$  . . . . .  
 . . . . . 126, 4157, 4187,  
 4306, 4346, 4357, 4455, 4474, 4537,  
 4763, 4915, 4917, 4923, 4958, 5048,  
 5051, 5066, 5094, 5095, 5178, 5190,  
 5212, 5228, 5257, 5258, 5261, 5267,  
 5283, 5284, 5287, 5376, 5458, 5485,  
 5502, 5604, 5605, 5648, 5689, 5690,  
 5722, 5735, 5752, 5777, 5785, 5806,  
 5814, 5867, 5872, 5945, 5958, 5971,  
 5981, 5994, 6002, 6006, 6008, 6063,  
 6418, 6419, 6947, 6955, 6957, 6959  
 $\backslash l_{stex\_current\_term\_tl}$  4920, 5141,  
 5195, 5503, 5606, 5607, 5608, 5691,  
 5719, 5732, 5747, 5758, 5774, 5791,  
 5803, 5820, 5989, 6411, 6417, 6607  
 $\backslash stex\_current\_this:$  . 5187, 6060, 6070  
 $\backslash l_{stex\_current\_this\_tl}$  . . . . .  
 . . . . . 6062, 6066, 6080, 6083  
 $\backslash l_{stex\_current\_type\_tl}$  . . . . .  
 . . . . . 126, 5063, 5194, 6279,  
 6334, 6341, 6344, 6348, 6663, 6712  
 $\backslash stex\_deactivate\_macro:Nn$  . . . . .  
 . . . . . 137, 348, 348, 2559,  
 2966, 2967, 2968, 2969, 2970, 2971,  
 2972, 3253, 3322, 3456, 3457, 3458,  
 3475, 3496, 3520, 3585, 3606, 3627,  
 3721, 3946, 4164, 4504, 6115, 6189,  
 6251, 6967, 6973, 6981, 6989, 7010,  
 7043, 7061, 7070, 7345, 7418, 7438,  
 7443, 7450, 7459, 7557, 7581, 7654,  
 8422, 8590, 8591, 8600, 8655, 8675  
 $\backslash stex\_debug:nn$  . . 115, 64, 64, 101,  
 105, 176, 195, 246, 513, 638, 705,  
 712, 859, 929, 932, 967, 971, 982,  
 1023, 1031, 1059, 1064, 1084, 1087,  
 1120, 1163, 1191, 1202, 1212, 1232,  
 1248, 1263, 1518, 1583, 1588, 1628,  
 1632, 1648, 1651, 1657, 1659, 1663,  
 1666, 1672, 1674, 1677, 1686, 1687,  
 1713, 1760, 1762, 1764, 1856, 1862,  
 1867, 1874, 2212, 2214, 2230, 2232,  
 2236, 2253, 2255, 2262, 2264, 2286,  
 2299, 2312, 2314, 2336, 2376, 2454,  
 2456, 2465, 2569, 2594, 2602, 2606,  
 2641, 2907, 2939, 2943, 2946, 3056,  
 3061, 3063, 3071, 3078, 3083, 3087,  
 3126, 3145, 3162, 3168, 3175, 3191,  
 3202, 3217, 3235, 3243, 3245, 3332,  
 3339, 3376, 3397, 3413, 3417, 3427,  
 3445, 3447, 3870, 3872, 3874, 3876,  
 3993, 4010, 4049, 4060, 4062, 4215,  
 4247, 4258, 4308, 4485, 4489, 4565,  
 4574, 4579, 4600, 4749, 4868, 4908,  
 5127, 5132, 5228, 5233, 5238, 5257,  
 5260, 5263, 5283, 5335, 5344, 5368,  
 5376, 5492, 5843, 6126, 6198, 6278,  
 6818, 6821, 6823, 6827, 7003, 7016,  
 7030, 7065, 7239, 7294, 7393, 7590  
 $\backslash c_{stex\_debug\_clist}$  . . . . .  
 . . . . . 28, 37, 65, 68, 89, 93, 95, 99, 103  
 $\backslash c_{stex\_default\_metatheory}$  2158, 7550  
 $\backslash l_{stex\_default\_notation}$  . . . . .  
 . . . . . 4517, 4522, 4525, 4527, 4528,  
 4545, 5098, 5272, 5277, 5298, 5632  
 $\backslash stex\_do\_default\_notation:$  . . . . .  
 . . . . . 4507, 5097, 5270, 5631  
 $\backslash stex\_do\_default\_notation\_op:$  . . . . .  
 . . . . . 4507, 4508, 4543, 5295  
 $\_stex\_do\_deprecation:n$  . . . . .  
 . . . . . 115, 431, 431, 2292, 3697, 3798  
 $\_stex\_do\_for\_list:$  . . . . .  
 . . . . . 2976, 6784, 6799, 7163, 7234, 7289  
 $\_stex\_do\_id:$  . . . . . 127, 436,  
 436, 1351, 6863, 6878, 7164, 7243,  
 7303, 7312, 7321, 7401, 8313, 8738  
 $\backslash stex\_do\_up\_to\_module:n$  . . . . .  
 . . . . . 118, 2537, 2537, 2540, 2547, 3304, 6266  
 $\backslash l_{stex\_dochader\_sect}$  . . . . .  
 . . . . . 116, 1276, 1302, 1318, 1326, 1328,  
 1332, 1356, 1368, 1370, 1373, 1376,  
 1382, 1395, 1397, 1401, 1412, 1413,  
 1414, 1415, 1416, 1417, 1419, 1422,  
 1428, 1432, 1438, 1442, 7795, 7802  
 $\_stex\_eat\_exclamation\_point:$  . . . . .  
 . . . . . 3752, 5261, 5272, 5708, 5710  
 $\_stex\_end:$  . . . . . 420, 428, 2874, 2882  
 $\_stex\_every\_file:$  . . . . .  
 . . . . . 998, 1001, 1006, 1018, 7660  
 $\_stex\_every\_module:n$  . . . . .  
 . . . . . 117, 2274, 2277,  
 2561, 3292, 3476, 3497, 3521, 3586,  
 3607, 3628, 3722, 3947, 4165, 4505,  
 6116, 6190, 6253, 6263, 7558, 7582  
 $\_g_{stex\_every\_module\_tl}$  . . . . .  
 . . . . . 2275, 2278, 2290  
 $\backslash l_{stex\_every\_symbol\_tl}$  5142, 5147,  
 5149, 5150, 5156, 5157, 5160, 5198

```

\stex_execute_in_module:n
 117, 2291, 2365, 2545,
 2545, 2549, 2580, 2612, 3261, 3504,
 3931, 6106, 6166, 6178, 6217, 6234
\stex_fatal_error:n 137, 80, 80, 1118
\stex_fatal_error:nnn
 137, 80, 83, 86, 1129, 2022, 2094
\l_stex_feature_name_str
 124, 2818, 2822,
 2851, 2922, 2927, 2943, 2944, 2946,
 2947, 2990, 3335, 3351, 3385, 3389
\stex_file_in_smsmode:nn
 130, 2134, 2153, 2182, 2328, 3231
\stex_file_resolve:Nn 132,
 133, 687, 692, 708, 715, 877, 978,
 987, 989, 992, 1047, 1075, 1077,
 1603, 1621, 1711, 3079, 3173, 3200
\stex_file_set:Nn 132, 133, 681,
 681, 686, 699, 710, 873, 920, 1015, 1072
\stex_file_split_off_ext:NN . . .
 132, 790, 790, 895, 2326, 3072
\stex_file_split_off_lang:NN . . .
 132, 790, 797, 892, 2327, 3073, 8286
\stex_file_use:N 132,
 133, 705, 712, 764, 764, 841, 846,
 851, 905, 911, 926, 929, 982, 993,
 997, 1052, 1072, 1078, 1083, 1127,
 1130, 1163, 1164, 1166, 1200, 1604,
 1605, 1617, 1696, 1702, 1707, 1712,
 1714, 1859, 1866, 1871, 1883, 1886,
 1910, 1915, 1926, 1982, 1990, 2028,
 2032, 2042, 2046, 2056, 2061, 2329,
 3075, 3078, 3079, 3081, 3102, 3117,
 3127, 3146, 3174, 3190, 3201, 3216
\stex_filestack_pop:
 132, 1007, 1007, 1032, 1039, 2179
\stex_filestack_push:n
 132, 985, 985, 1025, 1027, 2163
\l_stex_fors_seq 2826,
 2829, 6785, 6788, 6802, 6819, 6820,
 6834, 6835, 6893, 6920, 7167, 7168,
 7218, 7219, 7238, 7293, 7374, 7375
\stex_get_env:Nn
 137, 50, 51, 59, 87, 300, 604,
 610, 974, 976, 1043, 1045, 1050, 3638
\stex_get_in_morphism:n
 126, 2828, 2979, 2979, 3325, 3369, 3551
\l_stex_get_mathstructure:n . . .
 2787, 6143, 6148
\stex_get_mathstructure:n . . .
 6142, 6142, 6160, 6209, 6748
\l_stex_get_structure_module_str . . .
 2788, 6144, 6149, 6153, 6167, 6218
\l_stex_get_symbol:n
 3965, 3971, 6150
\stex_get_symbol:n
 119, 120, 126, 1821, 3964,
 3964, 4129, 4404, 4909, 5216, 5902,
 5910, 5921, 6787, 6945, 6996, 7049
\l_stex_get_symbol_args_t1 . . .
 119, 121,
 229, 3028, 3358, 3741, 3860, 3862,
 3863, 3999, 4040, 4072, 4083, 4085,
 4098, 4513, 4778, 4791, 4873, 4973,
 4986, 5221, 5386, 6131, 6811, 7635
\l_stex_get_symbol_arity_int . . .
 119, 121, 229,
 3027, 3357, 3740, 3782, 3806, 3812,
 3816, 3820, 3824, 3828, 3832, 3836,
 3840, 3844, 3847, 3848, 3849, 3850,
 3861, 3919, 3991, 3998, 4039, 4071,
 4175, 4210, 4242, 4249, 4269, 4319,
 4436, 4748, 4777, 4790, 4831, 4872,
 4972, 4985, 5024, 5220, 6810, 7634
\l_stex_get_symbol_def_t1 . . .
 119, 2847, 3029,
 3333, 4000, 4041, 4073, 4874, 5222
\l_stex_get_symbol_invoke_cs . . .
 119, 3032, 3362,
 4003, 4044, 4076, 4877, 5225, 6152
\l_stex_get_symbol_macro_str . . .
 126, 3026, 3356
\l_stex_get_symbol_mod_str
 119, 1823, 2830, 2840, 3024, 3340, 3344,
 3354, 3379, 3388, 3923, 3929, 3972,
 3996, 4037, 4069, 4135, 4139, 4154,
 4317, 4406, 4410, 4414, 4418, 4425,
 4429, 4486, 4493, 4870, 5218, 5982,
 6789, 6948, 6998, 7051, 7644, 7650
\l_stex_get_symbol_name_str . . .
 119, 1823, 2830, 2841, 2980, 2984,
 2988, 3025, 3332, 3334, 3340, 3344,
 3354, 3376, 3379, 3388, 3389, 3924,
 3929, 3966, 3973, 3997, 4038, 4070,
 4135, 4139, 4153, 4154, 4317, 4406,
 4410, 4414, 4418, 4425, 4429, 4443,
 4448, 4451, 4487, 4493, 4871, 4897,
 4899, 4905, 4907, 5219, 5912, 5923,
 5945, 5956, 5958, 5969, 5971, 5982,
 5983, 5984, 5985, 6151, 6789, 6948,
 6949, 6950, 6951, 6978, 6986, 6994,
 6998, 7039, 7047, 7051, 7645, 7650
\stex_get_symbol_or_var:n . . .
 120, 4867, 4904
\l_stex_get_symbol_return_t1 . . .
 119, 3031, 3361, 4002,
 4043, 4075, 4750, 4876, 4939, 5224
\l_stex_get_symbol_type_t1 . . .
 119, 3030, 3360, 4001, 4042, 4074,

```

```

 4875, 5223, 6153, 6161, 6211, 6750
\stex_get_var:n 120, 4442,
 4867, 4896, 5943, 5954, 5967, 7037
\c_stex_home_file 133, 1041
\stex_if_check_terms:
 119, 3634, 3645, 3649
\stex_if_check_terms:TF 119, 3633,
 3654, 4131, 4445, 4752, 4948, 4951
\stex_if_check_terms_p: ... 119, 3633
\stex_if_do_html:
 281
\stex_if_do_html:TF 135,
 278, 290, 1254, 1281, 1290, 1534,
 2505, 2525, 2763, 2779, 2809, 2857,
 3042, 3266, 3307, 3343, 3377, 3731,
 3915, 3927, 4133, 4492, 4746, 4754,
 4800, 4947, 6172, 6228, 6756, 6814,
 7038, 7235, 7253, 7263, 7280, 7290,
 7324, 7331, 7333, 7371, 7592, 7617,
 7649, 8292, 8323, 8381, 8390, 8400,
 8406, 8438, 8447, 8457, 8463, 8487,
 8496, 8506, 8512, 8536, 8545, 8555,
 8561, 8587, 8596, 8642, 8649, 8658
\stex_if_do_html_p:
\stex_if_file_absolute:N 132, 747, 757
\stex_if_file_absolute:NTF
 132, 745, 991, 1076
\stex_if_file_absolute_p:N . 132, 745
\stex_if_file_starts_with:NN 132, 767
\stex_if_file_starts_with:NNTF ..
 132, 767, 1199
\stex_if_html_backend:TF
 135, 295, 320,
 327, 336, 619, 1254, 1298, 1360,
 1379, 1426, 1933, 1960, 3633, 5170,
 5204, 5716, 5772, 5801, 5979, 6005,
 6857, 6867, 6943, 7695, 7735, 7860,
 7940, 7988, 7996, 8008, 8018, 8128
\stex_if_html_backend_p: ... 135, 295
\stex_if_in_module:
\stex_if_in_module:TF
 117, 2281, 2529, 2545
\stex_if_in_module_p: 117, 2529
\stex_if_module_exists:n
\stex_if_module_exists:nTF
 117, 2298, 2311, 2533, 3130, 3133,
 3149, 3152, 3237, 6162, 6212, 6751
\stex_if_module_exists_p:n 117, 2533
\stex_if_smsmode:
 130, 437, 1246, 1520, 2117,
 2184, 2317, 2516, 2524, 3046, 3189,
 3215, 3270, 3311, 3463, 3470, 3483,
 3491, 3507, 3515, 3577, 3597, 3618,
 3708, 3936, 4142, 4495, 6850, 6866,
 6879, 6892, 6919, 7022, 8306, 8322
\stex_if_smsmode_p: 130, 2117
\stex_ignore_spaces_and_pars: ...
 .. 137, 357, 357, 360, 2555, 2556, 8333
\l_stex_import_archive_str . 125,
 2457, 2462, 2794, 3039, 3064, 3068,
 3088, 3089, 3090, 3258, 3285, 3301
\stex_import_module_uri:nn
 125, 2455, 2791,
 3037, 3055, 3055, 3256, 3282, 3299
\l_stex_import_name_str
 125, 2459, 2464, 2796, 3041, 3049,
 3058, 3260, 3274, 3287, 3303, 3315
\l_stex_import_ns_str 2465,
 2468, 2798, 3044, 3048, 3131, 3134,
 3137, 3150, 3153, 3156, 3164, 3262,
 3265, 3268, 3273, 3305, 3309, 3314
\l_stex_import_path_str
 125, 2458, 2463,
 2795, 3040, 3059, 3070, 3074, 3078,
 3079, 3080, 3083, 3259, 3286, 3302
\stex_import_require_module:nnm .
 125, 2461, 2793,
 3038, 3093, 3093, 3106, 3257, 3300
\stex_import_require_module_-
safe:nnn 3108, 3284
\l_stex_import_uri_str
 125, 3069, 3090, 3096,
 3101, 3111, 3116, 3124, 3126, 3130,
 3131, 3137, 3143, 3145, 3149, 3150,
 3156, 3175, 3182, 3202, 3237, 3238
\stex_in_archive:nn ... 129, 1092,
 1092, 1881, 1932, 1957, 2011, 2064
\stex_in_invisible_html_bool ...
 3772, 4821, 5714, 5715, 5745
\l_stex_in_meta_bool 2360, 2361, 2366
\l_stex_inpararray_bool 5845
\stex_input_with_hooks:n
 .. 1020, 1883, 1886, 1907, 1924, 1926
_stex_invoke_notation:w
 5133, 5250, 5251, 5256, 5293
\stex_invoke_outer_field: 6136
\stex_invoke_sequence:
 4977, 4990, 5041, 5041, 5582
\stex_invoke_sequence_in: 127
\stex_invoke_sequence_range: ... 127
\stex_invoke_structure:
 6104, 6152, 6272
\stex_invoke_symbol 126
\stex_invoke_symbol:
 120, 126, 3745,
 4782, 4795, 5227, 5227, 6812, 7639

```

```

\stex_invoke_symbol:nnnnnnnN . .
 118, 126,
2598, 3980, 3994, 3995, 5168, 5168,
5181, 5217, 6678, 6692, 6700, 6705
\stex_invoke_symbol:nnnnnnnN\l_-
 stex_current_symbol_str 126
\stex_invoke_text_symbol: 3911, 3959
\stex_invoke_variable:nnnnnn . 5202
\stex_invoke_variable:nnnnnnN ..
 126, 4788, 4983, 5202, 5580
\stex_is_sequentialized:n
 5574, 5601, 5676, 5686
\stex_iterate_break: 118, 2654, 2657
\stex_iterate_break:n . 118, 2654,
 2660, 2737, 3418, 3428, 3443, 4068
\stex_iterate_morphisms:nn
 2720, 2720, 3396, 3412
\stex_iterate_notations:nn
 121, 2695, 2695, 2916, 6712
\stex_iterate_symbols:n
 118, 2653, 2653, 4061
\stex_iterate_symbols:nn
 118, 2670, 2670, 2879, 3446, 6120, 6663
\l_stex_key_archive_str
 127, 385, 388, 1567, 1585,
1599, 1608, 1609, 1686, 1693, 1707
\l_stex_key_argnames_clist 119
\l_stex_key_args_str
 119, 3666, 3671, 3680, 3714,
3758, 3808, 3813, 3817, 3821, 3825,
3829, 3833, 3837, 3841, 3845, 3864,
4470, 4803, 4934, 4935, 5000, 6769
\l_stex_key_argtypes_clist
 3684, 3689, 3788, 3790,
3877, 4836, 4839, 5029, 5032, 6773
\l_stex_key_assoc_str 3669, 3674,
3762, 3763, 4807, 4808, 5004, 5005
\l_stex_key_continues_tl . 7076, 7085
\l_stex_key_def_tl 120, 3682, 3692,
3713, 3742, 3776, 3777, 3873, 3884,
3888, 3908, 4469, 4779, 4792, 4825,
4826, 4974, 4987, 5018, 5019, 6771
\l_stex_key_deprecate_str
 411, 413, 432, 433
\l_stex_key_due_tl
 8713, 8717, 8752, 8753
\l_stex_key_feedback_tl
 8609, 8614, 8636, 8637
\l_stex_key_file_str
 127, 386, 389, 1568,
1584, 1587, 1604, 1619, 1647, 1662,
1673, 1686, 1698, 1702, 1708, 1780
\l_stex_key_for_clist 2827, 6768,
6776, 6786, 7073, 7082, 7354, 7359
\l_stex_key_for_str 6856
\l_stex_key_from_tl 7074, 7083
\l_stex_key_Ftext_tl 8612, 8620, 8634
\l_stex_key_functions_tl . 7078, 7086
\l_stex_key_given_tl
 8712, 8716, 8749, 8750
\l_stex_key_hide_bool 7080, 7089, 7222
\l_stex_key_id_str
 127, 393, 395, 438,
439, 6837, 6838, 6905, 6907, 7300,
7309, 7398, 8374, 8375, 8377, 8383,
8431, 8432, 8434, 8440, 8480, 8481,
8483, 8489, 8529, 8530, 8532, 8538
\l_stex_key_intent_args_clist ...
 4112, 4118, 4284, 4293, 4295
\l_stex_key_intent_str
 3921, 4111, 4117, 4207, 4287
\l_stex_key_macroname_str
 .. 6767, 6777, 6794, 6796, 6805, 6809
\l_stex_key_method_tl
 .. 7079, 7088, 7209, 7210, 7356, 7360
\l_stex_key_mhrepos_str
 .. 8255, 8260, 8356, 8358, 8366, 8765
\l_stex_key_min_tl
 8253, 8258, 8312, 8330, 8350
\l_stex_key_name_str
 . 119, 120, 3679, 3686, 3710, 3711,
3725, 3726, 3739, 3748, 3757, 3798,
3853, 3882, 3886, 3895, 3896, 3898,
3906, 3914, 3924, 3932, 3938, 3939,
4443, 4466, 4467, 4485, 4487, 4738,
4739, 4749, 4756, 4759, 4774, 4776,
4789, 4802, 4851, 4854, 4855, 4859,
4861, 4862, 4931, 4932, 4954, 4969,
4971, 4984, 4999, 6766, 6775, 6795,
6796, 6800, 6803, 6809, 6817, 6826,
6855, 7355, 7362, 7378, 7379, 7392,
7393, 7394, 7623, 7624, 7633, 7645,
8254, 8259, 8285, 8287, 8290, 8308
\l_stex_key_number_tl
 8711, 8715, 8731, 8732
\l_stex_key_op_tl 3920, 4110, 4116,
4168, 4169, 4170, 4177, 4178, 4185,
4190, 4321, 4355, 4359, 4417, 4422,
4438, 4858, 4860, 4863, 4941, 4943
\l_stex_key_post_tl .. 5891, 5895,
5912, 5923, 5956, 5969, 6978, 6986
\l_stex_key_pre_tl ... 5890, 5894,
5912, 5923, 5956, 5969, 6978, 6986
\l_stex_key_prec_str .. 121, 3922,
4109, 4115, 4219, 4222, 4225, 4231,
4234, 4237, 4240, 4246, 4258, 4259
\l_stex_key_proofend_tl
 7075, 7084, 7186, 7187

```

\l\_stex\_key\_proot\_t1 ..... 5892  
 \l\_stex\_key\_pts\_t1 ..... 8252, 8257, 8311, 8327, 8350  
 \l\_stex\_key\_reorder\_str 3668, 3672,  
   3765, 3766, 4813, 4814, 5010, 5011  
 \l\_stex\_key\_return\_t1 .....  
   ... 3683, 3688, 3744, 3779, 3782,  
   3875, 4750, 4781, 4794, 4828, 4831,  
   4939, 4976, 4989, 5021, 5024, 6772  
 \l\_stex\_key\_role\_str .....  
   ... 3667, 3675, 3768, 3769,  
   3900, 4810, 4811, 5007, 5008, 6806  
 \l\_stex\_key\_root\_t1 ..... 5896  
 \l\_stex\_key\_short\_t1 ..... 1313, 1316, 1343, 1345  
 \l\_stex\_key\_sig\_str ..... 117, 2287, 2329, 2477, 2492, 2509, 8296  
 \l\_stex\_key\_style\_clist .....  
   ... 128, 405, 407,  
   457, 461, 508, 512, 6840, 6841, 6934  
 \l\_stex\_key\_T\_bool ..... 8610, 8616, 8618, 8631, 8651  
 \l\_stex\_key\_term\_t1 ..... 7077, 7087, 7206, 7207, 7357, 7361  
 \l\_stex\_key\_title\_str ..... 6778  
 \l\_stex\_key\_title\_t1 ..... 399,  
   401, 1569, 1747, 1748, 2499, 6854,  
   6859, 8302, 8303, 8309, 8373, 8415,  
   8416, 8430, 8472, 8473, 8479, 8521,  
   8522, 8528, 8570, 8571, 8744, 8745  
 \l\_stex\_key\_Ttext\_t1 8611, 8619, 8632  
 \l\_stex\_key\_type\_t1 ..... 120,  
   3681, 3691, 3712, 3743, 3773, 3774,  
   3871, 3883, 3887, 4468, 4780, 4793,  
   4822, 4823, 5015, 5016, 6770, 6779  
 \l\_stex\_key\_variant\_str .....  
   ... 121, 4108, 4114, 4121,  
   4123, 4152, 4205, 4318, 4327, 4359,  
   4453, 4472, 4761, 4852, 4860, 4956  
 \stex\_keys\_define:nnnn .....  
   ... 127, 365, 365, 384, 392, 398,  
   404, 410, 416, 1342, 1553, 1559,  
   2476, 3665, 3678, 3881, 4107, 4463,  
   4729, 5889, 6079, 6765, 7072, 7353,  
   7887, 8251, 8355, 8608, 8710, 8809  
 \stex\_keys\_set:nn ..... 127, 128,  
   380, 380, 1349, 1571, 1772, 1777,  
   2498, 3700, 3892, 3893, 4128, 4441,  
   4482, 4736, 4929, 5901, 5909, 5920,  
   5942, 5953, 5966, 6094, 6847, 6876,  
   6970, 6976, 6984, 7162, 7233, 7288,  
   7391, 7587, 7621, 7967, 8278, 8282,  
   8365, 8629, 8725, 8729, 8764, 8822  
 \stex\_kpsewhich:Nn 137, 42, 42, 53, 60  
 \c\_stex\_language\_abbrevs\_prop ...  
   ... 134, 109  
 \stex\_language\_from\_file: ...  
   ... 135, 157, 157, 1003  
 \c\_stex\_languages\_clist . 29, 180, 183  
 \c\_stex\_languages\_prop ...  
   ... 134, 109, 137, 138, 172, 188, 804  
 \g\_stex\_last\_feature\_str ...  
   ... 123, 2777, 6120  
 \stex\_macro\_body:N . 136, 543, 545, 563  
 \stex\_macro\_definition:N 136, 558, 558  
 \l\_stex\_macroname\_str ...  
   ... 120, 222, 2767,  
   2768, 3698, 3702, 3704, 3738, 3759,  
   3760, 3894, 3905, 4483, 4737, 4775,  
   4787, 4804, 4805, 4930, 4970, 4982,  
   5001, 5002, 6105, 6805, 7622, 7632  
 \stex\_main\_archive: .... 1198, 1237  
 \c\_stex\_main\_archive\_prop . 129, 1198  
 \c\_stex\_main\_file ...  
   ... 132, 133, 973, 1012, 1078, 7657  
 \stex\_map\_args:N ...  
   ... 3783, 4082, 4082, 4184, 4280,  
   4351, 4515, 4832, 5025, 5388, 6134  
 \stex\_map\_notation\_args:N ...  
   ... 4082, 4095, 4384  
 \stex\_map\_uri:Nnnnn 133, 810, 817, 2344  
 \c\_stex\_mathhub\_file 133, 917, 1041,  
   1117, 1127, 1130, 1140, 1199, 1617,  
   1696, 1707, 1859, 1871, 1883, 1886,  
   1910, 1915, 1926, 1978, 2028, 2032,  
   2042, 2046, 2056, 2061, 3102, 3117  
 \c\_stex\_mathhub\_main\_manifest\_-  
   prop ..... 1205, 1206  
 \stex\_mathml\_arg:nn ..... 136  
 \stex\_mathml\_intent:nn ..... 136  
 \stex\_maybe\_brackets:nn ...  
   ... 4568, 4585, 5049, 5285, 5296, 5838  
 \stex\_metagroup\_do\_in:nn ...  
   ... 118, 138, 231, 236,  
   243, 2538, 3350, 3384, 7629, 7630, 7641  
 \stex\_metagroup\_new:n ...  
   ... 138, 225, 226, 230, 2289, 2338, 2822  
 \l\_stex\_metatheory\_uri ...  
   ... 2158, 2364, 2367, 2451,  
   2467, 2481, 2483, 2510, 2511, 7548,  
   7549, 7550, 7597, 7598, 8297, 8298  
 \c\_stex\_module\_ ..... 118, 120  
 \stex\_module\_add\_code:n ...  
   ... 118, 2541, 2541, 2544, 2546, 2556, 7605  
 \stex\_module\_add\_morphism:nnn .. 117  
 \stex\_module\_add\_morphism:nnnn ..  
   ... 125, 2562, 2562,  
   2567, 2926, 3264, 6176, 6232, 7608

\stex\_module\_add\_notation:nnnn .  
..... 120, 2605,  
2605, 2616, 2918, 2921, 4316, 4435  
\stex\_module\_add\_symbol:nnnnnnN .  
..... 117, 2568  
\stex\_module\_add\_symbol:nnnnnnnN  
.... 118, 2568, 2940, 2944, 2947,  
3737, 3904, 6100, 6132, 6808, 7631  
\stex\_module\_setup:n .. 117, 2280,  
2280, 2503, 2773, 7468, 7588, 8290  
\\_stex\_module\_setup\_top\_nosig:n .  
..... 2288, 2297, 2357, 7584  
\l\_stex\_morphism\_morphisms\_seq ..  
..... 124, 2855, 2865, 2960  
\l\_stex\_morphism\_renames\_prop ...  
..... 124, 2854, 2864,  
2911, 2917, 2930, 2938, 2985, 3387  
\l\_stex\_morphism\_symbols\_prop ...  
..... 124, 2843,  
2853, 2863, 2881, 2885, 2894, 2908,  
2913, 2981, 2999, 3004, 3353, 3449  
\stex\_new\_statement:nn ..... 6784  
\stex\_new\_statement:nnn .....  
..... 6845, 6911, 6917, 6932, 6933  
\stex\_new\_stylable\_cmd:nnnn ....  
..... 128, 443, 443,  
3036, 3249, 3298, 3324, 3368, 3394,  
3572, 3592, 3613, 3699, 3891, 4127,  
4440, 4481, 4735, 4928, 7160, 7554  
\stex\_new\_stylable\_env:nnnnnnn ..  
..... 128, 443,  
478, 2497, 3459, 3481, 3501, 6071,  
6157, 6206, 6846, 7257, 7275, 7287,  
8275, 8389, 8446, 8495, 8544, 8722  
\\_stex\_next\_symbol:n .....  
.. 5145, 5146, 5164, 6483, 6605, 6965  
\l\_stex\_notation\_ ..... 121  
\\_stex\_notation\_add: .....  
.. 3926, 4132, 4304, 4315, 4491, 7648  
\l\_stex\_notation\_args\_tl .. 4096,  
4174, 4208, 4279, 4285, 4291, 4489  
\\_stex\_notation\_check: 4131, 4304,  
4304, 4445, 4490, 4752, 4951, 7647  
\\_stex\_notation\_do\_html:n .. 3929,  
4135, 4304, 4324, 4493, 4756, 7650  
\\_stex\_notation\_downprec .. 5504,  
5832, 5833, 5843, 5844, 5864, 5866  
\l\_stex\_notation\_macrocode\_cs ...  
..... 120-122, 4158, 4203,  
4215, 4309, 4320, 4349, 4409, 4437,  
4456, 4475, 4764, 4853, 4856, 4959  
\\_stex\_notation\_make\_args: 4159,  
4304, 4310, 4383, 4457, 4476, 4765  
\stex\_notation\_parse:n .....  
..... 3925, 4130, 4167, 4167,  
4444, 4488, 4751, 4942, 4945, 7646  
\stex\_notation\_parse\_and\_then:nw  
..... 121, 123  
\\_stex\_notation\_set\_default:n ..  
..... 4138, 4403, 4424, 4434, 4448  
\stex\_notation\_top:nw ..... 123  
\stex\_persist:n .....  
..... 117, 136, 616, 620, 621, 623, 626,  
629, 630, 636, 637, 1192, 1217, 2386  
\c\_stex\_persist\_mode\_bool .....  
..... 136, 31, 607, 670, 1236  
\\_stex\_persist\_read\_now: .....  
..... 669, 1216, 7659  
\c\_stex\_persist\_write\_mode\_bool ..  
136, 32, 613, 618, 671, 677, 1215, 2375  
\stex\_pseudogroup:nn ..... 137,  
138, 205, 205, 286, 1096, 2643, 5377  
\stex\_pseudogroup\_restore:N ..  
..... 137, 138, 205, 208, 1109, 2647  
\stex\_pseudogroup\_with:nn .....  
..... 137, 215, 215, 818,  
940, 2366, 2654, 2672, 2697, 3994,  
4664, 4673, 4698, 5864, 5878, 6000  
\c\_stex\_pwd\_file .....  
..... 133, 973, 993, 1199, 1200, 1714, 1866  
\stex\_reactivate\_macro:N 137, 348,  
354, 2561, 2973, 2974, 2975, 3292,  
3294, 3477, 3498, 3522, 3587, 3608,  
3629, 3722, 3947, 4165, 4505, 6116,  
6191, 6254, 6897, 6898, 6899, 6900,  
6901, 6915, 6924, 6925, 6926, 6927,  
6928, 6929, 6930, 7244, 7245, 7246,  
7247, 7248, 7249, 7250, 7251, 7558,  
7582, 7610, 8316, 8317, 8318, 8592  
\stex\_ref\_new\_doc\_target:n ..  
..... 116, 127, 439, 1502, 1515, 1539  
\\_stex\_ref\_new\_id:n .. 1505, 1516, 6906  
\stex\_ref\_new\_sym\_target:n ..  
..... 116, 1785, 1809, 1815, 6894, 6921, 6955  
\stex\_ref\_new\_sym\_target:nn 116, 1813  
\stex\_ref\_new\_symbol:n .....  
..... 116, 1785, 2411, 3747, 3913  
\\_stex\_ref\_url\_str .. 1512, 1533, 1535  
\\_stex\_renamedecl\_do:nn .....  
..... 3370, 3375, 3569  
\stex\_require\_archive:n .....  
..... 125, 129, 1086, 1115, 1115,  
1125, 1608, 1870, 3089, 3099, 3114  
\stex\_resolve\_path\_pair:Nnn ..  
..... 129, 1855, 1855, 1877  
\stex\_return\_args:nn .....  
..... 3751, 3783, 4832, 5025

\l\_stx\_return\_notation\_tl . . . . .  
..... 5185, 5362, 5363, 6321,  
6329, 6491, 6492, 6572, 6598, 6599  
\stx\_set\_current\_archive:n . . . . .  
... 129, 1085, 1085, 1105, 1211, 3233  
\stx\_set\_current\_namespace: . . . . .  
..... 134, 969, 969, 1004  
\stx\_set\_document\_uri: . . . . .  
..... 134, 965, 965, 1002  
\stx\_set\_language:n . . . . .  
..... 135, 135, 135, 156, 173, 2490  
\stx\_set\_notation\_macro:nnnn . . . . .  
120, 121, 2605, 2622, 2626, 2626, 2638  
\stx\_sms\_allow:N . . . . . 130, 2101,  
2101, 2112, 2113, 2114, 2115, 2116  
\stx\_sms\_allow\_env:n . . . . . 131,  
2101, 2109, 2528, 3479, 3500, 3524,  
6114, 6188, 6250, 6871, 7619, 8338  
\stx\_sms\_allow\_escape:N . . . . .  
131, 2101, 2105, 2475, 2560, 3291,  
3329, 3373, 3589, 3610, 3631, 3723,  
3948, 4166, 4506, 6887, 7011, 7655  
\stx\_sms\_allow\_import:Nn . . . . .  
..... 131, 2122, 2124, 3293  
\stx\_sms\_allow\_import\_env:nn . . . . .  
..... 131, 2122, 2128  
\g\_stx\_sms\_import\_code . . . . .  
..... 131, 2133, 2156, 2174, 3283  
\stx\_smemode\_do: . . . . . 131,  
2147, 2149, 2183, 2188, 2473, 2521,  
2557, 3251, 3320, 3327, 3371, 3468,  
3488, 3512, 3583, 3604, 3625, 3719,  
3944, 4148, 4501, 6073, 6182, 6239,  
6864, 6885, 7008, 7611, 7652, 8319  
\\_stex\_split\_slash: . . . . .  
..... 5932, 5936, 5985, 6951  
\\_stex\_sref\_do\_aux:n . . . . .  
..... 1791, 1798, 1802, 1805, 7464  
\stx\_str\_if\_ends\_with:nn .. 131, 533  
\stx\_str\_if\_ends\_with:nnTF ..  
.... 131, 533, 986, 3403, 3426, 4051  
\stx\_str\_if\_ends\_with\_p:nn ..  
.... 131, 533, 4026, 4066  
\stx\_str\_if\_starts\_with:nn 131, 538  
\stx\_str\_if\_starts\_with:nnTF ...  
131, 419, 538, 2880, 6299, 6303, 7014  
\stx\_str\_if\_starts\_with\_p:nn ...  
..... 131, 538  
\stx\_structural\_feature\_-  
module:nn ... 123, 2762, 2762, 6110  
\stx\_structural\_feature\_module\_-  
end: 123, 2762, 2776, 6075, 6184, 6246  
\stx\_structural\_feature\_-  
morphism:nnn . . . . . 2783  
\stx\_structural\_feature\_-  
morphism:nnnn . . . . . 125  
\stx\_structural\_feature\_-  
morphism:nnnnn . . . . . 124, 2784,  
3461, 3482, 3503, 3573, 3593, 3614  
\stx\_structural\_feature\_-  
morphism\_check\_total: . . . . .  
..... 2893, 3490, 3514, 3602, 3623  
\stx\_structural\_feature\_-  
morphism\_end: . 124, 2783, 2850,  
3473, 3494, 3518, 3582, 3603, 3624  
\stx\_style\_apply: . . . . .  
..... 128, 129, 443, 448, 483,  
488, 2519, 2524, 3051, 3276, 3317,  
3466, 3471, 3486, 3492, 3510, 3516,  
3580, 3600, 3621, 3716, 3941, 4145,  
4460, 4498, 4768, 4963, 6861, 6867,  
7172, 7242, 7262, 7279, 7299, 7317,  
7320, 7329, 8310, 8322, 8386, 8401,  
8405, 8443, 8458, 8462, 8492, 8507,  
8511, 8541, 8556, 8560, 8737, 8740  
\stx\_suppress\_html:n . . . . .  
..... 135, 285, 285, 2134, 4198  
\\_stex\_symdecl\_check\_terms: . . . . .  
... 120, 3729, 3868, 3868, 3903, 4743  
\stx\_symdecl\_do: . . . . .  
..... 119, 120, 3728, 3797,  
3797, 3902, 4742, 4937, 6807, 7626  
\\_stex\_symdecl\_html: . . . . .  
..... 3732, 3755, 3916, 6814  
\stex\_symdecl\_top:n . . . . .  
..... 120, 3706, 3724, 3724, 4484  
\\_stex\_symdef\_styledefs: . 4465, 4497  
\\_stex\_term\_arg:nnn . . . . .  
..... 5495, 5499, 5506, 5516  
\\_stex\_term\_arg:nnnn . . . . .  
..... 4399, 4629, 4637,  
5499, 5500, 5531, 5565, 5602, 5687  
\\_stex\_term\_arg\_aB:nnnnn . . . . .  
..... 4642, 4650, 4657, 5521, 5529  
\\_stex\_term\_do\_aB\_clist: .. 4664,  
4665, 4674, 4678, 4699, 4704, 5526,  
5538, 5567, 5617, 5646, 5694, 5697  
\\_stex\_term\_oma:nnn . . . . .  
..... 4581, 5387, 5772, 5773, 5799  
\\_stex\_term\_oma\_or\_omb:nnn . . . . .  
..... 4581, 4586, 4634, 4647  
\\_stex\_term\_omb:nnn . . . . . 4634,  
4647, 5415, 5416, 5801, 5802, 5828  
\\_stex\_term\_oms:nnn . . . . .  
..... 4359, 5172, 5174, 5708,  
5718, 5767, 5771, 5903, 5913, 5924  
\\_stex\_term\_oms\_or\_omv:nnn . . . . .  
..... 3961, 4569, 5050, 5172,

```

5174, 5206, 5208, 5286, 5297, 5370,
5708, 5771, 6338, 6376, 6414, 6470
\stex_term_omv:nnn
..... 4921, 5206, 5208,
5708, 5731, 5768, 5947, 5960, 5973
\stex_undefined: 40
\stex_uri_add_module:NNn
..... 134, 938, 938, 963, 1517, 7548
\stex_uri_from_current_file:Nn ..
..... 134, 928, 928, 966
\stex_uri_from_current_file_-
nolang:Nn 134, 928, 934, 970
\stex_uri_from_repo_file 134
\stex_uri_from_repo_file:NNNn ...
..... 133, 134, 891, 894, 930, 1622
\stex_uri_from_repo_file_-
nolang:NNNn 134, 891, 891, 935
\stex_uri_resolve:Nn 133,
876, 876, 879, 2467, 2483, 2487, 7467
\stex_uri_set:Nn 133, 826, 872, 875, 926
\stex_uri_use:N 133, 859, 880, 884,
932, 967, 971, 1512, 1518, 1519,
1523, 1589, 1591, 1624, 1631, 1648,
1649, 2367, 2511, 3128, 3133, 3134,
3147, 3152, 3153, 6838, 7598, 8298
\stex_vardecl_notation_macro: ...
... 120, 4446, 4753, 4849, 4849, 4952
\stex_variable:nnnnnnnN . 4728, 4869
\l_stex_variables_prop
..... 120, 4726, 4774, 4881, 4969
stex internal commands:
\stex_annotation_env_str ... 300, 301
\stex_aux_apply_patch:n .. 449, 456
\stex_aux_apply_patch_begin:n ..
..... 484, 507
\stex_aux_apply_patch_end:n ...
..... 489, 522
\stex_aux_args:n . 547, 551, 554, 557
\stex_aux_end: 543, 544, 547
\stex_aux_params:n 561, 592, 599, 602
\stex_aux_patch:nnn 445, 470
\stex_aux_patch:nnnn 480, 497
\stex_aux_prefix:n .. 559, 567, 581
\stex_aux_prefix_long:n
..... 573, 577, 583, 590
\stex_aux_split_at_bracket:w ..
..... 420, 428
\stex_aux_start: 543, 546
\l_stex_aux_tl
..... 370, 371, 372, 374, 377, 378
\stex_debug_nn 66, 69, 74
\l_stex_debug_cl 89, 91, 94
\stex_debug_env_str 87, 88, 91
__stex_doc_check_topsect:
..... 1427, 1433, 1439, 1445
__stex_doc_do_section:n
..... 1325, 1329, 1333, 1350
__stex_doc_maketitle: ... 1268, 1273
__stex_doc_orig_backmatter
..... 1460, 1463, 1481
__stex_doc_orig_frontmatter ...
..... 1450, 1453, 1470
__stex_doc_set_title:n .. 1245, 1261
__stex_doc_skip_fragment:n
..... 1390, 1396,
1400, 1404, 1405, 1406, 1407, 1408
__stex_doc_skip_section:
..... 1358, 1380, 1386
__stex_doc_skip_section_i:
..... 1367, 1370, 1373, 1381, 1386
__stex_doc_title_html:
..... 1250, 1253, 1265
\g_stex_doc_title_tl
... 1240, 1242, 1249, 1255, 1260, 1263
__stex_expr_aB_arg:nnnnn 5536, 5543
__stex_expr_aB_simple_arg:nnnn
..... 5554, 5563
__stex_expr_add_prop_arg:nnw ...
..... 5383, 5407, 5410
__stex_expr_arg:n 5384, 5420
\l__stex_expr_arg_counter_int ...
..... 5374, 5381, 5396, 5432, 5433
__stex_expr_arg_do:nnn
..... 5434, 5440, 5456, 5491, 5498
__stex_expr_arg_inner:nn
..... 5423, 5426, 5430, 5436
__stex_expr_assoc_make_seq:nnn .
..... 5598, 5627, 5706
__stex_expr_assoc_seq:nnnnnnn ...
..... 5547, 5595
__stex_expr_check:n 5464
__stex_expr_check:nTF ... 5433, 5439
__stex_expr_check_b:nn .. 5388, 5413
\l__stex_expr_count_int
... 5528, 5534, 5544, 5565, 5602, 5687
\l__stex_expr_cs 5629, 5632, 5652
\l__stex_expr_customs_prop
..... 5379, 5391, 5392,
5393, 5408, 5444, 5450, 5465, 5468
\l__stex_expr_customs_seq
... 5380, 5397, 5398, 5399, 5409, 5466
__stex_expr_do_aB_clist:
..... 5521, 5526, 5567, 5646
__stex_expr_do_ab_next:nnn ...
..... 5387, 5389, 5415, 5416
__stex_expr_do_headerterm:nn ...
..... 5696, 5728, 5741, 5744, 5769

```

```

__stex_expr_do_ref:nNn ... 5903,
 5911, 5922, 5944, 5955, 5968, 5978
__stex_expr_do_seqmap:nnnnn
 5552, 5659
__stex_expr_end: 5549, 5559
__stex_expr_gobble:nnnnnnn
 5549, 5559
\l__stex_expr_iarg_tl 5639, 5641, 5652
__stex_expr_invoke_custom:n
 5234, 5248, 5375
__stex_expr_invoke_math: 5229, 5237
__stex_expr_invoke_op_custom:n . .
 5234, 5241, 5367
__stex_expr_invoke_op_notation:w . .
 5243, 5244, 5282
__stex_expr_invoke_return: . .
 5323, 5326
__stex_expr_invoke_return_- maybe:n . .
 5265, 5275, 5304
__stex_expr_invoke_return_next: . .
 5311, 5320
__stex_expr_invoke_text: 5229, 5232
__stex_expr_is_seqmap:n ... 5588
__stex_expr_is_seqmap:nTF ... 5551
__stex_expr_is_varseq:n ... 5577
__stex_expr_is_varseq:nTF 5445, 5664
\l__stex_expr_left_bracket_str . .
 5834, 5860, 5868, 5878, 5879
\l__stex_expr_old_seq . .
 5671, 5674, 5678, 5683
\l__stex_expr_reset_tl . .
 5145, 5148, 5152, 5153, 5159
__stex_expr_ret_cs . .
 5308, 5313, 5340, 5345, 5350
__stex_expr_return_arg:n 5310, 5316
\l__stex_expr_return_args_tl . .
 .. 5305, 5317, 5322, 5331, 5347, 5352
__stex_expr_return_notation:n . .
 5328, 5361
\l__stex_expr_return_this_tl . .
 5306, 5322,
 5327, 5331, 5335, 5336, 5346, 5354
\l__stex_expr_right_bracket_str . .
 5835, 5861, 5873, 5878, 5880
__stex_expr_setup:nnnnn . .
 5171, 5183, 5205
__stex_expr_varseq_in_map:nnnnnnn . .
 5666, 5705
__stex_features_add_definiens:nn . .
 2834, 2977
__stex_features_break: .. 2835, 2839
__stex_features_check_break:nnnnnnnn . .
 2998, 3003, 3012, 3015, 3022
__stex_features_clean:nnw 2874, 2882
__stex_features_do_decls: 2866, 2878
__stex_features_do_elaboration: .
 2856, 2906
__stex_features_do_for_list: . .
 2825, 2976
__stex_features_do_morph:nnm .. .
 2954, 2958
__stex_features_do_morphisms:n . .
 2867, 2952, 2962
__stex_features_elab_check: . .
 2914, 2937
\l__stex_features_feature_str . .
 2817, 2929
__stex_features_get_check:nnnn . .
 2982, 3010
\l__stex_features_implicit_bool . .
 2783, 2802, 2805, 2942
__stex_features_reactivate: . .
 2820, 2965
__stex_features_rename:nn 2930, 2933
__stex_features_rename_all: . 2870
__stex_features_renamed_- check:nnnn . .
 2986, 2996
__stex_features_set_definiens_- macros: . .
 2835, 2839
__stex_features_set_definiens_- macros_i:nnnnnn . .
 2842, 2846
__stex_features_setup: . 2819, 2862
__stex_features_split_qm:w . .
 2905, 2923
\l__stex_features_tmp . .
 2917, 2919, 2938, 2939, 2940
__stex_features_total_check: . .
 2895, 2899
__stex_groups_do: . . 256, 263, 272
__stex_groups_do_in:nn 238, 245, 266
__stex_groups_exists:n . . 231
__stex_groups_exists:nTF . . 237
\l__stex_groups_ids_seq 225, 228, 264
__stex_groups_tmp . . 247, 254, 260
\l__stex_importmodule_archive_- str 3095, 3100, 3110, 3115, 3232, 3233
__stex_importmodule_check_- file:nn . .
 3176,
 3177, 3178, 3179, 3180, 3181, 3203,
 3204, 3205, 3206, 3207, 3208, 3242
__stex_importmodule_get_from_- file:nnn . .
 3136, 3172
__stex_importmodule_get_from_- file_safe:nnn . .
 3155, 3199
__stex_importmodule_get_- module:nnn . . 3097, 3103, 3161
__stex_importmodule_get_module_- safe:nnn . .
 3112, 3118, 3167

```

```

__stex_importmodule_get_module_-
 uri:nnn 3122, 3163
__stex_importmodule_get_module_-
 uri_safe:nnn 3141, 3169
__stex_importmodule_import_-
 module:nn 3250, 3255, 3295
__stex_importmodule_import_-
 module_presms:nn 3281, 3295
__stex_importmodule_load_file:n
 3193, 3196, 3220, 3225, 3230
\l__stex_importmodule_path_seq ..
 3072, 3073, 3075
__stex_importmodule_seq
 3057, 3058, 3059
\l__stex_importmodule_seq
 .. 3079, 3081, 3173, 3174, 3200, 3201
\l__stex_importmodule_str
 3102, 3103, 3117,
 3118, 3174, 3190, 3201, 3216, 3219,
 3224, 3231, 3235, 3243, 3244, 3246
__stex_inputs_bibresource:n ...
 1943, 1955, 1957
\l__stex_inputs_gin_repo_str ...
 2025, 2055, 2059, 2064
\l__stex_inputs_id_seq
 1979, 1981, 1986
\l__stex_inputs_id_str ... 1974, 1979
__stex_inputs_inputref:nn 1931, 1941
__stex_inputs_inputref_html:nn ..
 1896, 1934
__stex_inputs_inputref_pdf:nn ..
 1920, 1935
__stex_inputs_libinput:n
 1996, 2009, 2011
\l__stex_inputs_libinput_files_-
 seq 1945, 1948, 1977, 1984, 1992,
 1998, 2001, 2016, 2017, 2091, 2092
__stex_inputs_mhinput:nn 1880, 1893
\l__stex_inputs_path_seq
 1978, 1982, 1987, 1990
\l__stex_inputs_path_str
 1982, 1983,
 1984, 1986, 1987, 1990, 1991, 1992
\l__stex_inputs_tmp_str .. 2017, 2019
__stex_inputs_up_archive:nn ...
 1944, 1970, 1997, 2015, 2090
__stex_inputs_usetikzlibrary:nn
 2070, 2092
\l__stex_iterate_continue_bool ..
 2722, 2725, 2738, 2758
__stex_iterate_it_decl_check:nnnn
 2683, 2690
__stex_iterate_it_decl_i:n
 2675, 2679, 2692
__stex_iterate_it_not_check:nnnn
 2711, 2715
__stex_iterate_it_not_i:n
 2700, 2704, 2717
__stex_iterate_iterate_morphism:nn
 2728, 2732, 2741, 2744
\l__stex_iterate_mods_seq
 2671, 2680, 2681,
 2696, 2705, 2706, 2721, 2746, 2747
__stex_iterate_morphism_cs:nnnn
 2723, 2749
__stex_iterate_not_cs:nnnnn ...
 2697, 2698, 2708
__stex_iterate_sym_cs:nnnnnnnn
 .. 2654, 2655, 2665, 2672, 2673, 2686
\l__stex_iterate_todo_tl
 2727, 2731, 2745, 2758
\l__stex_lang_lang_str . 138, 141, 148
\l__stex_lang_str .. 170, 171, 172, 173
\l__stex_lang_turkish_bool
 181, 186, 196
\l__stex_mathhub_bool
 1138,
 1139, 1141, 1144, 1154, 1156, 1165
__stex_mathhub_check_manifest: .
 1143, 1152
__stex_mathhub_check_manifest:n
 1153, 1155, 1157, 1162
\l__stex_mathhub_cs .. 1093, 1094,
 1097, 1100, 1102, 1106, 1110, 1111
__stex_mathhub_do_manifest:n ...
 1121, 1126
__stex_mathhub_find_manifest:n .
 1127, 1135, 1150, 1200
\l__stex_mathhub_key 1177, 1178, 1180
\c__stex_mathhub_manifest_ior ...
 1170, 1172, 1174, 1189
\l__stex_mathhub_manifest_str ...
 1128, 1136, 1166, 1172, 1201
__stex_mathhub_parse_manifest:n
 1132, 1171, 1204
\l__stex_mathhub_prop
 1173, 1181, 1182,
 1183, 1184, 1185, 1190, 1191, 1194
\l__stex_mathhub_seq
 1137, 1140, 1145,
 1163, 1164, 1166, 1176, 1177, 1179
\l__stex_mathhub_str
 1043, 1045, 1047, 1050, 1051, 1055,
 1056, 1061, 1067, 1070, 1075, 1078,
 1208, 1209, 1211, 1218, 1222, 1225
\l__stex_mathhub_tl
 1145
\l__stex_mathhub_val
 .. 1179, 1181, 1182, 1183, 1184, 1185
__stex_module_setup_end: 2335, 2356

```

```

__stex_module_setup_get_uri_-
 str:n 2285, 2342
__stex_module_setup_load_meta: .
 2294, 2363
__stex_module_setup_load_sig: ..
 2315, 2325
\l__stex_module_setup_ns_str ...
 2286, 2288, 2343, 2345, 2352
\l__stex_module_setup_seg
 2348, 2349, 2350
\l__stex_module_setup_seq
 2347, 2348, 2350, 2352
__stex_module_setup_setup_-
 nested:n 2281, 2333
__stex_module_setup_setup_top:n
 2281, 2284
__stex_module_setup_setup_top_-
 sig:n 2288, 2310
\l__stex_module_setup_sigfile ...
 2326, 2327, 2329
__stex_module_setup_split_-
 module:n 2335, 2356
__stex_modules_activate_-
 i:nnnnnnnn 2589, 2593
__stex_modules_activate_not:nn .
 2613, 2619
__stex_modules_activate_sym:n ..
 2581, 2586
__stex_modules_export:n . 2552, 2554
__stex_modules_persist_module: .
 2375, 2385, 7462
__stex_modules_persist_nots_-
 i:nn 2401, 2422
\l__stex_modules_restore_mod_str
 2415, 2443
__stex_modules_restore_module:nnnn
 2387, 2406
__stex_modules_restore_nots:n ..
 2419, 2428
__stex_modules_restore_nots_i:n
 2429, 2432, 2449
__stex_modules_restore_nots_-
 ii:nnnn 2436, 2440
__stex_modules_set_metatheory:nn
 2452, 2472
__stex_modules_tl
 2408, 2409
\l__stex_modules_tl
 2441, 2446
\l__stex_morphisms_ass_tl
 3528, 3541, 3545, 3555, 3556
__stex_morphisms_do_morph_-
 assign:nnn
 3401, 3404, 3442
__stex_morphisms_do_parsed_-
 assign: 3547, 3550
__stex_morphisms_do_parsed_-
 newname: 3553, 3560
__stex_morphisms_do_parsed_-
 newname:w 3562, 3564, 3568
__stex_morphisms_end: ... 3553, 3568
\l__stex_morphisms_morphism_dom_-
 str ... 3395, 3408, 3420, 3430, 3444
\l__stex_morphisms_name_str 3526,
 3533, 3534, 3538, 3539, 3540, 3551
\l__stex_morphisms_newname_str ..
 3527, 3543, 3544, 3552, 3553
\l__stex_morphisms_next_tl
 3531, 3535, 3537
__stex_morphisms_parse_assign:n
 3525, 3575, 3595, 3616
\l__stex_morphisms_seq
 3529, 3530, 3531, 3533,
 3535, 3537, 3539, 3541, 3543, 3545
__stex_notations_add:nnnnn
 4615, 4620, 4624
__stex_notations_add_last:nnnnn
 4608, 4619
__stex_notations_add_missing_-
 args:nn 4184, 4299
__stex_notations_add_next:nnnnnn
 4610, 4614
\l__stex_notations_after_tl
 4594, 4621
__stex_notations_args_end:
 4085, 4088, 4091,
 4098, 4101, 4104, 4603, 4606, 4616
\l__stex_notations_args_tl
 4510, 4514, 4527
__stex_notations_augment_arg:nn
 4515, 4532
__stex_notations_check_aB_-
 arg:Nn 4655, 4663, 4672, 4697
\l__stex_notations_clist_count_-
 int 4695, 4703, 4709
\l__stex_notations_code_tl
 ... 4551, 4566, 4574, 4582, 4596,
 4597, 4600, 4628, 4636, 4641, 4649
__stex_notations_complex:nnnnnn
 4560, 4578
__stex_notations_const_precs: ...
 4176, 4218
\l__stex_notations_cs
 4567, 4572, 4583, 4592
__stex_notations_do_argname:nn
 4280, 4283
__stex_notations_do_argnames: ...
 4254, 4278
__stex_notations_fun_precs: ...
 4181, 4230

```

```

__stex_notations_make_arg:nnnn 4384, 4388
__stex_notations_make_arg_- html:nn 4351, 4366
__stex_notations_make_name: 4512, 4536, 4544
__stex_notations_map_args_i:w 4084, 4088, 4091
__stex_notations_map_args_i:w 4097, 4101, 4104
__stex_notations_map_cs: 4337, 4339,
4675, 4677, 4685, 4700, 4702, 4713
\l__stex_notations_missing_str 4182, 4300
\l__stex_notations_missing_tl 4183, 4212, 4301
\l__stex_notations_name_str 4538, 4539, 4540, 4545
\l__stex_notations_opprec_tl 4206,
4220, 4223, 4225, 4232, 4235, 4237,
4241, 4248, 4261, 4267, 4273, 4328
__stex_notations_parse_notation_- args:nnnnw 4603, 4606, 4616
__stex_notations_parse_precs: 4252, 4257
\l__stex_notations_pre_tl 4581, 4596, 4633, 4646
\l__stex_notations_precs_seq 4173, 4243,
4250, 4271, 4273, 4286, 4292, 4329
__stex_notations_process_- notation:nnnnnn 4550, 4556
\l__stex_notations_seq 4259, 4260, 4262, 4263, 4270
__stex_notations_simple:nnnnn 4558, 4564
\l__stex_notations_str 4260, 4261, 4262, 4264, 4270, 4271
__stex_notations_styledefs: 4144, 4151
__stex_path_: 688, 697
\l__stex_path_a_seq 768, 774, 780
\l__stex_path_a_tl 780, 782
__stex_path_auth:n 133, 810, 813, 814,
815, 818, 819, 864, 880, 885, 939, 941
\l__stex_path_auth_str 832, 840, 845, 850
\l__stex_path_b_seq 769, 775, 781, 787
\l__stex_path_b_tl 781, 782
__stex_path_canonicalize:N 700, 711, 717
__stex_path_colonslash 826, 831, 836
\l__stex_path_do_hooks_pre_tl
. 1021, 1022, 1034, 1037
__stex_path_dodots:n 722, 726, 732
\l__stex_path_file 899, 905, 911, 916
__stex_path_from_repo_file:NNNNn
. 892, 895, 898
\l__stex_path_maybein_str
. 749, 750, 751
\l__stex_path_mod 843, 846, 851
__stex_path_module:n 133,
814, 818, 821, 866, 880, 941, 943, 945
\l__stex_path_name 848, 851
__stex_path_name:n 133,
815, 818, 822, 867, 880, 941, 950, 952
\l__stex_path_path
. 837, 838, 841, 846, 851, 920, 921
__stex_path_path:n
. 133, 813, 818, 820, 865, 880, 941
__stex_path_relativize:N 908, 915
\l__stex_path_return_tl
. 770, 776, 783, 786, 788
\l__stex_path_seq 720, 723, 728, 736,
737, 740, 793, 794, 795, 800, 801,
803, 805, 808, 916, 918, 922, 924, 926
\g__stex_path_stack
. 983, 997, 1008, 1009, 1011, 1014
\l__stex_path_str
. 690, 693, 695, 696, 697, 699, 702,
709, 710, 719, 721, 725, 737, 792,
793, 794, 799, 800, 801, 803, 804,
805, 974, 976, 978, 1009, 1014, 1015
\l__stex_path_tl 918, 922, 924
\l__stex_path_uri
. 901, 902, 903, 908, 926
__stex_path_uri_set:NnN 827, 873, 877
__stex_path_uri_set:Nnnnn
. 840, 845, 850, 862, 870, 904, 910
__stex_path_uri_use:w 880, 886
\l__stex_path_win_drive
. 689, 694, 701, 703
__stex_path_win_take:w 688, 697
__stex_persist_env_str
. 604, 605, 606, 610, 611, 612
__stex_persist_load_file:n
. 633, 665, 674
__stex_persist_read_and_write:
. 650, 672
\c__stex_persist_sms_iow
. 616, 624, 646, 647, 662
__stex_persist_write_only:
. 645, 659, 666, 677
__stex_proof_add_counter: 7135, 7316
__stex_proof_begin_proof:nn
. 7230, 7258, 7276

```

\l\_\_stex\_proof\_counter\_intarray . . . . .  
..... 7093, 7098,  
7101, 7110, 7113, 7122, 7130, 7131,  
7139, 7144, 7151, 7157, 7231, 7232  
\l\_\_stex\_proof\_end\_list: . . . . .  
... 7200, 7271, 7332, 7342, 7408, 7431  
\l\_\_stex\_proof\_html: . 7204, 7226, 7382  
\l\_\_stex\_proof\_html\_env:n . . . . .  
..... 7215, 7236, 7291  
\l\_\_stex\_proof\_in\_spfblock\_bool . . . . .  
... 7229, 7259, 7270, 7277, 7305,  
7308, 7327, 7330, 7332, 7337, 7340,  
7348, 7390, 7404, 7426, 7446, 7452  
\l\_\_stex\_proof\_inblock\_restore: . . . . .  
..... 7334, 7347, 7448  
\l\_\_stex\_proof\_inc\_counter: . . . . .  
..... 7118, 7330, 7421, 7423  
\l\_\_stex\_proof\_inc\_counter\_bool 7092  
\l\_\_stex\_proof\_insert\_number: . . . . .  
..... 7094, 7314, 7421, 7423  
\l\_\_stex\_proof\_make\_step\_macro:Nnnnn  
..... 7388, 7421, 7422, 7423  
\l\_\_stex\_proof\_number\_as\_string:N  
..... 7105, 7301, 7310, 7399  
\l\_\_stex\_proof\_proof\_box\_tl 7075, 7179  
\l\_\_stex\_proof\_remove\_counter: . . . . .  
..... 7147, 7341  
\l\_\_stex\_proof\_start\_list:n . . . . .  
.... 7193, 7259, 7314, 7408, 7431  
\l\_\_stex\_proof\_step\_html:nn 7370,  
7406, 7408, 7414, 7429, 7431, 7435  
\l\_\_stex.refs.add\_doc\_ref:nn . . . . .  
..... 1519, 1541, 1552  
\l\_\_stex.refs.default\_archive\_-  
str . . . . . 1561, 1567, 1576  
\l\_\_stex.refs.default\_file\_str .. . . . .  
..... 1562, 1568, 1577  
\l\_\_stex.refs.default\_title\_tl .. . . . .  
..... 1563, 1569, 1578  
\l\_\_stex.refs.do\_autoref:n . . . . .  
..... 1637, 1649, 1660,  
1664, 1675, 1689, 1715, 1726, 1734  
\l\_\_stex.refs.do\_internal\_link:nn  
..... 1826, 1838, 1844  
\l\_\_stex.refs.do\_return:nmm . . . . .  
..... 1743, 1757, 1765  
\l\_\_stex.refs.do\_sref:nn .. 1645, 1774  
\l\_\_stex.refs.do\_sref\_in:n . . . . .  
..... 1653, 1668, 1679, 1685, 1783  
\l\_\_stex.refs.do\_url\_link:nn . . . . .  
..... 1832, 1846  
\l\_\_stex.refs.file . . . . .  
... 1603, 1605, 1621, 1623, 1711, 1712  
\l\_\_stex.refs\_file\_str . . . . .  
1695, 1701, 1706, 1711, 1712, 1713,  
1714, 1719, 1723, 1725, 1733, 1745  
\l\_\_stex.refs\_files\_seq . . . . .  
..... 1502, 1542, 1547, 1594, 1656  
\l\_\_stex.refs\_find\_uri:n . . . . .  
..... 1581, 1773, 1778  
\l\_\_stex.refs\_find\_uri\_in\_-  
file:nnn . . . . . 1590, 1595, 1627  
\l\_\_stex.refs\_find\_uri\_in\_prop\_-  
file:N . . . . . 1601, 1610, 1615  
\l\_\_stex.refs\_id\_str . . . . .  
..... 1721, 1756, 1762, 1763  
\l\_\_stex.refs\_iow . . . . .  
..... 1493, 1494, 1495, 1521  
\l\_\_stex.refs\_new\_symbol:n 1787, 1795  
\l\_\_stex.refs\_prop . . . . . 1609, 1610  
\l\_\_stex.refs\_restore\_target:nnnnn  
..... 1722, 1754  
\l\_\_stex.refs\_return\_tl . . . . .  
..... 1720, 1724, 1730, 1744  
\l\_\_stex.refs\_set\_keys\_b:n . . . . .  
..... 1565, 1652, 1667, 1678, 1779  
\l\_\_stex.refs\_str 1508, 1510, 1512,  
1517, 1519, 1524, 1797, 1799, 6907  
\l\_\_stex.refs\_sym\_aux:nn . . . . .  
..... 1823, 1836, 1841, 1852  
\l\_\_stex.refs\_unnamed\_counter\_-  
int . . . . . 1503, 1507, 1508  
\l\_\_stex.refs\_uri . . . . .  
..... 1517, 1518, 1622, 1624  
\l\_\_stex.refs\_uri\_str . . . . .  
... 1582, 1593, 1605, 1616, 1621,  
1624, 1631, 1646, 1656, 1657, 1658,  
1659, 1660, 1663, 1664, 1666, 1672,  
1674, 1675, 1677, 1687, 1688, 1689,  
1716, 1727, 1735, 1755, 1760, 1761  
\l\_\_stex\_seqs\_add: . . . . . 4949, 4967  
\l\_\_stex\_seqs\_args\_tl ... 5025, 5027  
\l\_\_stex\_seqs\_check\_terms: 4948, 4995  
\l\_\_stex\_seqs\_clist . . . . .  
..... 5062, 5069, 5076, 5080  
\l\_\_stex\_seqs\_cs . . . . .  
..... 5023, 5027, 5083, 5087,  
5095, 5098, 5107, 5114, 5127, 5128  
\l\_\_stex\_seqs\_do\_all:w ... 5121, 5131  
\l\_\_stex\_seqs\_do\_first: ... 5044, 5105  
\l\_\_stex\_seqs\_do\_first\_arg:n . . . . .  
..... 5103, 5110  
\l\_\_stex\_seqs\_do\_first\_next: . . . . .  
..... 5112, 5117  
\l\_\_stex\_seqs\_do\_one:w ... 5119, 5125  
\l\_\_stex\_seqs\_do\_op:w ... 5043, 5047  
\l\_\_stex\_seqs\_doop\_arg:n .. 5063, 5074

```

__stex_seqs_doop_range:w 5056, 5060
\l__stex_seqs_first_args_tl . . .
. 5109, 5127, 5128, 5132, 5133
__stex_seqs_get_index_notation:n
. 5055, 5093, 5126
__stex_seqs_html: 4947, 4997
__stex_seqs_macro: 4950, 4981
__stex_seqs_make_args: . . . 4960, 4994
\l__stex_seqs_range_clist . . .
. 4940, 4975, 4988
\g__stex_smsemode_allowed_escape_tl . . .
. 2099, 2106, 2235
\g__stex_smsemode_allowed_import_env_seq 2123, 2129, 2169, 2218, 2221
\g__stex_smsemode_allowed_import_tl . . .
. 2122, 2125, 2166, 2213
\g__stex_smsemode_allowed_tl . . .
. 2098, 2102, 2231
\g__stex_smsemode_allowedenvs_seq . . .
. 2100, 2110, 2240, 2243
\g__stex_smsemode_bool . . .
. 2117, 2118, 2120, 2136
__stex_smsemode_check_begin:Nn . . .
. 2218, 2240, 2252
__stex_smsemode_check_cs:NNn . . .
. 2191, 2199
__stex_smsemode_check_end:Nn . . .
. 2221, 2243, 2261
__stex_smsemode_do:w . . .
. 2185, 2197, 2199, 2201,
2223, 2233, 2245, 2258, 2265, 2268
__stex_smsemode_do_aux:N . 2199, 2205
__stex_smsemode_do_aux_curr:N . . .
. 2165, 2176, 2207
__stex_smsemode_do_aux_imports:N . . .
. 2165, 2211
__stex_smsemode_do_aux_normal:N . . .
. 2176, 2229
\l__stex_smsemode_importmodules_seq . . .
. 2154
__stex_smsemode_in_smsemode:n . . .
. 2134, 2164, 2174, 2175
\l__stex_smsemode_sigmodules_seq 2155
__stex_smsemode_smsemode_do: . . .
. 2147, 2183
__stex_smsemode_start_smsemode:n . . .
. 2145, 2172, 2177
__stex_statements_do_defref:nn . . .
. 6942, 6971, 6977, 6985
__stex_statements_force_id: . . .
. 6801, 6904, 6912, 6935
__stex_statements_html_keyvals:nn . . .
. 6831, 6852, 6880
__stex_statements_setup:nn . . .
. 6793, 6913, 6918, 6932, 6936, 6939
__stex_statements_setup_def: . . .
. 6891, 6914, 6937
\l__stex_statements_uri_str . . .
. 6816, 6820, 6821, 6826, 6827, 6997,
7000, 7003, 7005, 7050, 7053, 7056
\l__stex_structures_assigned_seq . . .
. 6479, 6590, 6629, 6645
__stex_structures_begin:nn . . .
. 6072, 6093, 6170, 6225
__stex_structures_check_def:nnnnnnn . . .
. 6244, 6257
\l__stex_structures_clist . . .
. 6453, 6474, 6480, 6482
\l__stex_structures_comp_cs . . .
. 6522, 6527
\l__stex_structures_cs . . .
. 6455, 6461, 6468
__stex_structures_current_type: . . .
. 6409, 6540, 6611
\l__stex_structures_current_type_tl . . .
. 6336, 6372, 6412, 6417
__stex_structures_do_assign:nn . . .
. 6356, 6360
__stex_structures_do_assign_list:n . . .
. 6332, 6353
__stex_structures_do_decl:nnnnnnnn . . .
. 6667, 6687
__stex_structures_do_decl_nomacro:nnnnnnnn . . .
. 6665, 6673
__stex_structures_do_externals: . . .
. 6076, 6118, 6185, 6247
__stex_structures_end: . . .
. 6300, 6304, 6320, 6325
\l__stex_structures_exstruct_name_str . . .
. 6220, 6225, 6269
__stex_structures_extend_structure_nn . . .
. 6197, 6220
__stex_structures_extend_structure_i:NnnnnnnnN . 6194, 6202
__stex_structures_external_decl:nnnn . . .
. 6121, 6125
\l__stex_structures_extmod_str . . .
. 6195, 6199
\l__stex_structures_extname_count . . .
. 6263, 6267, 6269
\l__stex_structures_field_name_str . . .
. 6577, 6581, 6582, 6613
\l__stex_structures_fields_clist . . .
. 6333,
6354, 6361, 6379, 6382, 6636, 6637
__stex_structures_get_field_name:n . . .
. 6576, 6588

```

```

\l__stex_structures_imports_seq 6158, 6163, 6171,
6208, 6213, 6227, 6749, 6752, 6755
\l__stex_structures_invocation_- type:n 6284, 6331
\l__stex_structures_invoke_- field:n 6554, 6586
\l__stex_structures_invoke_maybe_- field:nn 6543, 6547
\l__stex_structures_invoke_this:n 6293, 6535
\l__stex_structures_invoke_top:n 6274,
6277, 6301, 6305, 6308, 6311, 6313
\l__stex_structures_make_mod:n 6378, 6390
\l__stex_structures_make_oml:n 6382, 6396
\l__stex_structures_make_oml:nn 6397, 6399
\l__stex_structures_make_prop: 6421, 6548, 6626
\l__stex_structures_make_prop_- assign: 6422, 6551, 6635
\l__stex_structures_make_prop_- assign:nn 6638, 6643
\l__stex_structures_make_prop_- assign_replace:nnnn 6646, 6652
\l__stex_structures_make_type:n 6341, 6346, 6348, 6364
\l__stex_structures_maybe_- notation:w 6288, 6290, 6416
\l__stex_structures_merge:nw 6282, 6298
\l__stex_structures_more_- nextsymbol_tl 6589, 6591, 6616
\l__stex_structures_name_str 6064, 6081, 6086, 6088, 6095, 6096, 6101,
6102, 6107, 6108, 6111, 6127, 6133
\l__stex_structures_new_extstruct_- name: 6207, 6265
\l__stex_structures_present: 6427, 6552
\l__stex_structures_present:nn 6431, 6437, 6442, 6449, 6452
\l__stex_structures_present_- entry:nn 6457, 6463, 6478
\l__stex_structures_present_i:w 6423, 6429, 6435
\l__stex_structures_present_ii:nw 6440, 6448
\l__stex_structures_prop 6467, 6579, 6587, 6619, 6627, 6644,
6647, 6653, 6674, 6676, 6688, 6690
\l__stex_structures_prop_do_- decls: 6631, 6662
\l__stex_structures_prop_do_- notations: 6632, 6711
\l__stex_structures_redo_tl 6606, 6630, 6656, 6703, 6714, 6729
\l__stex_structures_replace_- this_tl 6119
\l__stex_structures_seq 6628, 6675, 6689, 6713
\l__stex_structures_set_comp_tl 6273, 6322, 6326, 6484, 6601
\l__stex_structures_set_custom_- comp:n 6327, 6516
\l__stex_structures_set_customcomp: 6300, 6325
\l__stex_structures_set_this:n 6549, 6558
\l__stex_structures_set_thiscomp: 6273, 6510
\l__stex_structures_set_thisnotation: 6304, 6320
\l__stex_structures_shift_- argls:nn 6134, 6139
\l__stex_structures_this_tl 6285, 6485, 6486, 6489, 6504, 6561,
6564, 6571, 6592, 6593, 6596, 6610
\l__stex_symdecl_add_decl: 3730, 3736
\l__stex_symdecl_args_tl . 3783, 3785
\l__stex_symdecl_cs 3781, 3785, 3975, 3977, 3979, 4005
\l__stex_symdecl_do_args: . 3800, 3859
\l__stex_symdecl_env_str 3638, 3639, 3640
\l__stex_symdecl_get_from_one_- string:n 4014, 4059
\l__stex_symdecl_get_symbol_from_- cs: 3981, 3992
\l__stex_symdecl_get_symbol_from_- modules:nn 4016, 4048
\l__stex_symdecl_get_symbol_from_- string:n 3982, 3984, 3987, 4009
\l__stex_symdecl_name 4012, 4018
\l__stex_symdecl_parse_arity: 3799, 3805
\l__stex_symdecl_seq 4011, 4012, 4013, 4017
\l__stex_symdecl_set_textsymdecl_- macro:nnn 3932, 3950
\l__stex_symdecl_sym_from_str_- i:nnnn 4022, 4053
\l__stex_symdecl_sym_i_finish:nnnnnnN 4028, 4035

```

```

__stex_symdecl_sym_i_gobble:nnnnnn 99, 129
..... 4030, 4033
__stex_vars_add: 4744, 4772
\l__stex_vars_args_tl ... 4832, 4834
\l__stex_vars_bind_bool
..... 4727, 4730, 4732, 4816
__stex_vars_check_var:nnnnnnnnN
..... 4882, 4886
\l__stex_vars_cs 4830, 4834
__stex_vars_get_var:n
..... 4880, 4898, 4906
__stex_vars_html: 4746, 4799
__stex_vars_macro: 4745, 4786
__stex_vars_set_vars:nnnnnnN
..... 4867, 4888, 4891
\sTeX/ComputerScience/Software 15
stex_annotation_env (env.) 136
\stexcommentfont
... 7190, 7260, 7327, 7349, 7412, 7433
\stexdoctitle 1241,
1300, 1312, 2501, 7980, 8120, 8303
\STEXexport 49, 81, 82, 116, 2550
\stexhtmlfalse 324
\stexhtmltrue 321
\STEXInternalAssocArgMarkerI 122
\STEXInternalAssocArgMarkerII 122
\STEXInternalNotation .. 4204, 4527, 4547
\STEXInternalSetSrefSymURL
..... 1498, 1799, 1802, 1805
\STEXInternalSrefRestoreTarget
..... 1496, 1522, 1722
\STEXInternalSymbolAfterInvocationTL
..... 122, 126
\STEXInternalTermMathArgiii 122
\STEXInternalTermMathAssocArgiiii 122
\STEXInternalTermMathOMAiii 122
\STEXInternalTermMathOMBiii 122
\STEXInternalTermMathOMSOrOMViii .. 122
\STEXinvisible . 76, 4301, 5165, 7240, 7295
\STEXRestoreNotsEnd 2402, 2426, 2433
\stextstyle 128
\stextstyleassertion 99
\stextstyleassign 99
\stextstyleassignMorphism 99
\stextstylecopymod 99
\stextstylecopymodule 99
\stextstyledefinition 99
\stextstyleexample 99
\stextstyleextstructure 99
\stextstyleimportmodule 99, 128
\stextstyleinterpretmod 99
\stextstyleinterpretmodule 99
\stextstylemathstructure 99
\stextstyleMMTinclude 99
\stextstylemodule 99, 129
\stextstylenotation 99
\stextstyleparagraph 99
\stextstyleproof 99
\stextstylerealization 99
\stextstylerealize 99
\stextstylerenamedecl 99
\stextstylerequiremodule 99
\stextstylepsfsketch 99
\stextstylesubproof 99
\stextstylesymdecl 99
\stextstylesymdef 99
\stextstyletextsymdecl 99
\stextstyleusemodule 99
\stextstylevardef 99
\stextstylevarnotation 99
\stextstylevarseq 99
\stopssolutions 106, 8423
str commands:
\c_backslash_str 695
\c_colon_str 826, 881, 1176, 2345
\c_dollar_str 4293
\c_hash_str 594, 2607, 4300
\c_percent_str 53, 1043
\str_case:Nn 1180
\str_case:nn 4626, 5414
\str_case:mntF 1411,
3809, 4367, 4389, 5442, 5470, 7759
\str_clear:N 385, 386, 393, 411, 694,
901, 1061, 1136, 1582, 1897, 2059,
2161, 2343, 2477, 2785, 2980, 3068,
3095, 3110, 3395, 3526, 3527, 3666,
3667, 3668, 3669, 3679, 3680, 3702,
3882, 3921, 3922, 3972, 3973, 4108,
4109, 4110, 4111, 4870, 4897, 4905,
5502, 6081, 6149, 6766, 6767, 6769,
6816, 6994, 7047, 7106, 7355, 7586,
7888, 8159, 8160, 8254, 8255, 8356
\str_const:Nn 7678
\str_count:n 535, 540
\str_gset:Nn 1499, 1817
\str_gset_eq:NN 1056, 2851, 2852
\str_if_empty:NTF
..... 88, 432, 438, 605, 611, 701,
721, 908, 1049, 1051, 1070, 1128,
1201, 1587, 1593, 1599, 1646, 1647,
1662, 1673, 1693, 1716, 1727, 1735,
1755, 1780, 1843, 2287, 2530, 2767,
2790, 2984, 2988, 3070, 3232, 3408,
3538, 3552, 3639, 3725, 3759, 3762,
3765, 3768, 3895, 3966, 4120, 4219,
4231, 4240, 4287, 4738, 4804, 4807,
4810, 4813, 4899, 4907, 4931, 4934,
5001, 5004, 5007, 5010, 6002, 6085,

```

6095, 6144, 6151, 6581, 6794, 6795,  
 6800, 6817, 6837, 6905, 7000, 7053,  
 7300, 7309, 7378, 7392, 7398, 7623,  
 7749, 7808, 7971, 8285, 8375, 8415,  
 8432, 8472, 8481, 8521, 8530, 8570  
`\str_if_empty:nTF` . . . . . 471, 498,  
 682, 733, 828, 1506, 1857, 2480, 3381  
`\str_if_eq:NNTF` . . . . . 171, 782  
`\str_if_eq:nnTF` . . . . .  
 . . . . . 145, 161, 162, 163, 185,  
 301, 534, 539, 569, 585, 594, 606,  
 612, 696, 734, 735, 751, 1630, 1714,  
 1756, 1761, 1763, 1814, 2267, 2349,  
 2588, 2621, 2726, 2997, 3002, 3011,  
 3014, 3190, 3216, 3400, 3416, 3640,  
 4222, 4234, 4246, 4887, 4890, 5081,  
 7017, 7812, 7815, 7880, 8039, 8602  
`\str_if_eq_p:nn` 4024, 4025, 4064, 4065  
`\str_if_exist:NTF` . . . . . 232, 1840  
`\str_if_in:NnTF` . . . . . 4300, 5983, 6949  
`\str_item:Nn` . . . . . 696, 751, 3864  
`\str_lowercase:n` . . . . . 8602  
`\str_map_break:` . . . . . 3810  
`\str_map_break:n` 3811, 3815, 3819,  
 3823, 3827, 3831, 3835, 3839, 3843  
`\str_map_inline:Nn` . . . . . 3808  
`\str_new:N` . . . . .  
 . . . . . 134, 1561, 1562, 2025, 2272, 3698  
`\str_put_right:Nn` . . . . . 7113  
`\str_range:Nnn` . . . . . 2019  
`\str_range:nnn` . . . . . 535, 540, 574  
`\str_replace_all:Nnn` . . . . . 695  
`\str_set:Nn` . . . . . 47,  
 55, 136, 184, 227, 689, 690, 693,  
 709, 826, 1083, 1166, 1178, 1179,  
 1508, 1510, 1512, 1576, 1577, 1605,  
 1616, 1624, 1631, 1695, 1701, 1706,  
 1712, 1721, 1859, 1866, 1871, 1982,  
 1990, 2017, 2055, 2306, 2322, 2345,  
 2415, 2644, 2798, 2803, 2806, 2817,  
 2840, 2841, 3024, 3025, 3026, 3059,  
 3064, 3069, 3074, 3080, 3088, 3090,  
 3096, 3100, 3101, 3102, 3111, 3115,  
 3116, 3117, 3124, 3131, 3134, 3137,  
 3143, 3150, 3153, 3156, 3174, 3201,  
 3246, 3444, 3534, 3540, 3544, 3674,  
 3704, 3726, 3813, 3817, 3821, 3825,  
 3829, 3833, 3837, 3841, 3845, 3894,  
 3896, 3898, 3900, 3996, 3997, 4037,  
 4038, 4069, 4070, 4121, 4153, 4182,  
 4187, 4306, 4346, 4357, 4483, 4737,  
 4739, 4871, 4915, 4917, 4930, 4932,  
 4935, 5190, 5191, 5604, 5648, 5689,  
 5981, 5984, 6063, 6086, 6096, 6105,

6199, 6263, 6267, 6269, 6577, 6582,  
 6806, 6820, 6826, 6947, 6950, 6997,  
 7050, 7302, 7311, 7400, 7622, 7624,  
 8373, 8374, 8377, 8430, 8431, 8434,  
 8479, 8480, 8483, 8528, 8529, 8532  
`\str_set_eq:NN` . . . . . 1067,  
 1567, 1568, 2517, 2788, 2818, 3923,  
 3924, 4123, 4152, 4443, 4453, 4472,  
 4486, 4487, 4761, 4956, 5945, 5958,  
 5971, 6088, 6153, 6796, 6805, 6855,  
 6907, 7286, 7367, 7585, 7589, 7613,  
 7615, 7628, 7642, 7644, 7645, 8307  
`\str_uppercase:n` . . . . . 7880  
`\l_tmpa_str` . . . . . 158, 159, 160,  
 161, 162, 163, 164, 168, 184, 188,  
 189, 190, 192, 1897, 1898, 1899,  
 1904, 1912, 2803, 2806, 2811, 2818  
`\subparagraph` . . . . . 27, 77  
`subproof (env.)` . . . . . 7286  
`\subproof` . . . . . 7244, 7345  
`\subproofautorefname` . . . . . 7286  
`\subsection` . . . . . 26, 27, 77  
`\subsubsection` . . . . . 27, 77  
`\svar` . . . . . 90, 3752, 4912  
`\symbol` . . . . . 84  
`\symdecl` . . . . . 23,  
 24, 31, 32, 39, 40, 47, 82–84, 94,  
 99, 119, 124, 130, 137, 138, 2966,  
 3698, 7486, 7488, 7517, 7525, 7528  
`\symdef` . . . . . 32, 33, 35, 40, 41, 83,  
 90, 119, 124, 130, 2968, 4463, 7470,  
 7473, 7479, 7481, 7483, 7485, 7495,  
 7496, 7497, 7498, 7504, 7512, 7523,  
 7532, 7533, 7536, 7539, 7541, 7543  
`\Symname` . . . . . 84, 95, 5887  
`\symname` 19, 20, 24, 62, 84, 85, 95, 97, 5887  
`\symref` 19, 20, 24, 48, 83, 84, 88, 95, 97, 5887  
`\symrefemph` . . . . . 97, 98, 5999  
`\symuse` . 48, 84, 5136, 5215, 5692, 6373,  
 6380, 6391, 6473, 6538, 6608, 6609  
`sys commands`:  
`\sys_get_shell:nnN` . . . . . 44  
`\sys_if_platform_windows:TF` . . . . .  
 . . . . . 50, 687, 746, 973, 1042

**T**

`\target` . . . . . 129, 132–134  
`\test` . . . . . 111  
`test` . . . . . 105  
`\testemptypage` . . . . . 70, 110  
`\testemptypage` . . . . . 8842  
`testheading (env.)` . . . . . 111  
`\testheading` . . . . . 8799  
`\testnewpage` . . . . . 70, 110

|                                                                               |                                                               |
|-------------------------------------------------------------------------------|---------------------------------------------------------------|
| \testnewpage . . . . .                                                        | 8846                                                          |
| \testsmallspace . . . . .                                                     | 70, 70, 70, 110, 110, 110                                     |
| \testspace . . . . .                                                          | 70, 110                                                       |
| \testspace . . . . .                                                          | 8845                                                          |
| \TeX . . . . .                                                                | 23, 24                                                        |
| \tex . . . . .                                                                | 23, 24                                                        |
| T <sub>E</sub> X and L <sup>A</sup> T <sub>E</sub> X 2 <sub>E</sub> commands: |                                                               |
| \@ . . . . .                                                                  | 2074, 2077, 2081                                              |
| \@addtoreset . . . . .                                                        | 8267                                                          |
| \@arabic . . . . .                                                            | 8131                                                          |
| \@author . . . . .                                                            | 8110                                                          |
| \@auxout . . . . .                                                            | 1792, 7665, 8349                                              |
| \@bonuspointsfalse . . . . .                                                  | 8830                                                          |
| \@bonuspointstrue . . . . .                                                   | 8835                                                          |
| \@currentHref . . . . .                                                       | 7302, 7311, 7400                                              |
| \@currentcounter . . . . .                                                    | 1525                                                          |
| \@currentlabel . . . . .                                                      | 1526, 7301,<br>7302, 7310, 7311, 7399, 7400, 7970             |
| \@currentlabelname . . . . .                                                  | 1528, 1529                                                    |
| \@currenvir . . . . .                                                         | 7854, 7855                                                    |
| \@dbllarg . . . . .                                                           | 8103, 8112                                                    |
| \@gobble . . . . .                                                            | 360                                                           |
| \@ifnextchar . . . . .                                                        | 359                                                           |
| \@ifstar . . . . .                                                            | 8082                                                          |
| \@mainmatterfalse . . . . .                                                   | 1455, 1465                                                    |
| \@mainmattertrue . . . . .                                                    | 1476, 1487                                                    |
| \@notprerr . . . . .                                                          | 139, 1421                                                     |
| \@onlypreamble . . . . .                                                      | 139, 1421                                                     |
| \@rustexfalse . . . . .                                                       | 297                                                           |
| \@title . . . . .                                                             | 1270, 1271, 8119                                              |
| \activate@excursion . . . . .                                                 | 8143, 8148                                                    |
| \bb@loaded . . . . .                                                          | 8235, 8694                                                    |
| \beamer@shortauthor . .                                                       | 8106, 8108, 8123                                              |
| \beamer@shorttitle . .                                                        | 8115, 8117, 8126                                              |
| \c@chapter . . . . .                                                          | 7835                                                          |
| \c@framenumber . . . . .                                                      | 8131                                                          |
| \c@part . . . . .                                                             | 7847                                                          |
| \compemph@uri . . . . .                                                       | 98, 126, 4343, 5991, 5999                                     |
| \correction@table . . . . .                                                   | 8778                                                          |
| \defemph@uri . . . . .                                                        | 98, 5999                                                      |
| \define@key . . . . .                                                         | 2027, 2041, 2054                                              |
| \Gin@eheight . . . . .                                                        | 8876, 8879, 8884, 8889                                        |
| \Gin@ewidth . . . . .                                                         | 8073, 8074, 8875, 8885, 8889                                  |
| \Gin@exclamation . . . . .                                                    | 8875, 8876, 8884                                              |
| \Gin@mrepos . . . . .                                                         | 2028, 2031, 2035, 2056, 2060, 2065                            |
| \hwexam@bonuspts . . . . .                                                    | 8832                                                          |
| \hwexam@checktime . . . . .                                                   | 8826                                                          |
| \hwexam@duration . . . . .                                                    | 8802, 8805, 8811, 8816                                        |
| \hwexam@kw@forggrading . . . . .                                              | 8794                                                          |
| \hwexam@kw@grade . . . . .                                                    | 8795                                                          |
| \hwexam@kw@probs . . . . .                                                    | 8795                                                          |
| \hwexam@kw@pts . . . . .                                                      | 8796                                                          |
| \hwexam@kw@reached . . . . .                                                  | 8797                                                          |
| \hwexam@kw@sum . . . . .                                                      | 8795                                                          |
| \hwexam@kw@testemptypage . . . . .                                            | 8843                                                          |
| \hwexam@min . . . . .                                                         | 8803, 8810, 8815, 8826                                        |
| \hwexam@minutes@kw . . . . .                                                  | 8803                                                          |
| \hwexam@reqpts . . . . .                                                      | 8812, 8817, 8829, 8833                                        |
| \hwexam@tools . . . . .                                                       | 8813, 8818                                                    |
| \hwexam@totalmin . . . . .                                                    | 8825, 8826                                                    |
| \hwexam@totalpts . . . . .                                                    | 8824, 8833                                                    |
| \if@bonuspoints . . . . .                                                     | 8828                                                          |
| \if@rustex . . . . .                                                          | 305                                                           |
| \itemize@inner . . . . .                                                      | 7920, 7926, 7935                                              |
| \itemize@label . . . . .                                                      | 7924, 7927, 7930                                              |
| \itemize@level . . . . .                                                      | 7918, 7923, 7926, 7935                                        |
| \itemize@outer . . . . .                                                      | 7919, 7923                                                    |
| \l@st@mrepos . . . . .                                                        | 2042, 2045, 2049                                              |
| \ltx@ifpackageloaded . . . . .                                                | 140, 144, 2026,<br>2040, 2053, 7180, 8234, 8624, 8693         |
| \m@switch . . . . .                                                           | 5858                                                          |
| \mdf@patchamsth . . . . .                                                     | 7944                                                          |
| \metakeys@show@keys . . . . .                                                 | 7921                                                          |
| \notesslides@slide@label . . . . .                                            | 7947, 7962                                                    |
| \ns@author . . . . .                                                          | 8103, 8104                                                    |
| \ns@title . . . . .                                                           | 8112, 8113                                                    |
| \pgf@temp . . . . .                                                           | 2071, 2072, 2073                                              |
| \pgfkeys@spdef . . . . .                                                      | 2071                                                          |
| \pgfutil@empty . . . . .                                                      | 2073                                                          |
| \pgfutil@InputIfFileExists . . . . .                                          | 2080                                                          |
| \prematurestop@endsfragment . . . . .                                         | 7853, 7856, 7862                                              |
| \problem@kw@* . . . . .                                                       | 8231                                                          |
| \problem@kw@correct . . . . .                                                 | 8632                                                          |
| \problem@kw@minutes . . . . .                                                 | 8330, 8583                                                    |
| \problem@kw@points . . . . .                                                  | 8327, 8578                                                    |
| \problem@kw@wrong . . . . .                                                   | 8634                                                          |
| \problem@restore . . . . .                                                    | 8350, 8354, 8772                                              |
| \stex@backend . . . . .                                                       | 135, 295                                                      |
| \symrefemph@uri . . . . .                                                     | 97, 98, 5903, 5913, 5924, 5999                                |
| \varemph@uri . . . . .                                                        | 98, 126, 5944, 5957, 5970, 5999                               |
| \texname . . . . .                                                            | 24                                                            |
| \text . . . . .                                                               | 20                                                            |
| \textbf . . . . .                                                             | 19, 6041, 7740, 8341, 8743, 8748                              |
| \textcolor . . . . .                                                          | 8662                                                          |
| \textsymdecl . . . . .                                                        | 23, 24, 83, 124, 2967, 3880                                   |
| \textwarning . . . . .                                                        | 103                                                           |
| \textwidth . . . . .                                                          | 8071, 8093, 8791                                              |
| \the . . . . .                                                                | 250, 251, 253, 255, 257, 2074, 2075, 2076                     |
| \theassignment . . . . .                                                      | 8736, 8743                                                    |
| \thechapter . . . . .                                                         | 1331, 1372, 1400, 1435,<br>7766, 7771, 7775, 7779, 7783, 7787 |
| \theframenumber . . . . .                                                     | 7970                                                          |
| \theparagraph . . . . .                                                       | 7783, 7787                                                    |
| \thepart . . . . .                                                            | 1327, 1369, 1396, 1429, 7761                                  |

```

\theplainsproblem 8271, 8272
\thesection
.. 7771, 7775, 7779, 7783, 7787, 8272
\thesproblem . 8268, 8272, 8341, 8350, 8736
\thes subparagraph 7787
\thes subsection .. 7775, 7779, 7783, 7787
\thes subsection .. 7779, 7783, 7787
\this 57–59, 91, 92, 5187,
.. 6060, 6489, 6566, 6567, 6571, 6596
\thisarchive 3272, 3313
\thisargs 3714, 4470
\thiscopyname
.. 3464, 3484, 3508, 3578, 3598, 3619
\thisdeclname .. 3711, 3939, 4153, 4467
\thisdecluri .. .
.. 3710, 3938, 4154, 4157, 4466, 4474
\thisdefiniens 3713, 4469
\thisfor 6856
\thismodulename .. .
.. 128, 2518, 3049, 3274, 3315, 8308
\thismoduleuri .. .
.. 128, 2517, 3048, 3273, 3314, 3465,
.. 3485, 3509, 3579, 3599, 3620, 8307
\thisname 6855
\thisnotation 4155, 4454, 4473, 4762, 4957
\thisnotationvariant .. .
.. 4152, 4453, 4472, 4761, 4956
\ThisStyle 5858
\thisstyle .. .
.. 128, 458, 461,
.. 462, 463, 509, 512, 513, 514, 515,
.. 523, 526, 527, 3050, 3275, 3316,
.. 3715, 3940, 4452, 4471, 4760, 4955
\thistitle 98, 128, 2499,
.. 2500, 2501, 6854, 8309, 8342, 8343
\thistype 3712, 4468
\thisvarname .. .
.. 4451, 4455, 4759, 4763, 4954, 4958
\throwaway 130
\tikzinput .. 113, 2065, 8868, 8873, 8899
tikzinput commands:
\c_tikzinput_image_bool 34, 8857, 8864
\tiny 7948, 7962
\ttitle 111
\ttitle 8112
tl commands:
\tl_clear:N 399,
.. 458, 509, 770, 1343, 1720, 2156,
.. 2275, 2481, 2745, 3050, 3275, 3316,
.. 3528, 3681, 3682, 3683, 3715, 3860,
.. 3883, 3884, 3920, 3940, 4174, 4183,
.. 4279, 4422, 4452, 4471, 4510, 4705,
.. 4760, 4920, 4943, 4955, 5185, 5195,
.. 5292, 5305, 5503, 5890, 5891, 5892,
.. 5989, 6080, 6561, 6589, 6630, 6770,
.. 6771, 6772, 7073, 7074, 7076, 7077,
.. 7078, 7079, 7356, 7357, 8158, 8609,
.. 8611, 8612, 8711, 8712, 8713, 8783,
.. 8784, 8785, 8810, 8811, 8812, 8813
\tl_const:Nn 5830, 5831
\tl_count:N 5447, 5453
\tl_count:n 5578, 5589
\tl_gclear:N 2301
\tl_gput_left:Nn .. 371, 373, 374
\tl_gput_right:Nn .. 251, 2102,
.. 2106, 2125, 2278, 2542, 3283, 8144
\tl_gset:Nn 253,
.. 366, 367, 1022, 1242, 1249, 2126,
.. 2130, 4190, 5148, 5152, 8775, 8776
\tl_gset_eq:NN 45, 2777
\tl_head:N .. 885, 939, 3979, 6511, 6517
\tl_head:n .. .
.. 553, 594, 597, 4656, 5579, 5590
\tl_if_empty:NTF .. 523, 786, 1024,
.. 1260, 1270, 1313, 1747, 2364, 2500,
.. 2510, 3333, 3555, 3742, 3773, 3776,
.. 3779, 3908, 4083, 4096, 4168, 4177,
.. 4185, 4355, 4509, 4822, 4825, 4828,
.. 4836, 4858, 4941, 5015, 5018, 5021,
.. 5029, 5259, 5271, 5362, 5382, 5467,
.. 5606, 5719, 5732, 5774, 5803, 6062,
.. 7186, 7206, 7209, 7597, 8074, 8165,
.. 8297, 8302, 8342, 8632, 8634, 8636,
.. 8731, 8744, 8749, 8752, 8802, 8829
\tl_if_empty:nTF .. 368, 552,
.. 568, 584, 593, 750, 759, 881, 882,
.. 944, 951, 1098, 1566, 1724, 1746,
.. 1901, 1923, 1954, 2008, 2198, 2564,
.. 2579, 2631, 2691, 2716, 2786, 2801,
.. 2900, 2959, 3060, 3094, 3109, 3123,
.. 3142, 3173, 3200, 3389, 3977, 4090,
.. 4103, 4557, 4607, 4914, 5410, 5431,
.. 5507, 5530, 5933, 6134, 6258, 6307,
.. 6310, 6355, 6365, 6454, 6456, 6550,
.. 6559, 6654, 6664, 6728, 6873, 6995,
.. 7048, 7064, 7560, 8105, 8114, 8665
\tl_if_empty_p:N 776
\tl_if_eq:NNTF 1140, 6152, 6511, 6517
\tl_if_eq:NnTF 8191
\tl_if_eq:nnTF .. .
.. 2433, 4681, 5075, 5590, 5635, 5673
\tl_if_exist:NTF 209,
.. 250, 265, 304, 462, 514, 526, 1286,
.. 1295, 1528, 1688, 2534, 6219, 7792
\tl_if_in:NnTF .. 2213, 2231, 2235
\tl_item:nn 5581
\tl_map_inline:Nn 2166
\tl_map_inline:nn 216, 220

```

```

\tl_new:N 964, 1034, 1240, 1563, 2098, 2099,
2122, 2133, 2451, 4726, 5141, 5145
\tl_put_left:Nn 4596, 4597, 5336, 8277, 8724
\tl_put_right:Nn 1216, 2352, 2727, 2731, 3862,
3863, 4285, 4291, 4301, 4517, 4522,
4525, 4628, 4636, 4641, 4649, 4712,
5173, 5197, 5207, 5317, 6560, 6656,
6703, 6714, 6729, 8787, 8788, 8789
\tl_range:nnn 570, 586
\tl_set:Nn 210, 247, 350,
453, 472, 474, 493, 494, 499, 500,
502, 503, 749, 783, 863, 957, 1021,
1278, 1319, 1453, 1463, 1578, 1744,
2028, 2031, 2518, 2627, 2629, 2632,
2847, 3028, 3029, 3030, 3031, 3032,
3272, 3313, 3464, 3484, 3508, 3535,
3541, 3545, 3578, 3598, 3619, 3710,
3783, 3938, 3999, 4000, 4001, 4002,
4003, 4040, 4041, 4042, 4043, 4044,
4072, 4073, 4074, 4075, 4076, 4154,
4169, 4178, 4203, 4220, 4223, 4232,
4235, 4241, 4248, 4267, 4466, 4514,
4527, 4545, 4566, 4581, 4582, 4594,
4633, 4646, 4665, 4678, 4704, 4787,
4832, 4873, 4874, 4875, 4876, 4877,
4982, 5025, 5109, 5142, 5147, 5149,
5156, 5186, 5192, 5193, 5194, 5306,
5327, 5447, 5453, 5466, 5472, 5475,
5478, 5521, 5607, 5639, 5641, 5691,
5834, 5835, 5879, 5880, 6119, 6131,
6200, 6273, 6285, 6321, 6322, 6326,
6329, 6336, 6372, 6411, 6485, 6491,
6501, 6564, 6566, 6591, 6592, 6598,
6607, 6655, 6657, 6699, 6704, 6716,
6719, 6723, 6726, 6731, 6734, 6738,
6741, 7179, 7185, 7761, 7762, 7766,
7767, 7771, 7772, 7775, 7776, 7779,
7780, 7783, 7784, 7787, 7788, 7803,
8252, 8253, 8340, 8364, 8623, 8630,
8640, 8763, 8769, 8770, 8826, 8832
\tl_set_eq:NN 349, 370,
372, 377, 1569, 2499, 3048, 3049,
3273, 3274, 3314, 3315, 3465, 3485,
3509, 3579, 3599, 3620, 3711, 3712,
3713, 3714, 3939, 4157, 4225, 4237,
4261, 4409, 4417, 4451, 4467, 4468,
4469, 4470, 4513, 4750, 4759, 4850,
4855, 4859, 4939, 4954, 5386, 5526,
5567, 5646, 6417, 6489, 6571, 6596,
6854, 7075, 8308, 8309, 8824, 8825
\tl_set_rescan:Nnn 138, 189
\tl_tail:n 553, 554, 599, 2198, 5552, 6381
\tl_to_str:n 65,
68, 96, 99, 109, 121, 217, 221, 222,
246, 349, 571, 587, 683, 705, 712,
811, 829, 831, 834, 853, 859, 910,
980, 1072, 1176, 1248, 1263, 1499,
1786, 1810, 1837, 1838, 1844, 1893,
1941, 2088, 2110, 2126, 2129, 2130,
2167, 2170, 2212, 2214, 2230, 2232,
2236, 2254, 2263, 2407, 2409, 2410,
2413, 2414, 2444, 2445, 2503, 2571,
2572, 2573, 2595, 2828, 2982, 3057,
3332, 3341, 3529, 4264, 4565, 4579,
4658, 4703, 5492, 6129, 6162, 6212,
6279, 6299, 6303, 6462, 6590, 6645,
6675, 6689, 6713, 6751, 6787, 7662
\tl_trim_spaces:N 48
\l_tmpa_tl 44, 45, 47, 4295,
4705, 4712, 4719, 5136, 5434, 5440,
5445, 5447, 5451, 5453, 5456, 5465,
5467, 5472, 5475, 5478, 5693, 6369,
8640, 8652, 8653, 8783, 8787, 8795
\l_tmpb_tl 5434, 5440, 5442, 5456, 5466, 5470,
8630, 8643, 8645, 8784, 8788, 8796
tmpc commands:
\l_tmpc_t1 8785, 8789, 8797
\to 7505, 7508, 7518, 7519
\today 8133
\todo 4994, 4995, 6356, 8189
todo internal commands:
\l__todo_mmt_module_str 7585, 7590,
7603, 7606, 7609, 7613, 7628, 7644
\l__todo_newlabel:n 7661, 7668
\l__todo_old_metagroup_cd 7629, 7641
\l__todo_old_newlabel: ... 7662, 7667
\l__todo_stex_module_str 7589, 7590, 7615, 7642
token commands:
\c_math_subscript_token 49, 82, 4391, 4392, 4395,
4396, 4400, 6501, 7510, 7521, 7523
\topsep 7195
\type 111
U
\undefined 129, 40
\univ 63
\unless 7854
\uppercase 5927
\uri 133, 134

```

|                            |                                                                                                                                                                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>use commands:</b>       |                                                                                                                                                                                                                                                      |
| \use:N . . . . .           | 248, 381,<br>459, 463, 465, 510, 515, 517, 524,<br>527, 529, 1314, 1316, 1723, 1746,<br>1841, 1846, 2167, 2170, 2645, 3910,<br>5051, 5261, 5287, 6419, 7793, 7799                                                                                    |
| \use:n . . . . .           | 1829,<br>2018, 2026, 2040, 2053, 3780, 4829,<br>5022, 5217, 5307, 5339, 6471, 6578                                                                                                                                                                   |
| \use:nn . . . . .          | 54, 197, 200,<br>206, 546, 1316, 2442, 2466, 2797,<br>2842, 2998, 3003, 3737, 3904, 4158,<br>4309, 4348, 4456, 4475, 4764, 4959,<br>5106, 5128, 5133, 5349, 5552, 5599,<br>5684, 5859, 6100, 6132, 6537, 6604,<br>6646, 6808, 7631, 8169, 8366, 8765 |
| \use_i:nn . . . . .        | 6578, 8788                                                                                                                                                                                                                                           |
| \use_ii:nn . . . . .       | 1833, 2919, 2934, 6618                                                                                                                                                                                                                               |
| \use_none:nnnnnn . . . . . | 3017                                                                                                                                                                                                                                                 |
| \usebox . . . . .          | 8025                                                                                                                                                                                                                                                 |
| \usemodule . . . . .       | 15, 18, 22, 23, 26,<br>37, 49, 88, 89, 91, 207, 422, 429, 3036                                                                                                                                                                                       |
| \usepackage . . . . .      | 7, 21, 2018, 7868                                                                                                                                                                                                                                    |
| \useSGvar . . . . .        | 104, 8182                                                                                                                                                                                                                                            |
| \usestructure . . . . .    | 91, 6747                                                                                                                                                                                                                                             |
| \usetHEME . . . . .        | 7868                                                                                                                                                                                                                                                 |
| \usetikzlibrary . . . . .  | 75, 2087, 8867                                                                                                                                                                                                                                       |
| <b>V</b>                   |                                                                                                                                                                                                                                                      |
| \varbind . . . . .         | 47, 51, 90, 95, 6901, 6924, 7035, 7043                                                                                                                                                                                                               |
| <b>W</b>                   |                                                                                                                                                                                                                                                      |
| \vardef . . . . .          | 35,<br>47, 51, 90, 119, 120, 4726, 7066, 7394                                                                                                                                                                                                        |
| \varempth . . . . .        | 98, 5999                                                                                                                                                                                                                                             |
| \Varname . . . . .         | 5887                                                                                                                                                                                                                                                 |
| \varname . . . . .         | 5887                                                                                                                                                                                                                                                 |
| \varannotation . . . . .   | 90, 4440                                                                                                                                                                                                                                             |
| \varref . . . . .          | 5887                                                                                                                                                                                                                                                 |
| \varseq . . . . .          | 43, 90, 4928                                                                                                                                                                                                                                         |
| \vbox . . . . .            | 130, 7181, 7942, 8031,<br>8046, 8396, 8453, 8502, 8551, 8625                                                                                                                                                                                         |
| vbox commands:             |                                                                                                                                                                                                                                                      |
| \vbox_set:Nn . . . . .     | 2135                                                                                                                                                                                                                                                 |
| \vdash . . . . .           | 7533                                                                                                                                                                                                                                                 |
| \fill . . . . .            | 7797, 8843                                                                                                                                                                                                                                           |
| \VM . . . . .              | 53                                                                                                                                                                                                                                                   |
| \VMs . . . . .             | 55                                                                                                                                                                                                                                                   |
| \vn . . . . .              | 43                                                                                                                                                                                                                                                   |
| \vp . . . . .              | 45, 47                                                                                                                                                                                                                                               |
| \vrule . . . . .           | 7181, 8093, 8625                                                                                                                                                                                                                                     |
| \vskip . . . . .           | 7181, 8092, 8094, 8625                                                                                                                                                                                                                               |
| \vspace . . . . .          | 8845                                                                                                                                                                                                                                                 |
| <b>X</b>                   |                                                                                                                                                                                                                                                      |
| \xspace . . . . .          | 1286, 1295, 3954, 3955, 3961, 3962                                                                                                                                                                                                                   |
| <b>Y</b>                   |                                                                                                                                                                                                                                                      |
| \yield . . . . .           | 7249, 7440, 7443                                                                                                                                                                                                                                     |