

Deep Learning

Brief History




Learning goals

- Predecessors of modern (deep) neural networks
- History of DL as a field

A BRIEF HISTORY OF NEURAL NETWORKS


- **1943:** The first artificial neuron, the "Threshold Logic Unit (TLU)", was proposed by Warren McCulloch & Walter Pitts.

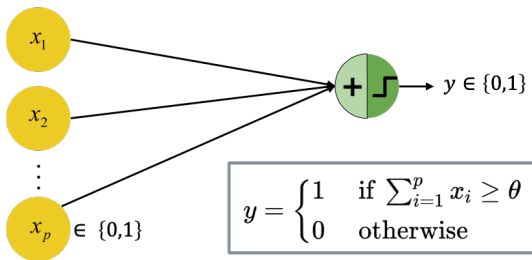

- The model is limited to binary inputs.
- It fires/outputs $+1$ if the input exceeds a certain threshold θ .
- The weight are not adjustable, so learning could only be achieved by changing the threshold θ .

A BRIEF HISTORY OF NEURAL NETWORKS


- **1957:** The perceptron was invented by Frank Rosenblatt.

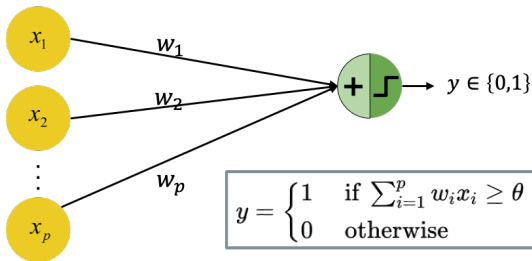

- The inputs are not restricted to be binary.
- The weights are adjustable and can be learned by learning algorithms.
- As for the TLU, the threshold is adjustable and decision boundaries are linear.

A BRIEF HISTORY OF NEURAL NETWORKS

- **1960:** Adaptive Linear Neuron (ADALINE) was invented by Bernard Widrow & Ted Hoff; weights are now adjustable according to the weighted sum of the inputs.

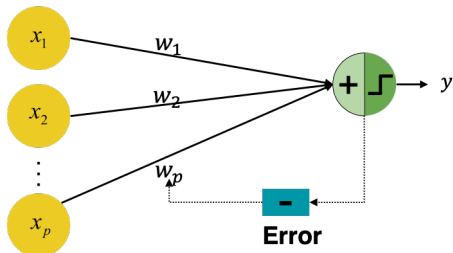


- **1965:** Group method of data handling (also known as polynomial neural networks) by Alexey Ivakhnenko. The first learning algorithm for supervised deep feedforward multilayer perceptrons.


A BRIEF HISTORY OF NEURAL NETWORKS

- **1969:** The first “AI Winter” kicked in.
 - Marvin Minsky & Seymour Papert proved that a perceptron cannot solve the XOR-Problem (linear separability).
 - Less funding \Rightarrow Standstill in AI/DL research.

OR Logical Function



XOR Logical Function



- **1985:** Multilayer perceptron with backpropagation by David Rumelhart, Geoffrey Hinton, and Ronald Williams.
 - Efficiently compute derivatives of composite functions.
 - Backpropagation was developed already in 1970 by Linnainmaa.

A BRIEF HISTORY OF NEURAL NETWORKS

- **1985:** The second “AI Winter” kicked in.
 - Overly optimistic expectations concerning potential of AI/DL.
 - The phrase “AI” even reached a pseudoscience status.
 - Kernel machines and graphical models both achieved good results on many important tasks.
 - Some fundamental mathematical difficulties in modeling long sequences were identified.




Credit: <https://emerj.com/ai-executive-guides/will-there-be-another-artificial-intelligence-winter-probably-not/>


A BRIEF HISTORY OF NEURAL NETWORKS

- **2006:** Age of deep neural networks began.
 - Geoffrey Hinton showed that a deep belief network could be efficiently trained using *greedy layer-wise pretraining*.
 - This wave of research popularized the use of the term deep learning to emphasize that researchers were now able to train deeper neural networks than had been possible before.
 - At this time, deep neural networks outperformed competing AI systems based on other ML technologies as well as hand-designed functionality.

Machine Learning




Deep Learning



A BRIEF HISTORY OF NEURAL NETWORKS


Deep Learning Timeline

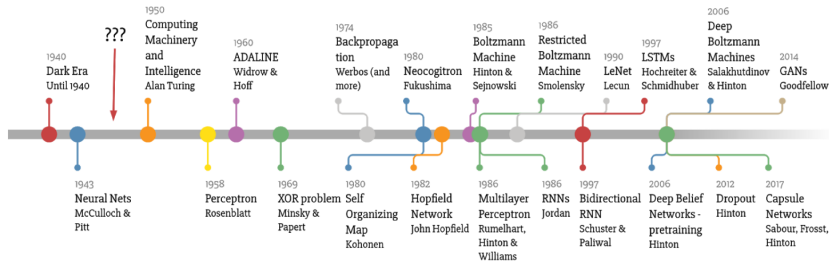

Credit: <https://towardsdatascience.com/a-weird-introduction-to-deep-learning-7828803693b0>

A BRIEF HISTORY OF NEURAL NETWORKS

History of DL Tools

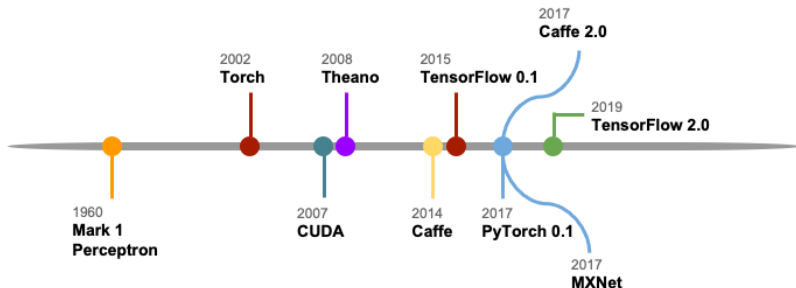

A BRIEF HISTORY OF NEURAL NETWORKS



Figure: IBM Supercomputer

- Watson is a question-answering system capable of answering questions posed in natural language, developed in IBM's DeepQA project.
- In 2011, Watson competed on *Jeopardy!* against champions Brad Rutter and Ken Jennings, winning the first place prize of \$1 million.


A BRIEF HISTORY OF NEURAL NETWORKS



Figure: Google self driving car (Waymo)

- Google's development of self-driving technology began on January 17, 2009, at the company's secretive X lab.
- By January 2020, 20 million miles of self-driving on public roads had been completed by Waymo.


A BRIEF HISTORY OF NEURAL NETWORKS

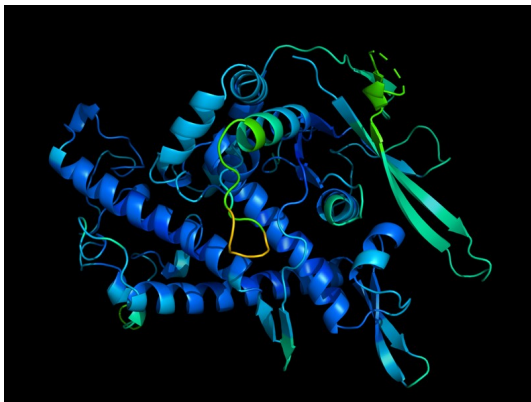

Credit: DeepMind

- **AlphaFold** is a deep learning system, developed by Google DeepMind, for determining a protein's 3D shape from its amino-acid sequence.
- In 2018 and 2020, AlphaFold placed first in the overall rankings of the Critical Assessment of Techniques for Protein Structure Prediction (CASP).


A BRIEF HISTORY OF NEURAL NETWORKS

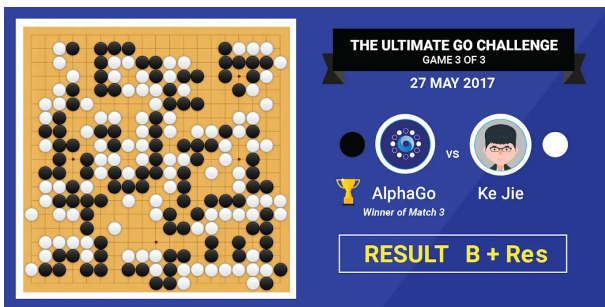

Credit: DeepMind

- **AlphaGo**, originally developed by DeepMind, is a deep learning system that plays the board game Go. In 2017, the Master version of AlphaGo beat Ke Jie, the number one ranked player in the world at the time.
- While there are several extensions to AlphaGo (e.g., Master AlphaGo, AlphaGo Zero, AlphaZero, and MuZero), the main idea is the same: search for optimal moves based on knowledge acquired by machine learning.

A BRIEF HISTORY OF NEURAL NETWORKS

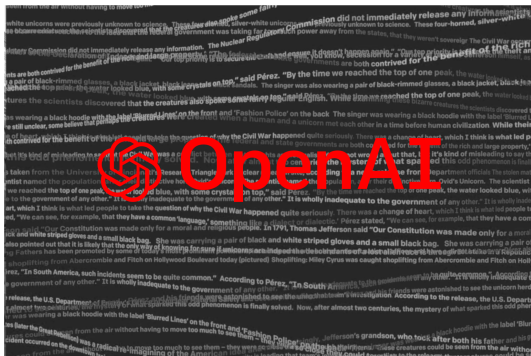

- **Generative Pre-trained Transformer 3 (GPT-3)** is the third generation of the GPT model, introduced by OpenAI in May 2020, to produce human-like text.
- There are 175 billion parameters to be learned by the algorithm, but the quality of the generated text is so high that it is hardly possible to distinguish it from a human-written text.

REFERENCES



Goodfellow, I., Bengio, Y., & Courville, A. (2016). *Deep Learning*. MIT Press.



MathWorks. (n.d.). *Regularization*. MATLAB & Simulink.
<https://de.mathworks.com/discovery/regularization.html>



Carter, D. S. and S. (n.d.). *Tensorflow - Neural Network Playground. A Neural Network Playground*. <https://playground.tensorflow.org>



Google. (n.d.). *Regularization for Simplicity: Playground Exercise (L2 Regularization)*. Google. <https://developers.google.com/machine-learning/crash-course/regularization-for-simplicity/playground-exercise-examining-l2-regularization?hl=de>