# DECISION TREES - EXAMPLE

- Fit decision tree with tree depth of 3 on bike data
- E.g., mean prediction for the first 105 days since 2011 is 1798
  $\rightsquigarrow$ Applies to $\hat{=}$15% of the data (leftmost branch)
- days_since_2011: highest feature importance (explains most of variance)

| Feature | Importance |
|---|---|
| days_since_2011 | 79.53 |
| temp | 17.55 |
| hum | 2.92 |

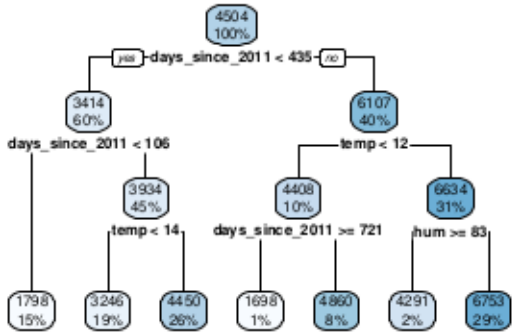

# UNBIASED RECURSIVE PARTITIONING

▸ Hothorn et al. (2006) ▸ Zeileis et al. (2008) ▸ Strobl et al. (2007)

**Problems** with CART (Classification and Regression Trees):

1. Selection bias towards high-cardinal/continuous features
2. Does not consider significant improvements when splitting ($\rightsquigarrow$ overfitting)

**Unbiased recursive partitioning** via conditional inference trees (ctree) or model-based recursive partitioning (mob):

1. Separate selection of **feature used for splitting** and **split point**
2. Hypothesis test as stopping criteria

# UNBIASED RECURSIVE PARTITIONING

▸ Hothorn et al. (2006) ▸ Zeileis et al. (2008) ▸ Strobl et al. (2007)

**Problems** with CART (Classification and Regression Trees):

1. Selection bias towards high-cardinal/continuous features
2. Does not consider significant improvements when splitting ($\rightsquigarrow$ overfitting)

**Unbiased recursive partitioning** via conditional inference trees (ctree) or model-based recursive partitioning (mob):

1. Separate selection of **feature used for splitting** and **split point**
2. Hypothesis test as stopping criteria

**Example (selection bias)**:

Simulate data ($n = 200$) with $Y \sim N(0, 1)$ and 3 features of different cardinality independent from $Y$ (repeat 500 times):

- $X_1 \sim Binom(n, \frac{1}{2})$
- $X_2 \sim M(n, (\frac{1}{4}, \frac{1}{4}, \frac{1}{4}, \frac{1}{4}))$
- $X_3 \sim M(n, (\frac{1}{8}, \frac{1}{8}, \frac{1}{8}, \frac{1}{8}, \frac{1}{8}, \frac{1}{8}, \frac{1}{8}, \frac{1}{8}))$

Which feature is selected in the first split?

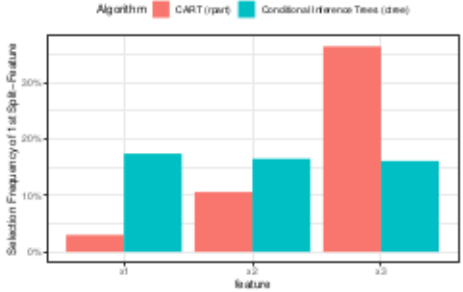

# UNBIASED RECURSIVE PARTITIONING

Differences to CART:

- Two-step approach (1. find most significant split feature, 2. find best split point)
- Parametric model (e.g. LM instead of constant) can be fitted in leave nodes
- Significance of split (p-value) given in each node
- `ctree` and `mob` differ in hypothesis test used for selecting the split feature (independence test vs. fluctuation test) and how to find the best split point

# UNBIASED RECURSIVE PARTITIONING

Differences to CART:

- Two-step approach (1. find most significant split feature, 2. find best split point)
- Parametric model (e.g. LM instead of constant) can be fitted in leave nodes
- Significance of split (p-value) given in each node
- `ctree` and `mob` differ in hypothesis test used for selecting the split feature (independence test vs. fluctuation test) and how to find the best split point

**Example** (`ctree`): Bike data (constant model in final nodes)

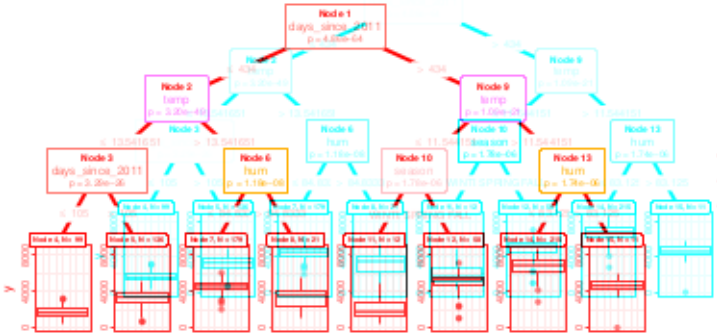


Train error (MSE):
758,844.0 (`ctree`)
742,244.4 (`mob`)

# UNBIASED RECURSIVE PARTITIONING

Differences to CART:

- Two-step approach (1. find most significant split feature, 2. find best split point)
- Parametric model (e.g. LM instead of constant) can be fitted in leave nodes
- Significance of split (p-value) given in each node
- `ctree` and `mob` differ in hypothesis test used for selecting the split feature (independence test vs. fluctuation test) and how to find the best split point

**Example** (`mob`): Bike data (linear model with `temp` in final nodes)

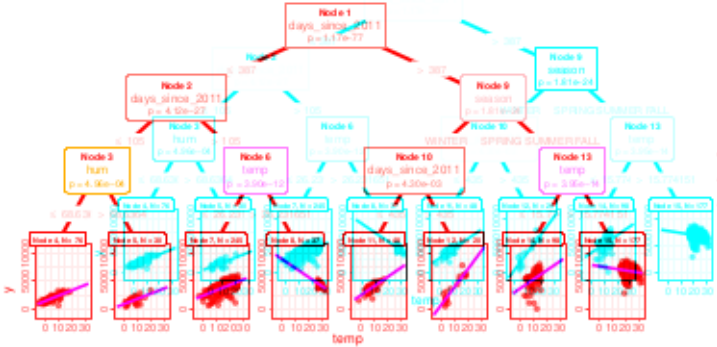


Train error (MSE):
758,844.0 (`ctree`)
742,244.4 (`mob`)

Train error (MSE): 758,844.0 (`ctree`), 742,244.4 (`mob`)

# OTHER RULE-BASED MODELS

## Decision Rules

▸ Holte 1993

- (Chaining of) simple "if – then" statements
  ⇝ very intuitive and easy-to-interpret
- Most methods work only for classification and categorical features

IF `size=small` THEN `value=low`

IF `size=medium` THEN `value=medium`

IF `size=big` THEN `value=high`




## RuleFit

▸ Friedman and Popescu 2008

- Combination of LM and decision trees
- Allows for feature interactions and non-linearities



# OTHER RULE-BASED MODELS

## Decision Rules

Holte 1993

- (Chaining of) simple "if – then" statements
  $\rightsquigarrow$ very intuitive and easy-to-interpret
- Most methods work only for classification and categorical features

## RuleFit

Friedman and Popescu 2008

- Combination of LM and decision trees
- Uses (many) decision trees to extract important decision rules $r_1, r_2, r_3, r_4$ which are used as features in a (regularized) LM
- Allows for feature interactions and non-linearities

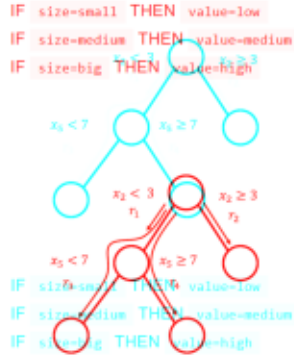


Molnar 2022