

Interpretable Machine Learning




Counterfactuals and Adversarial Examples
Optimization Problem and Objectives

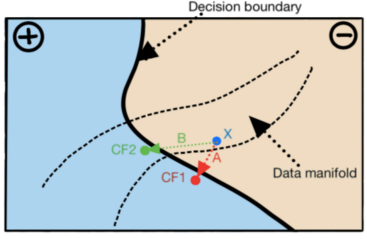

Learning goals

- Formulate CEs as optimization problem
- Identify key objectives (proximity, sparsity)
- Understand trade-offs in CE generation


MATHEMATICAL PERSPECTIVE



Terminology:

- $\boldsymbol{x}$: original/factual data point whose prediction we want to explain
- $y' \subset \mathbb{R}^g$: desired prediction ($y' =$ "grant credit") or interval ($y' = [1000, \infty[$)

MATHEMATICAL PERSPECTIVE




Terminology:

- $\boldsymbol{x}$: original/factual data point whose prediction we want to explain
- $y' \subset \mathbb{R}^g$: desired prediction ($y' =$ "grant credit") or interval ($y' = [1000, \infty[$)

A **valid** counterfactual $\boldsymbol{x}'$ satisfies two criteria:

1. **Prediction validity:** CE's prediction $\hat{f}(\boldsymbol{x}')$ is equal to the desired prediction y'
2. **Proximity:** CE $\boldsymbol{x}'$ is as close as possible to the original input $\boldsymbol{x}$

MATHEMATICAL PERSPECTIVE



Terminology:

- $\boldsymbol{x}$: original/factual data point whose prediction we want to explain
- $y' \subset \mathbb{R}^g$: desired prediction ($y' =$ "grant credit") or interval ($y' = [1000, \infty[$)

A **valid** counterfactual $\boldsymbol{x}'$ satisfies two criteria:

1. **Prediction validity:** CE's prediction $\hat{f}(\boldsymbol{x}')$ is equal to the desired prediction y'
2. **Proximity:** CE $\boldsymbol{x}'$ is as close as possible to the original input $\boldsymbol{x}$


Reformulate these two objectives as optimization problem:

$$\arg\min_{\boldsymbol{x}'} \lambda_1 o_{target}\left(\hat{f}(\boldsymbol{x}'), y'\right) + \lambda_2 o_{proximity}(\boldsymbol{x}', \boldsymbol{x})$$

- λ_1 and λ_2 balance the two objectives
- o_{target}: distance in target space
- $o_{proximity}$: distance in feature space

OBJECTIVE FUNCTIONS

▸ "Dandl et al." 2020




Distance in target space o_{target}:

- **Regression:** L_1 distance
  $o_{target}(\hat{f}(\boldsymbol{x}'), y') = |\hat{f}(\boldsymbol{x}') - y'|$
- **Classification:**
  - For predicted probabilities: $o_{target}(\hat{f}(\boldsymbol{x}'), y') = |\hat{f}(\boldsymbol{x}') - y'|$
  - For predicted hard labels: $o_{target}(\hat{f}(\boldsymbol{x}'), y') = \mathbb{1}_{\{\hat{f}(\boldsymbol{x}') \neq y'\}}$

OBJECTIVE FUNCTIONS

▸ "Dandl et al." 2020



Distance in target space o_{target}:

- **Regression:** L_1 distance
  $o_{target}(\hat{f}(\boldsymbol{x}'), y') = |\hat{f}(\boldsymbol{x}') - y'|$
- **Classification:**
  - For predicted probabilities: $o_{target}(\hat{f}(\boldsymbol{x}'), y') = |\hat{f}(\boldsymbol{x}') - y'|$
  - For predicted hard labels: $o_{target}(\hat{f}(\boldsymbol{x}'), y') = \mathbb{1}_{\{\hat{f}(\boldsymbol{x}') \neq y'\}}$

Distance in input space $o_{proximity}$: Gower distance (mixed feature types)


$$o_{proximity}(\boldsymbol{x}', \boldsymbol{x}) = d_G(\boldsymbol{x}', \boldsymbol{x}) = \frac{1}{p} \sum_{j=1}^{p} \delta_G(x_j', x_j) \in [0, 1]$$

where

- $\delta_G(x_j', x_j) = \mathbb{1}_{\{x_j' \neq x_j\}}$ if x_j is categorical
- $\delta_G(x_j', x_j) = \frac{1}{\widehat{R}_j} |x_j' - x_j|$ if x_j is numerical

  $\rightsquigarrow$ $\widehat{R}_j$: range of feature j in the training set to ensure $\delta_G(x_j', x_j) \in [0, 1]$

FURTHER OBJECTIVES: SPARSITY




Additional constraints can improve the explanation quality of the corresponding CEs
$\rightsquigarrow$ popular constraints include **sparsity** and **plausibility**

Sparsity Favor explanations that change few features

- End-users often prefer short over long explanations

FURTHER OBJECTIVES: SPARSITY




Additional constraints can improve the explanation quality of the corresponding CEs
$\rightsquigarrow$ popular constraints include **sparsity** and **plausibility**

Sparsity Favor explanations that change few features

- End-users often prefer short over long explanations
- Sparsity could be integrated into $o_{proximity}$
  e.g., using L_0-norm (number of changed features) or L_1-norm (LASSO)

FURTHER OBJECTIVES: SPARSITY



Additional constraints can improve the explanation quality of the corresponding CEs
$\rightsquigarrow$ popular constraints include **sparsity** and **plausibility**

Sparsity Favor explanations that change few features


- End-users often prefer short over long explanations
- Sparsity could be integrated into $o_{proximity}$
  e.g., using L_0-norm (number of changed features) or L_1-norm (LASSO)
- Alternative: Include separate objective measuring sparsity, e.g., via L_0-norm

$$o_{sparse}(\boldsymbol{x}', \boldsymbol{x}) = \sum_{j=1}^{p} \mathbb{1}_{\{x_j' \neq x_j\}}$$


FURTHER OBJECTIVES: PLAUSIBILITY

Plausibility:

- CEs should suggest realistic (i.e., plausible) alternatives
  $\rightsquigarrow$ Implausible: increase income *and* become unemployed




FURTHER OBJECTIVES: PLAUSIBILITY



Plausibility:

- CEs should suggest realistic (i.e., plausible) alternatives
  $\rightsquigarrow$ Implausible: increase income *and* become unemployed
- CEs should adhere to data manifold or originate from distribution of $\mathcal{X}$
  $\rightsquigarrow$ Avoid unrealistic combinations of feature values


FURTHER OBJECTIVES: PLAUSIBILITY



Plausibility:


- CEs should suggest realistic (i.e., plausible) alternatives
  $\rightsquigarrow$ Implausible: increase income *and* become unemployed
- CEs should adhere to data manifold or originate from distribution of $\mathcal{X}$
  $\rightsquigarrow$ Avoid unrealistic combinations of feature values
- Estimating joint distribution is hard, especially for mixed feature spaces
  $\rightsquigarrow$ Common proxy: ensure that $\boldsymbol{x}'$ is close to training data $\mathbf{X}$

FURTHER OBJECTIVES: PLAUSIBILITY



Plausibility:


- CEs should suggest realistic (i.e., plausible) alternatives
  $\rightsquigarrow$ Implausible: increase income *and* become unemployed
- CEs should adhere to data manifold or originate from distribution of $\mathcal{X}$
  $\rightsquigarrow$ Avoid unrealistic combinations of feature values
- Estimating joint distribution is hard, especially for mixed feature spaces
  $\rightsquigarrow$ Common proxy: ensure that $\boldsymbol{x}'$ is close to training data $\mathbf{X}$

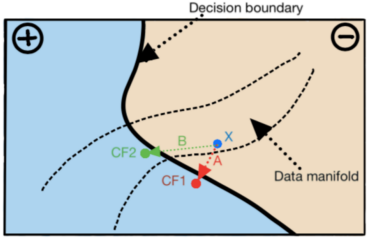

Example from ▸ "Verma et al." 2020

- Input $\boldsymbol{x}$ originally classified as $\ominus$
- Two valid CEs in class $\oplus$: CF1 and CF2
- Path **A** (CF1) is shorter (but unrealistic)
- Path **B** (CF2) is longer but in data manifold

FURTHER OBJECTIVES




Plausibility term: Encourage counterfactuals close to observed data.

- Define $\boldsymbol{x}^{[1]}$ as the nearest neighbor of $\boldsymbol{x}'$ in the training set $\mathbf{X}$
- Use Gower distance between $\boldsymbol{x}'$ and $\boldsymbol{x}^{[1]}$ to define plausibility objective:

$$o_{plausible}(\boldsymbol{x}', \mathbf{X}) = d_G(\boldsymbol{x}', \boldsymbol{x}^{[1]}) = \frac{1}{p} \sum_{j=1}^{p} \delta_G(x'_j, x_j^{[1]})$$

FURTHER OBJECTIVES



Plausibility term: Encourage counterfactuals close to observed data.


- Define $\boldsymbol{x}^{[1]}$ as the nearest neighbor of $\boldsymbol{x}'$ in the training set $\mathbf{X}$
- Use Gower distance between $\boldsymbol{x}'$ and $\boldsymbol{x}^{[1]}$ to define plausibility objective:

$$o_{plausible}(\boldsymbol{x}', \mathbf{X}) = d_G(\boldsymbol{x}', \boldsymbol{x}^{[1]}) = \frac{1}{p} \sum_{j=1}^{p} \delta_G(x'_j, x_j^{[1]})$$

Extended optimization: Add sparsity and plausibility terms to the objective

$$\arg\min_{\boldsymbol{x}'} \lambda_1 o_{target}(\hat{f}(\boldsymbol{x}'), y') + \lambda_2 o_{proximity}(\boldsymbol{x}', \boldsymbol{x}) + \lambda_3 o_{sparse}(\boldsymbol{x}', \boldsymbol{x}) + \lambda_4 o_{plausible}(\boldsymbol{x}', \mathbf{X})$$


REMARKS: THE RASHOMON EFFECT



Issue (Rashomon effect):

- Solution to the optimization problem might not be unique
- Many equally close CEs might exist that obtain the desired prediction
  $\Rightarrow$ Many different equally good explanations for the same decision exist

REMARKS: THE RASHOMON EFFECT




Issue (Rashomon effect):

- Solution to the optimization problem might not be unique
- Many equally close CEs might exist that obtain the desired prediction
  $\Rightarrow$ Many different equally good explanations for the same decision exist

Possible solutions:

- Present all CEs for $\boldsymbol{x}$ (but: time and human processing capacity is limited)
- Focus on one/few CEs (but: by which criterion should guide this choice?)

REMARKS: THE RASHOMON EFFECT



Issue (Rashomon effect):

- Solution to the optimization problem might not be unique
- Many equally close CEs might exist that obtain the desired prediction
  $\Rightarrow$ Many different equally good explanations for the same decision exist


Possible solutions:

- Present all CEs for $\boldsymbol{x}$ (but: time and human processing capacity is limited)
- Focus on one/few CEs (but: by which criterion should guide this choice?)

Note:


- Nonlinear models can produce diverse and inconsistent CEs
  $\rightsquigarrow$ suggest both increasing and decreasing credit duration
  (confusing for users)
- Handling this **Rashomon effect** remains an open problem in interpretable ML

REMARKS: MODEL OR REAL-WORLD



- CEs explain model predictions, but may seem to explain real-world users
  $\rightsquigarrow$ Transfer of model explanations to explain real-world is generally not allowed
- **Example:** CE suggests increasing age by 5 to receive a loan
  $\rightsquigarrow$ The applicant waits 5 years and reapplies

REMARKS: MODEL OR REAL-WORLD



- CEs explain model predictions, but may seem to explain real-world users
  ⇝ Transfer of model explanations to explain real-world is generally not allowed
- **Example:** CE suggests increasing age by 5 to receive a loan
  ⇝ The applicant waits 5 years and reapplies
- **Problem:** Other features may change till then (e.g., job status, income)
  ⇝ ▸ "Karimi et al." 2020 propose CEs that respect causal structure
- **Model drift:** Bank's algorithm itself may change over time
  ⇝ Past CEs may become invalid