



Optimization in Machine Learning

Multi-criteria Optimization Evolutionary Approaches



Learning goals


- EMOAs and population-based approach
- NSGA-II
- SMS-EMOA

BASIC EA TEMPLATE LOOP

Algorithm Basic EA template loop

- ❶ Initialize and evaluate population $\mathcal{P}_0 \subset \mathcal{S}$ with $|\mathcal{P}_0| = \mu$.
 - ❷ Set $t \leftarrow 0$.
 - ❸ Repeat until the stop criterion is fulfilled:
 - ❶ Select parents from $\mathcal{P}_t$ and generate offspring $\mathcal{Q}_t$, with $|\mathcal{Q}_t| = \lambda$.
 - ❷ Select μ survivors to form $\mathcal{P}_{t+1}$.
 - ❸ Set $t \leftarrow t + 1$.
-



- As in standard EAs, we have parent selection, variation, and survival selection.
- For multi-objective EAs (EMOAs), ranking solutions by “fitness” is no longer straightforward. We need special selection strategies (non-dominated sorting, etc.).



NSGA-II: NON-DOMINATED SORTING (I)

NDS partitions an objective space set into fronts $\mathcal{F}_1 \prec \mathcal{F}_2 \prec \mathcal{F}_3 \prec \dots$



- $\mathcal{F}_1$ is non-dominated, each $\mathbf{x} \in \mathcal{F}_2$ is dominated, but only by points in $\mathcal{F}_1$, each $\mathbf{x} \in \mathcal{F}_3$ is dominated, but only by points in $\mathcal{F}_1$ and $\mathcal{F}_2$, and so on.
- We can easily compute the partitioning by computing all non-dominated points $\mathcal{F}_1$, removing them, then computing the next layer of non-dominated points $\mathcal{F}_2$, and so on.

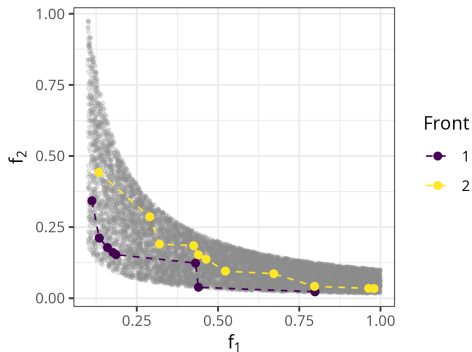

NSGA-II: NON-DOMINATED SORTING (II)

For **survival** in $(\mu + \lambda)$ selection:

- We rank all $\mu + \lambda$ individuals by front index.
- We start filling the next population from $\mathcal{F}_1$ upward.
- If front $\mathcal{F}_i$ cannot fully fit (because we would exceed μ), we partially fill with a subset of $\mathcal{F}_i$.

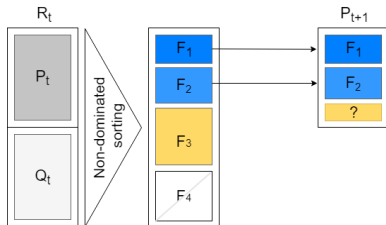

But: Which individuals survive from this partially included front? $\rightarrow$ *crowding distance* sorting.


(NDS is also used for parent selection with binary tournaments.)

NSGA-II: CROWDING DISTANCE (II)


Crowding distance: For each objective f_j :

- Sort points by f_j (in ascending order).
- Normalize f_j values to $[0, 1]$.
- “Border” points (lowest/highest f_j) get infinite distance (ensuring they always survive if possible).
- For internal points, distance is difference in f_j -values between next neighbors.

Then sum (or average) across all m objectives to get the final crowding score.

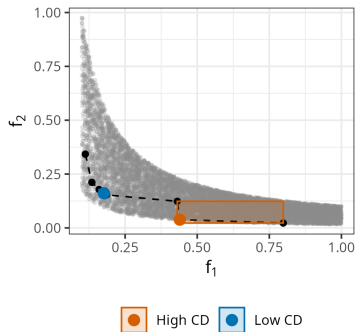

Red: High CD Blue: Low CD





HYPERVOLUME CONTRIBUTION

S-Metric-Selection uses the *hypervolume contribution* $\Delta s(\mathbf{x}, \mathcal{P})$ of each individual:

$$\Delta s(\mathbf{x}, \mathcal{P}) = S(\mathcal{P}, R) - S(\mathcal{P} \setminus \{\mathbf{x}\}, R),$$

where $S(\cdot, R)$ is the dominated HV w.r.t. reference point R .

- Dark rectangles: unique HV part dominated only by that dot
- Gray cross: reference point R .
- The individual with the smallest HV contribution is “least important” for covering objective space.
- This is used by the SMS-EMOA to remove individuals in survival selection.

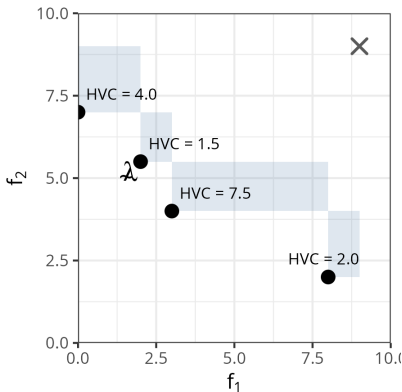

SMS-EMOA ALGORITHM

Algorithm SMS-EMOA

- ❶ Generate initial population $\mathcal{P}_0$ of size μ .
 - ❷ Set $t \leftarrow 0$.
 - ❸ Repeat until termination:
 - ❶ Create exactly one offspring $\mathbf{q}$ by recombination and mutation.
 - ❷ Perform non-dominated sorting on $(\mathcal{P}_t \cup \{\mathbf{q}\})$.
 - ❸ Let $\mathcal{F}_k$ be the last front.
 - ❹ Set $\tilde{\mathbf{x}} \leftarrow \arg \min_{\mathbf{x} \in \mathcal{F}_k} \Delta s(\mathbf{x}, \mathcal{F}_k)$.
 - ❺ Set $\mathcal{P}_{t+1} \leftarrow (\mathcal{P}_t \cup \{\mathbf{q}\}) \setminus \{\tilde{\mathbf{x}}\}$.
 - ❻ Set $t \leftarrow t + 1$.
-
- As soon as we exceed size $\mu + 1$, remove the worst HV contributor from the *last front*.
 - That way, each iteration keeps exactly μ individuals.
 - Ranking is primarily by front membership; hypervolume contribution is the tiebreak.

