Optimization in Machine Learning

First order methods
GD – Multimodality and Saddle points



Learning goals

- Multimodality, GD result can be arbitrarily bad
- Saddle points, major problem in NN error landscapes, GD can get stuck or slow crawling

UNIMODAL VS. MULTIMODAL LOSS SURFACES

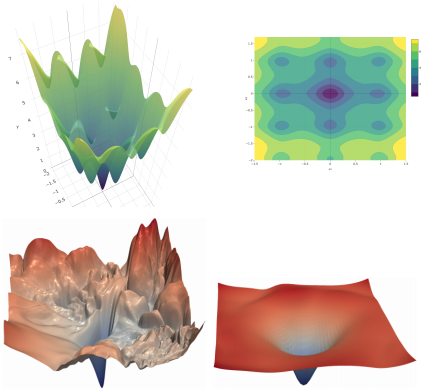

Click for source

- Snippet of a loss surface with many local optima
- In deep learning, we often find multimodal loss surfaces.
- **Left:** Multimodal loss surface.
- **Right:** (Nearly) unimodal loss surface.

GD: ONLY LOCALLY OPTIMAL MOVES

- GD makes only **locally** optimal moves
- It may move away from the global optimum

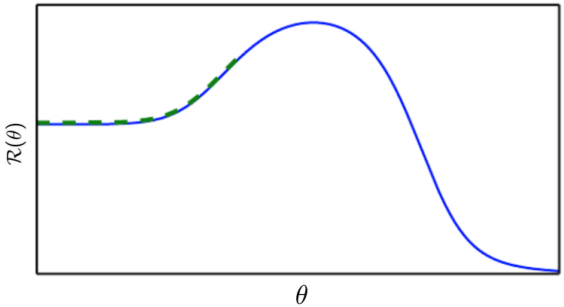

▸ Click for source

- Initialization on “wrong” side of the hill results in weak performance
- In higher dimensions, GD may move around the hill (potentially at the cost of longer trajectory and time to convergence)

LOCAL MINIMA

- **In practice:** Only local minima with high value compared to global minimium are problematic.

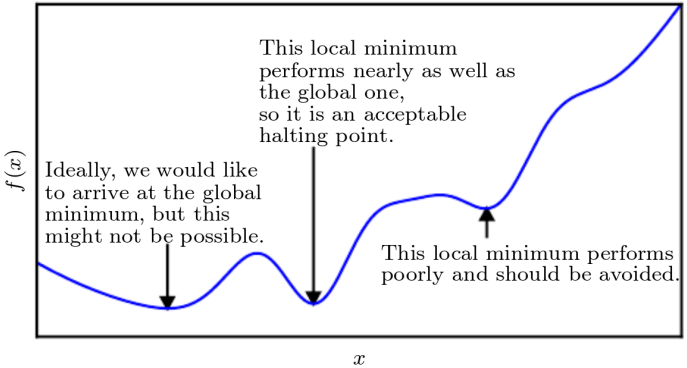

Click for source

LOCAL MINIMA: SENSITIVITY

- Small differences in starting point or step size can lead to huge differences in the reached minimum or even to non-convergence

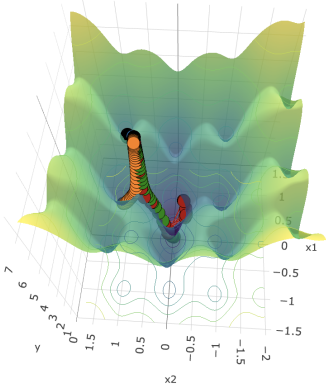

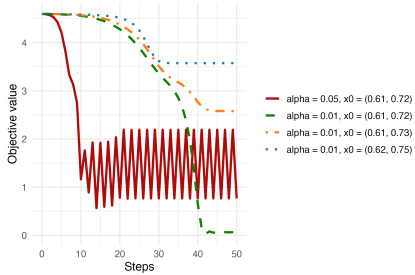

- (Non-)Converging gradient descent for Ackley function

GD AT SADDLE POINTS

Example:

$$f(x_1, x_2) = x_1^2 - x_2^2$$

$$\nabla f(x_1, x_2) = (2x_1, -2x_2)^T$$

$$\boldsymbol{H} = \begin{pmatrix} 2 & 0 \\ 0 & -2 \end{pmatrix}$$



- Along x_1, curvature is positive ($\lambda_1 = 2 > 0$).
- Along x_2, curvature is negative ($\lambda_2 = -2 < 0$).

EXAMPLE: SADDLE POINT WITH GD

- How do saddle points impair optimization?
- Gradient-based algorithms **might** get stuck in saddle points

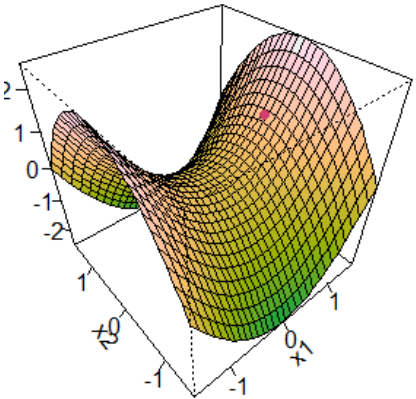

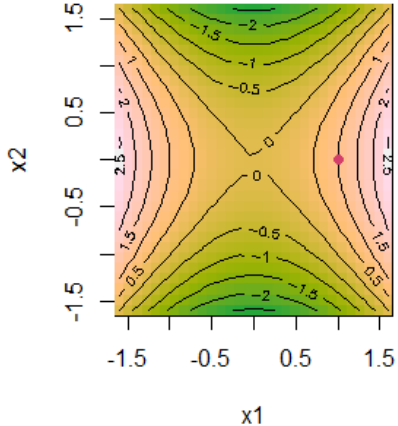

Red dot: Starting location

EXAMPLE: SADDLE POINT WITH GD

- How do saddle points impair optimization?
- Gradient-based algorithms **might** get stuck in saddle points

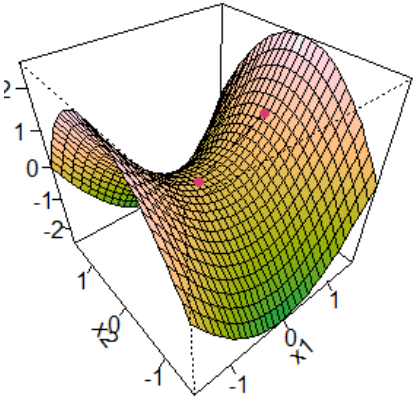

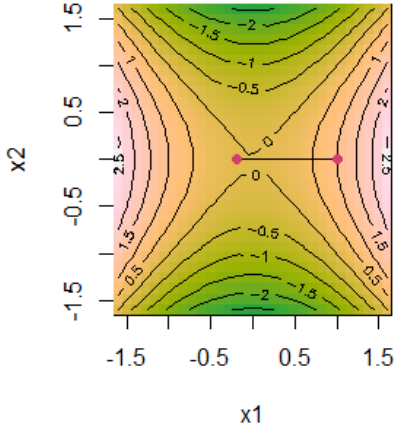

Step 1 ...

EXAMPLE: SADDLE POINT WITH GD

- How do saddle points impair optimization?
- Gradient-based algorithms **might** get stuck in saddle points

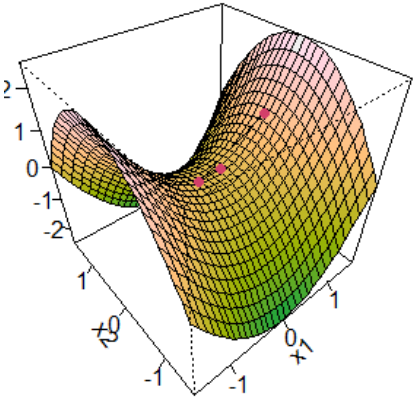

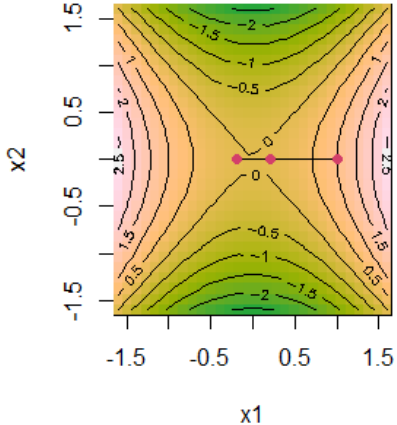

... Step 2 ...

EXAMPLE: SADDLE POINT WITH GD

- How do saddle points impair optimization?
- Gradient-based algorithms **might** get stuck in saddle points

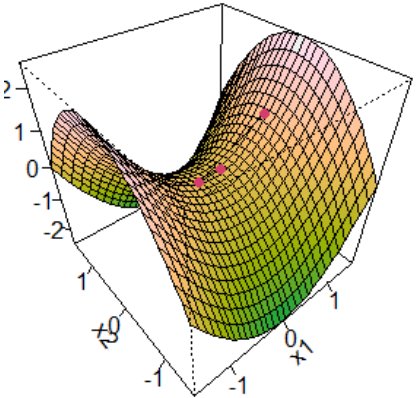

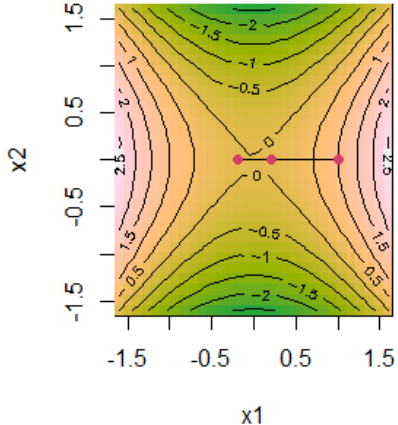

... Step 10 ... got stuck and cannot escape saddle point

EXAMPLE: SADDLE POINT WITH GD



- How do saddle points impair optimization?
- Gradient-based algorithms **might** get stuck in saddle points

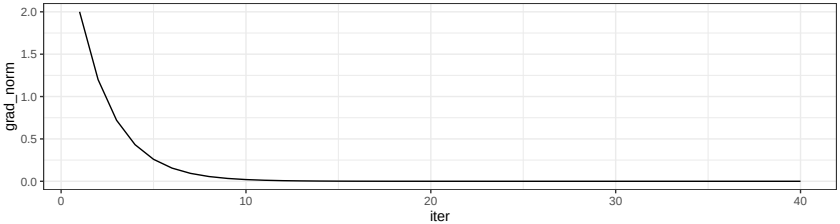

... Step 10 ... got stuck and cannot escape saddle point

SADDLE POINTS IN NEURAL NETWORKS



- For the empirical risk $\mathcal{R} : \mathbb{R}^d \to \mathbb{R}$ of a neural network, the expected ratio of the number of saddle points to local minima typically grows exponentially with d
- In other words: Networks with more parameters (deeper networks or larger layers) exhibit a lot more saddle points than local minima
- **Reason:** Hessian at local minimum has only positive eigenvalues. Hessian at saddle point has positive and negative eigenvalues.