# Optimization in Machine Learning

## Bayesian Optimization
## Multicriteria Bayesian Optimization




**Learning goals**

- Multicriteria Optimization
- Taxonomy
- ParEGO, SMS-EGO, EHI

# MULTICRITERIA BAYESIAN OPTIMIZATION

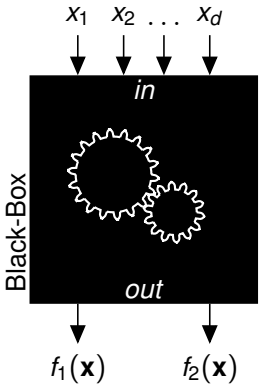


$$f : \mathcal{S} \to \mathbb{R}^m$$

$$\min_{\mathbf{x} \in \mathcal{S}} \quad f(\mathbf{x}) = (f_1(\mathbf{x}), \ldots, f_m(\mathbf{x}))$$

- A configuration **x dominates** ($\prec$) $\tilde{\mathbf{x}}$ if

$$\begin{aligned} \forall i \in \{1, ..., m\} : \quad & f_i(\mathbf{x}) \leq f_i(\tilde{\mathbf{x}}) \\ \text{and } \exists j \in \{1, ..., m\} : \quad & f_j(\mathbf{x}) < f_j(\tilde{\mathbf{x}}) \end{aligned}$$

- Set of non-dominated solutions:

$$\mathcal{P} := \{\mathbf{x} \in \mathcal{S} | \nexists \tilde{\mathbf{x}} \in \mathcal{S} : \tilde{\mathbf{x}} \prec \mathbf{x}\}$$

- Pareto set $\mathcal{P}$, Pareto front $\mathcal{F} = f(\mathcal{P})$
- Goal: Find $\hat{\mathcal{P}}$ of non-dominated points that estimates the true Pareto set $\mathcal{P}$

# MULTICRITERIA BAYESIAN OPTIMIZATION / 2

Example Pareto front:

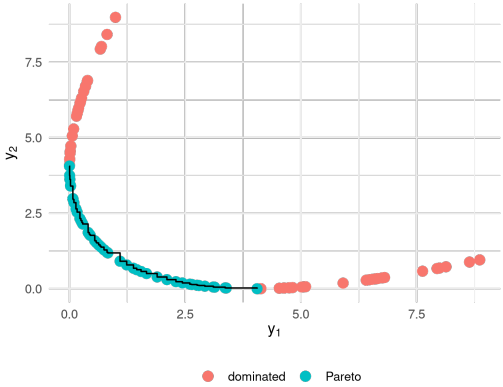

# MULTICRITERIA BAYESIAN OPTIMIZATION / 3



The most popular quality indicator is the hypervolume indicator (also called dominated hypervolume or $\mathcal{S}$-metric).

The hypervolume, HV, of an approximation of the Pareto front $\hat{\mathcal{F}} = f(\hat{\mathcal{P}})$ can be defined as the combined volume of the dominated hypercubes $\text{domHC}_{\boldsymbol{r}}$ of all solution points $\mathbf{x} \in \hat{\mathcal{P}}$ regarding a reference point $\boldsymbol{r}$, i.e.,

$$\text{HV}_{\boldsymbol{r}}(\hat{\mathcal{P}}) := \mu\left(\bigcup_{\mathbf{x}\in\hat{\mathcal{P}}} \text{domHC}_{\boldsymbol{r}}(\mathbf{x})\right)$$

where $\mu$ is the Lebesgue measure and the dominated hypercube is given as:

$$\text{domHC}_{\boldsymbol{r}}(\mathbf{x}) := \{\boldsymbol{u} \in \mathbb{R}^m \mid f_i(\mathbf{x}) \leq \boldsymbol{u}_i \leq \boldsymbol{r}_i \ \forall i \in \{1, \ldots, m\}\}$$

# MULTICRITERIA BAYESIAN OPTIMIZATION / 4

Hypervolume example:

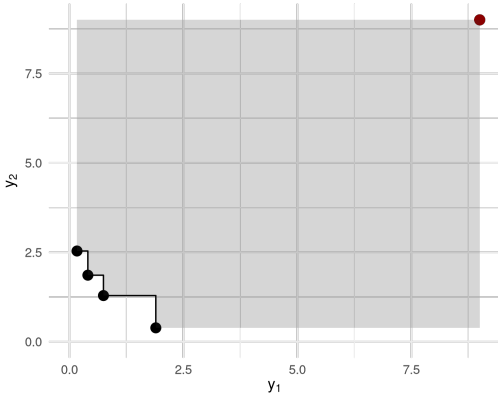


Reference point $\boldsymbol{r}$ in red, estimated Pareto front $\hat{\mathcal{F}}$ in black, corresponding $\mathrm{HV}_{\boldsymbol{r}}(\hat{\mathcal{P}})$ is given by the grey area

# TAXONOMY

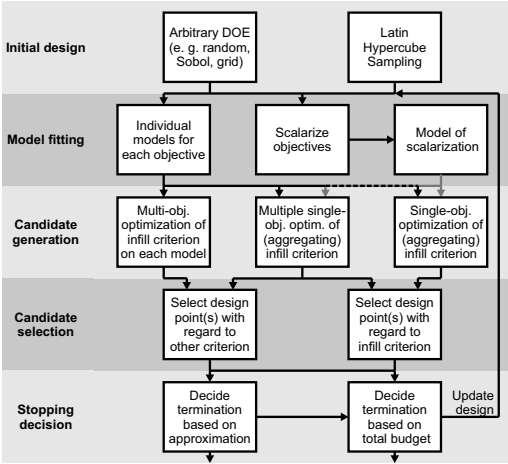


Horn, Wagner, Bischl et al. (2014).

# PAREGO

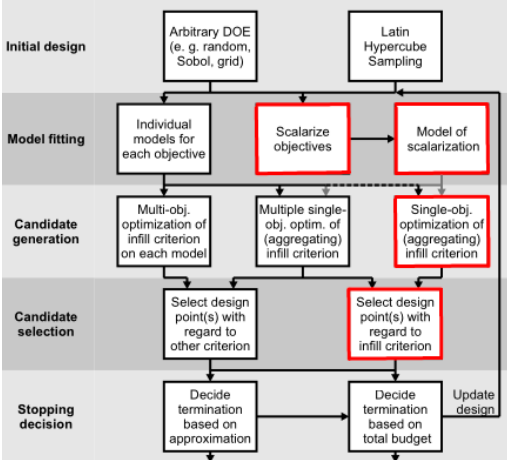
Initial design
Arbitrary DOE (e. g. random, Sobol, grid)
Latin Hypercube Sampling
Model fitting
Individual models for each objective
Scalarize objectives
Model of scalarization
Candidate generation
Multi-obj. optimization of infill criterion on each model
Multiple single-obj. optim. of (aggregating) infill criterion
Single-obj. optimization of (aggregating) infill criterion
Candidate selection
Select design point(s) with regard to other criterion
Select design point(s) with regard to infill criterion
Stopping decision
Decide termination based on approximation
Decide termination based on total budget
Update design

# PAREGO / 2



1. Scalarize standardized objectives using the augmented Tchebycheff norm

$$\max_{i \in \{1,\ldots,m\}} w_i f_i(\mathbf{x}) + \rho \sum_{i=1}^{m} w_i f_i(\mathbf{x})$$

   with weight vector **w** drawn uniformly from the set of evenly distributed weight vectors $\mathcal{W}$
2. Fit SM on the scalarized objective function
3. Proceed to use any standard single-objective acquisition function (EI, PI, LCB, ...)

# PAREGO / 3

ParEGO Example, initial design and true Pareto front in black ...

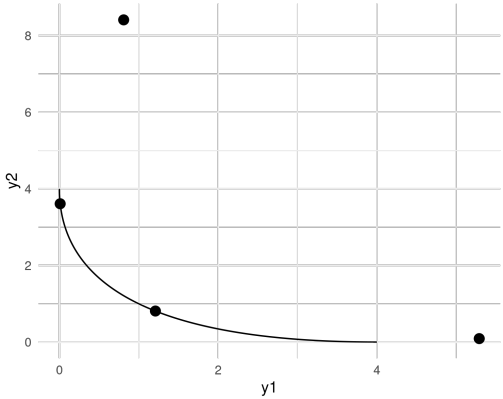

# PAREGO / 4

... standardize objectives, obtain scalarized objective via augmented Tchebycheff norm, fit SM and optimize EI ...

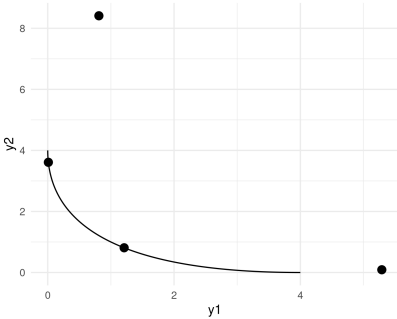


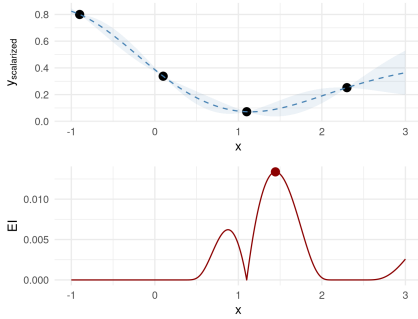

# PAREGO / 5

... note that the specific scalarization is different at each iteration!

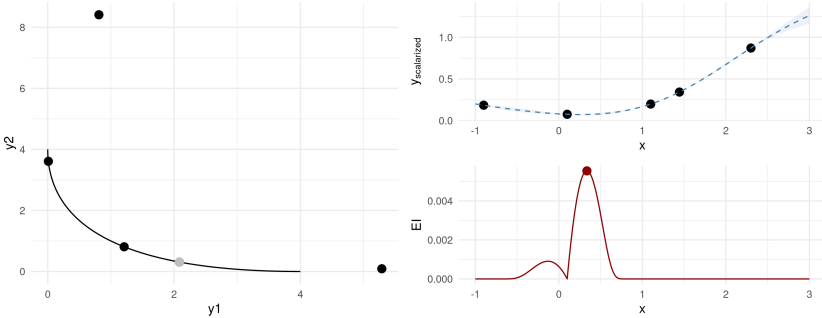


The grey point visualizes the candidate we choose to evaluate in the previous iteration

# SMS-EGO

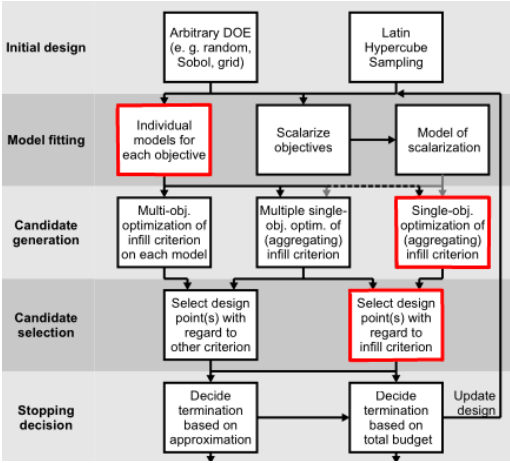
Initial design
Arbitrary DOE (e. g. random, Sobol, grid)
Latin Hypercube Sampling
Model fitting
Individual models for each objective
Scalarize objectives
Model of scalarization
Candidate generation
Multi-obj. optimization of infill criterion on each model
Multiple single-obj. optim. of (aggregating) infill criterion
Single-obj. optimization of (aggregating) infill criterion
Candidate selection
Select design point(s) with regard to other criterion
Select design point(s) with regard to infill criterion
Stopping decision
Decide termination based on approximation
Decide termination based on total budget
Update design

# SMS-EGO

Individual models for each objective $f_i$

Single-objective optimization of aggregating acquisition function: Calculate contribution of the confidence bound of candidate to the current front approximation

- Calculate LCB for each objective
- Measure contribution with regard to the hypervolume improvement
- For $\varepsilon$-dominated ($\prec_\varepsilon$) solutions, a penalty is added



# SMS-EGO

Individual models for each objective $f_i$

Single-objective optimization of aggregating acquisition function: Calculate contribution of the confidence bound of candidate to the current front approximation

- Calculate LCB for each objective
- Measure contribution with regard to the hypervolume improvement
- For $\varepsilon$-dominated ($\prec_\varepsilon$) solutions, a penalty is added



# SMS-EGO

Individual models for each objective $f_i$

Single-objective optimization of aggregating acquisition function: Calculate contribution of the confidence bound of candidate to the current front approximation

- Calculate LCB for each objective
- Measure contribution with regard to the hypervolume improvement
- For $\varepsilon$-dominated ($\prec_\varepsilon$) solutions, a penalty is added



# OUTLOOK

Many more options exist:

- Expected Hypervolume improvement
- Multi-Ego
- Entropy based: PESMO, MESMO
- ...