Introduction to Machine Learning

Advanced Risk Minimization
Advanced Classification Losses



Learning goals

- Know the (squared) hinge loss
- Know the *L2* loss defined on scores
- Know the exponential loss
- Know the AUC loss

HINGE LOSS

- The intuitive appeal of the 0-1-loss is set off by its analytical properties ill-suited to direct optimization.
- The **hinge loss** is a continuous relaxation that acts as a convex upper bound on the 0-1-loss (for $y \in \{-1, +1\}$):

$$L\left(y, f(\mathbf{x})\right) = \max\{0, 1 - yf(\mathbf{x})\}.$$

- Note that the hinge loss only equals zero for a margin $yf(\mathbf{x}) \geq 1$, encouraging confident (correct) predictions.
- Hinge loss is often used in SVMs (cf. chapters on SVMs)
- It resembles a door hinge, hence the name:

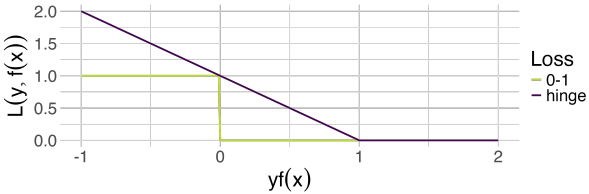

SQUARED HINGE LOSS

- We can also specify a **squared** version for the hinge loss:

$$L\left(y, f(\mathbf{x})\right) = \max\{0, (1 - yf(\mathbf{x}))\}^2.$$

- The $L2$ form punishes margins $yf(\mathbf{x}) \in (0, 1)$ less severely but puts a high penalty on more confidently wrong predictions.
- Therefore, it is continuously differentiable yet more outlier-sensitive than the hinge loss.

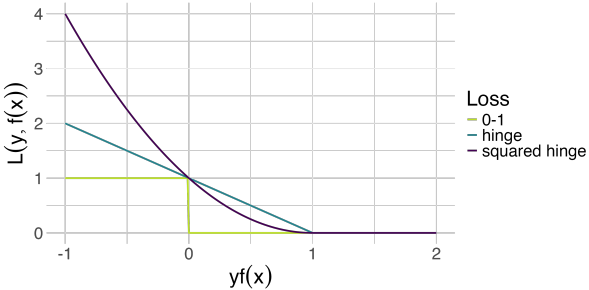

SQUARED LOSS ON SCORES



- Analogous to the Brier score defined on probabilities we can specify a **squared loss on classification scores** (with labels $y \in \{-1, +1\}$, using that $y^2 = 1$):

$$\begin{aligned} L(y, f(\mathbf{x})) = & \quad (y - f(\mathbf{x}))^2 = y^2 - 2yf(\mathbf{x}) + f(\mathbf{x})^2 = \\ = & \quad 1 - 2yf(\mathbf{x}) + (yf(\mathbf{x}))^2 = (1 - yf(\mathbf{x}))^2 \end{aligned}$$

- This loss behaves just like the squared hinge loss for $yf(\mathbf{x}) < 1$, but is not clipped to 0 for $yf(\mathbf{x}) > 1$ (zero only for $yf(\mathbf{x}) = 1$ and increases again in $yf(\mathbf{x})$ which is in general not desirable!)

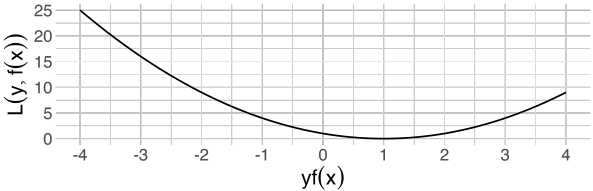

CLASSIFICATION LOSSES: EXPONENTIAL LOSS



Another smooth approximation to the 0-1-loss is the **exponential loss**:

- $L(y, f(\mathbf{x})) = \exp(-yf(\mathbf{x}))$, used in AdaBoost.
- Convex, differentiable (thus easier to optimize than 0-1-loss).
- Loss increases exponentially for wrong predictions with high confidence; if prediction is correct but with low confidence only, the loss is still positive.

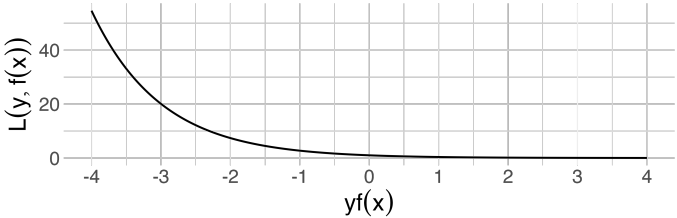

CLASSIFICATION LOSSES: AUC-LOSS



- Often AUC is used as an evaluation criterion for binary classifiers.
- Let $y \in \{-1, +1\}$ with n_- negative and n_+ positive samples.
- The AUC can then be defined as

$$AUC = \frac{1}{n_+} \frac{1}{n_-} \sum_{i:y^{(i)}=1} \sum_{j:y^{(j)}=-1} [f^{(i)} > f^{(j)}]$$

- This is not differentiable w.r.t f due to indicator $[f^{(i)} > f^{(j)}]$.
- The indicator function can be approximated by the distribution function of the triangular distribution on $[-1, 1]$ with mean 0.
- However, direct optimization of the AUC is numerically difficult and might not work as well as using a common loss and tuning for AUC in practice.

For a comprehensive survey on advanced loss functions, see, e.g.,

▸ Wang et al. 2020