



Virtual Function in C++

Difficulty Level : Medium • Last Updated : 29 Jan, 2021

A virtual function is a member function which is declared within a base class and is re-defined (Overridden) by a derived class. When you refer to a derived class object using a pointer or a reference to the base class, you can call a virtual function for that object and execute the derived class's version of the function.

- Virtual functions ensure that the correct function is called for an object, regardless of the type of reference (or pointer) used for function call.
- They are mainly used to achieve [Runtime polymorphism](#)
- Functions are declared with a **virtual** keyword in base class.
- The resolving of function call is done at Run-time.

Rules for Virtual Functions

1. Virtual functions cannot be static.
2. A virtual function can be a friend function of another class.
3. Virtual functions should be accessed using pointer or reference of base class type to achieve run time polymorphism.
4. The prototype of virtual functions should be the same in the base as well as derived class.
5. They are always defined in the base class and overridden in a derived class. It is not mandatory for the derived class to override (or re-define the virtual function), in that case, the base class version of the function is used.

A class may have [virtual destructor](#) but it cannot have a virtual constructor.



Compile-time(early binding) VS run-time(late binding) behavior of Virtual Functions

Consider the following simple program showing run-time behavior of virtual functions.

CPP

```
// CPP program to illustrate
// concept of Virtual Functions

#include <iostream>
using namespace std;

class base {
public:
    virtual void print()
    {
        cout << "print base class" << endl;
    }

    void show()
    {
        cout << "show base class" << endl;
    }
};

class derived : public base {
public:
    void print()
    {
        cout << "print derived class" << endl;
    }

    void show()
    {
        cout << "show derived class" << endl;
    }
};

int main()
{
    base* bptr;
    derived d;
    bptr = &d;

    // virtual function, binded at runtime
    bptr->print();
```

```
// Non-virtual function, binded at compile time  
bptr->show();  
}
```

Output:

```
print derived class  
show base class
```

Explanation: Runtime polymorphism is achieved only through a pointer (or reference) of base class type. Also, a base class pointer can point to the objects of base class as well as to the objects of derived class. In above code, base class pointer 'bptr' contains the address of object 'd' of derived class. Late binding(Runtime) is done in accordance with the content of pointer (i.e. location pointed to by pointer) and Early binding(Compile time) is done according to the type of pointer, since print() function is declared with virtual keyword so it will be bound at run-time (output is *print derived class* as pointer is pointing to object of derived class) and show() is non-virtual so it will be bound during compile time(output is *show base class* as pointer is of base type).

NOTE: If we have created a virtual function in the base class and it is being overridden in the derived class then we don't need virtual keyword in the derived class, functions are automatically considered as virtual functions in the derived class.

Working of virtual functions(concept of VTABLE and VPTR)

As discussed [here](#), If a class contains a virtual function then compiler itself does two things:




If object of that class is created then a **virtual pointer(VPTR)** is inserted as a data member of the class to point to VTABLE of that class. For each new



object created, a new virtual pointer is inserted as a data member of that class.

- Irrespective of object is created or not, a **static array of function pointer called VTABLE** where each cell contains the address of each virtual function contained in that class.

Consider the example below:

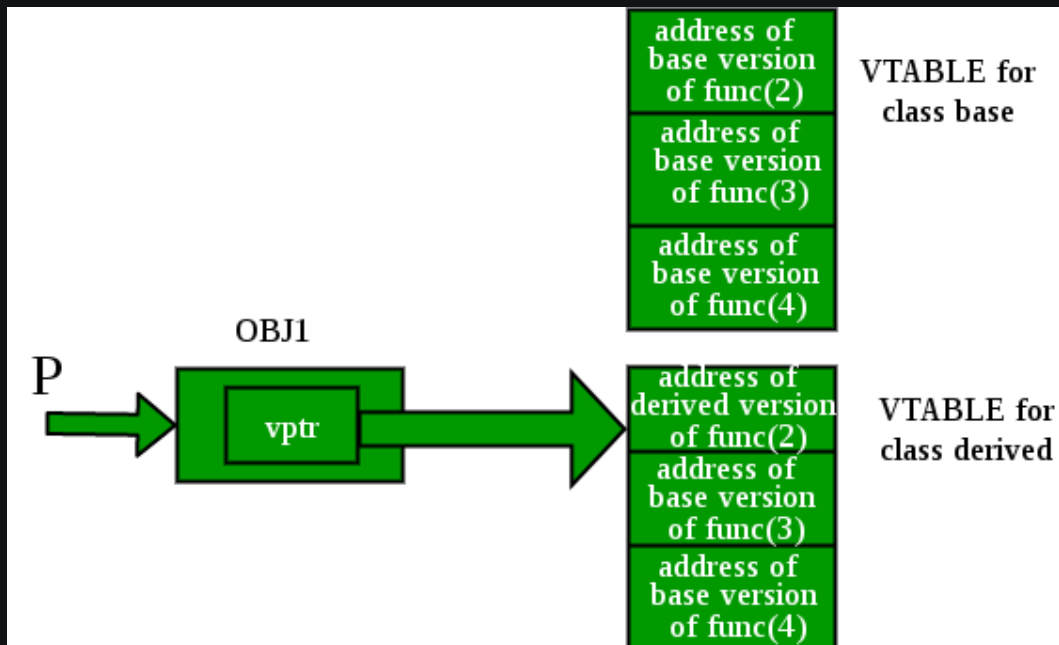

CPP

```
// CPP program to illustrate
// working of Virtual Functions
#include <iostream>
using namespace std;

class base {
public:
    void fun_1() { cout << "base-1\n"; }
    virtual void fun_2() { cout << "base-2\n"; }
    virtual void fun_3() { cout << "base-3\n"; }
    virtual void fun_4() { cout << "base-4\n"; }
};

class derived : public base {
public:
    void fun_1() { cout << "derived-1\n"; }
    void fun_2() { cout << "derived-2\n"; }
    void fun_4(int x) { cout << "derived-4\n"; }
```

```
};

int main()
{
    base* p;
    derived obj1;
    p = &obj1;

    // Early binding because fun1() is non-virtual
    // in base
    p->fun_1();

    // Late binding (RTP)
    p->fun_2();

    // Late binding (RTP)
    p->fun_3();

    // Late binding (RTP)
    p->fun_4();

    // Early binding but this function call is
    // illegal(produces error) because pointer
    // is of base type and function is of
    // derived class
    // p->fun_4(5);
}
```



Related Articles >



base-3

base-4

Explanation: Initially, we create a pointer of type base class and initialize it with the address of the derived class object. When we create an object of the derived class, the compiler creates a pointer as a data member of the class containing the address of VTABLE of the derived class.

Similar concept of **Late and Early Binding** is used as in above example. For fun_1() function call, base class version of function is called, fun_2() is overridden in derived class so derived class version is called, fun_3() is not



overridden in derived class and is virtual function so base class version is called, similarly `fun_4()` is not overridden so base class version is called.

NOTE: `fun_4(int)` in derived class is different from virtual function `fun_4()` in base class as prototype of both the function is different.

This article is contributed by **Yash Singla**. If you like GeeksforGeeks and would like to contribute, you can also write an article using contribute.geeksforgeeks.org or mail your article to contribute@geeksforgeeks.org. See your article appearing on the GeeksforGeeks main page and help other Geeks.

Please write comments if you find anything incorrect, or you want to share more information about the topic discussed above.

Want to learn from the best curated videos and practice problems, check out the [C++ Foundation Course](#) for Basic to Advanced C++ and [C++ STL Course](#) for foundation plus STL. To complete your preparation from learning a language to DS Algo and many more, please refer [Complete Interview Preparation Course](#).



Like 214

< Previous

Next >



RECOMMENDED ARTICLES

Page : 1 2 3

