

Corrigendum: The Science of Visual Data Communication: What Works

Psychological Science in the
Public Interest

1–2

© The Author(s) 2022

Article reuse guidelines:

sagepub.com/journals-permissions

DOI: 10.1177/15291006221099494

www.psychologicalscience.org/PSPI



Original article: Franconeri, S. L., Padilla, L. M., Shah, P., Zacks, J. M., & Hullman, J. (2021). The science of visual data communication: What works. *Psychological Science in the Public Interest*, 22(3), 110–161. <https://doi.org/10.1177/15291006211051956>

Two of the figures in this article and several of the references to the figures have been corrected. These changes are detailed below, and the new figures appear at the end of the text.

On p. 116, in the last sentence of the fourth full paragraph, the callout for Figure 2 has been changed to “(such as that shown in Fig. 2, top of second column).”

On p. 120, Figure 5 has been replaced because the color-blindness model that was used to test the originally published version of the figure was incorrect. The following sentence has been added to the end of the Figure 5 caption for clarification: “Protanopia was simulated in Photoshop.” In addition, in the last paragraph of the left column, the second and third sentences have been updated as follows:

For example, the first row in Figure 5 shows a scatterplot encoded with two colors, green and orange. People with typical vision can see that the green dots have a steep positive correlation and the orange dots make a flat line.

On p. 140, in the first paragraph in the right column, two sentences (the sentence beginning “For example, when viewing. . .” and the sentence following it) have been replaced to more accurately describe Figure 20. The new sentences read as follows:

For example, when viewing results of an evaluation of a new intervention (e.g., a special type of equipment one might use to improve one’s score in a sports competition) relative to a control, one might wonder how much investing in the new equipment is likely to help increase one’s score for a randomly drawn instance of the game. When shown frequentist 95% confidence intervals representing uncertainty on bars representing the control (“Standard Boulder”) and treatment

(“Special Boulder”) outcomes in a fictional boulder-sliding competition (Hofman et al., 2020; see Fig. 20, left), lay viewers were inclined to pay more for the treatment and overestimate effect size relative to when they saw error bars showing a predictive interval representing uncertainty in the underlying measurements (Fig. 20, middle).

On p. 141, the second and third sentences in the caption for Figure 20 have been changed to more accurately describe the figure. The new sentences read as follows:

Hofman et al. (2020) found that participants in an online study who viewed the chart on the left, showing a range extending 1.96 *SE* above and below the mean, were more likely to pay more for a new intervention (i.e., “Special Boulder”) compared with the standard intervention (i.e., “Standard Boulder”) and to overestimate the size of the new intervention’s effect than those who saw the chart in the center, showing a range extending 1.96 *SD* above and below the mean. The chart on the right is the same as the chart on the left, except that it has the *y*-axis range of the chart in the center. This display slightly reduced overpayment and overestimation, which suggests that viewers are sensitive to superficial visual cues, such as how big a difference looks within the frame of the chart.

On p. 143, Figure 23 has been replaced to correct the color palette.

Finally, on p. 148, the figure callout at the end of the fourth full paragraph has been updated to “(see Fig. 24; see also Garcia-Retamero & Galesic, 2009),” and the figure callout at the beginning of the sixth full paragraph has been updated to “(as in Fig. 24; Garcia-Retamero & Cokely, 2017).”

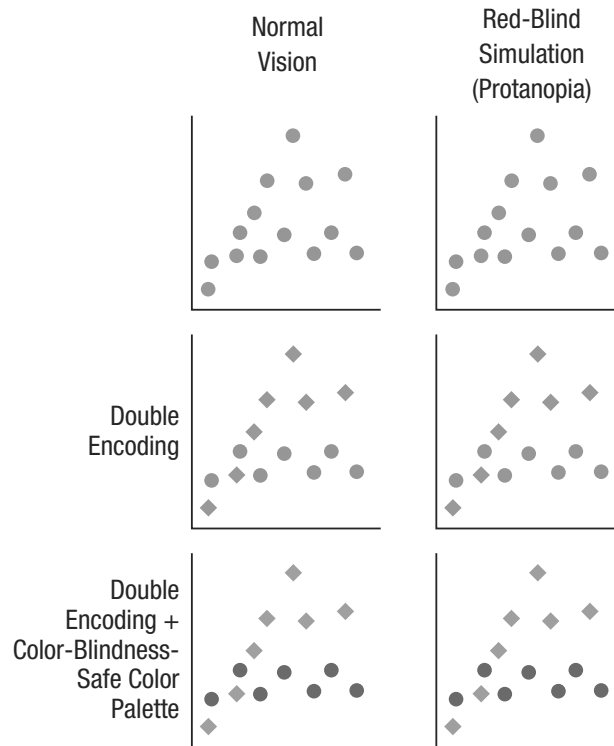


Fig. 5. Three ways to encode data for two groups in a scatterplot, as seen by observers with typical color perception and those with protanopia, a form of color blindness. Protanopia was simulated in Photoshop.

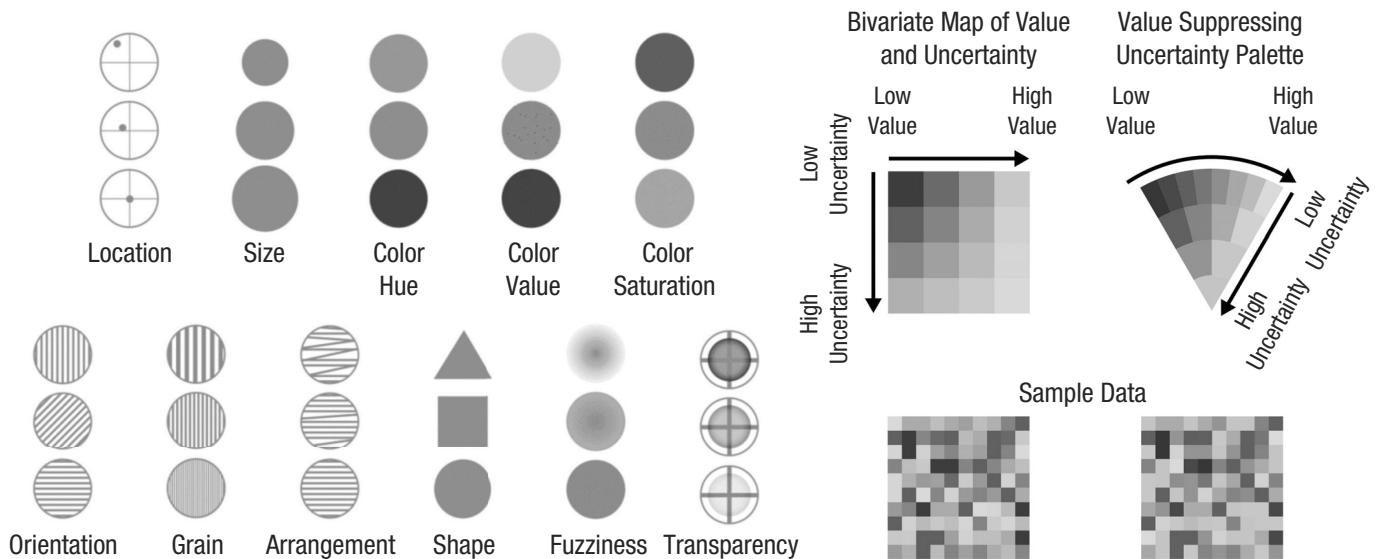


Fig. 23. Methods for depicting uncertainty. On the left of the figure are different visual variables for conveying uncertainty tested by MacEachren et al. (2012), who found that fuzziness, location, arrangement, and color value were rated as relatively more logical than other variables for representing uncertainty. The right shows a bivariate color map that separately encodes value (via hue) and uncertainty (via lightness). A value-suppressing uncertainty palette uses a tree metaphor to collapse value distinctions in proportion to the uncertainty surrounding the values (Correll et al., 2018). Left figure reprinted with permission from “Visual Semiotics & Uncertainty Visualization: An Empirical Study,” by A. M. MacEachren, R. E. Roth, J. O’Brien, B. Li, D. Swingley, and M. Gahegan, 2012, in *IEEE Transactions on Visualization and Computer Graphics*, 18(12), p. 2497 (<https://doi.org/10.1109/TVCG.2012.279>). Copyright 2012 by IEEE. Right figure republished with permission of the Association for Computing Machinery, “Value-Suppressing Uncertainty Palettes,” by M. Correll, D. Moritz, and J. Heer, *CHI ’18: Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems* (<https://doi.org/10.1145/3173574.3174216>). Copyright 2018 Association for Computing Machinery.

The Science of Visual Data Communication: What Works

Steven L. Franconeri¹, Lace M. Padilla², Priti Shah³,
Jeffrey M. Zacks⁴, and Jessica Hullman⁵

¹Department of Psychology, Northwestern University; ²Department of Cognitive and Information Sciences, University of California, Merced; ³Department of Psychology, University of Michigan; ⁴Department of Psychological & Brain Sciences, Washington University in St. Louis; and ⁵Department of Computer Science, Northwestern University

Abstract

Effectively designed data visualizations allow viewers to use their powerful visual systems to understand patterns in data across science, education, health, and public policy. But ineffectively designed visualizations can cause confusion, misunderstanding, or even distrust—especially among viewers with low graphical literacy. We review research-backed guidelines for creating effective and intuitive visualizations oriented toward communicating data to students, coworkers, and the general public. We describe how the visual system can quickly extract broad statistics from a display, whereas poorly designed displays can lead to misperceptions and illusions. Extracting global statistics is fast, but comparing between subsets of values is slow. Effective graphics avoid taxing working memory, guide attention, and respect familiar conventions. Data visualizations can play a critical role in teaching and communication, provided that designers tailor those visualizations to their audience.

Keywords

visual communication, graph comprehension, reasoning, statistical cognition, uncertainty communication, data visualization

This report presents research-backed guidelines for creating powerful and intuitive visualizations oriented toward communicating data to students, coworkers, and the general public. We begin by reviewing guidelines for helping viewers extract data from visualizations in precise and unbiased ways, avoiding a set of known illusions and distortions. We then describe when visual processing of visualizations is powerful (processing broad statistics) versus where it slows to a crawl (making individual comparisons), and we provide a tool kit for avoiding that slowdown. We review guidelines for ensuring that a viewer properly maps visualized values to the right concepts in the world (e.g., viewers can extract the size of an error bar on a graph, but do they understand what it means?), allowing viewers to use visualizations as effective tools for reasoning. We then review guidelines for conveying uncertainty and risk (e.g., how could a physician express survival odds for a treatment to a patient?). Finally, we summarize a set of guidelines for creating

visualizations that communicate clearly and suggest resources for readers interested in learning more.

Data visualizations range from simple graphs in elementary school classrooms, to depictions of uncertainty in election forecasts in news media, to complex data displays used by scientists and analysts. When designed effectively, these displays leverage the human visual system's massive processing power, allowing rapid foraging through patterns in data and intuitive communication of those patterns to other viewers. But when designed ineffectively, these displays leave critical patterns opaque or leave viewers confused about how to navigate unfamiliar displays.

We review methods, empirical findings, theories, and prescriptions across the fields of visual perception,

Corresponding Author:

Steven L. Franconeri, Department of Psychology, Northwestern University
Email: franconeri@northwestern.edu

graph comprehension, information visualization, data-based reasoning, uncertainty representation, and health risk communication. These research communities study similar questions and use complementary expertise and styles of inquiry, yet they too rarely connect. We ignore artificial boundaries among these research fields, and instead integrate across them.

The Importance of Visualization Design and Literacy

Thinking and communicating with data visualizations is critical for an educated public (Börner et al., 2019). Science education standards require students to use visualizations to understand relationships, to reason about scientific models, and to communicate data to others (National Governors Association Center for Best Practices and Council of Chief State School Officers, 2010; National Research Council, 2013). Evidence-based public policy prescriptions about climate change, vaccines, and policing are argued to be most effectively built (Kohlhammer et al., 2012) and communicated to the public (Otten et al., 2015) with visualizations. Journalists at *The New York Times* Upshot, FiveThirtyEight, *The Economist*, and *The Washington Post* use visualizations to communicate data and evidence about statistics and policy. Data visualizations are ubiquitous in the workplace—in data-analysis software, in data-overview dashboards, and in millions of slide presentations created each day (Berinato, 2016; Parker, 2001). Physicians rely on them to show data about the risks of medical procedures, and meteorologists use them to show the uncertainty in a hurricane's potential path (Ancker et al., 2006; Ruginski et al., 2016).

In each of these domains, low graphical literacy and ineffective design lead many viewers to struggle to understand these otherwise powerful thinking tools. Many students can find textbook visualizations too challenging to understand or integrate with nearby text (Nistal et al., 2009; Shah & Hoeffner, 2002). Public policy visualizations can be counterintuitively designed, leading many viewers to draw a conclusion opposite the one suggested by the depicted data (Engel, 2014). Dozens of best-selling guides have decried the state of visualizations in the workplace and offered prescriptions for more powerful, clear, and persuasive graphs (see the Recommended Practitioner Books section at the end of this article and Ajani et al., 2021, for a more exhaustive list). Medical-risk visualizations can lead patients to fundamentally misunderstand the base rates or risk factors for diseases or medical procedures (Ancker et al., 2006). When a prediction has a high level of uncertainty that is not intuitively conveyed, the public can lose trust in scientists and analysts. For example,

when a hurricane's path deviates somewhat from the most likely trajectory, or when a politician with a 20% predicted chance to win an election prevails, these outcomes may be consistent with the uncertainty inherent to the predictions. But if the forecaster does not effectively visually communicate that uncertainty, their reputation can suffer when their prediction is “wrong” (Padilla et al., 2021).

Who Studies the Design and Comprehension of Visualizations?

Research on the design and pedagogy of data visualizations takes place in several communities. A psychologist focusing on perception might study the mapping between a color value in a heat map and the abstract magnitude that an observer extracts from it (Stevens, 1957). A cognitive psychologist might explore how working memory limits the complexity of the statistical relationships that a viewer might extract (Halford et al., 2007; Padilla et al., 2018). An education researcher might try to remove roadblocks for students struggling to translate visual depictions to their underlying concepts (Börner & Polley, 2014; Shah & Hoeffner, 2002) or seek multimedia design principles for designing effective graphics and integrating them with text (e.g., Mayer & Fiorella, in press). Researchers in public policy communication or political science might study why viewers find some visualizations to be more trustworthy or persuasive than others (Nyhan & Reifler, 2019). Health communication researchers evaluate how to effectively communicate the risk of a medical procedure to patients with low *numeracy* (i.e., ability to work with numbers and mathematics; Ancker et al., 2006). Specialists in statistical cognition and communication seek ways to communicate uncertainty across election outcomes, bus arrival times, and hurricane paths (Hullman, 2019). Finally, a research community housed in computer and information sciences studies data visualization at multiple levels, from data types and algorithms to the creation of user task taxonomies, to design prescriptions for visually powerful displays and fluid interaction (Munzner, 2014).

In this article, we also draw advice from communities of practitioners who might not engage in empirical research but use extensive in-context experience to generate prescriptions for powerful and intuitive visualizations. At the end of this review, we include a list of recommended visualization-design guidebooks. Although many of these guides are oriented toward business analysts, their prescriptions extrapolate directly to science, education, and public policy visualizations. We also discuss design techniques used by a new wave of journalists focused on communicating data analysis to the general public.

The Structure of Our Review

This review focuses on how to effectively design visualizations that communicate data to students and the general public. We review evidence-based prescriptions for designing visualizations that help people understand and reason about the patterns, models, and uncertainties carried by a data set. Another important topic, which we do not cover systematically here, is how to measure visualization literacy and the effectiveness of teaching techniques that improve it (see Börner et al., 2019; Lee et al., 2016). We also restrict our scope to quantitative visualizations, omitting discussion of qualitative visualizations of text data, diagrams, and processes (see Hegarty, 2011; Henderson & Segal, 2013, for review). We focus on research and prescriptions that are most relevant for communication to nonspecialist audiences, instead of the design of powerful tools for data analysis within expert communities.

We first illustrate why visualizations can be such powerful tools for thinking about data. Because the human visual system is highly developed for rapid parallel extraction of behavior-relevant features and relationships, visualizations allow us to process some types of patterns across an entire two-dimensional array of values at once. We describe the limited set of visual channels that can effectively depict magnitudes to a viewer, such as the *position* of a value in a dot plot, the *size* of a circle hovering over a map, or the *color intensity* of an activation pattern in a functional MRI (fMRI) image.

We then discuss design guidelines for ensuring that the human eye accurately decodes those depicted values. We review evidence for a ranking of some visual channels (e.g., position) as more precise than others (e.g., color intensity) for at least one common task but also discuss how new work has begun to dismantle that ranking for a broader array of tasks. We list a set of common errors and illusions that cause viewers to extract the underlying values from visual channels incorrectly—for example, y-axis manipulations that exaggerate differences among values, confusion about whether circles depict values with their size or diameter (which can change the extracted value by an order of magnitude), a common illusion produced by line graphs, and other illusions and categorical distortions that can arise when depicting value with color intensity. We also include a brief review of accessibility considerations for viewers with color blindness. Finally, we discuss best practices for distinguishing between groups of data (say, two groups of points on a scatterplot) by marking them with different shapes or colors.

Next, we discuss an important dissociation in visual processing power: Whereas computing statistics across an image is broad and instantaneous, making comparisons among subsets of values is slow and limited to two or three comparisons per second. We review the

types of grouping cues that loosely control what information is compared by a typical viewer and further techniques for precisely guiding a viewer to the right comparison. We discuss the importance of respecting a viewer's limited working memory, including avoiding legends and animated displays that can engage but also confuse. Finally, we review evaluations of whether visualizations should have rich and memorable designs, as opposed to a minimalist and clean aesthetic.

The next section introduces visualization *schemas*, or knowledge structures that include default expectations, rules, and associations that a viewer uses to extract conceptual information from a data visualization. We illustrate the importance of schemas by introducing the reader to a small set of new visualization designs that will likely be unfamiliar. We then provide examples of common schema elements that are known to more graphically literate audiences (but not always respected by designers), such as the assumption that larger values are plotted upward. We shift to a brief review of human reasoning about visualizations, including formal models that draw links from visual depictions, to numeric values, to their underlying concepts and the designer's intended message. We then explore two case studies: reasoning about graphs illustrating scientific concepts and reasoning about graphs of mathematical functions.

The subsequent sections review research on visualizing uncertainty or risk. Communication failures can start with a lack of understanding of critical statistical concepts, even among scientists. We give examples of how viewers tend to misread error bars as depicting the edges of a range of data instead of correctly understanding them as parameters of a distribution. Probability information expressed as risk is critical for people such as patients considering a medical procedure and potential evacuees who may be in the path of a hurricane, but depictions of risk are frequently misunderstood. We review guidelines for showing uncertainty or risk more intuitively, including depicting samples of discrete outcomes, showing probability density functions, and depicting data with arrays of icons.

Finally, we summarize a set of evidence-based prescriptions for creating powerful visualizations for intuitive communication of data and provide a list of recommended practitioner guides (Box 1), websites, and data-journalism outlets for further reading and inspiration (for a concise review of similar guidelines, see also Zacks & Franconeri, 2020).

The Power of Visualization

Visualizations let viewers see beyond summary statistics

Visualizations allow powerful processing of an entire two-dimensional rectangle of information at once, in

Box 1. Recommended Reading

The following books offer excellent, concise guides to designing effective visualizations for communication of data and analyses:

Camões, J. (2016). *Data at work: Best practices for creating effective charts and information graphics in Microsoft Excel*. New Riders.

Evergreen, S. D. H. (2017). *Presenting data effectively: Communicating your findings for maximum impact* (2nd ed.). SAGE Publications.

Knaflic, C. N. (2015). *Storytelling with data: A data visualization guide for business professionals*. Wiley.

Schwabish, J. (2021). *Better data visualizations: A guide for scholars, researchers, and wonks*. Columbia University Press.

For a review of the ethics of persuasion with visualizations, we recommend the following books:

Cairo, A. (2016). *The truthful art: Data, charts, and maps for communication*. New Riders.

Cairo, A. (2019). *How charts lie: Getting smarter about visual information*. W.W. Norton.

For a review of accessibility considerations in data visualization, we recommend the following article:

Kim, N. W., Joyner, S. C., Riegelhuth, A., & Kim, Y. (2021). Accessible visualization: Design space, opportunities, and challenges. *Computer Graphics Forum*, 40(3), 173–188.

stark contrast to the limitation of reading handfuls of symbolic numbers per second. As a demonstration, Figure 1 (top left) contains four sets of 11 pairs of values. Take a moment to compare those columns, and notice that reading symbolically represented numbers takes time. As you seek patterns within each set, or make comparisons among the four sets, progressively processing more pairs of values becomes increasingly difficult. Worse, these tasks quickly exhaust memory capacity, such that new numbers or patterns tend to displace ones that were previously seen. These limitations on symbolic processing of numbers lead viewers to rely instead on summary statistics that compress data sets into a single group of numbers. For the four sets of numbers in Figure 1, those statistics on the bottom row—means, standard deviations, and correlation coefficients—are identical, which might lead you to believe that the numbers contributing to the statistics are similar (Anscombe, 1973). However, because statistics summarize larger sets of numbers by abstracting over them and making assumptions about the patterns that they might contain, many sets of numbers can generate the

same statistics. For these four sets of numbers, relying on statistics turns out to be dangerous.

The differences between the four sets of numbers in Figure 1 are immediately visible when translated into images in the form of scatterplots (bottom left). These images allow you to leverage the two-dimensional processing power of your visual system, the largest single processing system of the brain (Van Essen et al., 1992). If you are familiar with statistics, then the first image at the bottom left likely matches what you assumed the numbers should look like given the statistics on the bottom rows: an orderly positive relationship. But the other sets are clearly different in important ways. The right side of Figure 1 depicts frames of an animation that provides a more sophisticated example (Matejka & Fitzmaurice, 2017), in which visual processing allows one to immediately see that, despite identical statistics (to the second decimal place) for each scatterplot, the nine plots contain saliently different patterns. When exploring a new data set, it is good practice to visualize every column of data with a histogram, and every potentially interesting pairing of columns with scatterplots, before turning to statistical summaries (Moore et al., 2017; Wongsuphasawat et al., 2015).

Visual channels translate numbers into images

Visualizations rely on several visual channels to transform numbers into images that the visual system can efficiently process (Bertin, 1983; Mackinlay, 1986; see Munzner, 2014, for a more complete list). Knowing these channels allows a designer to consider which might be best suited for a given data set and context—particularly given that each is associated with differential levels of precision and potential illusions, as described in the following sections. The first column of Figure 2 depicts five of the more frequently used channels. Dot plots and scatterplots, such as those in Figure 1, represent values as *position*. Bar graphs represent values not only as positions (of the tips of the bars) but also as one-dimensional *lengths* (and, some argue, even two-dimensional *areas*; Yuan et al., 2019). If two bars do not rest on the same baseline, such as segments within the same bar in a stacked bar graph, the comparison relies only on length or area. Next, two circles code numbers exclusively as two-dimensional areas (typically circles), a technique often used to overlay values across maps. *Angle* typically emerges when points are connected to form a line graph, organically allowing an encoding of the difference between adjacent points (a bigger difference creates a steeper slope and, typically, a longer line). Outside of pie charts, angle is less frequently used to

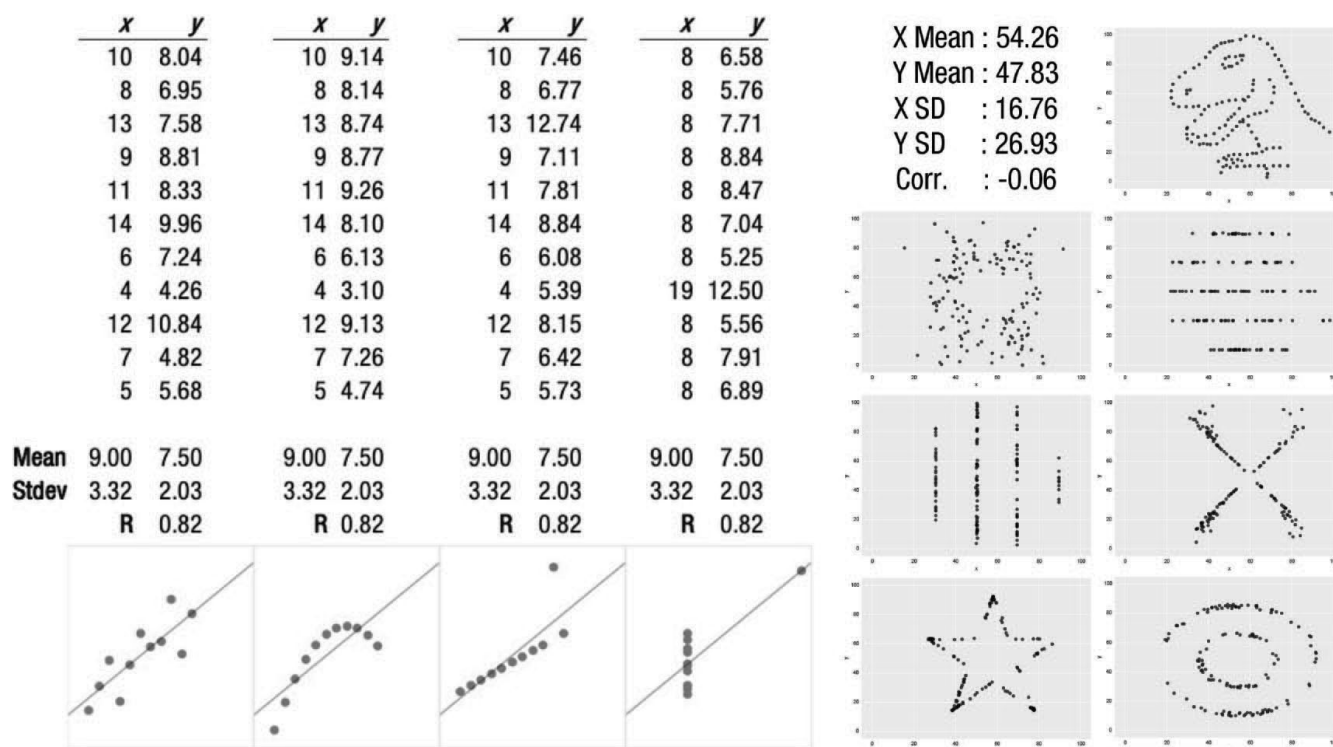


Fig. 1. Examples of how visualizations can let viewers see beyond summary statistics. At left, four sets of 11 numbers have identical statistics but dramatically different patterns, as revealed by the scatterplots below each column. At right is a more extreme example of nine dramatically different scatterplots (including one that looks suspiciously like a dinosaur) depicting data with identical statistics, down to the second decimal place. The graphs on the right are adapted with permission of the Association for Computing Machinery, from “Same Stats, Different Graphs: Generating Datasets With Varied Appearance and Identical Statistics Through Simulated Annealing,” by J. Matejka and G. Fitzmaurice, *CHI '17: Proceedings of the 2017 CHI Conference on Human Factors in Computing Systems* (<https://doi.org/10.1145/3025453.3025912>). Copyright 2017 Association for Computing Machinery.

depict numbers directly—perhaps on local areas of a map to represent wind directions. *Numerosity* is omitted from the figure, but it often implicitly shows higher-level attributes of data. For example, you can immediately estimate the number of points in a scatterplot, segments in a stacked bar chart, or icons in an infographic. *Intensity* is an umbrella term (often also called *lightness* or *value*) for either luminance contrast or color saturation, as used in a heat map or fMRI activation map. *Motion* is also not included in the figure, but animating a scatterplot to show values changing over time can encode the rate and direction of change in the speed and direction of the dots’ motion.

How to Design a Perceptually Accurate Visualization

Understand how to leverage visual channels

Visual channels are ranked by their perceptual accuracy. These channels differ in how precisely they convey numeric values to a viewer, and knowing the

ranking of these channels allows a designer to prioritize what information to show most precisely. The leftmost column of Figure 2 presents five of the channels that can depict metric data to the human visual system. This list is ordered by the typical precision with which a viewer can verbally state the ratios between the two values shown; more precise ways of communicating numbers are at the top and less precise ways are at the bottom (Cleveland & McGill, 1984, 1985; Heer & Bostock, 2010). It should be clear from the figure that the 1:7 ratio can be relatively precisely extracted for position, but that task is a bit tougher for area, and far more difficult for intensity, at the bottom of the list.

Because position is the clear winner for precision, visualization designers often prioritize the vertical and horizontal dimensions of two-dimensional space when depicting or organizing quantitative data. Faced with a single column of numbers in a spreadsheet, a visualization designer might depict those data vertically with position (in a bar or line graph) and rely on horizontal position to organize the values into categories, as in a typical bar chart. If faced with two columns of numbers, a designer might simply create two of those same types

of graphs or organize each set of numbers along both the vertical and horizontal axes of position, as in a scatterplot.

The advantage of position over length for precisely depicting ratios between numbers is demonstrated in the second column of Figure 2, which shows a horizontally oriented stacked bar graph in its second row of examples. Because the black segments of the bars are aligned on a common axis at their left, their right tips provide a precise position code, allowing the viewer to see the delicate 0.9:1 ratio between the bars. However, the next set of medium-gray segments are tougher to distinguish because the positions of their right tips are no longer useful, so the viewer must rely on length—a lower-precision channel—to extract the same ratio.

Mapping visual ratios back to numbers can cause perceptual errors. Using visualizations can unlock powerful data-pattern processing. However, a designer must be aware of several perceptual illusions that can lead viewers to map visual depictions back to their original numeric values incorrectly (Huff, 1954; Tufte, 1983). If two plotted values have a 1:7 ratio, then the visualization should cause a typical viewer to see that 1:7 ratio veridically. Even for a precise visual channel such as position, this requirement can be tougher than anticipated. For example, see the dot plot and bar graph at the top of the second column of Figure 2. The dot plot uses position as its visual channel, and the bar graph depicts the same data with both position and length. The second value appears to be roughly double the first value. Look more closely at the y -axis: The second value is only about 1% bigger than the first; the difference appears greater because the axis baseline does not start at zero. In theory, the data are transparently depicted—but in reality, such graphs are frequently misinterpreted.

Figure 3 illustrates some real-world examples of this problem. The line graphs in the upper left, adapted from Darrell Huff's classic 1954 book *How to Lie With Statistics*, show how a line graph's scale can be stretched to make a trend appear steeper (Huff, 1954). In March 2014, a version of the bar graph at the upper right appeared on *Fox News*, a network with an avowedly opposite political orientation to Barack Obama, the U.S. president at the time. Around 6 million U.S. citizens had signed up for a new health-care program sponsored by the president, and the government specified a goal of 7 million sign-ups by March 31. Although the numbers presented are honest (a 6:7 ratio), the visualization's truncation of the y -axis tells a different story (a 1:3 ratio) to the viewer's visual system, suggesting a failure of the president's plan.

Will people not simply read the y -axis labels and easily overcome this initial misperception? Unfortunately, both real-world anecdotes and laboratory studies


suggest that this practice can be deeply misleading (Correll et al., 2020; Hofman et al., 2020; Pandey et al., 2014). For example, using a visualization similar to the *Fox News* example, researchers asked crowdsourced workers to rate the contrast between the two depicted values on a 1-to-5 scale. Ratings in a zero-baseline condition averaged around 1.5, whereas ratings in a deceptive-baseline condition averaged 2.8 (Pandey et al., 2015). In that study, stretching the y -axis also strongly affected ratings of the strength of the trend. The crowdsourced workers were not simply inattentive: Only participants who passed attention-check trials were included. Moreover, the deceptive effect persisted when participants were asked to type the numeric values represented by each bar before making their effect-size rating and were reminded of the y -axis's truncation, which was indicated by a “broken axis” symbol (such as that shown in Fig. 2, top of second column) at the base of the y -axis (Correll et al., 2020).

The prevalence of this deceptive effect has led to quantitative prescriptions for how to set y -axis boundaries to produce accurate measures of statistical effect sizes by typical viewers (Witt, 2019; B. W. Yang et al., 2021). For example, if the relevant data are far from zero, starting the y -axis at zero can make effect sizes illegible. One approach to increase legibility is to center the y -axis on the data's mean, then extend the y -axis 0.75 SD above and below the mean (Witt, 2019). This approach can be appropriate when the overall scale is not essential.


Visually conveying an appropriate difference often depends on what “appropriate” means. Many visualization designers subscribe to the principle that a y -axis must always start at zero so that the visually depicted ratios match the ratios in the data. By contrast, others argue that this guideline must be subject to context (for a distillation of arguments by designers, see Correll et al., 2020). For example, it seems clear that designers should consider the practically relevant range of data values when small but essential differences would be tough to see on a zero-baseline graph. A now-infamous (and now-deleted) story in the *National Review* used a graph similar to one at the bottom left of Figure 3 to suggest that the recent global temperature rise is inconsequential (Correll et al., 2020). It even went beyond using a zero baseline for the axis, intriguingly using -10°F as a lower bound. The graphic to its right shows the pattern of data widely agreed by the scientific community to be more honest: a “hockey stick” pattern indicating a recent rapid rise.

The image at the bottom right of Figure 3 is a now-famous cover of *The Economist* magazine from September 2019, which similarly mapped a restricted range of data to the full range of a blue-to-red color scale. Another issue highlighted by these examples of


The Difficulty of Mapping Numbers to Visual Channels in Honest Ways

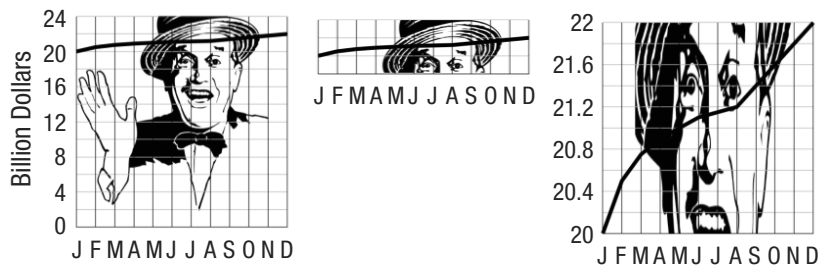

Stretching the y-axis scale of the left graph drastically increases the slope of the perceived trend at right, which feels dishonest.

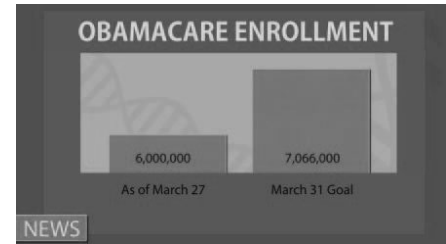

The same axis stretch in a bar graph, from a real-world example.

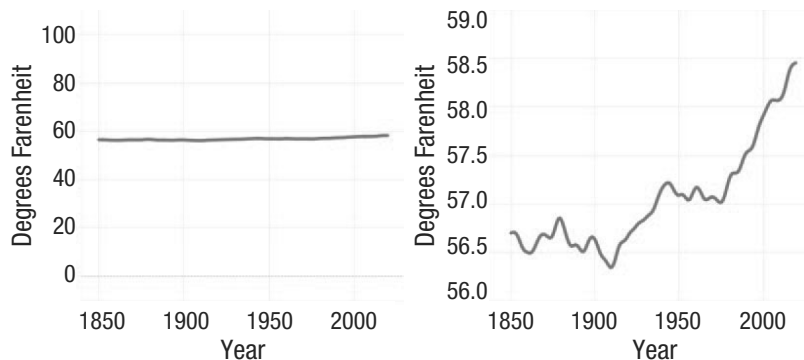

Here, taking a small visual increase (left) and stretching it (right) is the “honest” way to show climate-change data.



This color mapping similarly amplifies a relatively small temperature increase.

Fig. 3. Deceptive axis manipulations across a line graph (top left) and a bar graph (top right). So, should data always be plotted relative to zero? The graph on the bottom left depicts climate change by plotting temperature data from a baseline of 0 °F, yet most would agree that graph is less informative than the version to its right, which allows the differences in temperatures to be seen. At the bottom right of the figure, a cover of *The Economist* from September 2019 maps the same restricted range of data to the full range of a blue-to-red color scale. The graphs at top left are inspired by Huff (1954); those at bottom left are inspired by Correll et al. (2020). The magazine cover at bottom right is reprinted, with permission, from *The Economist* (September 19, 2019).

temperature data is that not all variables have a single natural zero point. Zero degrees Fahrenheit is not a meaningful value for ratio comparisons. Temperature in Celsius has a somewhat meaningful zero point (the typical freezing point of water on earth), but that baseline is not relevant to climate change.

These mismappings of visually depicted ratios are not isolated to the position and length channels. One can imagine similar differences in interpretations arising for size or intensity. Imagine a map of a country with a circle over each major city. One might depict crime rates with the intensity of the circles' color, but with what link to the original data? If zero were mapped to gray and 100 violent crimes per capita per year (a very

high rate) to gray with a small amount of red, the country might seem safe regardless of the underlying data. Another depiction might link 100 violent crimes per year to a bright red. Side by side, those two depictions would suggest a huge difference in crime rates despite showing the same data. One could imagine the same trick, but this time mapping crime rates to the circles' size. If 100 violent crimes were linked to a 1 mm circle, the country would seem safe, but if the same number of crimes were linked to a 10 mm circle, it would seem more dangerous.

Which visual channel is linked to the data values? In other cases, viewers can misunderstand which

visual property encodes the data. In a classic example at the top left of Figure 4, values are encoded by one-dimensional length (the height of each person), producing a 1:2 ratio of the two numbers. However, you might find that your estimate of the depicted values is determined instead by the area taken up by each person, leading to something closer to a 1:4 ratio (or even a 1:16 ratio, if the icons suggest three-dimensional volume). People do indeed make this error, even when the numeric data are printed saliently near the visual representation (Pandey et al., 2015).

In the donut plot to the right of the human icons in Figure 4, there are two ways that numbers are potentially miscommunicated. First, although the data are mapped onto angle, viewer judgments are more strongly determined by two-dimensional area (with some potential contribution from arc length, which is tough to dissociate from area). Because the two donuts are different sizes, this means that the larger donut's value will be artificially inflated. Second, the graph is depicted in 3D. If the viewer can recover the actual three-dimensional geometry from the two-dimensional depiction, then the values should be accurately perceived. By contrast, if the viewer pulls values from the two-dimensional image (the amount of green or purple pixels on the screen), the values in the "front" will be inflated because of the perspective projection. Unfortunately, this technique is indeed substantially misleading because static two-dimensional projections do not typically lead to effective recovery of three-dimensional structures (Tittle et al., 2001; but see Brath, 2014).

Avoid common illusions and misperceptions

A common optical illusion in line graphs. In the line graph in the middle of Figure 4, the two curves are identical ($y = x^3$), but the darker line is translated vertically upward by a constant of 1,000. Even if the viewer knows that the two shapes are identical, it is difficult to see that the vertical distance between the two lines is the same across their entire horizontal span. Instead, given any point on the dark line, viewers tend to see its distance from the closest point on the gray line, which becomes progressively smaller as both lines increase. This illusion makes it difficult to visually estimate differences between lines, especially lines with steep slopes (Cleveland & McGill, 1984). A similar example is depicted in the second column of Figure 2. This illusion is well known to electrophysiology researchers: When faced with visualizing the difference between two measured waves, they will explicitly plot a "difference wave" that shows the difference as a single line (Luck & Kappenman, 2012).

Illusory contrast effects for intensity. The bottom of the second column of Figure 2 shows a final illusion that


can warp our perception of visualized data. Both on the map and in the rectangle, the two vertically separated circles have the same luminance value. However, the lower circle is subjectively darker to the eye because it has been placed on a lighter background and has a higher contrast with its surroundings. In the real world, converting luminance to contrast is a critically important mechanism for seeing accurate luminance and color despite changes in the brightness and color profile of light in the environment (Purves et al., 2004). However, this correction leads to misperceptions of intensity-coded values in the artificial world of data visualizations (Szafir, 2018). One rule of thumb is never to plot intensities on top of other intensities that vary, as in the map in Figure 2.

Misleading illusions that combine separate values. When plotting two sets of numbers on a map, designers typically rely on intensity for one set of values and map the other set of values to the area of circles. This design solution works because, rather than plotting one intensity on top of another intensity, which creates an *integral* representation of contrast, intensity and area are relatively separable representations (Garner, 1974). Other examples of integral representations include encoding two sets of data in rectangles—one set in their widths and one set in their heights. Instead of seeing these values separately, the eye is tempted to translate them into the aspect ratio and the area of each rectangle. The eye then focuses on the ratios and multiplication of each pair of values (Shechter & Hochstein, 1992). As an extreme case, it is unwise to attempt to use the red component of a single color (imagine using the RGB sliders to change the color of an object in presentation software) to depict one number and the green component for another. Red and green will combine in an integral fashion when both are at their highest value, and the viewer will see a single integral percept of yellow (Ware, 2019).

A final example is shown in the scatterplot in Figure 4. Once two sets of numbers are combined into a single two-dimensional plot, new integral percepts emerge, such as the distance between any two points across both their x and y values, points that are outliers on both axes, or the global shape of all points that we can easily interpret as a correlation (F. Yang et al., 2019). However, there is a trade-off. The distribution of values of either set in isolation is now tougher to disentangle (Mackinlay, 1986). This is why data scientists often pair a scatterplot with "marginal histograms" that allow them to see those data in a separable way.

The biasing effect of categorical perception. When continuous values are encoded through visual channels, those values can be warped by categorical perception. A classic example is the seven discrete colors that we see in a rainbow, which are not present in the rainbow itself.


A Set of Common Visual Confusions, Illusions, and Distortions

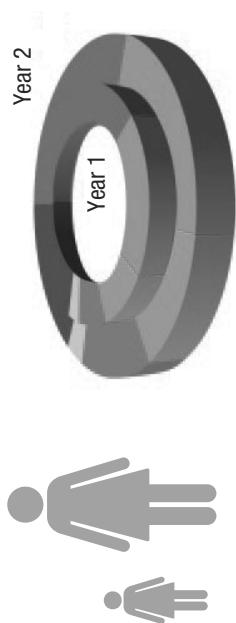


In these examples, linear increases in height or radius suggest the square of that increase.



The same data are displayed with two color mappings, revealing how color-category boundaries can bias value perception.

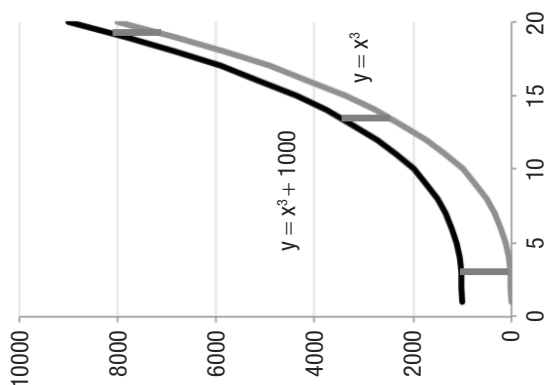

The difference between these lines is constant, yet an illusion suggests that the difference decreases.

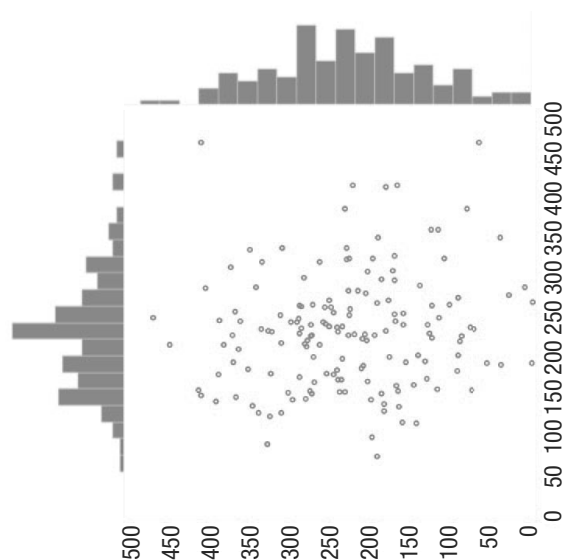

Combining two data dimensions in a scatterplot can make recovery tougher for either alone.

Fig. 4. A set of common visual confusions, illusions, and distortions. At upper left, the two human icons represent vastly different ratios depending on whether the data are represented by their one-dimensional heights, or their two-dimensional areas, or their three-dimensional volumes. The donut graph to their right shows that three-dimensional depictions can artificially inflate data values in the two-dimensional plane. At bottom left, the same fMRI data are plotted with two color mappings. The brain image on the left produces less of a spurious categorical boundary effect, whereas the image on the right shows a common red-to-green color map that makes continuous variation appear exaggerated when it maps onto transitions from one color category to another. At center, an illusion prohibits the accurate recovery of differences between values in a line graph. At right, correlation is easier to detect from the scatterplot, but individual histograms for each dimension are easier to see when plotted separately.

Those color categories are created by an automatic process that systematically bins continuous wavelengths into one of several perceptual categories, exaggerating metric differences among values that straddle those boundaries and shifting percepts toward prototypes for the categories (Goldstone & Hendrickson, 2010; Newcombe et al., 1999). This same phenomenon occurs when data are depicted by hues, as in the bottom left of Figure 4. Across the two brain images, the one on the right uses a greater variety of hues to depict activation values. These additional hues create new color-category boundaries that can dramatically exaggerate the differences between values that straddle them (Y. Liu & Heer, 2018; Quinan et al., 2019). In *The Economist* cover shown in Figure 3, the blue-to-red scale creates a salient categorical color boundary at the color transition point, which makes the temperature increase in the past few years especially salient. Similar category boundaries can affect the perception of values depicted by other channels such as position or length. In a pie graph or stacked bar graph, values that are near gridlines or the implicit 50% mark in the middle of the bar or pie are recalled as being farther from that category boundary (Ceja et al., 2021; McColeman et al., 2021; Spence & Krizel, 1994; Xiong, Ceja, et al., 2020).

Design for color-vision impairments

Beyond illusions and biases, certain combinations of colors in visualizations can be problematic for people who are color-blind or have other color-vision impairments. Color-vision impairments are estimated to affect 4% of the global population (Olson & Brewer, 1997), or roughly 300 million people. Further, older adults can have less sensitivity to color (Silva et al., 2011). Some color blindness results in viewers not being able to distinguish between various colors; protanopia, or red-green color blindness, is the most common, but various other versions of color blindness exist. Color-vision impairments are highly problematic for visualizations, as a portion of the audience may literally not see important patterns in data.

Numerous online color-blindness simulators allow users to upload an image to learn how someone with color blindness would see it (Asada, 2019). For example, the first row in Figure 5 shows a scatterplot encoded with two colors, green and orange. People with typical vision can see that the green dots have a steep positive correlation and the orange dots make a flat line. However, when the scatterplot is processed through a color-blindness simulator, the colors look the same, and all the dots appear to show a positive correlation. The simplest way to make visualizations accessible to viewers with color blindness is to avoid using hue as the only encoding channel or allow viewers to change the

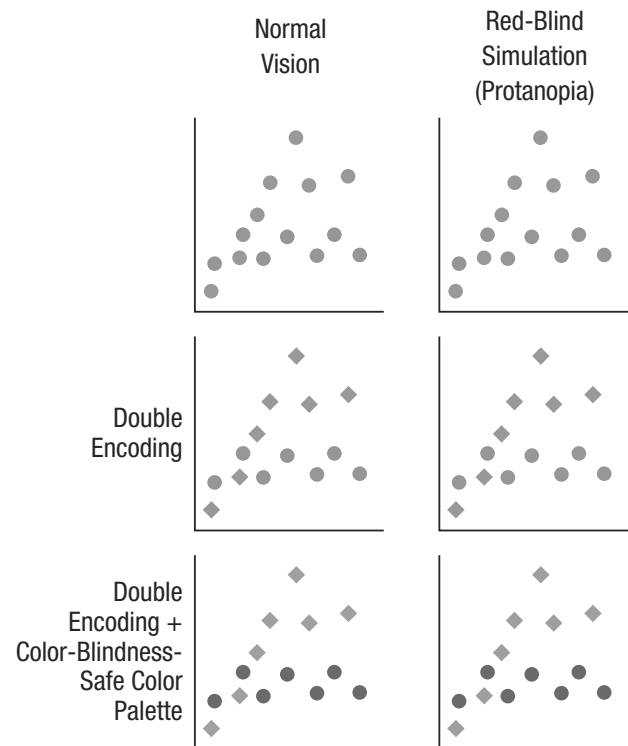


Fig. 5. Three ways to encode data for two groups in a scatterplot, as seen by observers with typical color perception and those with protanopia, a form of color blindness. Protanopia was simulated in Photoshop.

color palette (Silva et al., 2011). Designers can also double-encode a variable, using hue and another encoding channel (Plaisant, 2005), as in the second row of Figure 5. The most thorough and inclusive option is to use color palettes that are safe for people with color blindness, such as those proposed by Harrower and Brewer (2003), as seen in the bottom row of Figure 5.

Design for perceptual accuracy across a broad array of tasks

The ranking of precision for visual channels depicted in the first column of Figure 2 is based on a measure of precision in a particular task: the average error in verbal reports of the ratio between two depicted values (1:7 for each of the examples in the first column; Cleveland & McGill, 1984; Heer & Bostock, 2010).

Although this task is surely important when comparing two values, it is not the only task (or perhaps even the primary task) that viewers complete when examining visualizations (Bertini et al., 2020). One proposed taxonomy of graph-interpretation tasks separated them into three levels: elementary, intermediate, and “overall,” roughly corresponding to simple fact retrieval, comparison and identification of trends, and gist understanding (Bertin, 1981). Additional taxonomies have been developed in the context of cognitive models of

graph comprehension. Other taxonomies are based on analyses of cognitive processes involved in different tasks (Tan & Benbasat, 1990), reliance on local versus global features (Carswell, 1992), or other criteria (MacDonald-Ross, 1977; Washburne, 1927; Wickens, 1989). Work in the data-visualization literature has begun to catalog such tasks and to test the types of displays that best support performance for each. One list of tasks is distilled from questions submitted by students who were asked to analyze a large data set (Amar et al., 2005). This list includes analytic tasks such as “retrieve value,” “sort,” “determine range,” “correlate,” and “characterize distribution.” Another list of tasks focuses on how people generate summary statistics for plotted data (Szafir et al., 2016).

The ranking derived from performance on two-value ratio judgments does not always extrapolate across these alternative tasks. For example, depicting data with a line graph, which relies on “precise” position coding, can lead to *lower* efficiency in seeing big-picture statistical properties such as means. Intriguingly, the opposite is true for intensity coding. Multiple studies have shown that for identifying particular values, position is far more precise than intensity, but for judging an average across many values, intensity is more precise (Albers et al., 2014; Correll et al., 2012). The reason for this dissociation is not well understood. It is possible that the lower precision of intensity better allows its values to blend together to construct aggregate values, or perhaps intensity is simply processed by a different mechanism that affords aggregate judgments (Szafir et al., 2016). Some visualization designs purposely use the low precision of the intensity channel to focus viewers on the big-picture trend of the data instead being distracted by precise details, as in the visualization from the cover of *The Economist* magazine (Fig. 3), which focused viewers on the big picture of climate while de-emphasizing more detailed (but less relevant) variability in monthly weather.

Other work has tested whether people can more quickly or accurately complete the types of tasks listed above (judge mean, correlate, etc.) given different graph formats (scatterplots, bar graphs, tables, etc.) and data-set sizes (small vs. large; Y. Kim & Heer, 2018) or different arrangements of data within a graph (Jardine et al., 2019; Ondov et al., 2019). Although such studies have found consistent interactions—better performance on Task X with Design Y in Arrangement Z for Data-Set Size S—the existing pattern of results is currently too complex to generalize to novel combinations. To create generalizable guidelines, the research community will likely require a more complex model of the underlying perceptual operations that produce these complex interactions (Jardine et al., 2019; Ondov et al., 2021).

Among these alternative tasks, the perception of correlation is particularly well studied (Harrison et al.,

2014; Jardine et al., 2019; Rensink & Baldridge, 2010; F. Yang et al., 2019; Yuan et al., 2019), leading to initial suggestions of its underlying perceptual operations. For example, scatterplots allow for more accurate judgments of correlation than pairs of bar charts presenting the same data (Harrison et al., 2014).

Effectively distinguish among groups in data

Scatterplots present two metric variables in relation to each other. Imagine that the horizontal position represents the longitude of a collection of oil wells and the horizontal position represents their latitude. This example makes clear that scatterplots and data maps share DNA. Suppose the designer now wants to differentiate the set of points according to a *nominal* (categorical) variable, such as the company that owns the oil well. Because the two dimensions of position (vertical and horizontal) are already being used to represent the metric variables, designers would typically differentiate points from each group with either different colors or shapes.

Plotting the groups as categorically different colors is often the first choice because the visual system processes color differences more efficiently than shape differences across the two-dimensional visual plane, as measured by performance in visual-search and texture-segmentation tasks (Wolfe & Horowitz, 2017). These findings, based on simple displays used in laboratory studies, extrapolated to a data-visualization context in which viewers compared the average heights of multiple color-coded or shape-coded clouds of points in a scatterplot: Color coding produced far better performance (Correll et al., 2012).

When color differences distinguish data from two separate groups or classes, differentiating those classes is easier if the encoded colors are farther apart in a perceptual color space. For example, it is easier to differentiate red from blue than from orange-red. Researchers have constructed effective palettes from perceptually informed color spaces (e.g., CIELAB; Y. Liu & Heer, 2018) to suggest colors to use to differentiate N nominal classes; colors become progressively crowded together as N increases. One such set that is viewable (and customizable) online is ColorBrewer 2.0 (Brewer, 1994a, 1994b). Another tool, Colorgorical, balances perceptual differentiation with aesthetic considerations (Gramazio et al., 2016).

Picking a color for a nominal value should also be constrained by the semantic congruence of the value and the color. If the nominal values are lemons and cherries, it is easier for viewers to answer questions about a chart that labels those values with yellow and red, compared with a standard palette that does not consider semantic congruence (Lin et al., 2013; Schloss

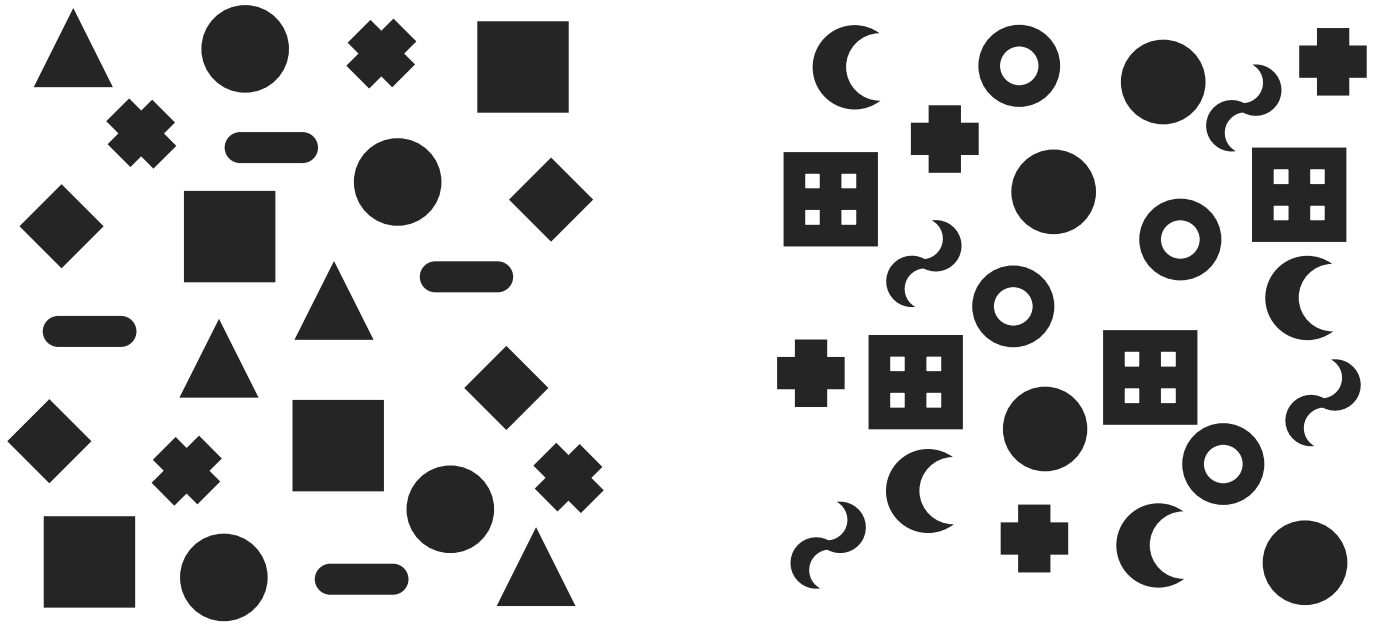


Fig. 6. The standard shape set for Microsoft Excel (left) compared with a perceptually spaced set (right; inspired by Huang, 2020). Try to pick out the four instances of each shape in each display—you should find that task easier on the right side.

et al., 2018). An algorithm can automatically generate intuitive color choices for a given noun by analyzing the color profile of images pulled from Web searches for the noun and then optimizing color assignments in terms of perceptual spacing and semantic fit. Such algorithms can perform as well as human experts in quickly picking color palettes for nominal data (Lin et al., 2013; Setlur & Stone, 2015).

Sometimes a visualization designer needs to show a second set of nominal values in the same plot. Thinking back to our map, imagine that we have used a unique color to represent each oil company (A, B, C) but also wish to depict each company's nationality (Canada, Brazil, Mexico). Typically, shape would be used to show that second nominal variable. Because it is less perceptually effective than color, it should be used for the less important variable, or the one with fewer values to differentiate. The shape sets used in commercial software (e.g., Microsoft Excel) gravitate toward intuitive shapes, such as circles, triangles, squares, and diamonds, that are not actually well separated in perceptual space.

Researchers have begun to explore perceptual shape space, and some have extrapolated from pairwise subjective similarity ratings of combinations of candidate shapes (Demiralp et al., 2014). Other work has relied on objective performance tasks on actual simulated scatterplots (Burlinson et al., 2017; Huang, 2020). This work is also new, but so far, human shape space (at least for the simple shapes used in visualizations, and at least for the types of tasks tested so far) appears to prioritize the difference between open (circle, square, triangle) and closed ($\times$, $+$, $*$) shapes, such that

differentiating points is easier when they differ in that property (Burlinson et al., 2017; Huang, 2020). An initial full three-dimensional perceptual shape space (Huang, 2020) adds the additional properties of intersection and spikiness; Figure 6 depicts a clear improvement in shape differentiability compared with the typical sets used even in professional data-visualization software.

Finally, some software automatically differentiates nominal variables with both color and shape, under the assumption that more differentiation is better. However, work has shown that color is already so dominant in its effectiveness that *redundant encoding* does not substantially improve visual processing efficiency (Gleicher et al., 2013) unless the viewer has color-vision impairments or the viewer's task is exceptionally difficult (Nothelfer et al., 2017). Given anecdotal claims from some expert designers that redundant encoding can cause confusion in viewers, who typically expect color and shape to signal different nominal variables (Tufte, 1983), the lack of evidence for a perceptual advantage suggests that redundant encoding should be avoided in most cases, except when used to make visualizations accessible for viewers with color-vision impairments.

How to Design a Perceptually Efficient Visualization

Use visualizations to allow viewers to powerfully compute statistics

One core advantage of visualizations is that they capitalize on our visual system's ability to extract information

efficiently. The encoding properties in the first column of Figure 2 are properties that we process in parallel across two-dimensional images (Treisman, 1998; Wolfe & Horowitz, 2017). Faster than an eyeblink, we can pull statistics from data encoded as positions, one-dimensional lengths, two-dimensional areas, angles, or intensities. In the natural world, we typically use these statistics to recognize the type of scene we are in (e.g., a beach scene containing light brown, blue, and horizontal angles from the sand, sky, and horizon; Oliva, 2005) and to help provide a summary of an otherwise complex world (Brady et al., 2009; M. A. Cohen et al., 2016). A substantial literature in visual cognition has examined the power and limits of this ability to explore what types of statistics can be extracted under what conditions (e.g., Baek & Chong, 2020; Haberman & Whitney, 2012).

Much of this work in visual cognition relies on simplified laboratory displays of colored squares and circles, which are conveniently similar to the structure of the artificial worlds of data visualizations (for a review of insights from this literature for data-visualization design, see Szafir et al., 2016). The third column of Figure 2 summarizes the types of statistics (minimums, means, maximums, and outliers) that can be pulled from any of the five visual properties in the first column. In the dot plot (encoding numbers as positions), a viewer can easily extract the minimum, mean, or maximum height. In the stacked bar chart below, the lighter segments present numbers through both their lengths and the positions of their tips because their bases are aligned. The darker segments are offset in arbitrary ways by the lighter segments underneath, so only their lengths visually represent values—yet the observer can still pick out minimum, mean, or maximum values quickly. The same is true for the bubble chart and the angles of the slope graph (a specialized line graph whose lines have only two points). Finally, for the heat map at the bottom that represents values as luminance contrasts, the lightest (minimum) and darkest (maximum) values are easy to pick out, and one can also quickly imagine the contrast of the mean value.

Avoid a visual processing limit: making comparisons

Within their first glance at a data visualization, viewers can immediately pull general statistics from the positions, lengths, areas, slopes, and intensities (Szafir et al., 2016). This provides viewers with a starting point in understanding the distribution of the data and whether there might be outliers. However, the second step is to extract relations from the data by making a sequence of comparisons, a critical mental operation when viewing visualizations (Franconeri, 2021; Gleicher et al., 2011; Tufte, 1983). Comparisons include local comparisons between

elements (“this point is higher than that point”; “this line segment is shallower than that one”), groups of elements (“these two bars have a greater range than those two”; “these red circles are on average larger than the green ones”), or global trends (“this section of the heat map is more saturated than that section”).

Each of those verbal sentences describes a single visual comparison that must be extracted serially, as part of a sequence (Michal & Franconeri, 2017; Roth & Franconeri, 2012). These comparisons can each take hundreds of milliseconds to process (Franconeri et al., 2012; Logan & Compton, 1998; Wolfe, 1998), so that viewers tend to process only a handful per second (Franconeri et al., 2012). Extracting the necessary multitude of comparisons from a visualization is therefore not like instantly recognizing a particular face, place, or Pokémon but instead more like the serial and controlled reading of a paragraph (Carpenter & Shah, 1998; Shah et al., 2005; see Franconeri, 2013, for a discussion of the different types of attention demanded by these two scenarios). Each single comparison is limited in its complexity as well—by some estimates, encompassing interactions among approximately four variables at maximum (Halford et al., 2007).

This severe capacity limit has been confirmed for realistic comparison tasks in data visualizations. When viewers are asked to perform the types of tasks shown in the fourth column of Figure 2—for example, to locate pairs of graphed values in which the second value is bigger among pairs in which the second value is smaller—the time need to make each of those comparisons cumulates in painfully slow overall performance (Nothelfer & Franconeri, 2019). Likewise, the bar graph in Figure 7 (left) shows two test scores for each student, one before and one after an intervention. You can feel the sluggishness of those comparisons by answering the question: Who is the only student who got worse?

As a second example, when viewers are challenged to complete a tough comparison task with the blue dots of the scatterplot shown in Figure 7 (right), they can fail to process the positions of the green dots, such that 93% fail to notice the presence of a dinosaur shape among them (Boger et al., 2021).

A few hundreds of milliseconds of processing time for a single comparison is not noticed. However, across many comparisons, that time quickly adds up. Imagine a bar graph showing the performance of two groups, A and B, in both treatment and control conditions, for a total of four bars. Even in this small set, there are six possible pairwise comparisons, plus two main effects, plus multiple ways to look at interactions. In a graph with 12 bars, there are 66 pairwise comparisons alone!

When visualization designers create data-heavy displays that require fast processing, such as a business-metric-monitoring dashboard, many implicitly realize

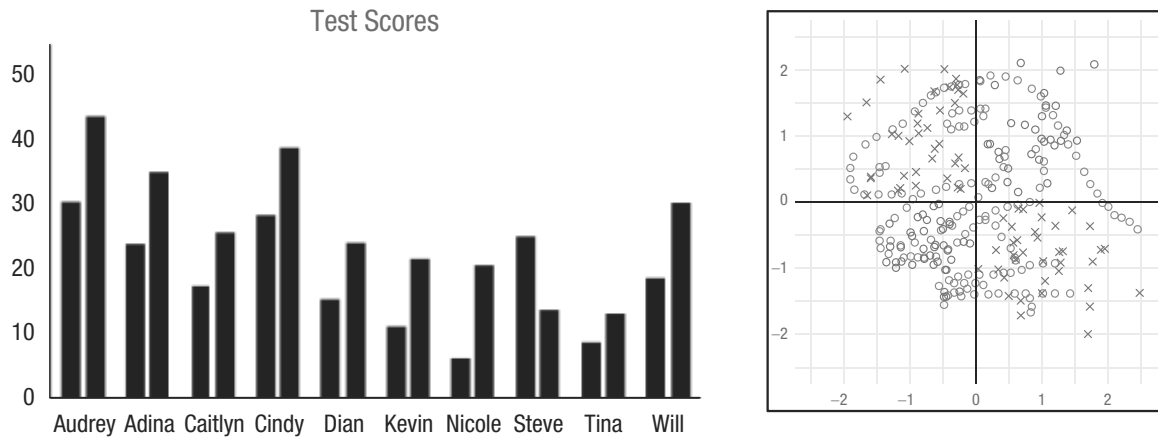


Fig. 7. Visual comparison as a serial process. In the bar graph on the left, which student has a second bar that is lower than the first? To find the answer, the viewer needs to process each set of bars individually, rather than all at once. On the right, viewers tasked with processing the blue set of marks failed to notice the dinosaur shape created by the green set of marks. The image on the right is reprinted from Boger et al. (2021).

that comparisons are a sluggish visual operation. One common solution is to remove the need for the viewer to explicitly compare values by providing a second view of the data plotting the differences between values (Fig. 2, upper right; Few, 2009). Known as *directly depicting deltas*, these dashboards commonly show differences between current financial values, such as revenue, and baseline financial values, such as revenue from the same month in the previous year, or between financial and budget values.

Control comparison with visual grouping cues

A visualization that is designed to guide viewers to make the “right” visual comparisons can lead those viewers to make meaningful insights than they would gain on their own. One major cue for this guidance is to visually group the data values that should be compared with each other or should be compared as a group to other groups. The same classic grouping cues studied in the perception literature can control which values are selected and compared. Figure 8 depicts four of the primary cues roughly in order of strength: connecting lines, position proximity, and similarity in either color or shape (Brooks, 2015; Palmer, 1995). The two rightmost columns of Figure 2 also show examples of grouping-defined comparisons.

Many of these grouping cues may stem from metaphors about real-world scenarios (Tversky, 2001). Objects that are spatially nearby are likely to stem from the same source, such as tomatoes from the same plant or birds nesting in the same nest. When three objects fall close to a common line, their spatial arrangement naturally conveys conceptual ordering because of how

processes produce spatial ordering: If an animal leaves a trail, the order of the prints naturally reflects the timing of how they were laid down. Lines imply connections because connected things in the world tend to belong to the same objects, such as grapes connected by vines. Closed contours such as circles or blobs define objects because objects in the world tend to have closed, discernible borders or boundaries.

In line graphs, the choice of which variable is grouped by connecting lines (e.g., Fig. 8) has a profound impact on the interpretation of data. For example, one study presented viewers with graphs that showed the effects of two independent variables on a third variable. The data were depicted in line graphs; one variable was plotted as separate lines and the other was plotted as connected lines. Viewers could answer more sophisticated questions about the quantitative relationships depicted by the connected lines but only relatively simple questions about relationships between the separate lines (Shah & Carpenter, 1995). In many cases, viewers were unable to recognize the same data plotted with a different choice of how points were connected by lines. Relationships *between* values that straddle different lines or different panes need to be integrated with multiple comparisons, which requires controlled processing, taxes working memory, and introduces a risk of error.

The graphs at the top of Figure 9 show how these grouping cues can control which comparisons are prioritized. In the example to the left, both proximity and color facilitate comparisons among categories (Social Security is highest) and overall between years (the yellow bars have a larger range than the green bars). However, you are less likely to compare a single category across the same year, which requires a jump of

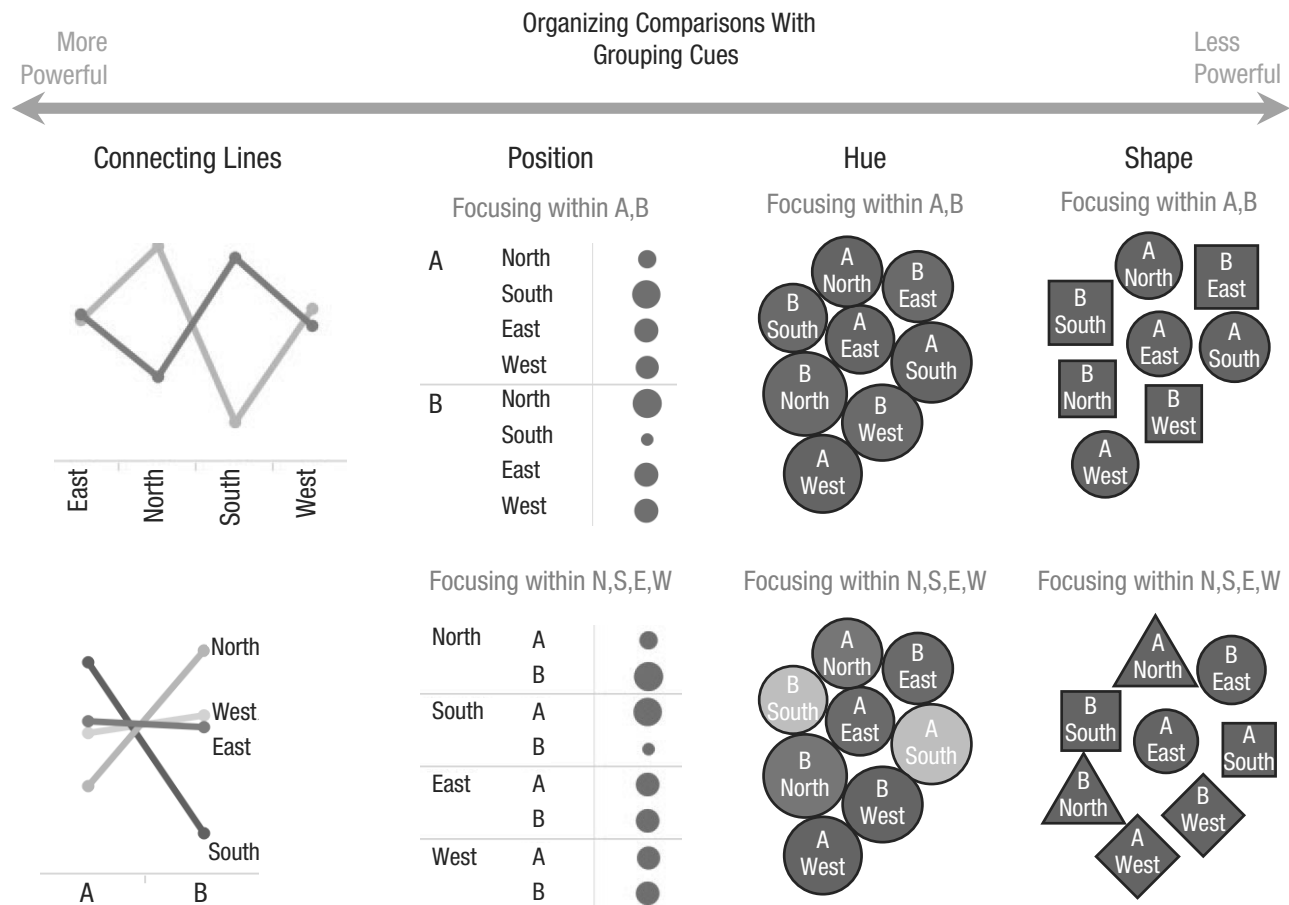


Fig. 8. Several grouping cues that can control how data values are compared. Connecting lines are particularly powerful cues, followed by proximity, color, and shape (Brooks, 2015).

your eye to find the companion bar. The opposite is true of the example to the right (Shah & Freedman, 2011; Shah et al., 1999). The word clouds at the bottom of Figure 9 show an example of controlling comparisons with proximity grouping. In the word cloud on the left, the relatively weak color grouping makes it tougher to identify the common theme in each of five groups of words. On the right, identifying the common themes (restaurant, baseball, hands, etc.) is easier because the more powerful cue of proximity grouping has been added (Hearst et al., 2020).

Guide the viewer to the most important comparison

A good visualization relies on the grouping techniques described in the previous section, including connectivity and proximity, to help guide a viewer to compare one set of values or another. However, even within that one set, there are still many possible comparisons to make.

When multiple groups compete for comparison, that competition tends to be won by groups that are different or brighter in color, largest in size, or presented at

the top or left of a display. Such visual salience can be modeled by showing viewers pictures or visualizations, recording their eye movements, and then feeding the images and responses into computational models that predict human attention (Bylinskii et al., 2017). Many of these models exist for salience in natural scenes, ranging in complexity from simpler weighted linear combinations of relative differences in features (uniqueness in color, or orientation, at various locations and spatial scales) to more complex models that extract object contours or predict salience in movies (Borji et al., 2013). But many of these models fail to predict salience in the novel context of visualizations because the statistical profiles of those images differ substantially, containing large areas of blank space, text, axes, and titles (Haass et al., 2016). New models of salience for artificial information displays, trained on eye movements or on mouse-tracking data that are closely correlated with eye movements (N. W. Kim et al., 2017), can reach higher levels of predictive power (Bylinskii et al., 2017; Matzen et al., 2018).

Visualization designers will often deliberately control visual salience to bring the viewer's eye straight to the

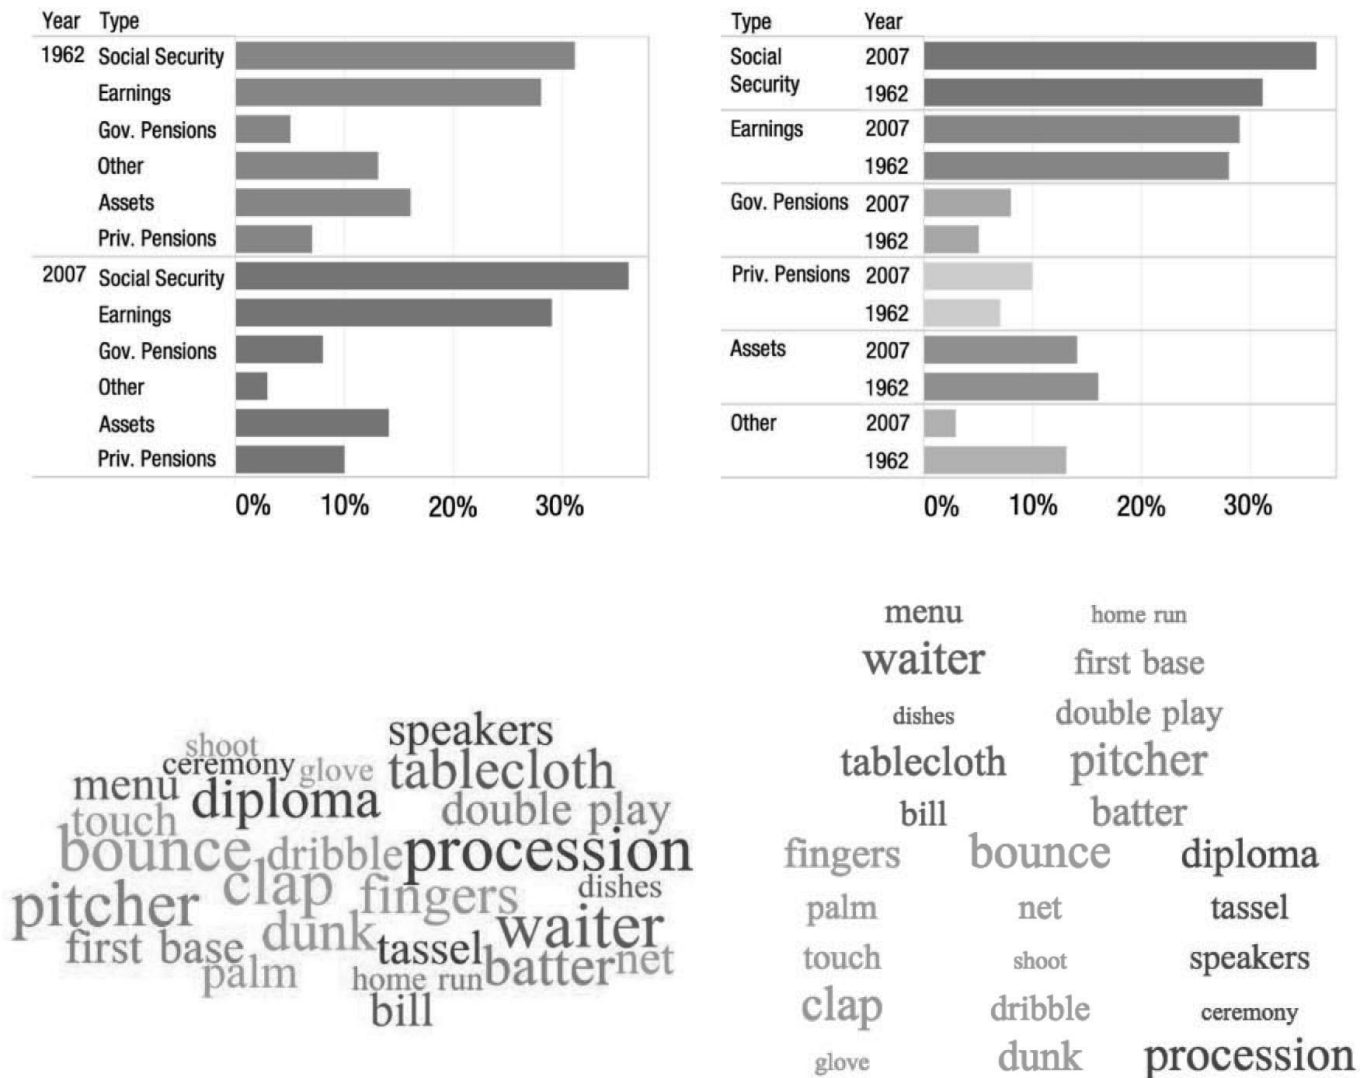


Fig. 9. How visual grouping cues can control visual comparison. At top, a combination of color and proximity grouping lead the viewer to different visual comparisons across the two bar graphs. At the bottom, comparisons in a word cloud are weakly controlled by color grouping, and more strongly controlled with proximity grouping.

critical comparison. One technique is to add salient color highlighting a single group of items (Fig. 10) to ensure that viewers process that comparison first (Ajani et al., 2021; Grant & Spivey, 2003; Hullman & Diakopoulos, 2011; Mayer & Moreno, 2003). Some practitioner guides also recommend using color-coded accompanying text, as in the graph at the top of Figure 10, to ensure that the viewer will match the pattern in the data to the relevant reference in the visualization designer's argument (e.g., Knaflic, 2015). More generally, a good visualization should place verbal information near relevant visual information so that viewers do not need to glance back and forth in a time-consuming search to see what text matches what visual pattern (Moreno & Mayer, 1999). These methods of guiding viewers to the most relevant comparisons are particularly important

for low-knowledge readers, who benefit from visualizations that present or highlight only the relevant comparisons (Canham & Hegarty, 2010). These techniques are less important for experts, who rely on prior experience to guide their attention.

Some research has studied the techniques of data journalists, who are tasked with clearly communicating data-based arguments to nonexperts. This work has cataloged techniques used by news outlets such as *The New York Times* Upshot, *The Washington Post*, *The Economist*, and FiveThirtyEight (Hullman & Diakopoulos, 2011; Hullman, Diakopoulos, & Adar, 2013; Segel & Heer, 2010) and has used computation to automatically generate visualizations that use particular strategies (Gao et al., 2014; Hullman, Drucker, et al., 2013; N. W. Kim et al., 2017). These outlets employ specially trained

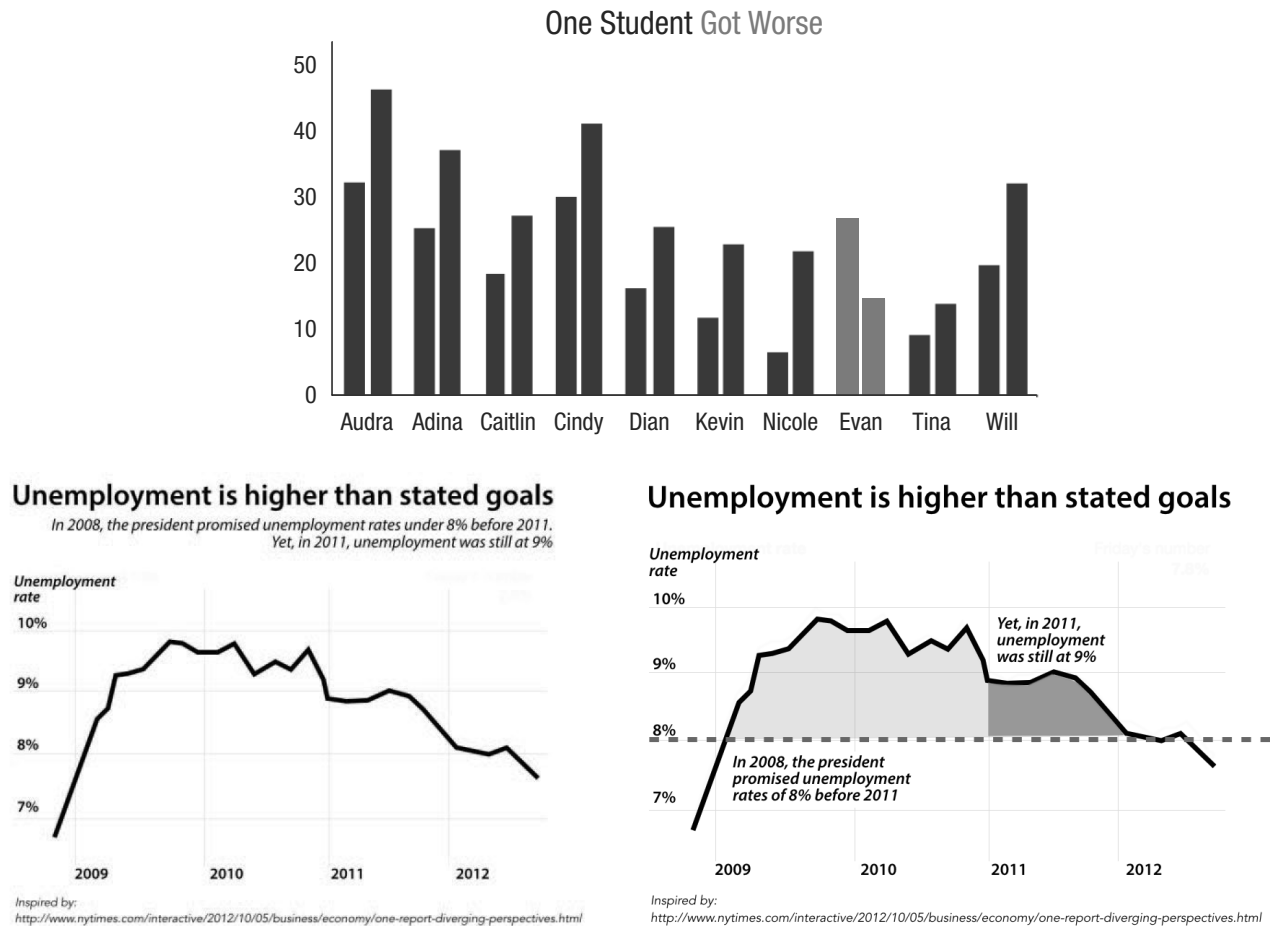


Fig. 10. Color highlighting and direct annotation to help viewers make the right comparison first and know what conclusion is supported by that pattern in the data. The graphic at the top illustrates a color-highlighting technique suggested in business-oriented practitioner guides (e.g., Knafllic, 2015). The graphs at the bottom (inspired by Bostock et al., 2012) are an adaptation of a graph by data journalists using grouping, highlighting, and verbal annotation.

reporters who convey data-based political, economic, health, and science stories to the lay public. They will often show a single pattern in the data at a time, relying on the viewer to step or scroll (Amabili, 2019) through a sequence of patterns. In each step, a pattern of data is highlighted to ensure that the viewer's limited processing capacity is directed to the values simultaneously described in a verbal annotation. The bottom row of Figure 10 illustrates how data journalists might redesign the example on the left, which requires viewers to navigate text that is placed far from the patterns that it describes and to use their imagination to fill in the patterns referred to by the text. The example on the right addresses both of these issues, leading to more effective communication of a key data pattern (Ajani et al., 2021). The two rightmost columns of Figure 2 summarize these techniques, showing that grouping, highlighting, and annotating can help viewers quickly make the right comparisons.

If helping viewers prioritize critical comparisons in a visualization is so important, then why do so few presenters do it? One likely reason is that presenters have a *curse of knowledge*—an inability to simulate the perspective of the naive viewer because they cannot ignore what they know and see (Birch & Bloom, 2007; Camerer et al., 1989). Figure 11 presents an empirical demonstration of this curse from a lab study (Xiong, Van Weelden, & Franconeri, 2020). Participants heard an intriguing story about a dip and rise of a political candidate's popularity in the polls (the top line in the top left graph); the story made those patterns stick out to the participants. They were then told to forget the story and predict what patterns another person, naive to the story, would find interesting or salient in the graph. The graph at the upper right presents their collective predictions—and makes it clear that people think that others will see what they see, even when they know that others do not have the same expertise.

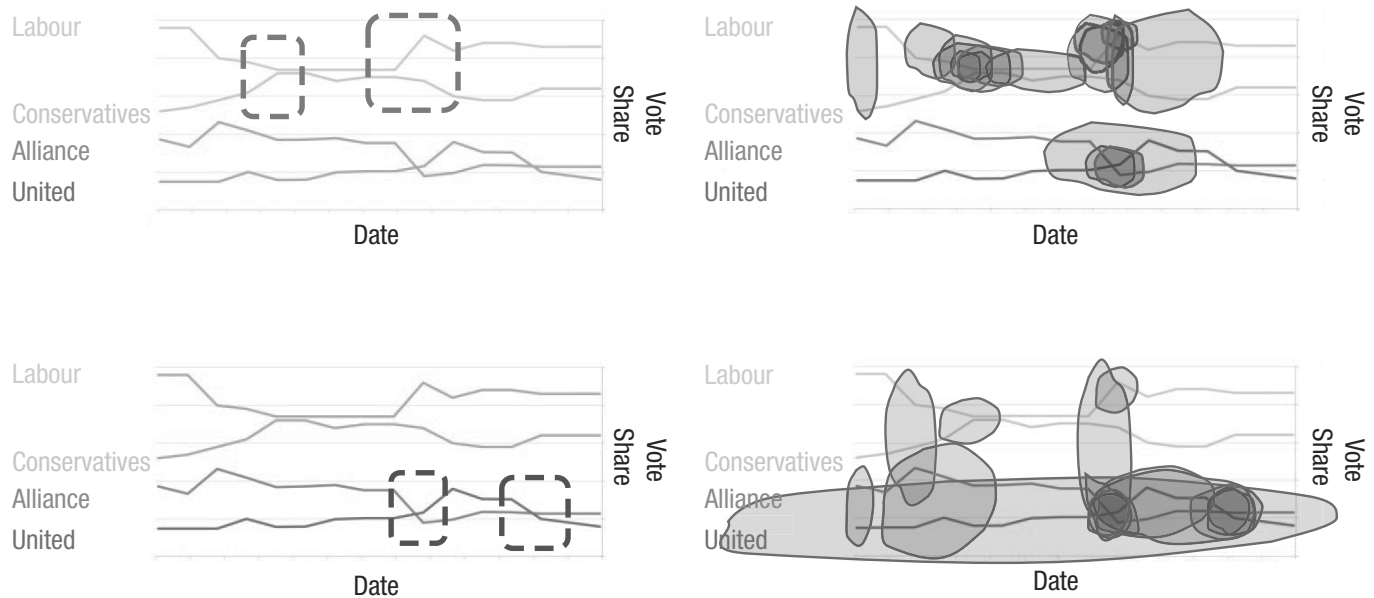


Fig. 11. A demonstration of the curse of knowledge in data visualizations. Participants were told a story involving the data patterns highlighted in the top two lines (top left) or the bottom two lines (bottom left) of a line graph. They were then told to forget the story and to circle the patterns that a naive viewer would notice first on an unannotated version of the graph. Their predictions (bottom right) mirrored the story they had been told, showing a “curse of knowledge,” or an inability to inhibit relevant expertise. Adapted with permission from C. Xiong, L. Van Weelden, and S. Franconeri (2020), “The Curse of Knowledge in Visual Data Communication,” *IEEE Transactions on Visualization and Computer Graphics*, 26(10), p. 3051–3062, <https://doi.org/10.1109/TVCG.2019.2917689>. Copyright 2020 by IEEE.

The graphs in the bottom row show how, when the original story concerned a different candidate, the pattern of results changed accordingly. It is impossible to “turn off” your own expertise, which makes it difficult to see through the eyes of nonexperts.

Persuade with visualizations

If grouping, highlighting, and annotation can guide viewers toward a certain comparison or pattern, then for better or worse, a visualization designer has some control over what their viewers see in a data set. Figure 12 shows an example, adapted from *The New York Times*, in which the same unemployment data might be seen—or designed to be seen—in different ways. During Barack Obama’s presidency, a member of his party (the blue glasses) might see a drop in unemployment rates and highlight that downward-sloping pattern in the orientation channel. But a member of the rival party (the red glasses) might see a failure to meet a goal of 8% unemployment and emphasize the information in the area channel by highlighting the area under the curve (Bostock et al., 2012). These visual manipulations are similar in spirit to choosing which of those features to highlight in a verbal argument.

An analysis of distortions and biased annotations in news media visualizations showed that rhetorical biases are pervasive in data graphics and that labels and framing may be skewed toward progressive or conservative

positions, depending on the news outlet (Mehta & Guzmán, 2018). A taxonomy of “visualization rhetoric” likens visualization design to an editorial process in which decisions about what data to include, how to encode them, how to use titles and labels, how to describe the data’s provenance, and what interactions to allow represent rhetorical choices aimed at guiding viewers toward preferred interpretations (Hullman & Diakopoulos, 2011). People’s perceptions of a visualization’s message, and their ability to recall it, are particularly influenced by the visualization’s title (Kong et al., 2018, 2019). For an engaging tour of the complexities of truth and deception in visualization with an emphasis on a journalism perspective, we point the curious reader to the books of Alberto Cairo (2016, 2019).

Viewers can also be influenced by expectations or social pressures, even for relatively low-level visual judgments. For example, when participants made judgments about correlations in scatterplots, their estimates were higher when the data were labeled as personality variables, which one would expect to be correlated, than when the data were unlabeled (Freedman & Smith, 1996). In another study, participants were asked to make judgments about visualizations (e.g., rating the linear association in a scatterplot) presented either alone or with a histogram plotting other people’s ratings. The other ratings were either true ratings or a distribution of the true ratings shifted by 1 *SD*. When participants were provided with the manipulated

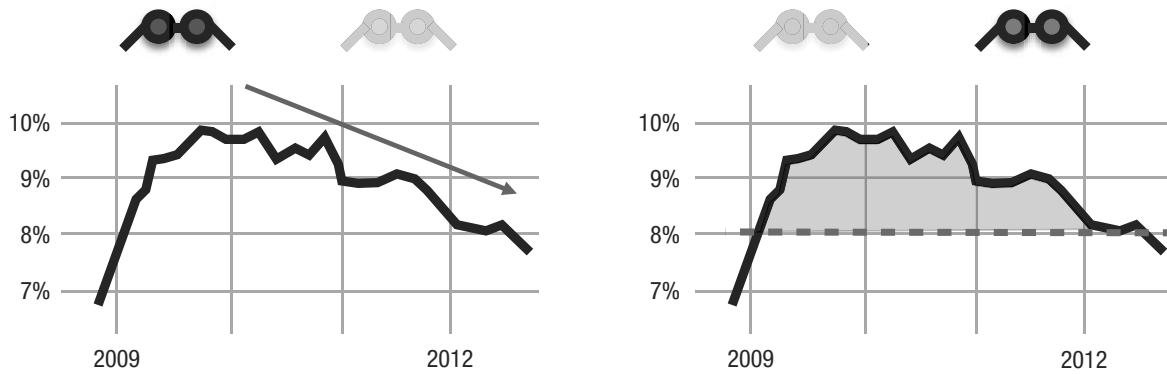


Fig. 12. An example of emphasizing different perspectives in a single data set (inspired by Bostock et al., 2012). One data set can be seen with dramatically different perspectives, depending on which patterns an observer does and does not extract.

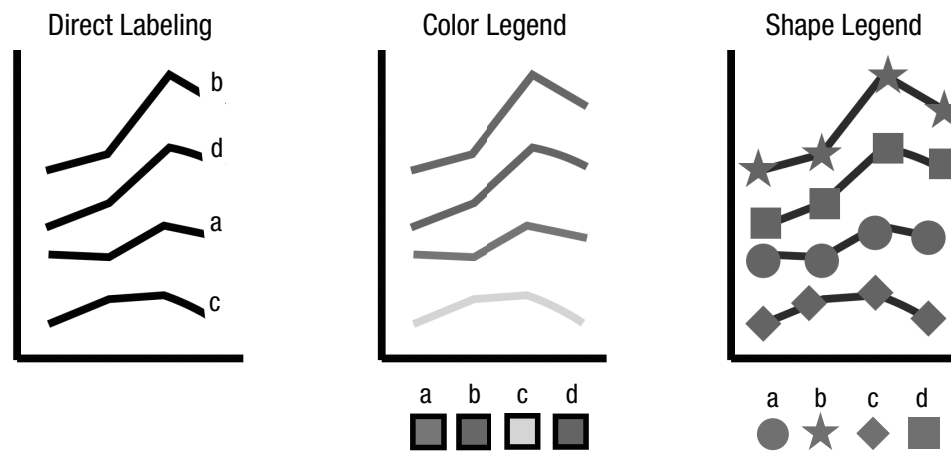


Fig. 13. A demonstration of the advantage of direct labels over legends. Take a moment to state the names of the four groups shown in the line graph at left in top-to-bottom order. (Answer: b, d, a, c.) Now do the same for the graphs at center and right, which require coordination with color and shape legends. You should notice a substantial slowdown because of the need to frequently look back and forth between the graph and the legend. If you attempt to memorize the legend first, you will experience the capacity limit of your working memory.

histograms, their judgments were biased in the direction of the social influence (Hullman et al., 2011).

Finally, the format of a visualization can also guide the types of conclusions that viewers draw from the underlying data. Imagine data showing that students who eat breakfast more often tend to have higher GPAs. A viewer might see this correlation and assume a causal relationship whereby a good breakfast causes better grades. Although plausible, this conclusion cannot be drawn from these data. When shown visualizations like these, viewers made unwarranted claims about similar correlational data, and they did so more often when the visualizations aggregated the data into fewer groups (e.g., a two-bar graph), compared with more groups (e.g., a scatterplot showing all of the individual data values; Xiong, Shapiro, et al., 2020), perhaps because

seeing the data in fewer groups is implicitly associated with those data being gathered by an experimental manipulation.

Avoid taxing limited working memory

Given that comparisons are already highly capacity limited, any extraneous demands on working memory due to the design of visualizations should be avoided. Interpreting the graphs in the middle and right sides of Figure 13 requires individuals to map the symbols and colors in the graphs to their referents in the legends below. This task is highly demanding of limited working memory resources. If information is lost in interpreting a graph, viewers might make interpretation errors or require extra time to reinspect the legend. Indeed, one

study found that people answered questions about data both faster and more accurately when the data were directly labeled in graphs compared with when there was a legend (Lohse, 1993). Therefore, instead of legends, use direct labels whenever possible (e.g., Wong, 2010). Note that there may be exceptions to this recommendation, if legends provide a way to index data values that labels cannot. For example, a map of an amusement park might list locations under the map to allow the viewer to browse the locations alphabetically or clustered by type (rides, food, etc.), which is not possible for map locations that are already organized in space.

When visualizations are well designed, they can help viewers overcome working memory limits by offloading information storage and some types of processing to a page or screen (Kirsh, 2005; Tversky, Heiser, et al., 2002). Compared with the slow difficulty of reading and comparing symbolic numbers, a visualization can allow these steps to unfold far more quickly and efficiently. For example, older adults with normal cognitive decline were asked to compare multiple health-care plans. They were given plan information (e.g., about monthly premiums, deductibles, and gap coverage [supplementary insurance to cover medical costs incurred before reaching the deductible]) either in a table full of text and numbers or in a table with visual categorical encodings of the information (e.g., green circles for the best gap coverage and red circles for no coverage). The adults using the visually encoded table made better and, in some cases, faster decisions about which health-care plan to select because they found it easier to make comparisons (Price et al., 2016).

Beware the working memory load of animation.

Limits on working memory can also be strained by animation. Some kinds of visual motion, such as patterns of translation or expansion that accompany moving the head or walking, can be tracked efficiently and automatically (Gibson, 1979). However, our capacity for tracking the motion of objects that move in arbitrary directions is highly limited, to as few as one or two objects at a time (Alvarez & Thompson, 2009; Scimeca & Franconeri, 2014; Xu & Franconeri, 2015), including in moving scatterplots (Chevalier et al., 2014). If a viewer's capacity is overwhelmed during an animation, they may not retain the motion information before the animation is over. Education researchers have termed this the *transient information effect*, a "loss of learning due to information disappearing before the learner has time to adequately process it or link it with new information" (Sweller et al., 2011, p. 220).

Examples of both of these problems can be seen in studies of mechanical diagrams. In a review of roughly

100 studies on the use of animated diagrams for teaching complex mechanical, biological, or computational systems, researchers found that students' descriptions of processes were no more accurate with animations than with labeled static diagrams (Tversky, Morrison, & Betrancourt, 2002). In one experiment, students saw static or animated diagrams of the mechanical processes involved in flushing toilet tanks. Both groups could identify the number of sequential stages. However, students who saw the animated diagram made more errors (20% for animated vs. 5% for static) about individual stages, such as whether air or water ends the flushing process (Kriz & Hegarty, 2007). Even when viewers can extract global patterns from an animated diagram, the capacity limitation in processing animations can generate a cost for other information in the scene.

The mere presence of animation can also induce an illusion of understanding, such that it erroneously inflates observers' confidence in their percept. For example, observers who saw animated diagrams of a toilet's flushing mechanism were not only less accurate at recalling the names and functional roles of parts relative to observers who saw static diagrams; they also reported less perceived difficulty and higher engagement than did the more successful static-diagram learners (Paik & Schraw, 2013).

There is little evidence that animation facilitates understanding of information displays, but there is one important exception: animation used to convey probabilistic processes and uncertainty, in which draws from a distribution provide a metaphor for random sampling (Hofman et al., 2020; Hullman et al., 2015; Kale et al., 2019). Such animations are effective in conveying sampling uncertainty. One reason appears to be automatic (i.e., not requiring conscious attention) processing of frequency information (Hasher & Zacks, 1984). Using animation to convey uncertainty does not tax working memory because neither the sequence of samples nor the specific properties of individual samples are important for understanding that variability.

Allowing a viewer to control an animation manually may prepare them to focus their limited capacity on the right subsets of information at the right time and to replay critical portions of an animation. Viewer-controlled animation has shown some success (ChanLin, 1998; Faraday & Sutcliffe, 1997; Mayer & Moreno, 2003; Schwan & Riempp, 2004; Tversky, Morrison, & Betrancourt, 2002). However, empirical evaluation shows that interactivity does not always improve performance. One famous example of an animated data visualization is Gapminder's Trendalyzer (Gapminder Foundation, 2007), a scatterplot containing circles for countries and plotting, for example, the countries' gross domestic product (GDP) on the *y*-axis, life expectancy on the



Fig. 14. A screenshot from Hans Rosling's (2006) TED talk on the power of visualized data. Hans Rosling helped viewers see relevant patterns in a complex animated visualization with exaggerated gestures and clear linguistic guidance toward the critical visual comparisons that supported his arguments.

x -axis, and population as the size of their circle. The Trendalyzer uses animation to show trends over time, moving the dots to show how each of these factors changes. When participants were shown a similar display with interactive controls for the animation, they were better able to answer precise questions about each country than participants without interactive controls, but they also became worse at extracting global trends across countries compared with participants shown static alternatives (Abukhodair et al., 2013; Robertson et al., 2008). Furthermore, user-controlled interactivity is not always possible for some systems or audiences.

Nevertheless, viewers frequently report that animated diagrams and data visualizations are more engaging and enjoyable than static versions, which may explain animation's continued use (Abukhodair et al., 2013; Robertson et al., 2008; Tversky, Morrison, & Betrancourt, 2002). In a communication context, anecdotal evidence suggests that an engaging animation can still communicate patterns in data when carefully deployed. The example in Figure 14 depicts a TED talk by Hans Rosling (2006), in which Rosling used the moving display to depict changing world health statistics over time. Rosling made his dynamic data story easy to understand by carefully using language to guide his audience ("look at this cluster, it's moving up . . ."), paired with exaggerated gestural cues to help the audience focus on the relevant data values. Such cues have been shown to help students integrate verbal information when interpreting diagrams (Mautone & Mayer, 2007), graphs (Michal et al., 2018), animations (de Koning & Tabbers, 2011), and other educational materials (Goldin-Meadow, 1999). Future research inspired by

Rosling's case study might help outline concrete rules for using animation in ways that would allow his success to be replicated.

Should your visualizations be rich or minimalistic?

Given the limited working memory resources of visualization viewers, designers often recommend a minimalist aesthetic that strips away any design elements that are not critically needed (Few, 2004; Knaflitz, 2015; Tufte, 1983). One popular mantra is to keep a maximal "data-ink ratio" (Tufte, 1983), though the definition of "ink" can be frustratingly vague (Correll & Gleicher, 2014a). Figure 15 depicts variants of a visualization based on this prescription. The visualization at the top is filled with "clutter": grid lines, a background pattern, and varied colors across the bars. The middle image is a "decluttered" visualization that omits these elements. Although newer editions of Microsoft Excel have eliminated some forms of clutter shown in the top image, critics of the 2007 edition argued that the software encouraged users to create graphs containing dense grid lines, unnecessary labels, unneeded color variation, and even three-dimensional effects that transformed simple bars into cylinders or pyramids (Kirk, 2012; Kosslyn, 2010; Su, 2008; Ware, 2010, 2019).

Despite strong calls to declutter visualizations (e.g., Tufte, 1983), there is only mixed evidence that this practice improves aesthetic ratings and little evidence that the prescription affects objective performance. Several studies have measured aesthetic ratings for cluttered versus decluttered charts, and some have shown clear preferences for decluttered versions (Ajani et al., 2021) and others, surprisingly, showing the opposite (Hill et al., 2017; Inbar et al., 2007). Researchers who have found the opposite have typically argued either that viewers' higher level of familiarity with cluttered charts make those charts more attractive or that decluttered charts that are *too* minimalistic become boring. Another possibility is that users may prefer particular depiction styles for particular purposes, mindful of their audience and goals (Levy et al., 1996). Objective performance measures, such as the speed with which viewers can compute means across values in a bar graph, also present mixed evidence. For example, that speed can be slightly faster when some forms of "clutter," such as axis tick marks, are removed but slower when other elements are removed (Gillan & Richman, 1994). Given the large number of design elements that could count as clutter, combined with the large number of tasks that one could complete on a visualization, some have argued that a simple rule for whether to declutter is unlikely to arise and have discouraged further empirical

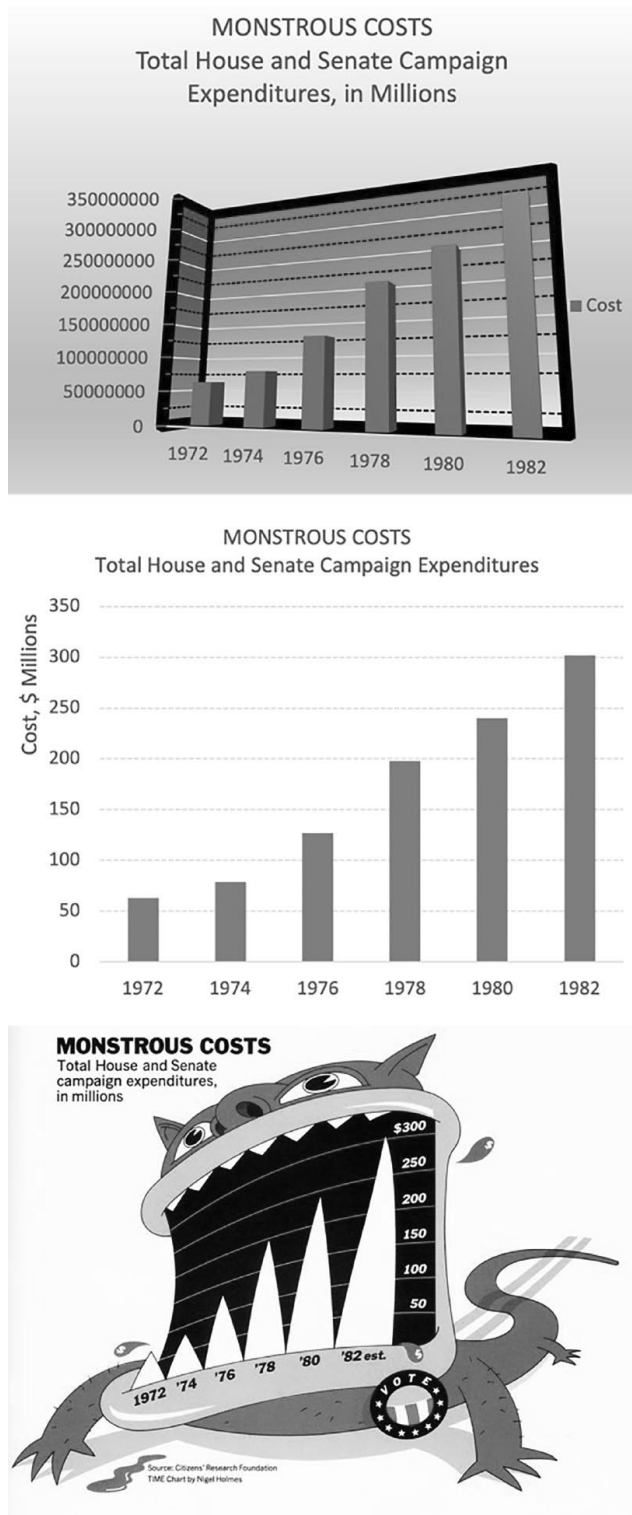


Fig. 15. A “cluttered” visualization (top), a minimalist “decluttered” version (middle), and a version that incorporates pictorial embellishment (bottom). The graph at the bottom was created by Nigel Holmes for *TIME Magazine* and was reprinted in his 1984 book, *Designer’s Guide to Creating Charts & Diagrams*. Used with permission.

testing given the small and mixed effects found so far (Ajani et al., 2021).

The bottom of Figure 15 shows the same bar graph embedded within a cartoonish monster. The addition of such pictorial elements that embellish data with anthropomorphic or metaphorical elements—intended to enhance engagement or memory—has been demonized as “chartjunk” (e.g., Tufte, 1983). Various studies have shown that adding these elements leads to no improvement in memory for the data (Helgeson & Moriarty, 1993; Kelly, 1989), mixed results depending on the details of the task and context (Gillan & Richman, 1994; Li & Moacdieh, 2014), or better memory for the data content or message (Bateman et al., 2010; Borkin et al., 2016; Haroz et al., 2015b). Like animation, these visual embellishments can increase ratings of engagement and aesthetic value (Li & Moacdieh, 2014). And despite mixed evidence as to whether their presence improves memory for the data, pictorial elements do improve memory for the fact that a visualization was previously seen, both in the short and the longer term (Borkin et al., 2013).

How to Design an Understandable Visualization

Use familiar designs to show data intuitively

Visualizations can be powerful, but a poorly designed visualization can easily confuse or even mislead (Burns et al., 2020; Cairo, 2019; Szafir, 2018). Because the interpretation of visualized data is in the eye and mind of the human beholder, we must consider the psychology of the observer as the translator of images into an understanding of the original data and the patterns that they hold. Below, we outline a set of common translation errors that can confuse and mislead.

Understanding a visualization can depend on a *graph schema*: a knowledge structure that includes default expectations, rules, and associations that a viewer uses to extract conceptual information from a data visualization. Figure 16 serves as an example of why a graph schema is often needed to interpret a data visualization. It depicts the GDP (on a log scale) and population of the 10 most populous countries. Take a moment to interpret the data.

If you are having trouble extracting the data from this visualization, it is not your fault—you do not have the needed schema. First, if you have never seen this type of visualization, you cannot know which aspects of its variation are meaningful. The bubbles differ in

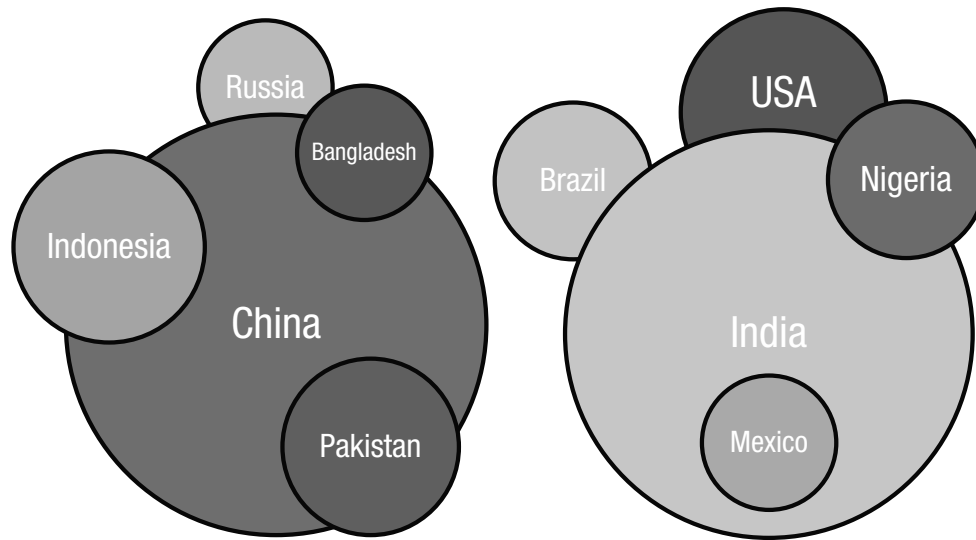


Fig. 16. An example of a visualization with an unclear schema.

their areas, hues, horizontal positions, vertical positions, proximity and enclosure relationships, and depth planes, which causes confusion. Why are Russia, Brazil, and the USA “hiding” behind the other countries? Why does India enclose Mexico? Why are there two main clusters? Is it meaningful that Bangladesh and Pakistan have the same horizontal position? Which of these many sources of variability should the viewer translate back to the original data?

You are experiencing the same confusion felt by a novice viewer encountering a given type of visualization for the first time. A young student might see rectangles with widths, heights, tops, bottoms, left sides, right sides, legend entries, and gridlines that vary in vertical position. Reading a bar graph requires a schema that allows the viewer to do what you do when viewing a bar graph: to focus instantly on the positions of the bar tops, because they signal the numbers depicted by the bars.

Here is a hint for Figure 16: Only the size and hues matter; the rest of the variation is irrelevant. Areas map to population, and hues to GDP. Now, how does the variability in those channels map back to numeric values? You will guess that larger sizes are linearly related to a larger population because you have implicitly memorized that association from previous experience with visualizations. However, how do the hues map to GDP? It looks like the variance scales between red and blue, but is red high because it is “hot” or low because it is “bad”? You may have already inferred that red maps to higher by stepping back to your knowledge of the data to realize that China has a high GDP, so red probably maps to high. However, if you did not have that knowledge, your existing schema would not have allowed you to recover that relationship confidently.

Humans develop similar schemas for many other domains. A face schema, for example, specifies what features are typically in a face (eyes, ears, mouth, nose . . .), how those features tend to vary (many eyes have brown irises, but some are blue, green, or gray), what their relations tend to be (noses are between, and below, the eyes; Palmer, 1975). Having well-developed schemas enables a viewer to more effectively perceive, understand, and remember—without a face schema, a face presents a set of tens of thousands of independent pixels that vary in unpredictable ways. When one views a graph, one may depend on graph schemas that encode knowledge about the graph type, and also schemas that encode knowledge about what the graph is about—for example, understanding a high-low graph of stock prices requires knowledge about that graph type and also about stocks and the stock market.

Schemas can bias judgments when a new instance deviates from the schema (Mandler & Ritchey, 1977; Rumelhart, 1980; Tversky, 2001). In one example of bias in the context of graphs, participants saw simple displays labeled as either “graphs” or “maps” and were asked to draw the displays from memory. When the displays were called “graphs,” participants distorted a central line as being closer to a 45° angle. When these same displays were called “maps,” the participants distorted the lines as being closer to horizontal or vertical, suggesting that their memory for the image was influenced by canonical representations of these two types of visualizations (Tversky & Schiano, 1989).

In much of the world, children learn about common graph types such as bar graphs, line graphs, and scatterplots in school—but an audience without such schooling may not appreciate the conventions for how

Cartesian space is used and how axes are drawn and labeled. Even relatively common visualizations such as scatterplots are misunderstood by 37% of adults in the United States (Goo, 2015).

Given that the reader of this article is likely familiar with common visualizations, we remind the reader of the need to learn how a new visualization works, by introducing examples that are less likely to be familiar. Expert communities have developed idiosyncratic visualizations that serve important data-analysis or -communication purposes, but they require learning new graph schemas. This can lead to severe difficulties for new viewers. For a broader tour of a curated “zoo” of novel visualizations, see Heer et al. (2010). For those ready for a true safari of new visualization schemas, we recommend browsing the Xenographics website (Lambrechts, n.d.).

The left column of Figure 17 depicts four visualizations that are likely familiar to the reader, and the right column shows four equivalent visualizations that likely require a new schema. The first row shows two line graphs, plotted in the same space. An alternative way to plot those data is with a *connected scatterplot* shown at right (Haroz et al., 2015a; Peebles & Cheng, 2003). For each time point on the *x*-axis of the two-line graph, plot the point for Line 1 on the *x*-axis of the scatterplot and Line 2 on the *y*-axis. Now connect all points with a line, in a temporal order. Engineers and economists use this format because it facilitates views of relationships between two sets of data: The line segments’ slope and direction reflect their ratios and changes in polarity.

The second row depicts standard bar graphs on the left, showing the square footage, price, and time on the market for three houses. It becomes tougher to find relationships among similar houses in the bar graph as the number of metrics increase or the data set’s size grows because both the measures and the houses become more spatially separated. Parallel coordinates, as shown on the right, are a popular visualization format for analysts facing a much larger data set. The same data are now plotted as the height of lines that straddle parallel lines representing each measure. When combined with interactivity, this format allows users to extract individual values and perceive correlations between neighboring measures: flat lines reflect positive relationships, and slanted lines, negative relationships.

The third row shows a simple hierarchy of the content of a hard drive, in the style of an organizational diagram. In this representation, vertical position relies on a “levels of height” metaphor to indicate a folder’s place in the hierarchy, whereas horizontal position is typically irrelevant. The alternative depiction at right is called a tree map: *tree* because it shows a hierarchy,

and *map* because of its two-dimensional spatial layout (Shneiderman, 1992). Reading a tree map requires the schema of knowing that folders are now differently sized rectangles (with area indicating the size of each file and color somewhat arbitrarily mapping to different branches of the hierarchy). Critically, the hierarchy itself is no longer shown through a vertical “levels” metaphor but is instead depicted through an “enclosure” metaphor, as in a physical file drawer. Higher-level folders are now akin to bento boxes enclosing other bento boxes.

The final row shows network data as a *node-link diagram*, which could depict a social network. A node-link diagram can intuitively show connections (e.g., between people) with lines, making it useful for lay audiences. However, for complex analysis of large data sets, specialists prefer variants of the depiction at the right, in which each “node” is both a row and a column in the matrix, and their intersecting square is filled only if those nodes are connected (Heer et al., 2010). Similar in spirit to the correlation matrix, it is symmetric across the diagonal if all connections are bidirectional. However, if the connections are directional, then the two halves carry specific information.

Respect assumptions about how visual channels map to “less” and “more”

Some elements of schema are relatively universal for moderately experienced visualization users. For example, as illustrated in Figure 18, people have expectations for which “end” of some visual channels (e.g., bottom vs. top for position, light vs. dark for luminance) should map to smaller and larger numerical values. Larger values tend to be mapped to higher vertical positions, perhaps because of the natural metaphor of stacking more objects in higher piles, or larger people’s being taller. Likewise, many communities—particularly those whose languages are read from left to right—use a consistent mapping of larger values as being on the right side of horizontal space, as in the number lines found on the walls of elementary school classrooms (Tversky, 2000, 2001). Note that you implicitly knew that the phrase “first column” at the start of this paragraph indicated the column on the far left.

When these mappings are violated, viewers can become confused (Gattis & Holyoak, 1996). The brain electrophysiology research community shifted from a convention of plotting negative values (for microvolts) up on the *y*-axis to a more intuitive convention of plotting positive values up, forcing experienced researchers to relearn how to read familiar patterns that were now inverted (Handy, 2005). Visualizations from popular news media have been criticized for violating the

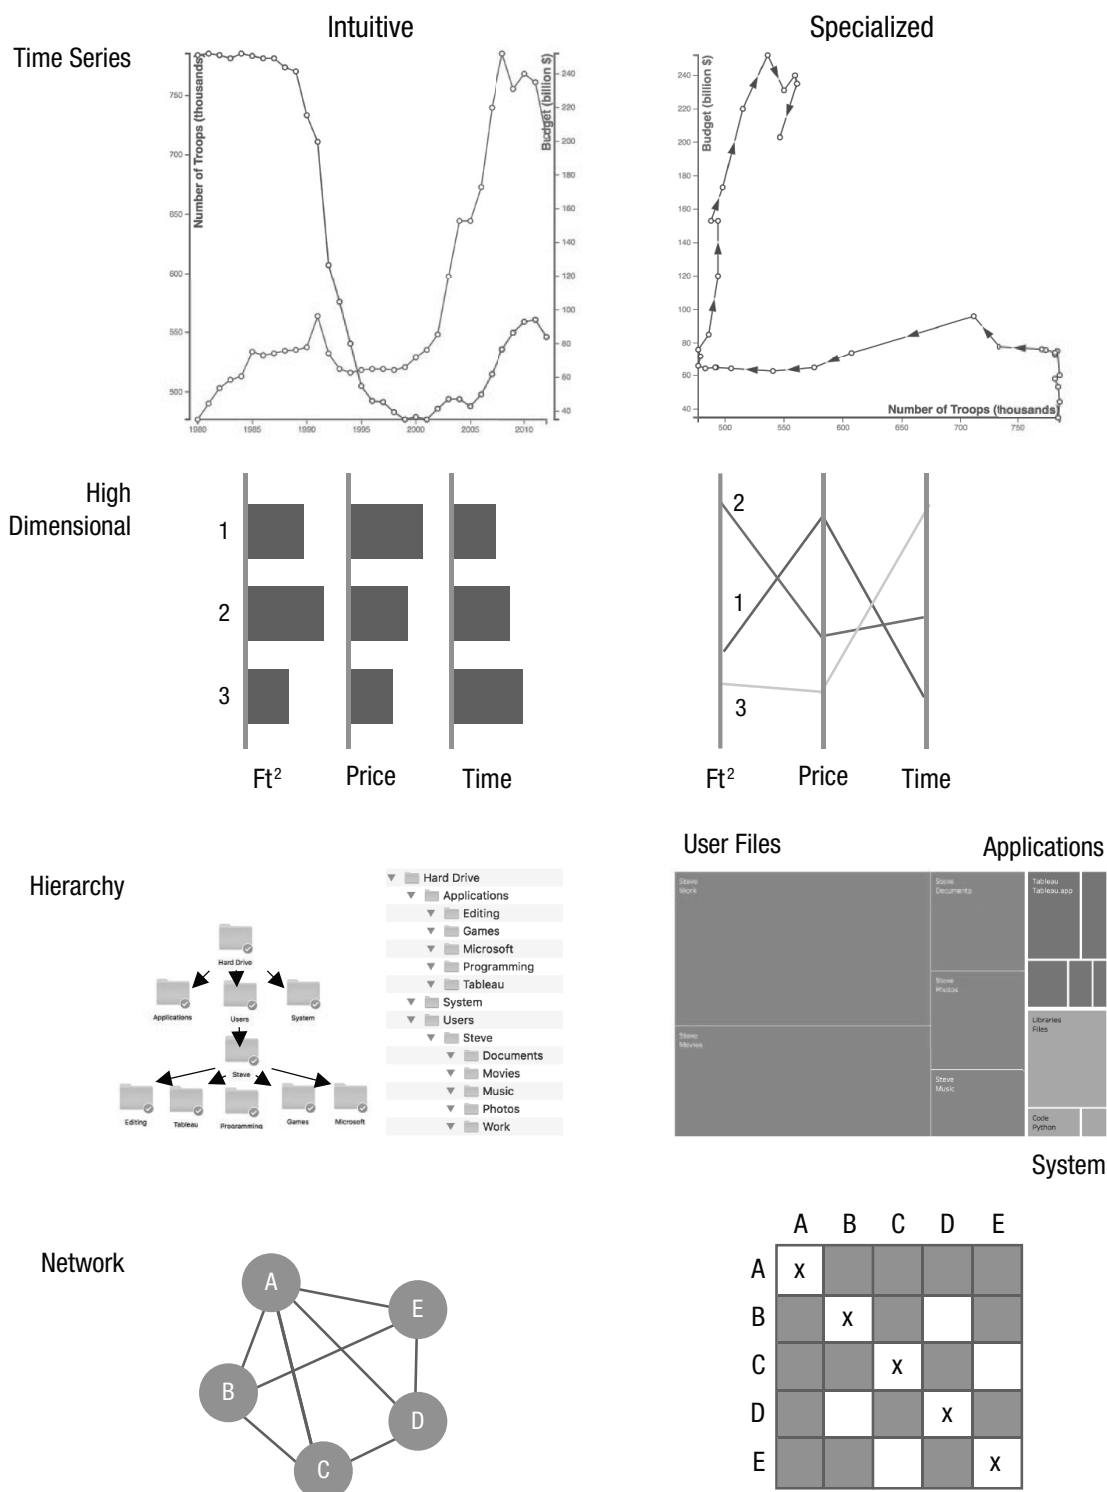


Fig. 17. Four common types of visualizations and equivalent representations used by expert communities.

convention of using higher position to indicate larger numbers, leading to confusion among viewers (Gattis & Holyoak, 1996). One such visualization depicted an increase in gun deaths in Florida after a permissive gun

law was passed (Engel, 2014; see also Kosara, 2014). Each used a counterintuitively inverted y -axis, smaller values at the top and larger values at the bottom, so that the designer could evoke a metaphor of downward

Common Confusions Caused by How Data Are Mapped to Visuals

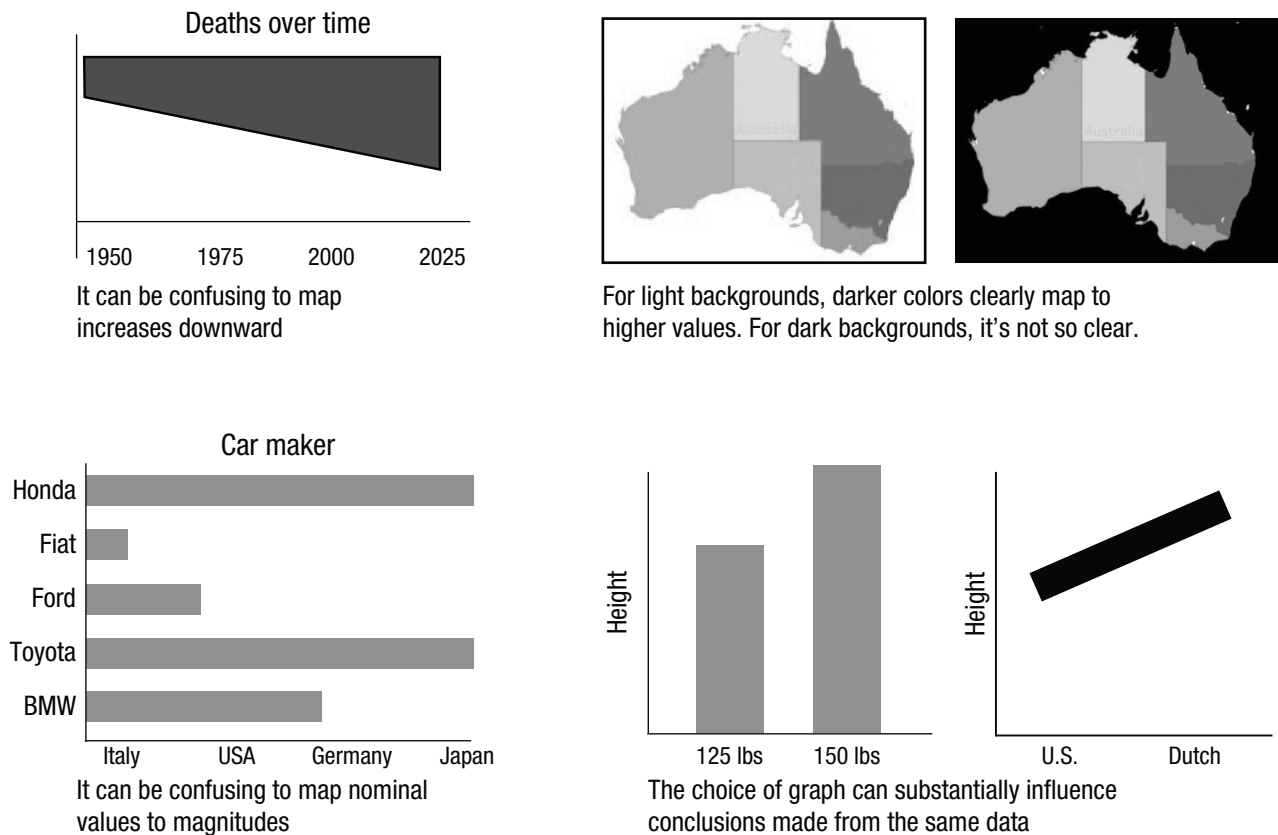


Fig. 18. Four types of counterintuitive graph designs. The graph at the top left shows a confusing flip of the typical mapping: positive numbers are plotted below the y -axis and increase as they move downward (Pandey et al., 2015). At right, larger values naturally map to dark values when placed on a light background (recommended), but the mapping is less clear when the colors are placed on a dark background (Schloss et al., 2018). As shown on the bottom left, a bar graph is a counterintuitive way to plot a nominal variable: Mapping the country of origin of a car company to a bar graph makes the data “feel” metric (Mackinlay, 1986). At right, bar graphs encourage discrete comparisons between points (“150-pounders are taller”), whereas line graphs encourage descriptions of trends (“One tends to get taller as one becomes more Dutch”); in either case, viewers may extract the wrong conceptual message (Zacks & Tversky, 1999).

streams of blood. Critics reported being initially confused by the break in convention, seeing increases in deaths as *decreases*. One study found that when graphs used this unconventional mapping (Fig. 18), viewers incorrectly assumed that positive values plotted below the y -axis midpoint were negative values, failing to notice the critical change in the y -axis labels (Pandey et al., 2015).

For length and area, the mapping is straightforward: Larger is more. Because these channels cannot intrinsically represent negative numbers (sizes cannot be negative), other channels must pitch in to differentiate negative values: Lengths are placed with a position under an axis, and negative areas could be red in color. For angle, larger angles correspond to more, perhaps relying on the metaphor of climbing a hill: A steeper slope leads one higher, a flat slope does not change elevation, and a downward slope leads one lower. Of

course, all of that assumes that you are “walking” from left to right, relying on a standard mapping of time and narrative as progressing from left to right (Boroditsky, 2011; Tversky et al., 1991).

For intensity, some previous work had shown that people tend to map larger values to darker colors, whereas other work had suggested the same for colors that appear more opaque. One study appears to have solved this long-standing uncertainty by showing that both factors affect the mapping depending on the background color. In Figure 18, in the map at the upper right with a white background, darker colors also appear more opaque, so darkness and opacity predict the same mapping: Either appears to show the larger number. However, in the map with a dark background, the darker areas can be seen as “see-through” so that the lighter areas seem comparatively opaque. Now, associations with darker as larger compete with associations of