Application Programming Interface
Send API Document (JSON)
(API Version: 5.0)

CONFIDENTIAL

Prabhu Money Transfer Private Limited

Ground Floor, A-45, Metro Station Rd, near Sector-15,
A Block, Sector 2, Noida, Uttar Pradesh 201301
Phone: +91- 8826898985
E-Mail: info@prabhumoneytransfer.co.in
Web: www. prabhumoneytransfer.co.in

NOTICE

Confidentiality

The material contained within this document is proprietary and confidential. It is the property of Prabhu Money Transfer Private Limited (PrabhuINDIA), and is not to be disclosed except for the purpose of integration or on behalf of PrabhuINDIA. Based upon the extent of the information provided, individuals with access to this information are required to sign a nondisclosure agreement.

Intellectual Property Rights

The contents of this document remain the intellectual property of Prabhu Money Transfer Private Limited (PrabhuINDIA). Unauthorised reproduction, photocopying to any other party, in whole or in part, without the expressed written consent of PrabhuINDIA is prohibited.

Trademarks

All trademarks mentioned herein are the property of PrabhuINDIA.

CONFIDENTIAL

Document Revision History

Date	Create By	API Version	Change Summary
September 2020	Kapil Acharya	2.0.0	Compliance Update
September 2020	Kapil Acharya	2.0.1	Update (Fields Added)
15 November 2022	Kamal Panthi	3.0	Review Document - Added Fields - Introduce New Process Flow
07 December 2022	Kamal Panthi	3.1	Update Process Flow with RBL Page information
26 October 2024	Kamal Panthi	4.0	Minor Correction & Review
25 March 2026	Kamal Panthi	5.0	Updated API in JSON along with Citizenship and Passport processes

CONFIDENTIAL

Table of Contents

1. Introduction 5
   1.1 Introduction 5
   1.2 Requirements 5
   1.3 Request API Base URL (Test Environment) 5
2. List of Methods to call 6
3. HMAC Authentication 7
4. Process Flow 10
5. Customer KYC Integration Process (for Partners) 12
   A. Aadhaar Card (ID Type: 77) 12
   B. Nepalese Citizenship (ID Type: 12) 15
   C. Nepalese Passport (ID Type: 4) 15
6. Payment Type 17
7. Transactions Status 17
8. Account Pay Bank Branch List 18
9. Get Service Charge 20
10. Get Static Data 22
11. Get State District 24
12. Get Customer by Mobile 26
13. Get Customer by ID 28
14. Send OTP 30
15. Create Customer 33
16. Upload Document 38
17. Create Receiver 40
18. Send Transaction 43
19. Confirm Transaction (Verify Transaction) 47
20. Unverified Transaction 48
21. Search Transaction 49
22. Get Balance 50
23. Register Complaint 51
24. Track Complaint 53

ANNEXURE I 55

Postman Collection and Environment 56

CONFIDENTIAL

1. Introduction

1.1 Introduction

Prabhu Money Transfer Private Limited (Prabhu INDIA) has developed an online **Application Programming Interface (API)** for its partners to create customers, add receivers, and initiate transactions. The **API is JSON-based** and interacts with the Prabhu INDIA system in real time as an authorised agent.

The **Send API** allows partner systems to send transaction details required by Prabhu INDIA for processing and payout at designated locations with the specified payment type. It also provides several supporting methods. These functions help partners manage operations efficiently and provide before- and after-sales services to their customers.

Additionally, the API supports generating a **secure signature** for authentication to access the above methods.

This document focuses on the **Send API**, describing its purpose, functionality, and usage. It also provides technical details and outlines the general process flow for Send Partners.

1.2 Requirements

To provide a Web Services interface (API) for Send Partners, which allows Send Partners to request services online, the following are a few preconditions:

- ✓ Partner must have an internet connection at their server
- ✓ Partner needs to be registered on the Prabhu INDIA system
- ✓ Partner will need to provide a public static IP address to Prabhu INDIA
- ✓ Partners will be provided with the necessary login credentials upon confirming the above requirement
- ✓ Prabhu INDIA will provide a Test Environment to the Partner and test all possible cases before going LIVE
- ✓ Partner will be going through a certification process before Prabhu INDIA will allow the partner to transact on the production system.
- ✓ Partner needs to create a Signature for secure HMAC Authentication for each method.

1.3 Request API Base URL (Test Environment)

https://sandbox.prabhuindia.com/Sendapi

CONFIDENTIAL

2. List of Methods to call

S. N	Method Name	Endpoint	Description
1	GetEcho	/Send/getEcho	To test the connection
2	GetCustomerByMobile	/Send/GetCustomerByMobile	To get the customer details by searching the registered Mobile Number
3	GetCustomerByID	/Send/GetCustomerById	To get the customer details by searching the registered ID Number. (*** Only for Nepalese Citizenship & Nepalese Passport**)
4	CreateCustomer	/Send/CreateCustomer	To create a sender if the details are not found on the GetCustomer Method.
5	CreateReceiver	/Send/CreateReceiver	To create a receiver if the details are not found on the GetCustomer Method.
6	SendTransaction	/Send/SendTransaction	To send the transaction.
7	ConfirmTransaction	/Send/ConfirmTransaction	To Verify the Transaction. Also named as (**VerifyTransaction**)
8	UnverifiedTransaction	/Send/UnverifiedTransactions	To get the transactions that were not verified. (*relates to the confirm transaction method*)
9	SendOTP	/Send/SendOTP	To send the OTP for creating the customer, send a Transaction, and create the CSP.
10	AcPayBankBranchList	/Send/AcPayBankBranchList	To get the Bank list of Nepal.
11	GetServiceCharge	/Send/GetServiceCharge	To get the Service Charge.
12	GetStateDistrict	/Send/GetStateDistrict	To get the State and District of India and Nepal. (**The parameters should be matched while calling the methods that have the state and District)**
13	GetStaticData	/Send/GetStaticData	To get the static data for validated parameters (*drop-down data*).
14	GetBalance	/Send/GetBalance	To check the available balance
15	UploadDocument	/Send/UploadDocument	To upload the sender document for **Nepalese Citizenship & Nepalese Passport**
16	SearchTransaction	/Send/SearchTransaction	To get the transaction status.
17	RegisterComplaint	/Send/RegisterComplaint	To generate a ticket for a complaint.
18	TrackComplaint	/Send/TrackComplaint	To track the generated complaint.

CONFIDENTIAL

3. HMAC Authentication

This HMAC-based authentication system ensures secure communication between clients and our ASP.NET Core API (SendAPI). It validates requests using a hashed signature derived from the request's body, method, URI, timestamp, and a secret key.

Authorisation Header Format

The Authorisation header must follow this format:

- Authorization: hmacauth {Username}:{Signature}:{Nonce}:{Timestamp}
- Username: A unique ID assigned to each client.
- Signature: A Base64-encoded HMAC-SHA256 hash.
- Nonce: A unique, one-time-use identifier (like a GUID).
- Timestamp: Unix epoch time (in seconds).

How Signature is Computed (Server)

message = AppId + HttpMethod + UrlEncodedUri + Timestamp + Nonce + Base64(MD5(body))
signature = Base64(HMACSHA256(UTF8Bytes(message), Base64Decoded(secret)))

Security Controls

- Replay protection: Timestamp is validated within a max age (Options.RequestMaxAgeInSeconds).
- Body hash check: Ensures integrity of the body using MD5.
- Logging: All requests are logged excluding Authorization headers.

Required Headers (Client Side)

Header	Description
Authorization	HMAC string as described above
Content-Type	Typically `application/json

Custom Error Codes

Code	Message	Description
1100	Signature is Invalid	Signature mismatch
1101	Missing/Invalid Header	Bad format or missing auth
1102	Request expired	Timestamp too old

CONFIDENTIAL

Client-Side C# Example

```
using System;
using System.Net.Http;
using System.Security.Cryptography;
using System.Text;
using System.Threading.Tasks;
public class HMACClient
{
 public async Task SendRequestAsync()
 {
 string appId = "YourAppIdHere";
 string secret = "YourBase64EncodedSecretHere";
 string nonce = Guid.NewGuid().ToString("N");
 string timestamp = ((long)(DateTime.UtcNow - new DateTime(1970, 1,
1)).TotalSeconds).ToString();
 string url = "https://yourapi.com/api/endpoint";
 string method = "POST";
 string body = "{\"sample\":\"data\"}"; //should be in json format
 string signature = ComputeSignature(appId, method, url, timestamp, nonce, body, secret);
 string authHeader = $"hmacauth {appId}:{signature}:{nonce}:{timestamp}";
 using var client = new HttpClient();
 client.DefaultRequestHeaders.Add("Authorization", authHeader);
 var content = new StringContent(body, Encoding.UTF8, "application/json");
 var response = await client.PostAsync(url, content);
 string result = await response.Content.ReadAsStringAsync();
 Console.WriteLine($"Response: {result}");
 }
 private string ComputeSignature(string appId, string method, string url, string timestamp,
string nonce, string body, string secretKey)
 {
 var uri = System.Web.HttpUtility.UrlEncode(url.ToLowerInvariant());
 var methodUpper = method.ToUpperInvariant();
 string bodyHash = "";
 if (!string.IsNullOrEmpty(body))
```

CONFIDENTIAL

```
 {
 using var md5 = MD5.Create();
 byte[] contentBytes = Encoding.UTF8.GetBytes(body);
 byte[] hash = md5.ComputeHash(contentBytes);
 bodyHash = Convert.ToBase64String(hash);
 }
 var message = $"{appId}{methodUpper}{uri}{timestamp}{nonce}{bodyHash}";
 byte[] keyBytes = Convert.FromBase64String(secretKey);
 byte[] messageBytes = Encoding.UTF8.GetBytes(message);
 using var hmac = new HMACSHA256(keyBytes);
 byte[] signatureBytes = hmac.ComputeHash(messageBytes);
 return Convert.ToBase64String(signatureBytes);
 }
}
```

CONFIDENTIAL

4. Process Flow

Step 1

Call **GetCustomerByMobile**

……..

Case 1: If the Customer is not found

Initiate **SendOTP** with Operation tagged **CreateCustomer**
Initiate **CreateCustomer**
[**ProcessID** and OTP given by sender should match]

Case 2: If Customer is Found

Follow the ***Customer KYC Integration Process** mentioned in this document.

……..
Go to Step 2
……..

Step 2: Create a Receiver with Mode of Payment

If the receiver is already there in response to **GetCustomerByMobile**, then no need to add again.

Case 1: Cash Payment:
Initiate **CreateReceiver**
[Go Step 3]

Case 2: Account Deposit
Call **AcPayBankBranchList** Take **BankDetails**
Initiate **CreateReceiver**
[Go Step 3]

Step 3:

- ✓ Check Customer Compliance; whether they can send transactions or not. Check the respective receiver details with available Payment types
- ✓ Get Customer confirmation, along with receiver details and payment type

Go to Step 4
[Else to go Step 1 or Step 2 based on the case]

Step 4:
Initiate **GetServiceCharge**
[Grab the required calculation and go to Step 5]

CONFIDENTIAL

Step 5:

Initiate **SendOTP** with Operation tagged **SendTransaction**
Initiate **SendTransaction**
[**ProcessID** and OTP given by the sender should be matched. Go to Step 6]

Step 6:

Initiate **ConfirmTransaction**
[For each Transaction, you need to verify (Like Checker/Maker)]

Step 7:

Initiate **Search Transaction**
Partners can view the status of the transaction by calling this method at any time

Step 8:

Initiate **Register Complaint**
Partners can generate the ticket by raising their queries or complaints for Agent Registration, Customer Registration, Receiver Registration or Transaction inquiry.

Step 9:

Initiate **Track Complaint**
Partners can track the complaint for closure.

.....

CONFIDENTIAL

5. Customer KYC Integration Process (for Partners)

Partners must capture **one of the following ID Types** during customer registration. Each ID Type has its own KYC verification flow and response logic.

ID Type	Description	Code
Aadhaar Card	eKYC through biometric authentication (real-time)	77
Nepalese Citizenship	Manual verification (document upload)	12
Nepalese Passport	Manual verification (document upload)	4

A. Aadhaar Card (ID Type: 77)
Aadhaar KYC is verified in real time through **eKYC API (biometric authentication)**.

API: GetCustomerByMobile
Response parameters to check:

"ekycStatus": "",
"onboardingStatus": ""

Verification Logic:

If

- ekycStatus = "Verified"
- onboardingStatus = "Success"

  → KYC **Completed** (Customer is eligible for transactions)
- Else
  → KYC **Not Completed**
  → Partner should call the **Token-based eKYC API (JSON-based)** to complete eKYC.

Example:

➢ **Verified Customer**

{

"idType": 77,

"ekycStatus": "Verified",

"onboardingStatus": "Success"

}

➢ **Pending eKYC**

{

"idType": 77,

"ekycStatus": "Unverified",

CONFIDENTIAL

"onboardingStatus": "Pending"

}

→ Action: Initiate Token-based eKYC API process.

Token-based eKYC API process:

Follow below of **Token Token-based eKYC API (JSON-based)** to complete the customer onboarding.

Case 1: (eKYC Status is Unverified and Onboarding Status is Pending)

**Separate Documents & Credentials shall be shared accordingly*

Base URL: https://ekyc-sandbox.prabhuindia.com/test/v1

- Token Generate: /auth/generatetoken [endpoint]
- eKYC Initiate: /customer/ekycinitiate [endpoint]

[Here Partner must display redirected URL (*RBL Page) where teller will type customer details and submit as below]

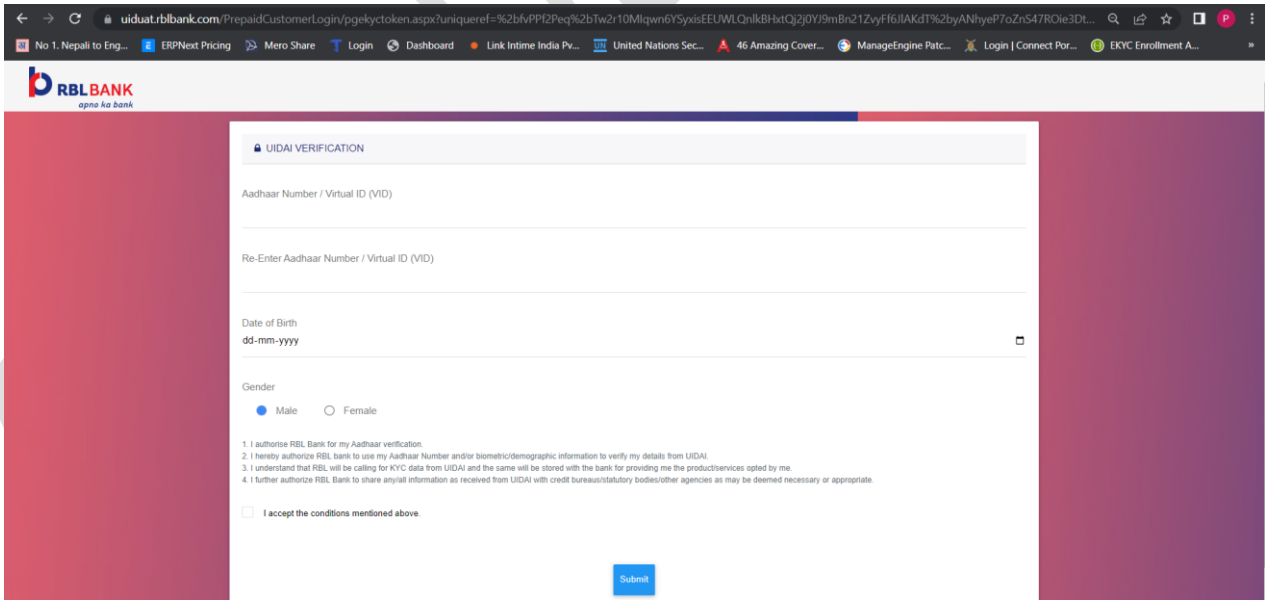

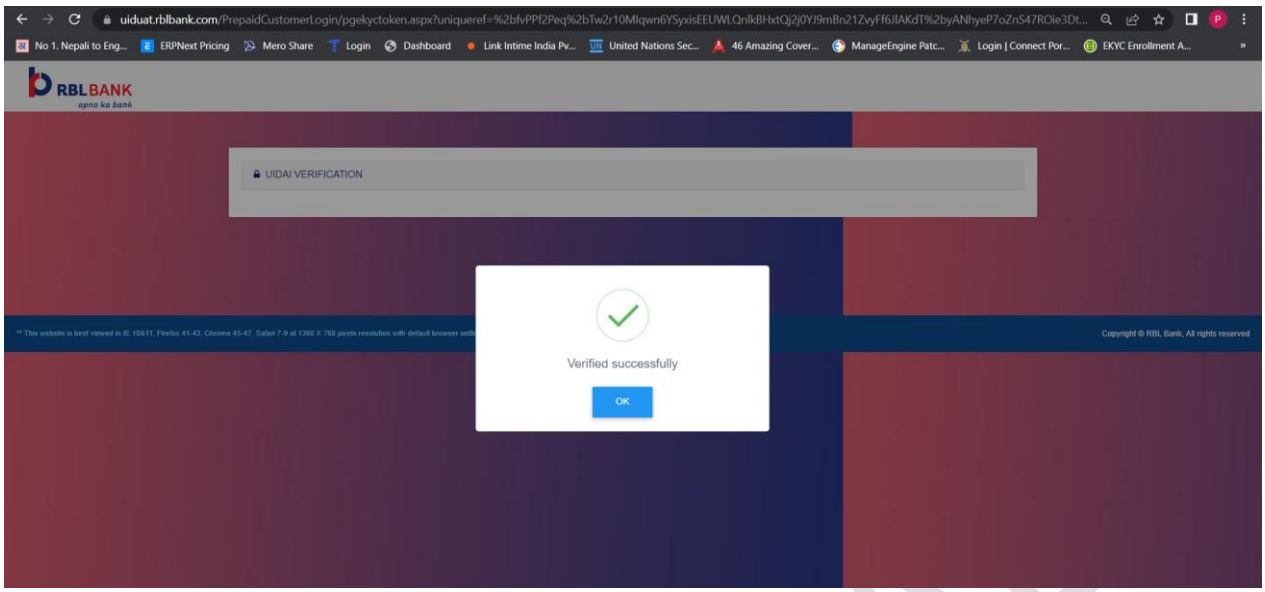

Partner needs to provide the landing page (static URL), which is required to redirect after the E-KYC enrolment initiation from the partner's end. For the Status of said customer done on RBL Bank, call the below API.

- ekycuniquerefstatus: /customer/ekycuniquerefstatus [endpoint]

  If Success: Go to Next API
  If Failed: Call ekycinitiate API with new PartnerUniqueRefNo

- eKYC Enrolment: /customer/ekycenrollment [endpoint]
- Onboarding: /customer/customeronboarding [endpoint]

Case 2: If Customer **EKYCStatus** is **Verified** and **OnboardingStatus** is **Pending**
[Call the **CustomerOnboarding** API from **Token-based eKYC API (JSON Based)**

Case 3: If Customer **EKYCStatus** is **Success** and **OnboardingStatus** is also **Success**

…
End
…

……..

[Goto Step 2 of Process Flow]

……

CONFIDENTIAL

B. **Nepalese Citizenship (ID Type: 12)**
C. **Nepalese Passport (ID Type: 4)**

Both follow **manual KYC verification** based on document upload and review by the Prabhu Money Transfer compliance team.

Check the KYC Document Guidelines and Samples KYC document for Physical KYC Approval by clicking the link. (**Guidelines link**)

API: GetCustomerByMobile
Response parameters to check:

"status": "",
"approveStatus": "",
"approveComment": ""

Verification Logic:

Response	Meaning	Action
"status": "Unverified", "approveStatus": "NoDocument"	No document uploaded	Upload the KYC document
"status": "Unverified", "approveStatus": "Pending"	Document uploaded, under review	Wait for compliance approval
"status": "Unverified", "approveStatus": "Rejected"	Document rejected by compliance	Check the approveComment for the reason and re-upload
"status": "Unverified", "approveStatus": "Reviewed"	Document re-uploaded, under re-review	Wait for the compliance decision
"status": "Verified", "approveStatus": "Approved"	KYC approved	The customer can transact

Example Responses:

- **No Document Uploaded**
  {
  "idType": 12,
  "status": "Unverified",
  "approveStatus": "NoDocument",
  "approveComment": ""
  }

- **Pending Review**
  {
  "idType": 4,
  "status": "Unverified",
  "approveStatus": "Pending",
  "approveComment": ""
  }

- **Rejected**
  {
  "idType": 12,

CONFIDENTIAL

"status": "Unverified",
"approveStatus": "Rejected",
"approveComment": "KYC Rejected: - Blurry image, please re-upload"
}

- **Approved**

{
"idType": 4,
"status": "Verified",
"approveStatus": "Approved",
"approveComment": "KYC Updated: Walk-In - Sender name, sender id doesn't falls on sanction list."
}

…
End
…

……..

[[Goto Step 2 of Process Flow]

…….

Transaction Eligibility Summary

ID Type	Verification Type	Eligibility Condition	Action if Not Verified
77 (Aadhaar)	Real-time eKYC	ekycStatus = Verified and onboardingStatus = Success	Complete through Token-based eKYC API
12 (Citizenship)	Document Upload	status = Verified and approveStatus = Approved	Upload document / wait for approval
4 (Passport)	Document Upload	status = Verified and approveStatus = Approved	Upload document / wait for approval

Notes for Partners

1. Partners must **validate KYC status before initiating any transaction**.
2. KYC completion status must be checked using the **GetCustomerByMobile** method each time before transaction initiation.
3. In case of **Aadhaar (77)**, if ekycStatus or onboardingStatus is not verified/success, partners must call the **Token-based eKYC API** to complete KYC.
4. For **Citizenship (12)** and **Passport (4)**, partners must integrate the **document upload** feature and handle status polling until approveStatus becomes **Approved**.
5. Transactions must be restricted until KYC is successfully completed and verified.

CONFIDENTIAL

6. Payment Type

We support the following payment methods.

Cash Payment:

- If you are sending transactions to pick up Cash with the Beneficiary Name & Valid Identity

Account Deposit:

- If you are sending transactions to deposit into the Account of Any Banks with the Beneficiary Name, Bank Name, and Account Number

7. Transactions Status

PrabhuINDIA has the following transaction statuses.

a. Hold
Once the transaction is initiated, the first txnStatus shown is Hold. Hold means the partner has not yet verified the transaction.

b. Un-Paid
Once the transaction is verified by the partner, the transaction status will be marked as **"Unpaid."** All generated transactions will undergo sanction screening. It also means processing the transaction from Compliance.

c. Post
After the screening is completed by Compliance, the status will be updated to "**Post**". This indicates that the transaction has been processed and approved by Compliance for posting. "**Post**" means the transaction is ready for collection or ready to be deposited in the payout system.

If the transaction remains in "**Post**" status for an extended period (i.e., 15 days), it will not be paid in Nepal and will be returned.

d. Paid
Once the payment is collected in pay-out side, then the transaction status will change to Paid. Paid stands for collected by the receiver or deposited into the receiver's account.

e. Cancelled
If the sender requests cancellation of the transaction within 15 days, it will be cancelled with OTP verification, and the collected amount will be refunded to the sender. The transaction status will be updated to "**Cancelled**".
"**Cancelled**" indicates that the amount has been refunded to the sender within 15 days.

f. Refunded
If the sender requests a refund after 15 days of the transaction, it will be cancelled with OTP verification, and only the principal amount (**excluding the service charge**) will be refunded to the sender. The transaction status will be updated to "**Refunded**".
"**Refunded**" indicates that the amount has been returned to the sender after 15 days.

CONFIDENTIAL

8. Account Pay Bank Branch List

This method will give you all the available Bank List with Respective branches for available Account Deposit services.

Note: Partner can also store the data and update the record in idle time (weekly or monthly basis).

URL: https://sandbox.prabhuindia.com/Sendapi/Send/GetAcPayBankBranchList

Request Header:
Content-Type: application/json
Authorization: {{signature}}

JSON Request

```
{
  "userName": "",
  "password": "",
  "country": "",
  "state": "",
  "district": "",
  "city": "",
  "bankName": "",
  "branchName": ""
}
```

JSON Response

```
{
  "code": "",
  "message": "",
  "bankBranches": [
    {
      "bankBranchId": "",
      "bankName": "",
      "branchName": "",
      "branchCode": "",
      "routingCode": "",
      "country": "",
      "address": "",
      "state": "",
      "district": "",
      "city": "",
      "phoneNumber": ""
    },
    {
      "bankBranchId": "",
      "bankName": "",
      "branchName": "",
      "branchCode": "",
      "routingCode": "",
      "country": "",
      "address": "",
      "state": "",
      "district": "",
      "city": "",
      "phoneNumber": ""
    }
  ]
}
```

CONFIDENTIAL

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
UserName	String	20	api-key provided by Prabhu	M
Password	String	20	api-secret provided by Prabhu	M
Country	String	10	**Nepal** as Hardcode	M
State	String	20		O
District	String	20		O
City	String	20		O
BankName	String	50		O
BranchName	String	50		O
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String		- 000 means 'Success' - *For others, check the Error Code and Message below*	M
Message	String		- Success - *Error Message mentioned below*	M
BankBranchId	String		Mandatory for Account Deposit	M
BankName	String		Bank Name	M
BranchName	String		Bank Branch Name	M
BranchCode	String		Branch Code Assigned	O
RoutingCode	String		Routing Code of Bank Branch	O
Country	String		Country of Bank Location	O
Address	String		Address of Bank Location	O
State	String		State of Bank Location	O
District	String		District of Bank Location	O
City	String		City of Bank Location	O
PhoneNumber	String		Bank Branch Phone Number	O

Error Code	Message
021	User Name Required
022	Password Required
023	Country Required
666	No Record Found

CONFIDENTIAL

9. Get Service Charge

This method will provide a service charge in response, as per the provided Transfer Amount, Payment Mode, and Customer ID.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/GetServiceCharge	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": "",
"country": "",
"paymentMode": "",
"transferAmount": "",
"payoutAmount": "",
"bankBranchId": "",
"isNewAccount": "",
"customerId":""
}
	{
	"code": "",
	"message": "",
	"collectionAmount": ,
	"collectionCurrency": "",
	"serviceCharge": ,
	"transferAmount": ,
	"exchangeRate": ,
	"payoutAmount": ,
	"payoutCurrency": ""
	}

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
UserName	String	20	api-key provided by Prabhu	M
Password	String	20	api-secret provided by Prabhu	M
Country	String	5	**NPL** as Hardcode	M
PaymentMode	String	20	Possible Value : **Cash Payment**, **Account Deposit**	M
TransferAmount	String	5	Send Amount without Service Charge	C
PayoutAmount	String	5	Payout Amount will be Mandatory if the Transfer Amount not Provided	C
BankBranchId	String	20	Get it from Method **AcPayBankBranchList**	O
IsNewAccount	String	1		O
customerId	String	20	Get it from the response of the Method **GetCustomerByMobile**	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String		- 000 means 'Success' - *For others, check the Error Code and Message below*	M

CONFIDENTIAL

Request Field				
Message	String		- Success - *Error Message mentioned below*	M
CollectionAmount	Number		Value will only return on Success	M
CollectionCurrency	String		Response will be “INR” if sending from India. Only returned on Success	M
ServiceCharge	Number		Value will only return on Success	M
TransferAmount	Number		Value will only return on Success	M
ExchangeRate	Number		Value will be returned on Success on the basis of Sendand Payout Country	M
PayoutAmount	Number		Value will be returned on Success and Calculated asTransferAmount X ExchangeRate	M
PayoutCurrency	String		INR if Payout Country India, otherwise currency of PayoutCountry i.e., NPR if payout country Nepal.	M

Error Code	Message
021	User Name Required
022	Password Required
023	Country Required
024	Payment Mode Required
026	Invalid Payment Mode. Only 'ACCOUNT DEPOSIT' or 'CASH PAYMENT' are allowed.
027	Customer id is required
1001	Commission is not define. Please contact to administrator.
1002	Customer not found.
1003	Transfer Amount or Payout Amount is Required!!
1004	Invalid Country. Only Nepal is allowed.
1006	Amount is invalid !! The maximum sending cap is INR. 50000 including charge.

CONFIDENTIAL

10. Get Static Data

This method provides the value of a specific field (Type) to be passed in different methods, while consuming the PrabhuINDIA API. If other than the given values are passed, then PrabhuINDIA shall reject the transactions.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/GetStaticData	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": "",
"type": ""
}
	{
	"code": "",
	"message": "",
	"dataList": [
	{
	"value": "",
	"label": ""
	},
	{
	"value": "",
	"label": ""
	},
	{
	"value": "",
	"label": ""
	}
	]
	}

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
UserName	String	20	api-key provided by Prabhu	M
Password	String	20	api-secret provided by Prabhu	M
Type	String	50	**Type Value** Gender, Nationality, IDType, SourceofFund, Relationship, PaymentMode, RemittanceReason, EntityType, Device, Connectivity, OffDay, SOURCEINCOMETYPE, CUSTOMERTYPE, CQualification, NepaleseIdType, Courses, Category, AnnualIncome, PhysicallyHandicapped, ComplainType, ComplainCategory	M

CONFIDENTIAL

Request Field				
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String		- 000 means 'Success' - *For others, check the Error Code and Message below*	M
Message	String		- Success - *Error Message mentioned below*	M
DataList			Value will only be returned on Success	M

Error Code	Message
021	User Name Required
022	Password Required
023	Type Required, Invalid Type, Value must either of Gender, Nationality, IDType, SourceofFund, Relationship, PaymentMode, RemittanceReason, EntityType, Device, Connectivity, OffDay, SOURCEINCOMETYPE, CUSTOMERTYPE, CQualification, NepaleseIdType, Courses, Category, AnnualIncome, PhysicallyHandicapped,ComplainType, ComplainCategory
024	Invalid Type, Value must either of Gender, Nationality, IDType, SourceofFund, Relationship, PaymentMode, RemittanceReason, EntityType, Device, Connectivity, OffDay, SOURCEINCOMETYPE, CUSTOMERTYPE, CQualification, NepaleseIdType, Courses, Category, AnnualIncome, PhysicallyHandicapped,ComplainType, ComplainCategory

CONFIDENTIAL

11. Get State District

This method provides a list of available States, Districts, and State Codes as per the country. The partner should map and send the respective value while registering the sender, registering the CSP, registering the receiver, and sending transactions.

Type of Country

- India
- Nepal

Note: Details for India are for registering the Sender and CSP, while details for Nepal are for registering the receiver.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/GetStateDistrict	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": "",
"country": ""
}
	{
	"code": "",
	"message": "",
	"data": [
	{
	"state": "",
	"district": "",
	"stateCode": "",
	"localLevel": ""
	},
	{
	"state": "",
	"district": "",
	"stateCode": "",
	"localLevel": ""
	}
	]
	}

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
UserName	String	20	api-key provided by Prabhu	M
Password	String	20	api-secret provided by Prabhu	M
Country	String	5	Possible Value: - India or IND - Nepal or NPL	M
Response Field				

CONFIDENTIAL

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String		- 000 means 'Success' - *For others, check the Error Code and Message below*	M
Message	String		- Success - *Error Message mentioned below*	M
Data			Value will only return on Success	M

Error Code	Message
021	User Name Required
022	Password Required
023	Country Required
024	Invalid Country!!

CONFIDENTIAL

12. Get Customer by Mobile

This method is used to retrieve the details of an existing customer from the PrabhuIndia system using the sender's mobile number, for all KYC types (*i.e., 4, 12 & 77*). If the partner intends to process a transaction for an existing customer, they must call this method to fetch the customer details and use the same information while submitting the transaction.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/GetCustomerByMobile

Request Header:
Content-Type: application/json
Authorization: {{signature}}

JSON Request

```
{
  "userName": "",
  "password": "",
  "customerMobile": ""
}
```

JSON Response

```
{
   "code": "",
   "message": "",
   "customers": [
      {
         "customerId": "",
         "name": "",
         "mobile": [
            ""
         ],
         "status": "",
         "approveStatus": "",
         "approveComment": "",
         "ids": [
            {
               "idType": ""
            }
         ],
         "transactionCount": {
            "day": "",
            "month": "",
            "year": ""
         },
         "ekycStatus": "",
         "onboardingStatus": "",
         "receivers": [
            {
               "receiverId": "",
               "name": "",
               "paymentMode": "",
               "bankName": "",
               "acNumber": ""
            },
            {
```

CONFIDENTIAL

URL: https://sandbox.prabhuindia.com/Sendapi/Send/GetCustomerByMobile	
	"receiverId": "", "name": "", "paymentMode": "", "bankName": "", "acNumber": "" }] }] }

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
UserName	String	20	api-key provided by Prabhu	M
Password	String	20	api-secret provided by Prabhu	M
CustomerMobile	String	10	Customer registered Mobile Number	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String		- 000 means 'Success' - *For others, check the Error Code and Message below*	M
Message	String		- Success - *Error Message mentioned below*	M
Customers	String		Information of Customer, Receivers and Counts with KYC Status	M

Error Code	Message
021	User Name Required
022	Password Required
023	Customer Mobile Required
666	No Record Found

CONFIDENTIAL

13. Get Customer by ID

This method is used to retrieve the details of an existing customer from the PrabhuIndia system using the sender's ID number, for KYC types (*i.e., 4 & 12*). If the partner intends to process a transaction for an existing customer, they must call this method to fetch the customer details and use the same information while submitting the transaction.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/GetCustomerById

Request Header:
Content-Type: application/json
Authorization: {{signature}}

JSON Request

```
{
  "userName": "",
  "password": "",
  "customerIdNo": ""
}
```

JSON Response

```
{
   "code": "",
   "message": "",
   "customers": [
      {
         "customerId": "",
         "name": "",
         "mobile": [
            ""
         ],
         "status": "",
         "approveStatus": "",
         "approveComment": "",
         "ids": [
            {
               "idType": ""
            }
         ],
         "transactionCount": {
            "day": "",
            "month": "",
            "year": ""
         },
         "ekycStatus": "",
         "onboardingStatus": "",
         "receivers": [
            {
               "receiverId": "",
               "name": "",
               "paymentMode": "",
               "bankName": "",
               "acNumber": ""
            },
            {
```

CONFIDENTIAL

URL: https://sandbox.prabhuindia.com/Sendapi/Send/GetCustomerById	
	"receiverId": "", "name": "", "paymentMode": "", "bankName": "", "acNumber": "" }] }] }

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
UserName	String	20	api-key provided by Prabhu	M
Password	String	20	api-secret provided by Prabhu	M
customerIdNo	Number	50	Customer registered ID Number	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String		- 000 means 'Success' - *For others, check the Error Code and Message below*	M
Message	String		- Success - *Error Message mentioned below*	M
Customers	String		Information of Customer, Receiver and Count with KYC Status	M

Error Code	Message
021	User Name Required
022	Password Required
023	Customer Id Number is Required
666	No Record Found

CONFIDENTIAL

14. Send OTP

This method is used to generate and send a One-Time Password (OTP) to the customer's registered mobile number as per the applicable operation. PrabhuINDIA will send the OTP, and the customer must share the OTP with the teller for verification. The transaction or request will be processed successfully only if the entered OTP matches; otherwise, it will be rejected.

This OTP validation process is applicable to SendTransaction, CreateCSP, and CreateCustomer operations.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/SendOTP	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": "",
"operation": "",
"mobile": "",
"customerId": "",
"receiverId": "",
"customerFullName": "",
"pinNo": "",
"paymentMode": "",
"sendAmount": "",
"cspMobile": "",
"cspName": "",
"IDType":""
}
	{
	"code": "",
	"message": "",
	"processId": ""
	}

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
UserName	String	20	api-key provided by Prabhu	M
Password	String	20	api-secret provided by Prabhu	M
Operation	String	20	**Possible Value:** CreateCustomer, SendTransaction, CreateCSP	M
Mobile	String	10	Sender Mobile is mandatory on the operation tag: **CreateCustomer** and **SendTransaction**	C
CustomerId	String	10	Mandatory on the Operation tag: **SendTransaction** (get value from **GetCustomerbyMobile** response)	C
ReceiverId	String	10	Mandatory on the Operation tag:	

CONFIDENTIAL

Request Field				
			SendTransaction (get value from **GetCustomerbyMobile** response)	C
customerFullName	String	50	Mandatory on the Operation tag: **CreateCustomer**	C
PinNo	String	20		O
PaymentMode	String	50	Mandatory on the Operation tag: **SendTransaction** (get value from **GetCustomerbyMobile** response with respective ReceiverId)	C
SendAmount	String	5	Mandatory on the operation tag: **SendTransaction** (Send Amount without Service Charge)	C
cspMobile	String	20	Mandatory on the operation tag: **CreateCSP**	C
cspName	String	50	Mandatory on the operation tag: **CreateCSP**	
IDType	String	5	Mandatory on the Operation tag: **CreateCustomer**	C
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String		- 000 means 'OTP Sent Successfully - *For others, check the Error Code and Message below*	M
Message	String		- OTP Sent Successfully - *Error Message mentioned below*	M
ProcessID	Decimal		Value will only return on Success	O

Note: Grab ProcessID as per the operation and match it with OTP sent to the respective mobile number via the respective method to complete the transactions.

Error Code	Message
002	Customer with Mobile already Exists
006	Provided Mobile Number doesnot belongs to Customer with provided CustomerID
007	Provided Receiver doesnot belongs to Customer
009	Provided Payment Type Doesnot match with Payment type of Receiver
021	User Name Required
022	Password Required

CONFIDENTIAL

Error Code	Message
023	Operation Required
024	Invalid Mobile Number
025	SendAmount Required
026	Invalid Operation, Value must either of CreateCustomer, SendTransaction, CreateCSP
027	CustomerId Required
028	PaymentMode Required
029	Id Type is Required !!.
030	Customer Full Name is Required !!.
032	Invalid PaymentMode it should be either Cash Payment or Account Deposit
033	ReceiverId Required
034	Invalid Id Type, it should be either 77, 12 or 4
035	CSP Mobile Number is Required !!.
036	CSP Name is Required !!.
099	Provided Payment Amount is greater than Transaction limit !!

CONFIDENTIAL

15. Create Customer

This method is used to register a customer. During customer registration, OTP verification is mandatory. PrabhuINDIA shall send an OTP to the mobile number provided by the customer. The customer must share the OTP with the teller, and the customer will be successfully created only if the OTP matches. Otherwise, the registration will be rejected.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/CreateCustomer	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": "",
"firstName": "",
"middleName": "",
"lastName": "",
"gender": "",
"dobAD": "",
"mobile": "",
"temporaryAddress": "",
"temporaryState": "",
"temporaryDistrict": "",
"temporaryCity": "",
"temporaryPINCode": "",
"nationality": "",
"permanentAddress": "",
"permanentState": "",
"permanentDistrict": "",
"permanentLocalLevel": "",
"permanentWardNo": "",
"fatherName": "",
"email": "",
"employer": "",
"idType": "",
"idNumber": "",
"citizenshipNo": "",
"idIssuedDateAD": "",
"idExpiryDate": "",
"idIssuedPlace": "",
"otpProcessId": "",
"otp": "",
"customerType": "",
"sourceIncomeType": "",
"annualIncome": "",
	{
	"code": "",
	"message": "",
	"customerId": ""
	}

CONFIDENTIAL

URL: https://sandbox.prabhuindia.com/Sendapi/Send/CreateCustomer	
"cspCode": "" }	

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
userName	String	20	api-key provided by Prabhu	M
password	String	20	api-secret provided by Prabhu	M
firstName	String	50	First Name of Remitter (Sender)	M
middleName	String	50	Middle Name of Remitter (Sender)	O
lastName	String	50	Last Name of Remitter (Sender)	O
gender	String	10	Get value from the **GetStaticData** method **(M / F / O)**	M
dobAD	String	10	Format YYYY-MM-DD	M
mobile	String	10	Mobile Number of Sender	M
temporaryAddress	String	100	Residence Address of sender (India)	M
temporaryState	String	50	Residence State of Sender (India) Get data from the **GetStateDistrict** Method and pass the **StateCode** Value	M
temporaryDistrict	String	50	Residence District of Sender (India) Get data from the **GetStateDistrict** Method	M
temporaryCity	String	50	Residence City of the Sender (India)	M
temporaryPINCode	String	6	Residence PIN Code of the Sender (India)	M
nationality	String	100	Pass **NPL** as Hardcode	M
permanentAddress	String	100	Permanent Address of Sender (Nepal)	M
permanentState	String	50	Permanent State of Sender (Nepal) Get data from the **GetStateDistrict** Method	M
permanentDistrict	String	50	Permanent District of Sender (Nepal) Get data from the **GetStateDistrict** Method	M
permanentLocalLevel	String	50	Permanent Local Level of Sender (Nepal) Get data from the **GetStateDistrict** Method	M
permanentWardNo	String	2	Permanent Ward No of Sender (Nepal)	M
fatherName	String	50	Father's Name of the Sender	O
email	String	100	Email ID of the Sender	O
employer	String	100	Name of Company Where Sender Works	M
idType	String	50	Get value from the **GetStaticData** Method with type **IDType**.	M
idNumber	String	20	ID Number of the Sender as per the IDType	M
citizenshipNo	String	50	A Nepalese Citizenship Number is mandatory when IDType is 4	C

CONFIDENTIAL

Request Field				
idIssuedDateAD	String	10	Format YYYY-MM-DD Mandatory when IDType is 12 & 4	C
idExpiryDate	String	10	Format YYYY-MM-DD Mandatory when IDType is 4	C
idIssuedPlace	String	50	ID Issued Place of Sender Mandatory when IDType is 12 & 4	C
otpProcessId	String	200	Get value from the response of the **SendOTP** Method	M
otp	String	6	Collect OTP from the Sender and pass it here.	M
customerType	String	5	Get value from the **GetStaticData** Method with type **CustomerType**.	M
sourceIncomeType	String	5	Get value from the **GetStaticData** Method with type **SourceIncomeType**	M
annualIncome	String	5	Get value from the **GetStaticData** Method with type **annualIncome**	M
cspCode	String	20	Agent's unique identification number of Partner	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
code	String		- 000 means 'Customer Created Successfully.' - *For others, check the Error Code and Message below*	M
message	String		- Customer Created Successfully. - *Error Message mentioned below*	M
customerId	Number		CustomerID of the registering Customer	M

Error Code	Message
021	User Name Required
022	Password Required
023	First Name Required
024	Invalid First Name, Special Characters and Numbers not allowed.
025	Gender Required
027	Invalid Middle Name, Special Characters and Numbers not allowed.
028	Invalid Last Name, Special Characters and Numbers not allowed.
029	Mobile Required
030	Invalid Mobile Number
032	Permanent State Required

CONFIDENTIAL

Error Code	Message
032	Temporary Address Required
033	Permanent Address Required
034	Temporary State Required
035	Permanent District Required
036	ID IssuedDate AD Required
037	ID Issued Place Required
038	Employer Required
039	IDType Required
040	- Invalid ID Type !!. - IDNumber Required - IDNumber length must be exactly 4 or 12.
041	ID Expiry Date AD Required
042	OTPProcessId Required
043	OTP Required
044	Invalid Gender
045	CSPCode Required
046	Nationality Required
047	Temporary District Required
048	Permanent Local Level Required
049	Temporary City Required
050	Permanent Ward No Required
051	Permanent Ward No must be exactly 2 numeric digits
052	Temporary PIN Code Required
053	Temporary PIN Code must be exactly 6 numeric digits
054	CustomerType is Required
055	AnnualIncome is Required
056	SourceIncomeType is Required
057	Invalid Nationality, Value must be NPL
058	Temporary State is not valid
059	Temporary District is not valid
060	Permanant State is not valid
061	Permanant District is not valid
062	Permanant Local Level is not valid
063	Value SourceIncomeType is not valid
064	Value AnnualIncome is not valid
065	Value IDType is not valid

CONFIDENTIAL

Error Code	Message
066	DOB AD Required
067	DOB AD must be in format yyyy-MM-dd
1	- CSPCode …… not Registered or Not enabled for Indo-Nepal Remittance. - Invalid Mobile OTP [001] - Mobile number ……. found already registered

CONFIDENTIAL

16. Upload Document

This method is used to upload the Customer Identification Document (ID scan copy) for compliance verification, as required by the licensing authority. The image must be converted to Base64 format with the correct file name and extension. The uploaded image should be viewable in the PrabhuINDIA system.

The following three files must be uploaded:

1. **frontImgFileBase64** – ID Card (Front)
2. **backImgFileBase64** – ID Card (Back)
3. **additionalImgFileBase64** – Customer photograph holding the ID card in hand at the counter

Note: The API may return a successful response even if the Base64 conversion is incorrect. Therefore, please verify the uploaded images in the PrabhuINDIA portal before going live.

This method is applicable only for **IDType 4 (Passport)** and **IDType 12 (Citizenship Card)**. Do not upload documents for **IDType 77 (Aadhaar Card)**.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/UploadDocument	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": "",
"customerId": "",
"idType": "",
"frontImgFileBase64": "",
"backImgFileBase64": "",
"additionalImgFileBase64": ""
}
	{
	"code": "",
	"message": ""
	}

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
userName	String	20	api-key provided by Prabhu	M
password	String	20	api-secret provided by Prabhu	M
customerId	Number	10	CustomerID responded to **GetCustomerByMobile**	M
idType	String	2	IDType responded to **GetCustomerByMobile**	M
frontImgFileBase64	Data Stream	2MB	Front Face of ID Card. OSV by the agent and Customer Signatory is Mandatory before uploading the file. Base64 Conversion of the File data required to be uploaded	M

CONFIDENTIAL

Request Field				
backImgFileBase64	Data Stream	2MB	Back Face of ID Card. OSV by the agent and Customer Signatory is Mandatory before uploading the file. Base64 Conversion of the File data required to be uploaded	M
additionalImgFileBase64	Data Stream	2 MB	Customer photograph holding the ID card in their hand at the counter. Base64 Conversion of the file data required to be uploaded	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String		- 000 means 'Success' - *For others, check the Error Code and Message below*	M
Message	String		- Success - *Error Message mentioned below*	M

Error Code	Message
021	User Name Required
022	Password Required
024	IdType is Required
025	CustomerId is Required
026	FrontImgFileBase64 is not a valid Base64 string
027	Front Image FileBase64 is Required
028	Back Image FileBase64 is Required
029	Additional Image FileBase64 is Required
036	- Invalid Id Type, it should be value for Citizenship or Passport - Mismatched Id Type While checking with the Customer Id !!.
100	Customer KYC is Already Verified.
101	Customer Record not Found !!.
999	Uploading document failed

CONFIDENTIAL

17. Create Receiver

This method is used to create the receiver with the respective sender.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/CreateReceiver	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": "",
"customerId": "",
"firstName": "",
"middleName": "",
"lastName": "",
"gender": "",
"mobile": "",
"relationship": "",
"address": "",
"state": "",
"district": "",
"localLevel": "",
"country": "",
"paymentMode": "",
"bankBranchId": "",
"accountNumber": "",
"nepaleseIdType": "",
"nepaleseIdNumber": "",
"nepaleseIdIssueDistrict": "",
"nepaleseIdIssueDate": "",
"nepaleseIdExpiryDate": "",
"nepaleseIdIssueCountry": ""
}
	{
	"code": "",
	"message": "",
	"receiverId": ""
	}

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
userName	String	20	api-key provided by Prabhu	M
password	String	20	api-secret provided by Prabhu	M
customerId	String	10	Get it from the response of the Method **GetCustomerByMobile**	M
firstName	String	50	First Name of Receiver	M
middleName	String	50	Middle Name of Receiver	O

CONFIDENTIAL

Request Field				
lastName	String	50	Last Name of Receiver	O
gender	String	10	Get value from the **GetStaticData** method **(M / F / O)**	M
mobile	String	50	Mobile Number of Receiver	M
relationship	String	50	Get label from the **GetStaticData** method with type **Relationship**	M
address	String	100	Address of Receiver (Nepal)	M
state	String	50	State of Receiver (Nepal) Get data from the **GetStateDistrict** Method	M
district	String	50	District of Receiver (Nepal) Get data from the **GetStateDistrict** Method	M
localLevel	String	50	Local Level of Receiver (Nepal) Get data from the **GetStateDistrict** Method	M
country	String	5	**Nepal** as Hardcode	M
paymentMode	String	20	Possible Value: **Cash Payment**, **Account Deposit**	M
bankBranchId	String	20	Get it from Method **AcPayBankBranchList** Mandatory when Payment Mode is **Account Deposit**	C
accountNumber	String	20	Receiver Bank Account Number Mandatory when Payment Mode is **Account Deposit**	C
nepaleseIdType	String	20		O
nepaleseIdNumber	String	50		O
nepaleseIdIssueDistrict	String	50		O
nepaleseIdIssueDate	String	20		O
nepaleseIdExpiryDate	String	20		O
nepaleseIdIssueCountry	String	20		O
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String		- 000 means 'Receiver created successfully.' - *For others, check the Error Code and Message below*	M
Message	String		- Receiver created successfully. - *Error Message mentioned below*	M
receiverId	Number		Responded with the receiver ID if Success	M

CONFIDENTIAL

Error Code	Message
021	User Name Required
022	Password Required
023	Customer Id No Required
024	First Name Required
025	Gender Required
026	Mobile Required
027	Relationship Required
028	Address Required
029	Payment Mode Required
030	Payment Mode Invalid !!. It should be either Cash Payment or Account Deposit
031	BankBranchId and AccountNumber are mandatory for Account Deposit payment mode
032	Receiver Country Mode Required
033	Invalid Country Name
034	Receiver State Mode Required
035	Receiver District Mode Required
036	State is not valid
037	District is not valid
038	Local Level is not valid
039	Mobile No length should be 10
1	- Provided Customer Id is Not Found !! - Receiver Mobile is already registered with Same Name - Receiver Mobile is already register with another receiver name - Receiver Mobile is already registered with Same Name and same Account - Provided Bank Branch Id Not Found !! - Receiver Mobile is already registered with Same Name and same Account - Receiver is already registered with Same Name and same Account - Receiver is already registered with Same Name
04	Relation Ship is not valid

CONFIDENTIAL

18. Send Transaction

This method is used to send a transaction. The request parameters must be taken from the **GetCustomerByMobile** or **GetCustomerID** methods. If the values passed do not match the data available in the PMT database, it will return an error.

Highly Important Instruction:

- Response Code 000 indicates Success.
- Response Code 999 indicates a timeout from the PMT database.

If **Response Code 999** is received, or if no response is received from the **SendTransaction API** (due to a delay in response from the PMT system to the partner), mark the transaction status as "**Success Unknown**"

Then, verify the transaction using the **SearchTransaction API** with **PartnerPinNo**.

- If the response is received with the **transactions** parameter (i.e., **pinNo**), update the transaction status according to the **txnStatus** parameter.

If no response is received, contact the **PMT OPS Team** and update the transaction status based on the confirmation provided by the **PMT OPS Team**.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/SendTransaction	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": "",
"customerId": ,
"senderName": "",
"senderMobile": "",
"senderIDType": "",
"receiverId": ,
"receiverName": "",
"sendCountry": "",
"payoutCountry": "",
"paymentMode": "",
"collectedAmount": "",
"serviceCharge": "",
"sendAmount": "",
"sendCurrency": "",
"payAmount": "",
"payCurrency": "",
"exchangeRate": "",
"accountNumber": "",
"partnerPinNo": "",
"remittanceReason": "",
	{
	"code": "",
	"message": "",
	"transactionId": ,
	"pinNo": ""
	}

CONFIDENTIAL

URL: https://sandbox.prabhuindia.com/Sendapi/Send/SendTransaction	
"SourceOfFund":"", "cspCode": "", "otpProcessId": "", "otp": "" }	

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
userName	String	20	api-key provided by Prabhu	M
password	String	20	api-secret provided by Prabhu	M
customerId	integer	10	Get it from the response of the Method **GetCustomerByMobile**	M
senderName	String	100	As per the response in the GetCustomer Method	M
senderMobile	String	10	As per the response in the GetCustomer Method	M
senderIDType	String	10	As per the response in the GetCustomer Method	M
receiverId	integer		As per the response in the GetCustomer Method	M
receiverName	String	50	As per the response in the GetCustomer Method	M
sendCountry	String	5	**India** as Hardcode	M
payoutCountry	String	5	**Nepal** as Hardcode	M
paymentMode	String	50	As per the response in the GetCustomer Method	M
collectedAmount	Decimal	5	Total Amount Collected from Customer	M
serviceCharge	Decimal	5	Service charge that is received from the **GetServiceCharge** Medhod	M
sendAmount	Decimal	5	Send amount without service charge	M
sendCurrency	String	3	**INR** as Hardcode	M
payAmount	Decimal	5	PayoutAmount that is received from the **GetServiceCharge** Method.	M
payCurrency	String	3	**NPR** as Hardcode	M
exchangeRate	Decimal		The exchange rate received from the **GetServiceCharge** Method.	M
accountNumber	String	22	As per the response in the GetCustomer Method Mandatory if **PaymentMode** is **Account Deposit**	C
partnerPinNo	String	16	Unique Transaction Identifier of Partner	M
remittanceReason	String	20	Get value from the **GetStaticData** Method with type as **RemittanceReason**.	M
SourceOfFund	String	20	Get value from the **GetStaticData** Method with type as **SourceOfFund**.	M

CONFIDENTIAL

Request Field				
cspCode	String	20	CSP Code of the requested merchant that is provided while doing the EKYA process for that location. Unique Identification agent Code of the partner.	M
otpProcessId	String	200	Get it from the response of the Method **SendOTP**	M
otp	Number	6	Collect the OTP that comes to the registered mobile number of the remitter.	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String	3	- 000 means 'Success' - *For others, check the Error Code and Message below*	M
Message	String	200	- Success - *Error Message mentioned below*	M
TransactionId	Int		It will respond as null	O
PinNo	String	20	16-digit transaction PIN (Return if success).	C

Error Code	Message
021	User Name Required
022	Password Required
023	Sender Name Required
029	Sender Mobile Required
035	Sender ID Type Required
037	Receiver Name Required
041	Sender Country Required
042	Value …. is not valid for Sender Country
043	Payout Country Required
044	Value …. is not valid for Payout Country
045	Payment Mode Required
046	Collected Amount Required
047	Service Charge Required
049	Send Amount Required
049	Send Currency should be the Indian Currency
050	Payout Amount should be according to Sending Amount
051	Pay Currency Required
052	Pay Currency should be the Nepali Currency
053	Exchange Rate Required
054	Exchange Rate should be 1.6

CONFIDENTIAL

Error Code	Message
055	Partner PinNo Required
056	Remittance Reason Required
057	CSP Code Required
058	Invalid Payment Mode
059	Value RemittanceReason is not valid
060	Value for Source of fund is required
061	Value Source of Fund is not valid
062	OTPProcessId Required
063	Account Number Required
065	Send Currency Required
070	OTP Required
001	Invalid Mobile OTP [001]
101	The transaction has been already generated with the same receiver's name and the same amount. If you want to send it again, please try after 5 min
108	Something went wrong. Service charge is Invalid. Please re-try it again
110	Service Charge Mismatch.Collected Amount and Send Amount Difference
205	Invalid Sender Name While Checking with Customer Detail
211	Invalid Sender Mobile While Checking with Customer Detail
213	Invalid Reciver Name While Checking with Receiver Detail
217	Invalid PaymentMode While Checking with Receiver Detail
219	Invalid ACNumber While Checking with Receiver Detail
305	CSPCode ….. not Registered or Not enabled for Indo-Nepal Remittance.

CONFIDENTIAL

19. Confirm Transaction (Verify Transaction)

All the transactions need to be approved through this method to make them available for payment. As soon as transactions are successful with the Send Transactions method; need to verify/approve from verify transactions.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/ConfirmTransaction	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": "",
"pinNo": ""
}
	{
	"code": "",
	"message": "",
	"pinNo":
	}

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
UserName	String	20	api-key provided by Prabhu	M
Password	String	20	api-secret provided by Prabhu	M
PinNo	String	20	The Transactions which requesting approval	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String	3	- 000 means 'Success' - *For others, check the Error Code and Message below*	M
Message	String	200	- Success - *Error Message mentioned below*	M
PinNo	String	20	Provided PIN NUMBER	M

Error Code	**Message**
021	User Name Required
022	Password Required
053	PinNo Required

CONFIDENTIAL

20. Unverified Transaction

All the transactions need to approve from this menu to make available for the payment. As soon as transactions get success with Send Transactions method; need to verify/approve from verify transactions.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/UnverifiedTransactions	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": ""
}
	{
	"transactions": [
	{
	Txn details 1
	},
	{
	Txn Details 2
	}
	],
	"code": "000",
	"message": "Success"
	}

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
UserName	String	20	api-key provided by Prabhu	M
Password	String	20	api-secret provided by Prabhu	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String	3	- 000 means 'Success' - *For others, check the Error Code and Message below*	M
Message	String	200	- Success - *Error Message mentioned below*	M
PinNo	String	20	Provided PIN NUMBER	M

Error Code	**Message**
021	User Name Required
022	Password Required
053	PinNo Required

CONFIDENTIAL

21. Search Transaction

The partner can retrieve the transaction status by calling this method. It also enables the partner to reconcile transactions within their system. Please take appropriate action based on the value received in the **TxnStatus** field. If the response is **"Hold,"** then call the **ConfirmTransaction** method.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/SearchTransaction	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": "",
"pinNo": "",
"partnerPinNo": "",
"fromDate": "",
"toDate": ""
}
	{
	"code": "",
	"message": "",
	"transactions": [
	]
	}

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
UserName	String	20	api-key provided by Prabhu	M
Password	String	20	api-secret provided by Prabhu	M
PinNo	String	20	The PinNo whose status is to be known	O
PartnerPinNo	String	100	The PartnerPinNo whose status is to be known	O
FromDate	String	10	ISO8601 Date Standard (yyyy-mm-ddThh:mi:ss.mmm)	O
ToDate	String	10	ISO8601 Date Standard (yyyy-mm-ddThh:mi:ss.mmm)	O
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String	3	- 000 means 'Success' - *For others, check the Error Code and Message below*	M
Message	String	200	- Success - *Error Message mentioned below*	M
transactions	String	20	Detailed List of all returned transactions	O

Error Code	**Message**
021	User Name Required
022	Password Required

CONFIDENTIAL

22. Get Balance

This method is used to view the partner balance accordingly.

URL: https://sandbox.prabhuindia.com/Sendapi/Send/GetBalance	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": ""
}
	{
	"code": "",
	"message": "",
	"balance": "",
	"availableLimit": ""
	}

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
UserName	String	20	api-key provided by Prabhu	M
Password	String	20	api-secret provided by Prabhu	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String	3	- 000 means 'Success' - *For others, check the Error Code and Message below*	M
Message	String	200	- Success - *Error Message mentioned below*	M
Balance	String		Available Balance of Partner (If Success)	M
AvailableLimit			If Success	O

Error Code	**Message**
021	User Name Required
022	Password Required

CONFIDENTIAL

23. Register Complaint

This method is used to view the partner balance accordingly.

URL: https://sandbox.prabhuindia.com/Sendapi//Send/RegisterComplaint	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "",
"password": "",
"complainType": "",
"mobileNumber": "",
"referenceNumber": "",
"ticketType": "",
"category": "",
"remarks": ""
}
	{
	"code": "",
	"message": "",
	"complainId": ""
	}

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
userName	String	20	api-key provided by Prabhu	M
password	String	20	api-secret provided by Prabhu	M
complainType	String	50	Get value from the **GetStaticData** Method with type as **ComplainType**	M
mobileNumber	String	10	Mobile number of Remitter/Sender	M
referenceNumber	String	16	16-digit transaction PIN. Mandatory if ComplainType is "**Transaction**"	C
ticketType	String	10	Possible Value: **Query, Complain**	M
category	String	50	Get value from the **GetStaticData** Method with type as **ComplainCategory**	M
remarks	String	100	Text Remarks on the complaint	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String	3	- 000 means 'Complaints Registered successfully.' - *For others, check the Error Code and Message below*	M
Message	String	200	- Complaints Registered successfully. - *Error Message mentioned below*	M
complainId	String		Available Balance of Partner (If Success)	M

CONFIDENTIAL

Error Code	Message
021	User Name Required
022	Password Required
081	Complain Type is Required
082	Ticket Type is Required
083	Complain Category is Required
084	Remarks is Required
085	Mobile Required
087	Reference Number is Required
088	Value Complain Type is not valid
091	Value …. is not valid Ticket Type. The Ticket Type should be either Query or Complain
092	The transaction with Refrence No. 1111260395426961 not found!!
093	Sender Mobile is Invalid
1	- No Complain Category Found with the name reds of Complain Type Transaction!! - Ticket has been Already raised with Ticket No:……!!

CONFIDENTIAL

24. Track Complaint

This method is used to view the partner balance accordingly.

URL: https://sandbox.prabhuindia.com/Sendapi//Send/TrackComplaint	
Request Header: Content-Type: application/json Authorization: {{signature}}	
JSON Request	**JSON Response**

{
"userName": "*{{api-key}}*",
"password": "*{{api-secret}}*",
"complainId": ""
}
	{
	"code": "",
	"message": "",
	"complains": [
	{
	"sno": "",
	"ticketNo": "",
	"complainType": "",
	"mobileNumber": "",
	"referenceNumber": "",
	"ticketType": "",
	"category": "",
	"remarks": "",
	"closedRemarks": "",
	"status": ""
	}
	]
	}

Request Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
UserName	String	20	api-key provided by Prabhu	M
Password	String	20	api-secret provided by Prabhu	M
complainId	String	20	**complainID** received in response to **RegisterComplaint**	M
Response Field				
Field Name	**Data Type**	**Length**	**Description**	**M/O/C**
Code	String	3	- 000 means 'Success' - *For others, check the Error Code and Message below*	M
Message	String	200	- Success - *Error Message mentioned below*	M
complains	String		Detailed List of all returned complaints	M

CONFIDENTIAL

Error Code	Message
021	User Name Required
022	Password Required
084	Complain No. is Required

CONFIDENTIAL

ANNEXURE I

KYC Document Guidelines and Samples KYC document for Physical KYC Approval (Citizenship '77' and Passport '4' as ID Types).

Guidelines:

1. **IDCardFront**: Upload the front side of the document with the OSV stamp, customer signature, and agent signature.
2. **IDCardBack**: Upload the back side of the KYC document.
3. **Additional**: Upload a photo of the customer holding their original ID in front of the sending counter, along with a proper authorization board.
4. Upload clear and legible copies of the documents.
5. The document must include:
   - Customer's signature
   - Customer's mobile number

6. The branch details must include:
   - Authorized signature
   - Shop/Agency name
   - Date
   - Mobile number
   - CSP Code

Before proceeding, ensure the following:

- The customer photo clearly shows the customer holding their KYC document.
- The document is clear and readable.
- The branch OSV stamp and signature are present.
- The customer's signature is clearly visible.

(*Go to Customer KYC Process 4 & 12*)

CONFIDENTIAL

Sample KYC Document:

(*Go to Customer KYC Process 4 & 12*)

Postman Collection and Environment

SendAPI_JSON_PMT.postman_collection.jsor

SendAPI_JSON_PMT.postman_environment.j

CONFIDENTIAL