


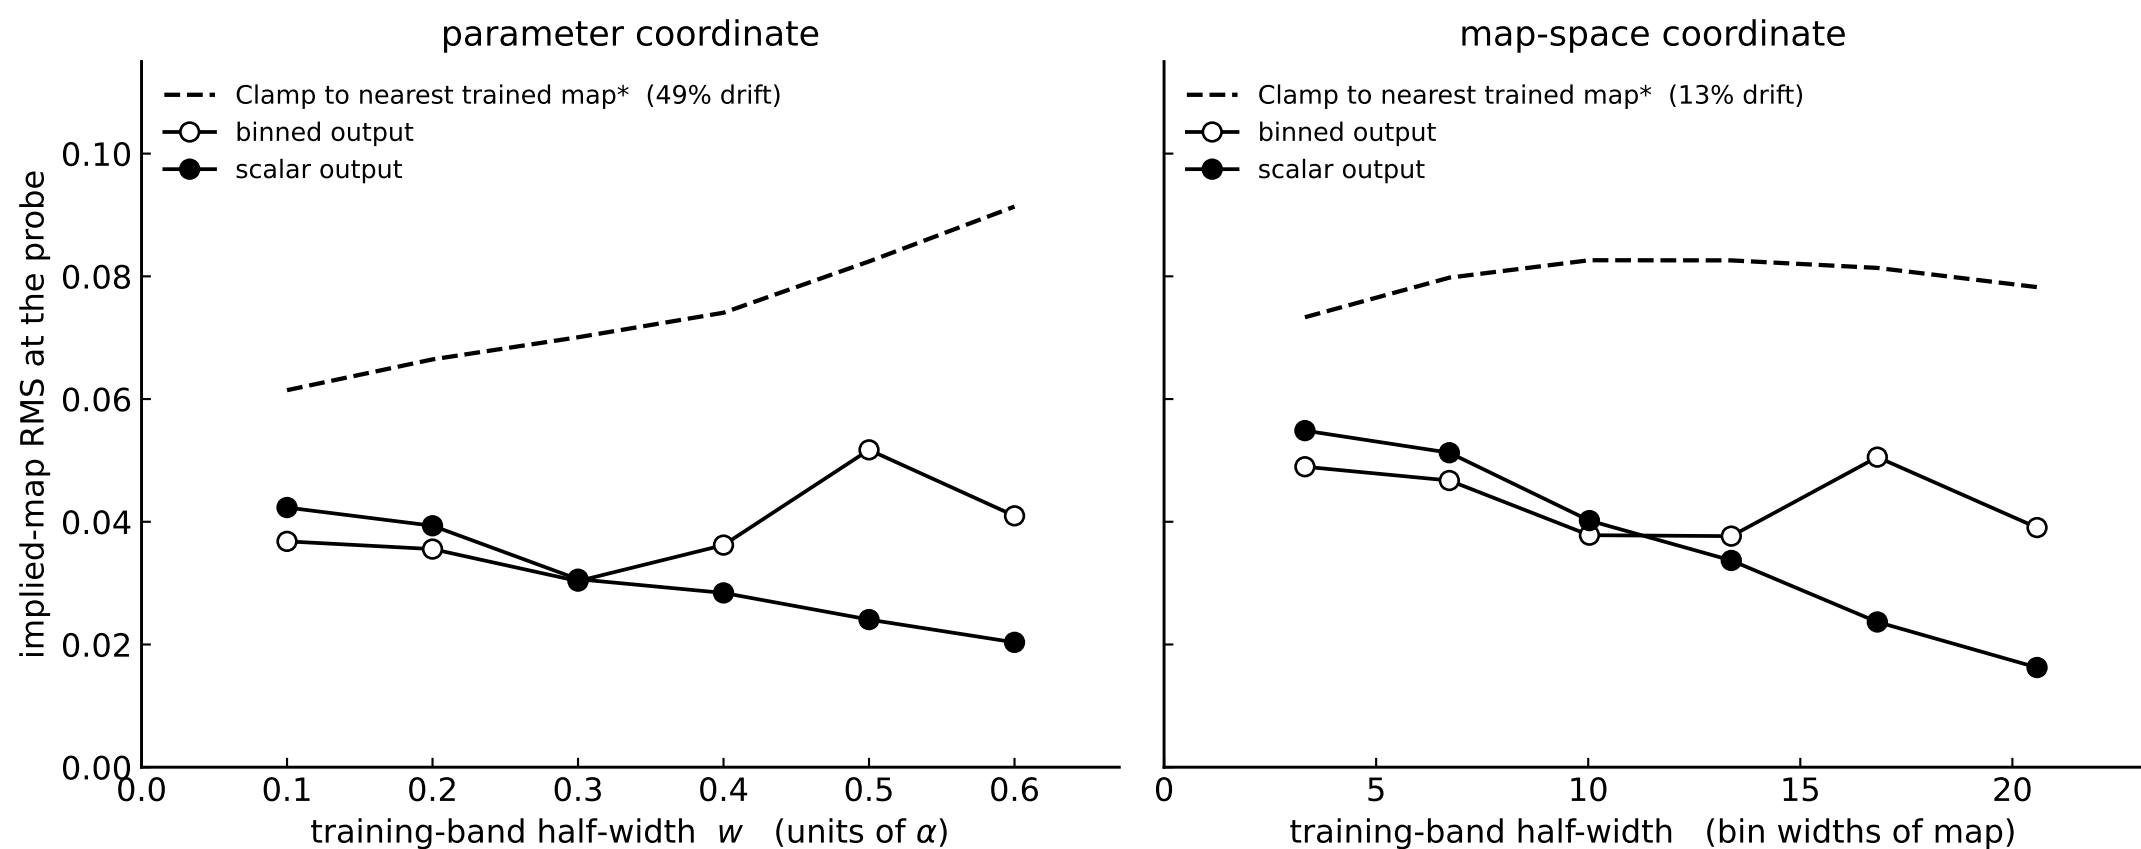

Continuous input, asymmetric family, same six runs in both panels. Left: the probe sits a fixed 0.2 of α past the band edge, and the null rises.

Right: it sits a fixed 8 bin widths past it in map space, and the null is flat, so the fall is the model rather than the probe.

*the best predictor using only maps seen in training.