

memwriter.c

memreader.c

create share mem segment (r/w)
with backing file



set shared mem size

map shared mem fd into mem
(operate on mem instead of r/w to fd)

create semaphore

critical section

cleanups

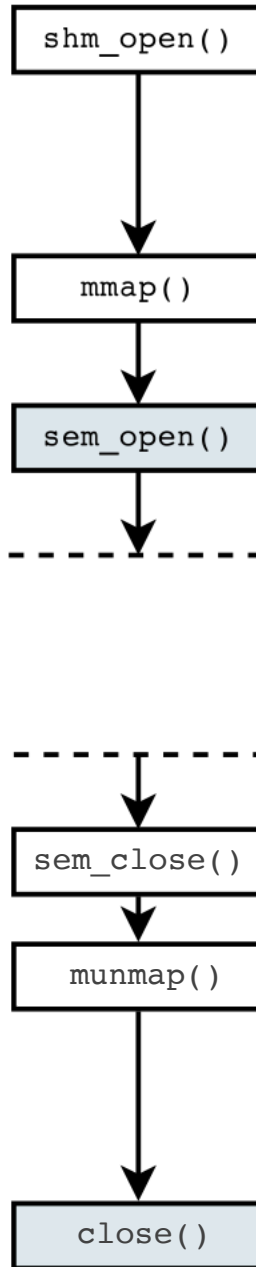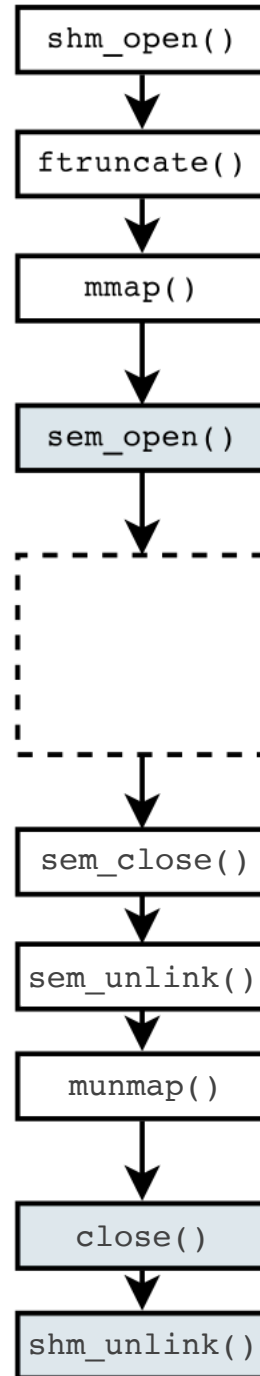

access to shared mem (r/w)

access semaphore

cleanups