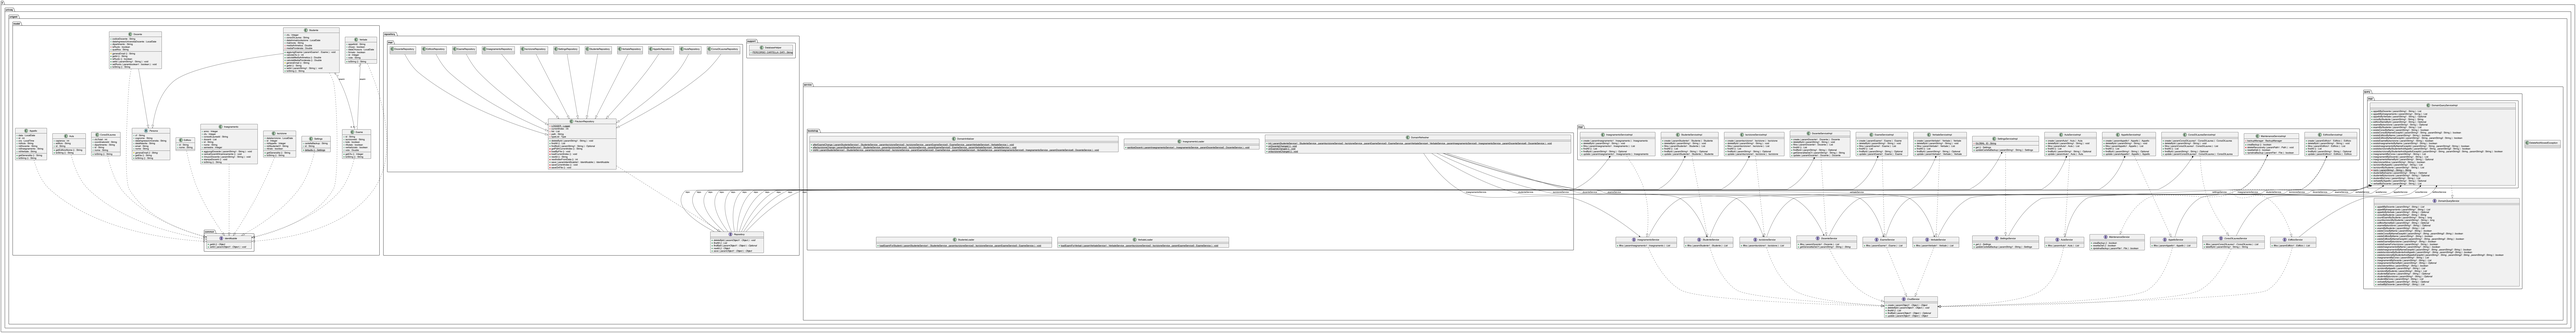
app
client
Invoice
Invoice
Invoice

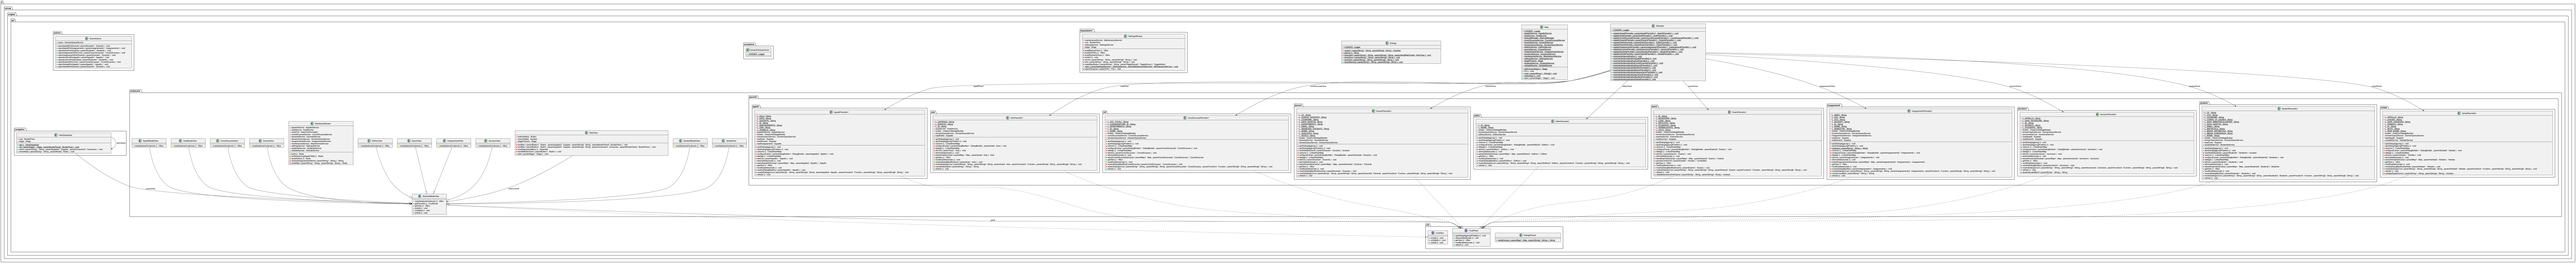
main
app
AppConfig
+ name: String
+ path: String
+ verbose_name: String
+ default_auto_field: str
+ ready(): None
apps
+ get_app_config(app_label): AppConfig
+ get_app_configs(): list
+ is_installed(app_name): bool
+ check_apps_ready(): None
+ check_models_ready(): None
+ get_models(include_auto_created, include_swapped): list
+ get_model(app_label, model_name, require_ready): Model
+ register_model(app_label, model): None
+ is_installed(app_name): bool
+ set_available_apps(available): None
+ unset_available_apps(): None
+ set_installed_apps(installed): None
+ unset_installed_apps(): None
+ clear_cache(): None
+ lazy_model_operation(function, *model_keys): None
+ do_pending_operations(model): None
+ clear_delayed_cache(): None
+ ready(): bool
+ save_config(): None
base
BaseCommand
+ help: str
+ output_transaction: bool
+ requires_migrations_checks: bool
+ requires_system_checks: list
+ stdout: OutputWrapper
+ stderr: OutputWrapper
+ execute(*args, **options): None
+ add_arguments(parser): None
+ handle(*args, **options): None
+ run_from_argv(argv): None
+ execute(*args, **options): None
+ check(app_configs, tags, display_num_errors, include_deployment_checks, fail_level, databases): list
+ check_migrations(): None
+ print_help(prog_name, subcommand): None
+ create_parser(prog_name, subcommand, **kwargs): CommandParser
CommandParser
+ missing_args_message: str
+ called_from_command_line: bool
+ __init__(**kwargs): None
+ parse_args(args, namespace): Namespace
+ error(message): None
DjangoHelpFormatter
+ show_last: set
+ max_help_position: int
+ width: int
+ indent_increment: int
+ _fill_text(text, width, indent): str
OutputWrapper
+ _out: TextIO
+ ending: str
+ __init__(out, ending): None
+ write(msg, style_func, ending): None
+ flush(): None
+ isatty(): bool
Error
+ __init__(msg, returncode, cmd, output, stderr): None
+ __str__(): str
SystemCheckError
+ __init__(msg, *args, **kwargs): None
color
Style
+ __call__(opt_text): str
make_style(opt_format): Style
color_style(force_color): Style
no_style(): Style
supports_color(): bool
termios
+ tcgetattr(fd): list
+ tcsetattr(fd, when, attributes): None
+ tcsendbreak(fd, duration): None
+ tcdrain(fd): None
+ tcflush(fd, queue): None
+ tcflow(fd, action): None
signals
+ SIGINT: int
+ SIGTERM: int
+ SIGHUP: int
+ SIGPIPE: int
+ SIGQUIT: int
+ SIGUSR1: int
+ SIGUSR2: int
+ SIGWINCH: int
+ SIG_DFL: int
+ SIG_IGN: int
+ signal(signalnum, handler): Callable
+ getsignal(signalnum): Callable
+ strsignal(signalnum): str
+ valid_signals(): set
+ raise_signal(signum): None
+ set_wakeup_fd(fd, *, warn_on_full_buffer): int
+ pthread_sigmask(how, mask): set
+ pthread_kill(thread_id, signalnum): None
+ sigwait(sigset): int
+ sigwaitinfo(sigset): struct_siginfo
+ sigtimedwait(sigset, timeout): struct_siginfo
+ pidfd_send_signal(pidfd, sig, siginfo, flags): None
+ pidfd_open(pid, flags): int
+ pidfd_getfd(pidfd, targetfd, flags): int
+ Handlers: enum
+ Sigmasks: enum
+ ItimerError: OSError
+ CTRL_C_EVENT: int
+ CTRL_BREAK_EVENT: int
+ GIL_MINIMAL_TIMEOUT: float
+ MAX_EMULATED_SIGNALS: int
+ default_int_handler(signalnum, frame): None
+ getitimer(which): tuple
+ setitimer(which, seconds, interval): tuple
+ alarm(seconds): int
+ pause(): None
+ default_sigint_main_wakeup_handler(signalnum, frame): None
+ wakeup_on_signal(signalnum, frame): None
+ wakeup_all(timeout): None
+ wakeup_fd_captured: bool
+ wakeup_os_read(fd, length): bytes
+ wakeup_os_close(fd): None
+ wakeup_poll_and_read(timeout): bytes
+ wakeup_drain_fd(fd): None
+ wakeup_write_byte(fd): None
+ wakeup_thread_ident: int
+ wakeup_running(): bool
+ wakeup_start_thread(): None
+ wakeup_stop_thread(timeout): bool
+ wakeup_reset_after_fork(): None
+ wakeup_in_main_thread(): bool
+ wakeup_enable_warnings(): None
+ wakeup_default_handler(signalnum, frame): None
+ wakeup_ignore_handler(signalnum, frame): None
+ wakeup_raise_handler(signalnum, frame): None
+ wakeup_set_handler(signalnum, handler): None
+ wakeup_get_handler(signalnum): Callable
+ wakeup_reset_handler(signalnum): None
+ wakeup_ignore_handler(signalnum): None
+ wakeup_default_handler(signalnum): None
+ wakeup_raise_handler(signalnum

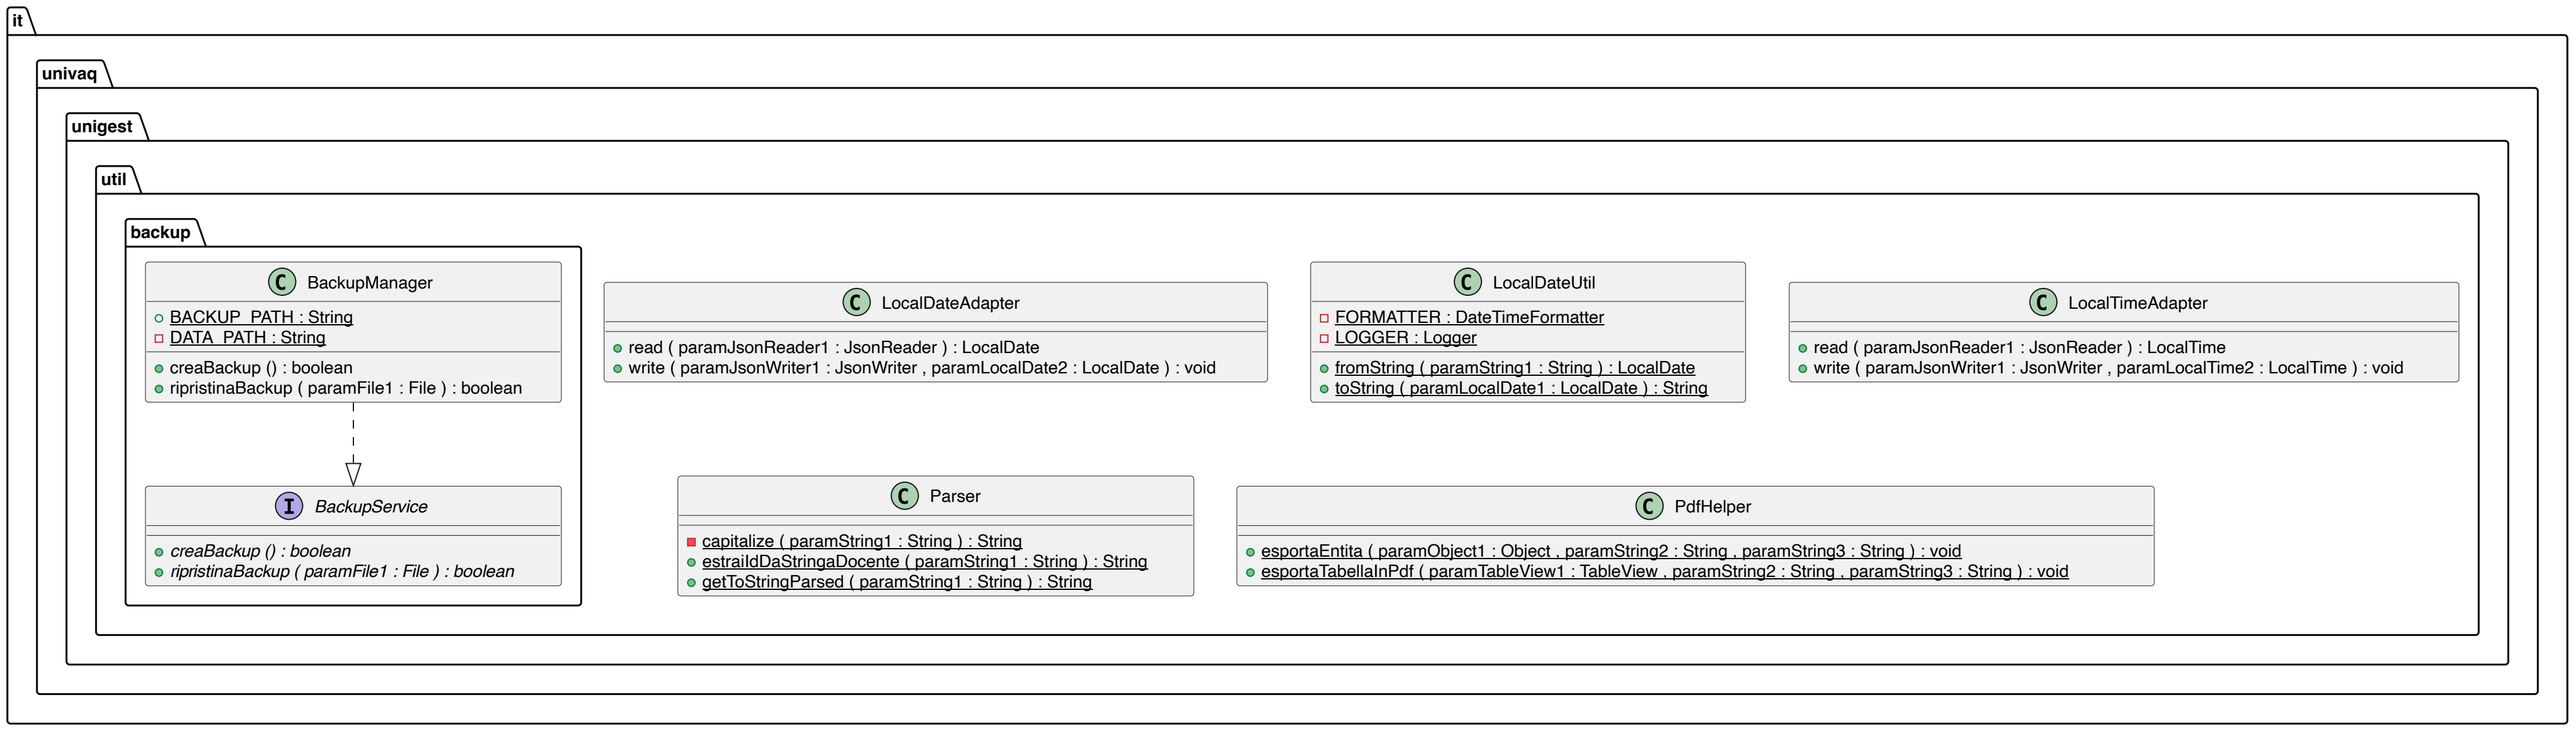
it
univaq
unigest
util
backup
BackupManager
BACKUP_PATH : String
DATA_PATH : String
creaBackup () : boolean
ripristinaBackup ( paramFile1 : File ) : boolean
BackupService
creaBackup () : boolean
ripristinaBackup ( paramFile1 : File ) : boolean
LocalDateAdapter
read ( paramJsonReader1 : JsonReader ) : LocalDate
write ( paramJsonWriter1 : JsonWriter , paramLocalDate2 : LocalDate ) : void
LocalDateUtil
FORMATTER : DateTimeFormatter
LOGGER : Logger
fromString ( paramString1 : String ) : LocalDate
toString ( paramLocalDate1 : LocalDate ) : String
LocalTimeAdapter
read ( paramJsonReader1 : JsonReader ) : LocalTime
write ( paramJsonWriter1 : JsonWriter , paramLocalTime2 : LocalTime ) : void
Parser
capitalize ( paramString1 : String ) : String
estraiIdDaStringaDocente ( paramString1 : String ) : String
getToStringParsed ( paramString1 : String ) : String
PdfHelper
esportaEntita ( paramObject1 : Object , paramString2 : String , paramString3 : String ) : void
esportaTabellaInPdf ( paramTableView1 : TableView , paramString2 : String , paramString3 : String ) : void