
PSS – API (v1.4)

Prescription Search Support (RIZIV-INAMI)



AUGUST 10, 2025
SMALS

Table of Contents

Table of Contents.....	2
1. Document management	6
1.1. Document history	6
1.2. Document reviews	6
1.3. Release Note	6
2. Reference	7
2.1. eHealth reference	7
2.2. FHIR references	7
3. Document information	8
3.1. Glossary	8
3.2. Formatting explanation.....	9
4. Goal of the document	10
5. Support.....	11
5.1. Report Issues.....	11
5.2. Certificates	11
6. Global overview	12
6.1. Context (goal of the project).....	12
Generic PSS platform	12
Antimicrobial.....	12
Radiology.....	12
Clinical biology	13
6.2. Access management	13
6.2.1. eHealth token.....	13
6.2.2. Disciplines	13
6.3. FHIR.....	13
6.3.1. Capability Statement.....	14
6.3.2. Recommendations and Feedback in FHIR resources.....	14
6.3.2.1. Antimicrobial Domain	14
6.3.2.1.1. Sequence diagram.....	16
6.3.2.2. Radiology Domain	17
6.3.2.2.1. Sequence diagram.....	18
7. Technical requirements	20
7.1. API documentation	20

8.	Description of the operations	20
8.1.	Common validations	20
8.1.1.	Authentication	20
8.2.	Common resources	21
8.2.1.	Bundle resource	21
8.2.1.1.	Implemented rules.....	21
8.2.2.	Patient resource.....	21
8.2.2.1.	Implemented rules.....	22
8.2.3.	RequestGroup resource	22
8.2.3.1.	Implemented rules.....	23
8.3.	Common fields	24
8.3.1.	Operations on Antimicrobial.....	24
8.3.1.1.	Consent	24
8.3.1.1.1.	Endpoint.....	24
8.3.1.1.2.	Request	25
8.3.1.1.2.1.	Implemented rules.....	25
8.3.1.1.2.2.	Example.....	26
8.3.1.1.3.	Response	26
8.3.1.2.	Get Data to Collect.....	26
8.3.1.2.1.	Endpoint.....	26
8.3.1.2.2.	Request	26
8.3.1.2.2.1.	Implemented rules.....	27
8.3.1.2.2.2.	Example.....	27
8.3.1.2.3.	Response	28
8.3.1.2.3.1.	Implemented rules.....	29
8.3.1.2.3.2.	Example.....	30
8.3.1.3.	Get Recommendations	30
8.3.1.3.1.	Endpoint.....	30
8.3.1.3.2.	Request	30
8.3.1.3.2.1.	Implemented rules.....	32
8.3.1.3.2.2.	Example.....	33
8.3.1.3.3.	Response	33
8.3.1.3.3.1.	Implemented rules.....	35
8.3.1.3.3.2.	Example.....	35
8.3.1.4.	Feedback	35

8.3.1.4.1.	Endpoint.....	35
8.3.1.4.1.	Request	35
8.3.1.4.1.1.	Implemented rules.....	37
8.3.1.4.1.2.	Example.....	37
8.3.1.4.2.	Response	37
8.3.1.4.2.1.	Implemented rules.....	38
8.3.2.	Operations on Radiology.....	39
8.3.2.1.	Get Diagnoses	39
8.3.2.1.1.	Endpoint.....	39
8.3.2.1.2.	Request	39
8.3.2.1.2.1.	Implemented rules.....	40
8.3.2.1.2.2.	Example.....	41
8.3.2.1.3.	Response	41
8.3.2.1.3.1.	Implemented rules.....	42
8.3.2.1.3.2.	Example.....	43
8.3.2.2.	Get Recommendations	43
8.3.2.2.1.	Endpoint.....	43
8.3.2.2.2.	Request	43
8.3.2.2.2.1.	Implemented rules.....	44
8.3.2.2.2.2.	Example.....	45
8.3.2.2.3.	Response	45
8.3.2.2.3.1.	Implemented rules.....	46
8.3.2.2.3.2.	Example.....	46
8.3.2.3.	Feedback	46
8.3.2.3.1.	Endpoint.....	46
8.3.2.3.2.	Request	46
8.3.2.3.2.1.	Implemented rules.....	47
8.3.2.3.2.2.	Example.....	48
8.3.2.3.3.	Response	48
8.3.2.3.3.1.	Implemented rules.....	49
8.3.2.4.	Retrieve Original Recommendations or Feedback	49
8.3.2.4.1.	Endpoint.....	49
8.3.2.4.2.	Request	49
8.3.2.4.3.	Response	50
9.	Error management.....	50

10.	Antimicrobial domain: front-end requirements	51
10.1.	Disclaimer.....	51
10.2.	Consent	52
10.3.	Patient situation.....	52
10.3.1.	Guidance	52
10.3.2.	Support Parameters (sp_).....	53
10.3.3.	Patient Variables (pv_).....	53
10.3.4.	10.2.4 Exclusive Support Parameters (sp_exc_)	55
10.3.5.	Exclusive Mandatory Support Parameters (sp_excMand_).....	56
10.3.6.	No parameters applicable - only 1 recommendation available.....	56
10.4.	Manually override patient situation	57
10.5.	Patient situation summary.....	59
10.6.	Recommendations	59
10.6.1.	Disclaimer.....	60
10.6.2.	Support options	60
10.6.3.	Scoring system legend	62
10.6.4.	Other support option	65
10.7.	Feedback	65
10.7.1.	Green or yellow score	66
10.7.2.	Red score: ask reason of deviation	66
10.7.3.	Other support option	69
10.7.4.	Confirmation	69

1. Document management

1.1. Document history

Version	Status	Date	Author(s)	Modifications
1.0	Draft	13/01/2025	Nick Sneijers	First version of the cookbook for the release 1.0 scope « MVP » of PSS
1.1	Final	06/02/2025	Nick Sneijers	First version for validation
1.2	Draft	01/04/2025	Inge Sneppe	Documentation front-end requirements antimicrobial and radiology
1.3	Final	28/04/2026	Nick Sneijers	Documentation consent and consult endpoints
1.4	Final	10/08/2026	Nick Sneijers	Corrected Task.focus wording; added code.text for free-text queries; clarified feedback for alternative treatments via generic SNOMED code 74964007 + focus.display; confirmed single-submission for GetRecommendations/\$feedback

1.2. Document reviews

Reviewers	Name(s)	Reviewed version	Comments
SPOC client PSSa	Jeroen De Wilde	1.0	
Analyst client PSSa and PSSr	Kevin Poilvache	1.0	
Analyst client PSSa and PSSr	Nathan Peeters	1.0	

1.3. Release Note

This section highlights the differences between the current API release and the previous version, to help integrators quickly identify what has changed.

- Overall cleanup of the documentation, following the first production release
- Documentation of consent and consult endpoints
- M2M Organization
- Free-text findings now use Observation.code.text instead of code.coding.display.
- Alternative treatment/exam feedback with no suitable code: use SNOMED 74964007 (Other) in focus.identifier.value, with focus.display for the free-text name.

2. Reference

2.1. eHealth reference

All referenced documents are available on the portal of the eHealth platform. These versions, or any following ones, can be used for onboarding and accessing the eHealth platform service.

ID	Title	Version	Date	Author
1	eHealth Services – Web Access	2.0	12/07/2018	eHealth platform
2	Identity & Authorization Management (IAM) eXchange	1.1	28/06/2024	eHealth platform

eHealth API Catalog: <https://portal.api.ehealth.fgov.be/>

2.2. FHIR references

ID	Title	Link
1	Implementation guide	https://www.ehealth.fgov.be/standards/fhir/pss/index.html
2	data-absent-reason	http://hl7.org/fhir/StructureDefinition/data-absent-reason
3	cpg-condition	http://hl7.org/fhir/uv/cpg/StructureDefinition/cpg-condition
4	condition-clinical	http://terminology.hl7.org/CodeSystem/condition-clinical
5	condition-ver-status	http://terminology.hl7.org/CodeSystem/condition-ver-status
6	condition-category	http://terminology.hl7.org/CodeSystem/condition-category
7	cpg-activity-type-cs	http://hl7.org/fhir/uv/cpg/CodeSystem/cpg-activity-type-cs
8	translation	http://hl7.org/fhir/StructureDefinition/translation
9	cpg-questionnaireresponse	http://hl7.org/fhir/uv/cpg/StructureDefinition/cpg-questionnaireresponse
10	FeedbackTask	https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition/FeedbackTask
11	PSSrFeedbackReasons	https://www.ehealth.fgov.be/standards/fhir/pss/CodeSystem/PSSrFeedbackReasons
12	PSSaFeedbackReasons	https://www.ehealth.fgov.be/standards/fhir/pss/CodeSystem/PSSaFeedbackReasons
13	Examples	https://www.ehealth.fgov.be/standards/fhir/pss/artifacts.html

3. Document information

3.1. Glossary

Term	Definition
Exchangeld	This is a unique number assigned by PSS to each PSS consultation issued.
PSS	This is the name given to the API which helps the prescriber making the correct recommendation. PSS stands for "Prescription Search Support".
PSSa	Prescription Search Support specifically for the domain antimicrobial
PSSr	Prescription Search Support specifically for the domain radiology
EPD	The Electronic Patient Dossier (EPD) in Belgium is a digital file that contains a patient's health information. The dossier is updated after each contact with healthcare providers and ideally includes data from all clinicians involved in the patient's care. The EPD ensures that medical information can be quickly and securely shared between healthcare providers and institutions, contributing to better quality of care and efficiency.
Prescriber	The person who initiates the prescription search support
Patient	The individual which is the subject of the prescription search support
Guideline manager	The guideline manager is a medical expert, specialized in a specific type of care (domain). The guideline manager is responsible for keeping the PSS content up-to-date with new scientific insights related to his domain.
Indication	The (clinical) indication is a disease, symptom or circumstance that makes a particular test, medication or procedure advisable.
Support Parameter	- A <i>Support Parameter</i> represents a question or condition (such as "Is the patient a risk patient?") so that all factors are collected to help PSS search the best support for the given indication (such as "Otitis media") and patient information. The list of Support Parameters that is required can vary depending on the <i>Indication</i> and logic applied. - The Support Parameter can have defined possible values (like "yes" or "no"). The value of a <i>Support Parameter</i> is determined by the patient's situation. The Support Parameter value can be - automatically derived by PSS from a set of Patient Variable values, - or can be manually overridden by the end user that is requesting support. The manual override of values is important to give the prescriber always the hand on correcting or completing

	the patient situation if necessary, as information in the EPD might not always be up to date. Some parameters cannot be retrieved from the EPD but serve as a reminder for the prescriber to do certain observations during patient visit (such as "dyspnea at rest or use of accessory muscles of respiration"). The set of Patient Variables, and the rules on how they can define the Support Parameter value, are defined by an expert group and are handled and managed to be in line with the latest scientific insights in the PSS system.
Patient Variable	A <i>Patient Variable</i> is an individual characteristic or piece of information about a patient that can influence the treatment process or support outcome. These variables are sourced from the Electronic Patient Data (EPD) and include attributes like allergies, past operations, comorbidities, immune system dysfunctions, and previous medications. A <i>set of Patient Variables</i> values can be used to derive the value of the parent Support Parameter. They are typically represented by coding systems (e.g., SNOMED CT) and values that describe the patient's condition in a standardized way. This is not always the case.
List of recommendations	The PSS result is the list of recommendations, based on the given input(s). The list of recommendations is a list of support options. Each support option contains a score and instruction. They are ranked by score of appropriateness. The scientific evidence is linked to the list of recommendations.
Reason of Deviation	Refers to the explanation provided by the prescriber when they choose to deviate from the recommendation given by Prescription Search Support (PSS). It captures <i>why</i> the guideline was not followed (e.g. patient-specific factors, clinical judgement, contraindications), allowing PSS to support transparency, learning, and later analysis of prescribing behaviour without blocking clinical autonomy.

3.2. Formatting explanation

- When a word is in **bold** and *italic* : that is a field in the FHIR specification. Ex : ***status***.
- When a word is between quotation marks "" : This is the value that the specific field can have. Ex : "ready".
- All FHIR resources mentioned in this document are described in the official eHealth FHIR implementation guide pages. Specific links are available in section 2.2.

4. Goal of the document

The goal of this document is to provide all the information needed to integrate PSS.

This document will describe the project but also what is around the project like how an integrator can have some support and what is needed to call PSS.

PSS uses FHIR to exchange messages with the integrators. This document will explain some fundamental concepts to understand what must be given and what happens by doing the different operations.

The access management will be also explained to allow the integrators to know when an operation can be called.

After these explanations, this document will describe all the operations available respecting the following structure :

- **Description:** The business purpose of the operation.
- **Allowed Roles:** Which user types are authorized to call the endpoint.
- **Endpoint:** The HTTP method and URL path.
- **Implemented Rules:** The specific validation, state, and security rules the API enforces (which may result in 4xx errors if violated).
- **Request & Response:** Expected payload structures, specific FHIR constraints, and expected HTTP status codes.

5. Support

5.1. Report Issues

For issues related to PSS:

- Acceptance: integration-support@ehealth.fgov.be
- Production: support@ehealth.fgov.be

5.2. Certificates

In order to access the secured eHealth platform environment each integrator has to obtain an eHealth platform certificate, used to identify the initiator of the request. Please consult the chapter about the eHealth Certificates on the portal of the eHealth platform:

- <https://www.ehealth.fgov.be/ehealthplatform/nl/ehealth-certificaten>
- <https://www.ehealth.fgov.be/ehealthplatform/fr/certificats-ehealth>

For technical issues regarding eHealth platform certificates:

- Acceptance: acceptance-certificates@ehealth.fgov.be
- Production: support@ehealth.fgov.be

6. Global overview

6.1. Context (goal of the project)

The goal of PSS (Prescription Search Support) is to help the prescriber in prescription processes in the application domains of:

- Antimicrobials
- Radiology
- Clinical Biology (out of scope in this document)

Prescriptions in these 3 domains count for more than 48 million prescriptions per year.

Two types of prescriptions can currently be distinguished:

1. Referral prescriptions, these will be handled by the future UHMEP platform, these are applicable for the domains of Radiology and Clinical Biology
2. Medication prescriptions, these are consultable via the VIDIS platform and are stored in the Recip-e database, these are applicable for the domain of Antimicrobials

Adequate evidence-based support in the prescription processes contributes to the quality and effectiveness of prescribed care decisions. This is important for RIZIV-INAMI, which as a key actor in social security is responsible for reimbursements. RIZIV-INAMI acts in this project also as a joint-controller with FOD Volksgezondheid/SPF Santé publique/FPS Health, responsible for the legal context around prescription search support. The project improves cooperation and information exchange between the various actors involved, thus contributing to an overall increased quality of care.

Generic PSS platform

Healthcare provider decision makers and executors can query the Prescription Support Service (PSS) in a secure manner in the context of a new or an existing care decision when making a prescription. The guidelines and decision rules for making care decisions are complex and specific by type of care. To support care decision making during the prescription processes, PSS will search a library of scored guidelines based on clinical indications that are predefined for each domain. The guidelines are subject to change over time, therefore the platform should also facilitate keeping the guidelines up-to-date. Moreover, the platform provides added value in an educational environment by enabling familiarization with the system. To make PSS operational quickly, we aim for smooth communication and integration with the software integrators.

Antimicrobial

Every year, about 11.5 million prescriptions are created in the field of "Antimicrobial". Via better alignment with the antibiotics guidelines established by BAPCOC (Belgian Antibiotic Policy Coordination Commission), and related decision rules established by EBPracticeNet, we expect that fewer incorrect antibiotic prescriptions will be made. Today, mainly antibiotics for respiratory and urinary tract infections are incorrectly prescribed.

Radiology

Every year, there are more than 20.5 million referral prescriptions for examinations in the field of "Radiology". This includes many examinations that are unnecessarily prescribed and performed. The

decision rules for "Radiology" are very complex. Therefore, the European ESR iGuide serves as a source for the imaging referral guidelines, in order to achieve better and more efficient use of the imaging resources.

Clinical biology

Out of scope in this document as it will not be available in 2025

6.2. Access management

6.2.1. eHealth token

The token of eHealth allows PSS to identify who is connected. Each integrator has to send the user token with the request if they want to use the PSS API

The exchanged token has the following information that will be used for the access management:

- Individual Healthcare Provider
 - NIHDI number for the healthcare professional
 - In absence of the NIHDI number, PSS will use the SSIN for the healthcare professional
- Organization
 - NIHDI number for the organization

There is other information present in the token but those are not used for the access management.

6.2.2. Disciplines

This functionality is supported for both **human users** and **machine-to-machine (M2M)** integrations. There is **no distinction between disciplines** regarding access. Currently supported:

- Pharmacist
- Physician
- Dentist
- Midwife
- Organization

The operations accessible by these disciplines are the following ones:

- Questionnaire Response (Consent)
- Get Data to Collect
- Get Diagnoses
- Get Recommendations - apply
- Get Recommendations – feedback
- Search on bundle

6.3. FHIR

[FHIR](#) (Fast Healthcare Interoperability Resources) is used by PSS as the transport layer. All communications with PSS should follow the guidelines defined by HL7. The [Belgian version of FHIR](#) is

managed by eHealth. Whenever available, links in this document should refer to the Belgian FHIR resources; otherwise, international resources will be used if no specific changes have been enforced in Belgium.

PSS follows the FHIR R4 version. All resources used in PSS align with the implementation guide artifacts from HL7 Belgium. This document does not define custom profiles but will reference the applicable FHIR resource definitions. In general, PSS supports all fields marked as “Must Support” (to be confirmed in a future release) and all mandatory fields specified in the FHIR documentation.

The implementation guide serves as a reference for both integrators and PSS, ensuring proper communication between EPD and PSS at the moment of sending and processing messages. Additionally, it can be used as a JSON validator on both ends of the communication. More details can be found at the following link: <https://www.ehealth.fgov.be/standards/fhir/pss/index.html>

6.3.1. Capability Statement

As a FHIR compliant server, PSS makes available a statement of the accessible features. It is described in the CapabilityStatement page from the FHIR International website.

This method is accessible to everyone, without any token from eHealth. The endpoint is the following:

GET /metadata

PSS will send back the resource CapabilityStatement filled with information about the API.

6.3.2. Recommendations and Feedback in FHIR resources

In PSS, retrieving recommendations and capturing prescriber decisions is done through domain-specific workflows. Each workflow is translated into FHIR resources and operations to ensure structured, interoperable decision support.

6.3.2.1. Antimicrobial Domain

1. **Consent collection (mandatory):** Before accessing the Antimicrobial workflow, the prescriber must provide the required consents (mandatory and optional). The consents can be submitted using the endpoint:

POST /QuestionnaireResponse

2. **Selecting an Indication:** The prescriber selects an indication. Based on this selection, PSS provides a list of required **support parameters** and **patient variables**. These can be retrieved using the following endpoint:

POST /PlanDefinition/GetDataToCollect/\$apply

3. **Providing the Required Data:** After the prescriber supplies the necessary support parameters and patient variables, PSS generates a list of recommendations. The required data can be **entered manually by the prescriber or automatically populated by the EPD**. These recommendations are available at the following endpoint:

POST /PlanDefinition/GetRecommendations/\$apply


4. **Submitting feedback**, for the Antimicrobial domain:

- Only one recommendation can be selected.
- If a red recommendation is selected, a reason of deviation is mandatory.
- The prescriber may also select “other option” if the preferred treatment is not present in PSS.

Feedback is submitted via the feedback endpoint:

POST /PlanDefinition/GetRecommendations/\$feedback

6.3.2.1.1. Sequence diagram

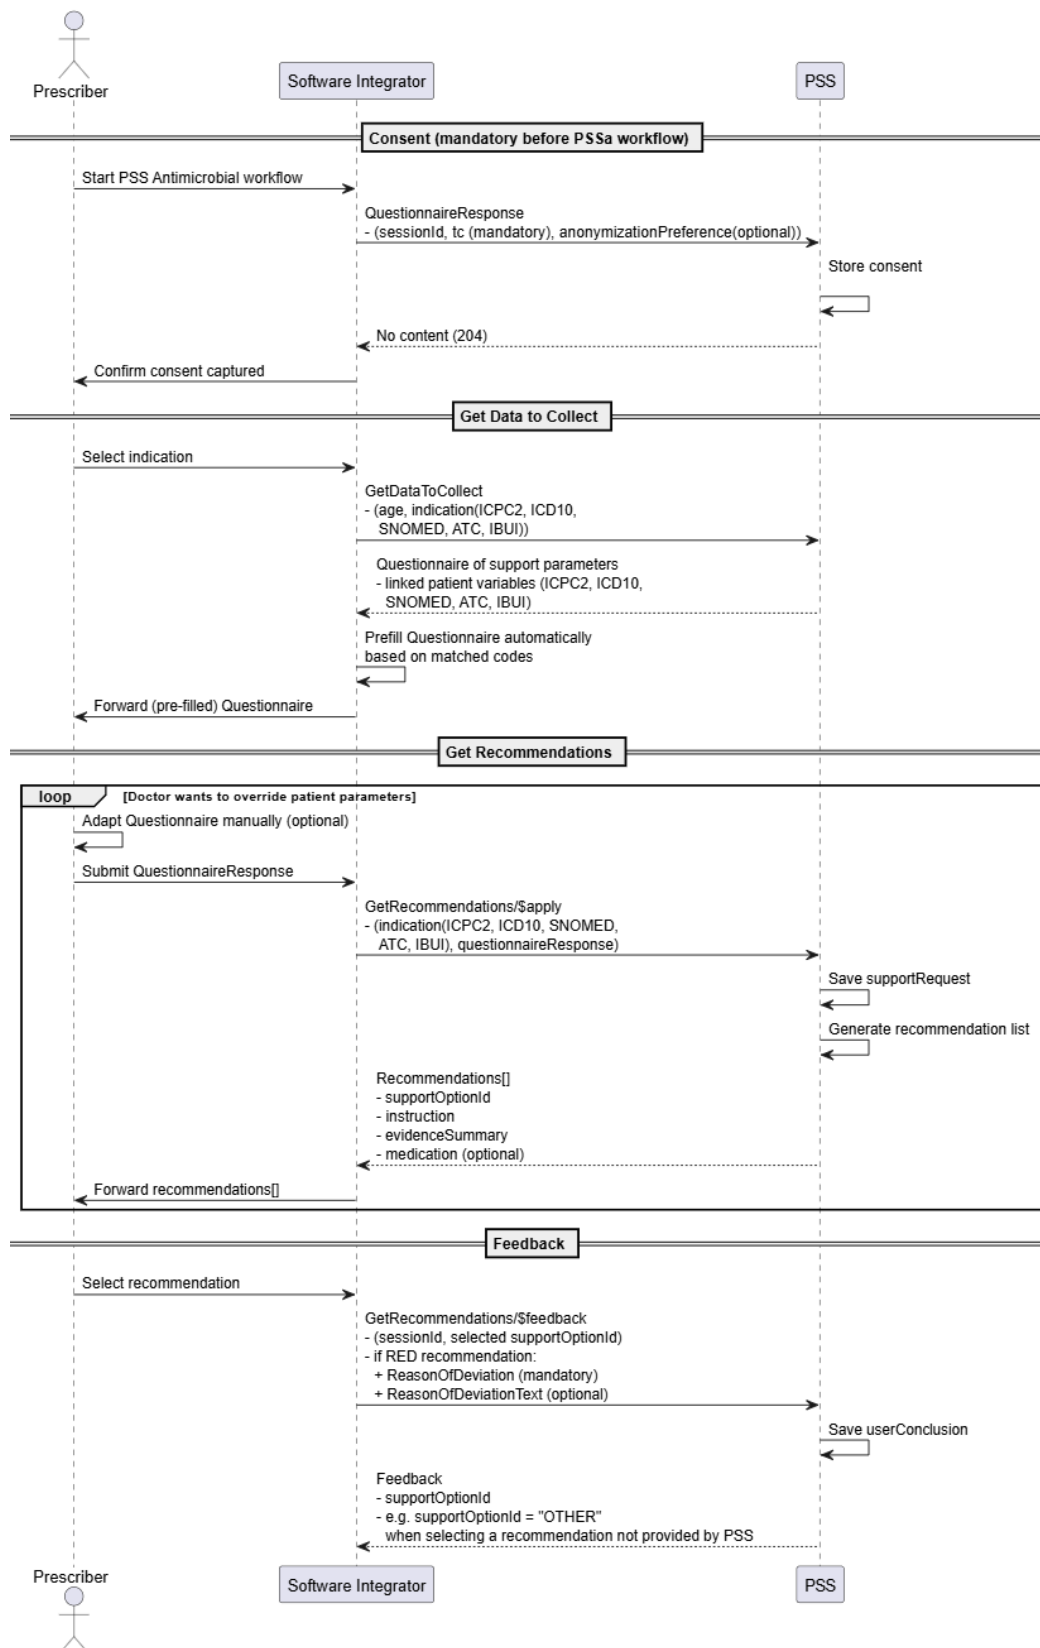

6.3.2.2. Radiology Domain

1. **Receiving Existing Data:** PSS receives pre-existing data, including details such as **sex**, **age**, **SNOMED codes**, **indication**, and **examination proposal**. Based on this input, PSS generates a list of possible indications related to the provided parameters. These possible indications can be accessed by endpoint:

POST /PlanDefinition/GetDiagnoses/\$apply

2. **Selecting Indication(s):** The prescriber selects one or multiple indications from the generated list. PSS then produces a list of recommendations tied to the selected indication(s), which can be consulted at endpoint:

POST /PlanDefinition/GetRecommendations/\$apply

3. **Submitting feedback**, for the Radiology domain:
 - Multiple recommendations can be selected.
 - If a orange/red recommendation is selected, a reason of deviation is mandatory.
 - The prescriber may also select “other option” if the preferred treatment is not present in PSS.

Feedback is submitted via the feedback endpoint:

POST /PlanDefinition/GetRecommendations/\$feedback


4. **Consultation of recommendations and feedback**, PSSr provides consultation endpoints that allow:
 - retrieval of the original list of recommendations
 - retrieval of the feedback provided by the prescriber

This enables later consultation, auditing, and analysis without re-executing the guideline logic. This can be consulted at the following endpoint:


GET /Bundle?bundle-identifier

6.3.2.2.1. Sequence diagram

Prescription Flow

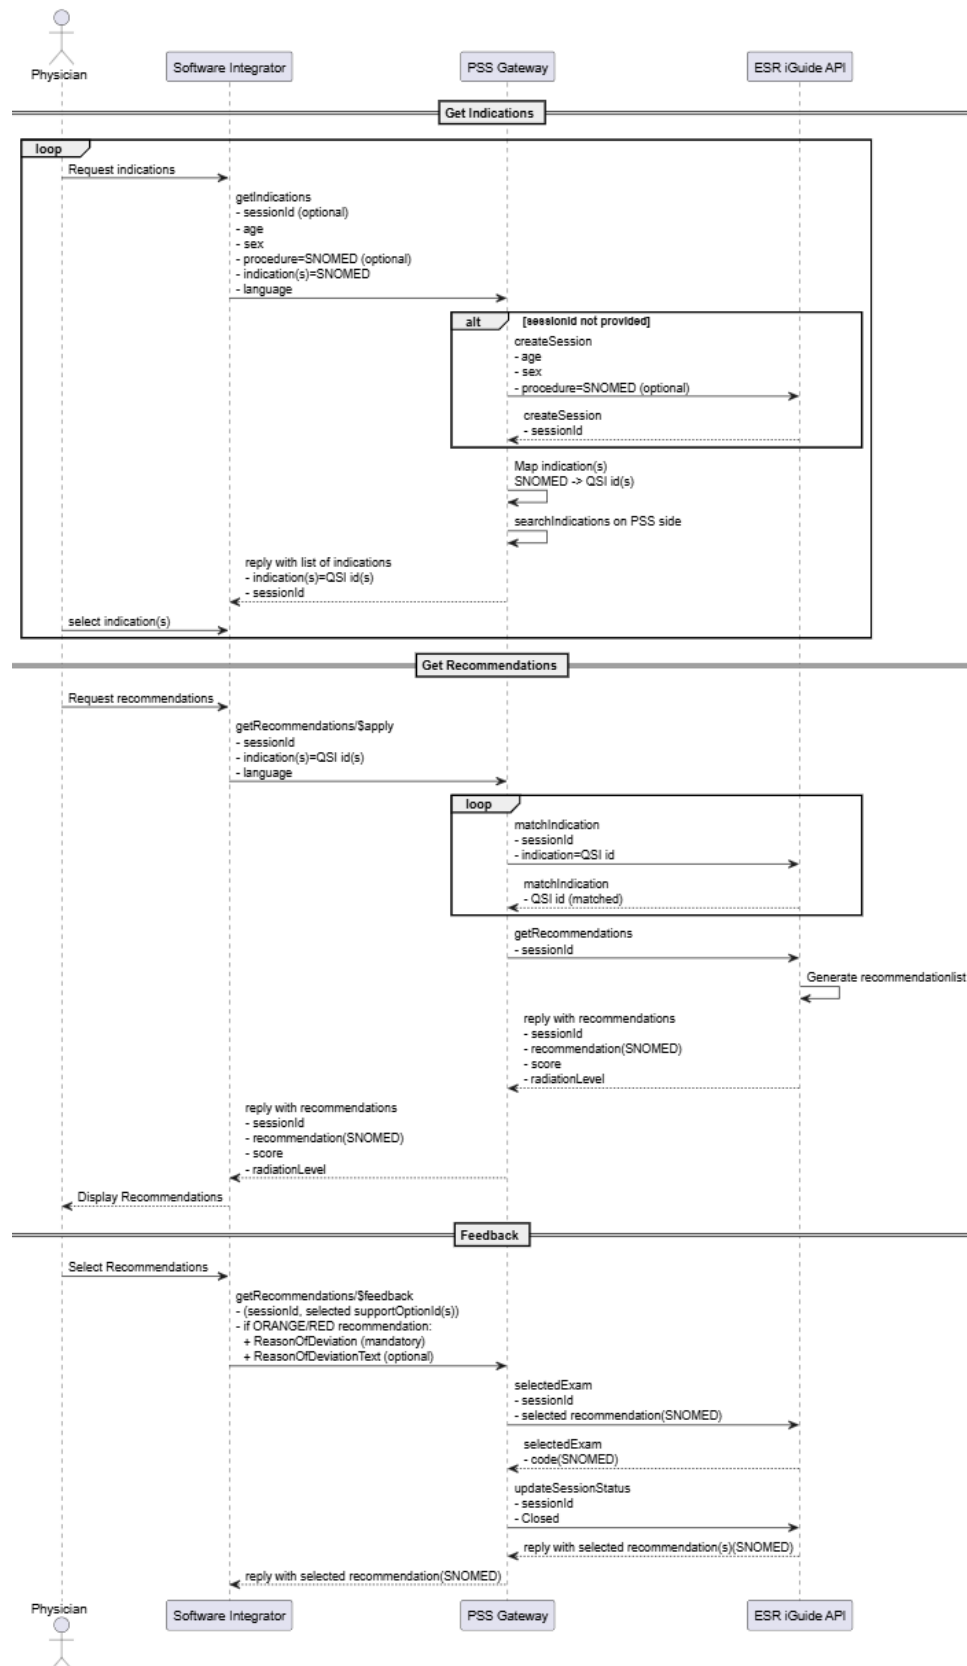

Consultation flow

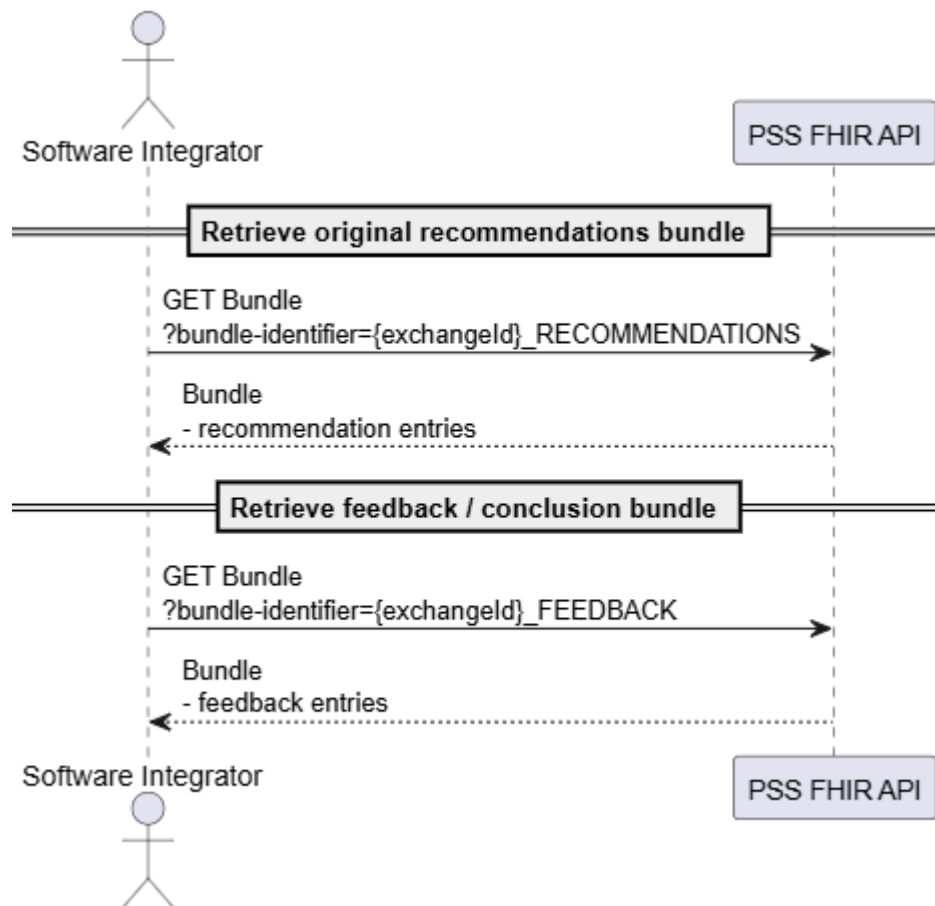

7. Technical requirements

7.1. API documentation

The last version of FHIR API interface described with a JSON / Swagger API is available on the eHealth API

Portal :

Environment	Endpoint
Acceptance	https://portal-acpt.api.ehealth.fgov.be
Production (not available at this moment)	https://portal.api.ehealth.fgov.be

Endpoint to call PSS is described in the API documentation on the [eHealth API Portal](#).

Different operations are available and textually described in section 8.


8. Description of the operations

8.1. Common validations

For all incoming requests, PSS applies a suite of common validations if the request is validated by the implementation guide described in section 6.3.

8.1.1. Authentication

Each user that wants to use PSS must be authenticated in order to be allowed to use PSS. PSS will verify the validity of the access token. PSS will also use the other information contained in the token to accept or reject the request. This behavior has been described in the section 6.2 talking about access management.

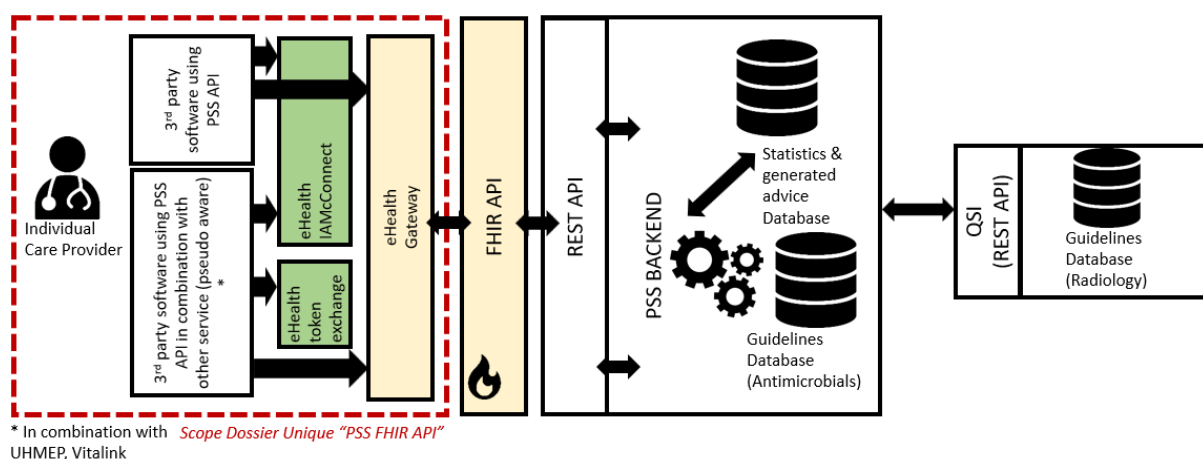

8.2. Common resources

These **common resources** are used in multiple FHIR requests and responses throughout the PSS process, they serve as fundamental building blocks for sharing healthcare-related information across different systems.

8.2.1. Bundle resource

Purpose: The Bundle resource serves as a container for grouping related resources into a single cohesive request/response. It ensures that all necessary resources for a particular operation are provided together in a structured manner. This is particularly useful in the PSS system, where multiple resources need to be collected and processed as a unit. The Bundle resource includes fields such as resource type, unique identifier, and a list of entries, each representing a resource included in the bundle. By using a common Bundle resource, the PSS system facilitates efficient and organized data exchange, enhancing interoperability and consistency across different healthcare systems.

Field	Description
resourceType	Identifies the type as “Bundle”
id	A unique identifier for the bundle
meta.profile	Specifies the canonical URL of the profile that this Bundle conforms to. In PSS, this ensures the structure and content of the Bundle align with the expected specification.
type	Indicates the type of bundle, for PSS this will always be a “collection”
entry	A list of entries (resources) included in the bundle

8.2.1.1. Implemented rules

The following rules apply to the Bundle resource fields:

- The field **meta.profile** can have one of the following values:
 - For a request:

“<https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition-PSSRequestBundle.html>”
 - For a response:

“<https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition-PSSResponseBundle.html>”

8.2.2. Patient resource

Purpose: This Patient resource is a key element in the PSS (Prescription Search Support) system. It holds anonymized demographic information (e.g., age and gender) needed for clinical decision support and data collection processes without revealing personal identifiers. This allows the PSS system to operate in a privacy-preserving and interoperable way, enabling consistent handling of patient-related data across FHIR requests.

Field	Description
resourceType	Identifies the type as “Patient”
id	A unique identifier for the patient

meta.profile	Specifies the canonical URL of the profile that this Patient resource conforms to. This ensures the patient data adheres to the required structure and validation rules defined by the PSS specification.
extension.url	Specifies the URL for the extension, which gives the patient's age without needing a full date of birth.
extension.valueAge	Indicates the relevant age (in years)
extension.valueAge.value	The numerical quantity representing the patient's age. This is the measurable value.
extension.valueAge.system	The coding system URI that defines the units used.
extension.valueAge.code	The unit of measure code corresponding to the value.
active	Boolean indicating whether the patient is active.
name.extension.url	Specifies the URL for the extension indicating the patient name is masked or intentionally withheld.
name.extension.valueCode	The reason the name is masked, here "masked", meaning the actual value is unavailable due to privacy or policy constraints.
gender	The patient's gender
deceasedBoolean	Boolean indicating whether the patient is deceased

8.2.2.1. Implemented rules

The following rules apply to the Patient resource fields:

- The field **meta.profile** should have the following value
[“https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition-PSSPatient”](https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition-PSSPatient)
- The extension for age must include these two subfields:
 - **url**:
[“https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition/PSSRelevantAge”](https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition/PSSRelevantAge)
 - **valueAge**:
 - **value** (numeric age)
 - **system** with value “http://unitsofmeasure.org”
 - **code** with value y (for years)
- The field **gender** can have one of the following values:
 - “Male”
 - “Female”
 - “Unknown”
- The extension for name must include these two subfields:
 - **url**: [“http://hl7.org/fhir/StructureDefinition/data-absent-reason”](http://hl7.org/fhir/StructureDefinition/data-absent-reason)
 - **valueCode**: “masked”

8.2.3. RequestGroup resource

Purpose: The RequestGroup resource defines and organizes a collection of related actions or tasks, such as data collection or diagnostic recommendations. It provides a high-level overview of what needs to be done and links to the detailed tasks. The RequestGroup resource includes fields such as status, intent, subject reference, and an array of potential actions. Each action can have its own

selection behavior, text equivalent, and reference to related resources. By using a common RequestGroup resource, the PSS system ensures that all proposed actions are part of a coherent and actionable group, facilitating better coordination and decision-making in patient care.

RequestGroup fields

Field	Description
resourceType	Identifies the type as “RequestGroup”
id	A unique identifier for the RequestGroup
meta.profile	Specifies the canonical URL of the profile that this RequestGroup resource conforms to. This ensures the structure and content of the request group align with the PSS implementation guide and validation rules.
status	The status of the request group
intent	The intent of the request group
subject - subject.reference	A reference to the associated patient
action	Proposed or planned actions: defines the steps, documentation, or linked activities like MedicationRequests.

Action (inside action) Fields

Field	Description
documentation	Supporting documentation or links relevant to the action (e.g., guidelines, documents)
- documentation.type	Type of documentation
- documentation.label	Label text to describe the document
- documentation.url	URL link to the supporting documentation
selectionBehavior	Defines rules about how actions should be selected
action	Nested actions
textEquivalent	Textual representation of the action for display
resource	Reference to the actual FHIR resource to perform
extension	Additional information like rating (e.g., clinical appropriateness rating).

8.2.3.1. Implemented rules

The following rules apply to the RequestGroup resource fields:

- The field **meta.profile** should have the following value
“<https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition-PSSResponseRequestGroup.html>”
- The field **status** will always have the value “active”
- The field **intent** will always have the value “proposal”

8.3. Common fields

This section outlines the fields that are frequently utilized across various resources. The common fields include essential attributes such as text status, narrative text, and coded concepts, which are used to represent and convey critical information in a structured and standardized manner.

Field	Description
Code	This element represents a coded concept that describes a specific value or meaning within a structured data model. It is commonly used in FHIR resources to standardize terminology across systems.
- code.coding	This is an array (or list) of coding elements that provide multiple representations of the same concept using different code systems. Each entry in this list represents a coded value from a specific system.
- code.coding.system	This element specifies the URI (Uniform Resource Identifier) of the coding system from which the code is derived. It helps ensure interoperability by defining the source terminology (e.g., SNOMED CT, ICD-10, LOINC)
- code.coding.code	This element contains the actual code value that represents a specific concept within the defined coding system. It is the unique identifier for a term or concept within that system

8.3.1. Operations on Antimicrobial

PSSa aims to assist prescribers in making informed decisions regarding antimicrobial prescriptions. This support is provided through a series of steps, starting with the collection of patient information and followed by generating recommendations based on the collected data. All information, including questionnaires, recommendations, and evidence links, will be provided in two languages: Dutch and French. This ensures that prescribers can access and understand the information in their preferred language, facilitating better communication and decision-making.

8.3.1.1. Consent

This endpoint allows the prescriber to submit the user consent required to use PSSa and optionally communicate the anonymization preference.

The consent is provided using a FHIR QuestionnaireResponse that references the official PSS consent questionnaire. The request does not contain patient-identifying data; it is limited to confirming that the user accepts the terms and selecting the anonymization preference.

The endpoint returns 204 No Content to confirm successful reception.

8.3.1.1.1. Endpoint

POST /QuestionnaireResponse

8.3.1.1.2. Request

- Method: POST
- Headers
 - Content-Type: application/fhir+json
 - Accept-Language
 - NL
 - FR
- Payload: a FHIR QuestionnaireResponse

QuestionnaireResponse

Purpose: The QuestionnaireResponse resource captures the prescriber's confirmation of consent and the anonymization preference. It references the published PSS consent questionnaire and provides the answers in a structured form.

Field	Description
resourceType	Identifies the type as "QuestionnaireResponse"
questionnaire	Canonical reference to the PSS consent questionnaire (including version)
status	Status of the questionnaire response
authored	Timestamp when the consent was authored
item	Answers to the consent questions

QuestionnaireResponse Items

Field	Description
item.linkId	Identifier of the group/question in the consent questionnaire
item.item.linkId	Identifier of the nested consent question (when grouped)
answer.valueBoolean	Consent decision (true/false)
answer.valueCoding.system	Code system used for coding-based answers
answer.valueCoding.code	Code for anonymization preference

8.3.1.1.2.1. Implemented rules

The following rules apply to the QuestionnaireResponse fields:

- The field **questionnaire** must reference the PSS consent questionnaire
- The field **status** will always have the value "completed"
- The field **authored** has to be structured based on ISO 8601 format (YYYY-MM-DD)
- The **consent answer** must be provided as a boolean:
 - item(linkId="tc").item(linkId="consent").answer.valueBoolean
- The **anonymization preference** must be provided as a coding:
 - item(linkId="anonymizationPreference").answer.valueCoding

- valueCoding.system must be:
<https://www.ehealth.fgov.be/standards/fhir/pss/CodeSystem/PSSCodes>
- valueCoding.code contains the selected preference (e.g. cluster-anon)

8.3.1.1.2.2. Example

An example for this request can be found here:

<https://www.ehealth.fgov.be/standards/fhir/pss/Questionnaire-26491cef-c5c7-4c5f-b10b-839e938f6b3e.html>

8.3.1.1.3. Response

- HTTP 204 No Content

Purpose: The service successfully received and processed the consent submission. No FHIR resource is returned.

8.3.1.2. Get Data to Collect

This endpoint initiates the first step in PSSa. The prescriber provides anonymized patient information, including age, gender, and the suspected indication. This ensures that PSS does not have access to the patient's identity. Based on the provided information, PSS generates a questionnaire containing support and patient variables. These variables may include a set of codes from various coding systems such as ICPC-2, ICD-10, SNOMED-CT, and ATC. The collected data will be used in the subsequent step, which involves the "Get Recommendations" endpoint described in section 8.3.1.2.

8.3.1.2.1. Endpoint

POST /PlanDefinition/GetDataToCollect/\$apply

8.3.1.2.2. Request

- **Method:** POST
- **Headers**
 - **Content-Type:** application/fhir+json
 - **Accept-Language**
 - NL
 - FR
- **Payload:** A FHIR Bundle:

Bundle:

For this request, PSS applies the common resource Bundle as described in section 8.2.1.

Patient:

For this request, PSS applies the common resource Patient as described in section 8.2.2.

Condition:

Purpose: The Condition resource in this endpoint is used to describe a single clinical condition linked to the referenced patient. The prescriber can only provide one condition, which includes details such as the clinical status, verification status, category, and specific coding information. This ensures that the PSS system has a clear and focused context for generating the appropriate questionnaire and subsequent recommendations.

Field	Description
resourceType	Identifies the type as “Condition”
Id	A unique identifier for the condition
meta.profile	Specifies the canonical URL of the profile that this condition resource conforms to. This ensures the structure and content of the condition align with the CPG structure.
clinicalStatus - clinicalStatus.coding - clinicalStatus.coding.system - clinicalStatus.coding.code	Indicates the condition's clinical state
verificationStatus - verificationStatus.coding - verificationStatus.coding.system - verificationStatus.coding.code	Confirms the diagnostic certainty
category - category.coding - category.coding.system - category.coding.code	Array of categories for the condition, represented with coding information
code - code.coding - code.coding.system - code.coding.code	Code specifying the condition, represented with a coding object
subject - subject.reference	A reference to the associated patient
onsetDateTime	The onset date and time of the condition

8.3.1.2.2.1. Implemented rules

The following rules apply to the Condition resource fields:

- The field **meta.profile** should have the following value
[“http://hl7.org/fhir/uv/cpg/StructureDefinition/cpg-condition”](http://hl7.org/fhir/uv/cpg/StructureDefinition/cpg-condition)
- The field **clinicalStatus.coding.code** will always have the value “active”
- The field **verificationStatus.coding.code** will always have the value “confirmed”
- The field **category.coding.code** will always have the value “encounter-diagnosis”
- The field **onsetDateTime** has to be structured based on ISO 8601 format (YYYY-MM-DD)

8.3.1.2.2.2. Example

An example for this request can be found here:

<https://www.ehealth.fgov.be/standards/fhir/pss/Bundle-getdatatocollect-a-data.html>

8.3.1.2.3. Response

The response is a FHIR **Bundle** with resources required to collect patient data. Below are the key components:

Bundle:

For this response, PSS applies the common resource Bundle as described in section 8.2.1.

RequestGroup:

For this response, PSS applies the common resource RequestGroup as described in section 8.2.3.

Task

Purpose: The Task resource represents specific actions that need to be carried out as part of the data collection process. The Task resource details the task of collecting a list of patient data variables required by the PSS system. This list is specific to each indication and is necessary for PSS to derive support for the given indication. The Task resource includes fields such as status, intent, code, and input data, which provide a structured and actionable framework for the data collection process. By using the Task resource, the PSS system ensures that all required data is collected systematically and efficiently.

Field	Description
<i>resourceType</i>	Identifies the type as “Task”
<i>id</i>	A unique identifier for the task
<i>meta.profile</i>	Specifies the canonical URL of the profile that this task resource conforms to. This ensures the structure and content of the task align with the CPG structure.
<i>status</i>	Indicates the current state or progress of the task. This helps track where the task is within its lifecycle.
<i>intent</i>	Defines the purpose or motivation behind the task being created.
<i>code</i> - <i>code.coding</i> - <i>code.coding.system</i> - <i>code.coding.code</i>	Code specifying the task, represented with a coding object (system, code, display)
<i>for</i> - <i>for.reference</i>	A reference to the associated patient
<i>input</i> - <i>input.coding</i> - <i>input.coding.system</i> - <i>input.coding.code</i>	Input data for the task, which includes a reference to the associated Questionnaire
<i>input.valueReference.reference</i>	Reference to a Questionnaire

Questionnaire

Purpose: The Questionnaire resource acts as a structured template for collecting specific data points about the patient. It includes questions, answer types, and references to valid answer sets, ensuring consistency and accuracy in the data collection process. The Questionnaire resource provides the

prescriber with a detailed set of questions that need to be answered to gather the necessary support and patient variables.

In the context of PSS: Get Data to Collect, the Questionnaire is optional and depends on the indication selected earlier. For some indications, only one recommendation is returned, and no further data collection via Questionnaire is required.

Questionnaire Resource Fields

Field	Description
resourceType	Identifies the type as “Questionnaire”
id	A unique identifier for the questionnaire
meta.profile	Specifies the canonical URL of the profile that this Questionnaire resource conforms to. This ensures the structure and content of the questionnaire align with the PSS implementation guide and validation rules.
language	Language in which the questionnaire is written
status	Current status of the questionnaire
date	Date the questionnaire was created or updated
item	Top-level questions or groups of questions

Questionnaire Items

Field	Description
linkId	Unique identifier for the question within the questionnaire
text	Label or question text presented to the user
type	Type of question (e.g., boolean, choice)
required	Whether the question must be answered
repeats	Whether the question can be answered multiple times
answerOption	Possible answers (for choice-type items)
extension	Additional content, including value sets and translations
item	Nested sub-items (e.g., questions within a group)

Patient:

For this response, PSS applies the common resource Patient as described in section 8.2.2.

8.3.1.2.3.1. Implemented rules

The following rules apply to the Task resource fields:

- The field **meta.profile** should have the following value
“<https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition-PSSQuestionnaireTask.html>”
- The field **status** will always have the value “requested”
- The field **intent** will always have the value “proposal”
- The field **code** will always have the value “collect-information”

The following rules apply to the Questionnaire resource fields:

- The field **meta.profile** should have the following value
“<https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition-PSSDataAcquisitionForm.html>”
- The field **status** will always have the value “active”

8.3.1.2.3.2. Example

An example for this request can be found here:

<https://www.ehealth.fgov.be/standards/fhir/pss/Bundle-getdatatocollect-a-response.html>

8.3.1.3. Get Recommendations

This endpoint represents the second step in PSSa, following the "Get Data to Collect" endpoint. In this step, the prescriber submits responses to the previously provided questionnaire. Based on these responses, PSSa generates a set of recommendations. These recommendations include various MedicationRequest and CommunicationRequest resources. Additionally, evidence links are provided, detailing the sources and guidelines upon which the recommendations are based. This ensures that the prescriber has access to evidence-based support for making informed decisions.

8.3.1.3.1. Endpoint

POST /PlanDefinition/GetRecommendations/\$apply

8.3.1.3.2. Request

- **Method:** POST
- **Headers**
 - **Content-Type:** application/fhir+json
 - **Accept-Language**
 - NL
 - FR
- **Payload:** A FHIR Bundle

Bundle:

For this request, PSS applies the common resource Bundle as described in section 8.2.1.

Patient:

For this request, PSS applies the common resource Patient as described in section 8.2.2.

Condition

Purpose: Although this information was provided in the "Get Data to Collect" endpoint, it needs to be included again because the PSSa system is stateless.

Field	Description
resourceType	Identifies the type as “Condition”
Id	A unique identifier for the condition
meta.profile	Specifies the canonical URL of the profile that this condition resource conforms to. This ensures the

	structure and content of the condition align with the CPG structure.
clinicalStatus - clinicalStatus.coding - clinicalStatus.coding.system - clinicalStatus.coding.code	Indicates the condition's clinical state
verificationStatus - verificationStatus.coding - verificationStatus.coding.system - verificationStatus.coding.code	Confirms the diagnostic certainty
category - category.coding - category.coding.system - category.coding.code	Array of categories for the condition, represented with coding information
code - code.coding - code.coding.system - code.coding.code	Code specifying the condition, represented with a coding object
subject - subject.reference	A reference to the associated patient
onsetDateTime	The onset date and time of the condition

QuestionnaireResponse:

Purpose: This resource includes detailed information about the patient's condition and other relevant data points, as reported by the prescriber or automatically extracted from the EPD system. The automatic extraction process involves matching the codes linked to a patient variable in PSS with the corresponding codes available for the patient in the EPD. This ensures that all necessary information is collected efficiently and accurately.

The QuestionnaireResponse resource ensures that PSS has access to comprehensive and up-to-date patient data, enabling it to generate tailored and evidence-based recommendations. This structured approach enhances the quality and reliability of the support provided to the prescriber.

In the context of PSS – Get Recommendations, if the Get Data to Collect response does not include a Questionnaire, then a QuestionnaireResponse must not be included in the request. This reflects the optional nature of data collection for certain indications.

Field	Description
resourceType	Identifies the type as "QuestionnaireResponse"
id	A unique identifier for the questionnaire response
meta.profile	Specifies the canonical URL of the profile that this QuestionnaireResponse resource conforms to. This ensures the structure and content of the QuestionnaireResponse align with the CPG structure.
questionnaire	Canonical reference to the Questionnaire this response answers (URL).
status	The current status of the QuestionnaireResponse
subject	A reference to the associated patient

- <i>subject.reference</i>	
<i>authored</i>	Date and time when the response was authored (submitted).
<i>item</i>	Groups and questions that are part of the response; contains answers for each linkId from the Questionnaire.

Item Fields:

Each response to a question (or group) uses the item element in the **QuestionnaireResponse** resource. The structure of the response depends on the type of question defined in the corresponding **Questionnaire**:

- If the question's type is **boolean**, the response should include a valueBoolean, with the answer being either true or false.
- If the question's type is choice, the response should include a valueCoding. In this case, the selected code must be one of the predefined PSS codes that were defined in the corresponding Questionnaire. These codes must use the following system:
<https://www.ehealth.fgov.be/standards/fhir/pss/CodeSystem/PSSCodes>

This ensures that each response is structured correctly according to the expected data type defined in the questionnaire.

Field	Description
<i>linkId</i>	Identifies the question from the Questionnaire (matches the linkId there)
<i>answer</i>	One or more answers to the question
<i>answer.valueBoolean</i>	Boolean value (true/false) provided as an answer
<i>answer.valueCoding</i>	Coded answer (e.g., selected choice from predefined options)
<i>item (nested)</i>	Used if there are sub-questions or nested items inside the answer (e.g., a subgroup of answers)

8.3.1.3.2.1. Implemented rules

The following rules apply to the Condition resource fields:

- The field **meta.profile** should have the following value
"<http://hl7.org/fhir/uv/cpg/StructureDefinition/cpg-condition>"
- The field **clinicalStatus.coding.code** will always have the value "active"
- The field **verificationStatus.coding.code** will always have the value "confirmed"
- The field **category.coding.code** will always have the value "encounter-diagnosis"
- The field **onsetDateTime** has to be structured based on ISO 8601 format (YYYY-MM-DD)

The following rules apply to the QuestionnaireResponse resource fields:

- The field **meta.profile** should have the following value
"<http://hl7.org/fhir/uv/cpg/StructureDefinition/cpg-questionnaireresponse>"
- The field **status** will always have the value "completed"
- The field **authored** has to be structured based on ISO 8601 format (YYYY-MM-DD)

8.3.1.3.2.2. Example

An example for this request can be found here:

<https://www.ehealth.fgov.be/standards/fhir/pss/1.0.0/Bundle-getrecommendations-a-data.html>

8.3.1.3.3. Response

The response is a FHIR **Bundle** with resources to list the recommendations. Below are the key components:

Bundle:

For this response, PSS applies the common resource Bundle as described in section 8.2.1.

RequestGroup:

For this response, PSS applies the common resource RequestGroup as described in section 8.2.3.

CommunicationRequest

Purpose: The CommunicationRequest in this context serves as a vehicle for conveying clinical guidance, clarifications, or rationale as part of a recommendation. It enables computable clinical decision support systems like PSSa to provide contextual communication messages to the care team. These messages may contain warnings, educational advice, or supporting information that inform or justify clinical decisions. In CPG-based systems, it complements structured recommendations (e.g., MedicationRequest) by delivering human-readable narrative that supports transparency and trust in automated recommendations.

Field	Description
<i>resourceType</i>	Identifies the type as "CommunicationRequest"
<i>id</i>	A unique identifier for the communication request
<i>meta.profile</i>	Specifies the canonical URL of the profile that this CommunicationRequest resource conforms to. This ensures the structure and content of the CommunicationRequest align with the PSS implementation guide and validation rules.
<i>status</i>	Status of the communicationrequest
<i>subject</i> - <i>subject.reference</i>	A reference to the associated patient
<i>payload</i>	Contains the actual communication content, typically advice or explanation.
<i>payload.contentString</i>	Text of the message to communicate, such as guideline clarifications or warnings.

MedicationRequest

Purpose: This resource includes essential information such as the status, intent, and details about the medication, including dosage instructions. Additionally, it contains extensions with clinical practice guideline (CPG) ratings, which support the recommendations with relevant clinical evidence.

By including the MedicationRequest resource, PSSa ensures that prescribers receive comprehensive and evidence-based medication proposals tailored to the patient's specific clinical scenario.

Field	Description
resourceType	Identifies the type as "MedicationRequest"
id	A unique identifier for the medication request
meta.profile	Specifies the canonical URL of the profile that this MedicationRequest resource conforms to. This ensures the structure and content of the MedicationRequest align with the PSS implementation guide and validation rules.
status	Status of the request
intent	The intent of the request
medicationCodeableConcept	Details about the medication being requested (with codes from e.g., ATC, local systems)
subject - subject.reference	A reference to the associated patient
dosageInstruction	How the medication should be administered to the patient
dosageInstruction.text	Text summary of how the medication should be taken
dosageInstruction.timing	Scheduling information
dosageInstruction.timing.repeat.boundsDuration	Duration over which the medication is to be administered
dosageInstruction.timing.repeat.frequency	Number of times the medication is taken per period
dosageInstruction.timing.repeat.period	Period length
dosageInstruction.timing.repeat.periodUnit	Units of the period
dosageInstruction.doseAndRate	Dosage quantity and optionally the rate at which the medication should be administered.
dosageInstruction.doseAndRate.doseQuantity.value	Amount of medication per dose
dosageInstruction.doseAndRate.doseQuantity.unit	Unit of measure for the dose

Patient:

For this response, PSS applies the common resource Patient as described in section 8.2.2.

8.3.1.3.3.1. Implemented rules

The following rules apply to the CommunicationRequest resource fields:

- The field **meta.profile** should have the following value
“<https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition-PSSResponseCommunicationRequest.html>”
- The field **status** will always have the value “active”

The following rules apply to the MedicationRequest resource fields:

- The field **meta.profile** should have the following value
“<https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition-PSSMedicationRequest.html>”
- The field **status** will always have the value “active”
- The field **intent** will always have the value “proposal”

8.3.1.3.3.2. Example

An example for this response can be found here:

<https://www.ehealth.fgov.be/standards/fhir/pss/1.0.0/Bundle-getrecommendations-a-response.html>

8.3.1.4. Feedback

This endpoint allows the prescriber to submit feedback on the recommendations provided by PSS. The feedback captures the user’s conclusion on the proposed treatment and, if applicable, a reason for deviation.

For PSSa, the prescriber can select exactly one treatment option per dossier. This selected option is expressed in the feedback as:

- a reference to one recommendation provided by PSS, or
- one alternative treatment that was not proposed by PSS.

The feedback is always linked to a unique PSS-ID.

8.3.1.4.1. Endpoint

POST /PlanDefinition/GetRecommendations/\$feedback

8.3.1.4.1. Request

- **Method:** POST
- **Headers**
 - **Content-Type:** application/fhir+json
 - **Accept-Language**

- NL
- FR
- **Payload:** a FHIR Parameters resource

Parameters:

Purpose: The Parameters resource is used as a lightweight container to submit feedback data that does not represent a standalone clinical resource. It bundles the unique PSS identifier together with the feedback details expressed as a Task resource.

Field	Description
resourceType	Identifies the type as "Parameters"
id	Identifier of the parameters instance
parameter	List of named parameters

Parameters Entries:

Field	Description
name	Always pss-id
valueString	Unique PSS exchange identifier

Purpose: Links the feedback to the correct PSS dossier and original recommendation set.

Field	Description
name	Always feedback-task
resource	Embedded Task resource describing the user feedback

Task (Feedback)

Purpose: The Task resource represents the prescriber's conclusion regarding a recommendation. It expresses whether the recommendation was accepted or deviated from, optionally providing a reason and pointing to the selected treatment or recommendation.

Field	Description
resourceType	Identifies the type as "Task"
id	Unique identifier for the feedback task
meta.profile	Canonical URL of the FeedbackTask profile
status	Outcome of the recommendation
statusReason - statusReason.coding - statusReason.coding.system - statusReason.coding.code	Reason explaining deviation or contextual justification
intent	Always option
focus - focus.reference	Reference to the selected recommendation or alternative

Or - <i>focus.identifier.system</i> - <i>focus.identifier.value</i>	
<i>lastModified</i>	Timestamp of feedback submission

8.3.1.4.1.1. Implemented rules

The following rules apply to the **Parameters** resource fields:

- The parameter *pss-id* is **mandatory**
- Exactly one feedback-task **must** be provided

The following rules apply to the **Task** resource fields:

- The field *meta.profile* should have the following value
“<https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition/FeedbackTask>”
- The field *intent* will always have the value “option”
- If *statusReason* is present:
 - *statusReason.coding.system* must be *PSSaFeedbackReasons*
- **Task.focus** must reference either one of these:
 - a PSS recommendation
 - an alternative treatment via identifier
 - If the alternative treatment/recommendation has no suitable code in the relevant coding system, the generic SNOMED CT code 74964007 (Other) must be used for *focus.identifier.value*, together with *focus.display* containing the free-text name of the proposed treatment/exam. The reasoning for the deviation is still captured in *statusReason.text*.
- The field *lastModified* has to be structured based on ISO 8601 format (YYYY-MM-DD)

8.3.1.4.1.2. Example

An example for this request can be found here:

<https://www.ehealth.fgov.be/standards/fhir/pss/Parameters-antimicrobial-feedback-green.html>

<https://www.ehealth.fgov.be/standards/fhir/pss/Parameters-antimicrobial-feedback-orange.html>

8.3.1.4.2. Response

The response is a FHIR **Bundle**. Below are the key components:

Bundle:

For this response, PSS applies the common resource Bundle as described in section 8.2.1.

Task

Purpose: The Task resource represents the stored feedback for the selected treatment option. For PSSa, exactly one Task is returned, as only one treatment option can be selected per dossier.

Field	Description
<i>resourceType</i>	Identifies the type as “Task”

id	A unique identifier for the task
meta.profile	Canonical URL of the FeedbackTask profile
status	Final outcome of the recommendation
statusReason	Reason for deviation or justification
intent	Defines the purpose or motivation
focus - focus.reference Or - focus.identifier.system - focus.identifier.value	Reference to the selected recommendation or alternative
lastModified	Timestamp of feedback submission

8.3.1.4.2.1. Implemented rules

The following rules apply to the Task resource fields:

- The field **meta.profile** should have the following value
“<https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition/FeedbackTask>”
- The field **intent** will always have the value “option”
- If **statusReason** is present:
 - statusReason.coding.system must be PSSaFeedbackReasons
- **Task.focus** must reference either one of these:
 - a PSS recommendation
 - an alternative treatment via identifier
- The field **lastModified** has to be structured based on ISO 8601 format (YYYY-MM-DD)

8.3.2. Operations on Radiology

PSSr aims to assist prescribers in making informed decisions regarding radiology referrals. This support is provided through a series of steps, starting with obtaining a list of possible diagnoses based on patient information such as age, gender, structured or free text indications, and optionally a ServiceRequest. The collected data will be used to generate recommendations based on the selected diagnoses. All information, including diagnoses, recommendations, and evidence links, will be provided in the language the prescriber is using in their system. This ensures that prescribers can access and understand the information in their preferred language, facilitating better communication and decision-making.

8.3.2.1. Get Diagnoses

This endpoint initiates the first step in the Prescription Search Support for Radiology (PSSr). The prescriber provides anonymized patient information, including age, gender, and suspected indications, which can be structured or free text. Optionally, a ServiceRequest can also be included. Based on this information, PSSr generates a list of possible diagnoses related to the provided parameters. This ensures that PSSr does not have access to the patient's identity. The collected data will be used in the subsequent step, which involves the "Get Recommendations" endpoint described in section 8.3.2.2.

8.3.2.1.1. Endpoint

POST /PlanDefinition/GetDiagnoses/\$apply

8.3.2.1.2. Request

- **Method:** POST
- **Headers**
 - **Content-Type:** application/fhir+json
 - **Accept-Language**
 - NL
 - FR
- **Payload:** A FHIR Bundle

Bundle:

For this request, PSS applies the common resource Bundle as described in section 8.2.1.

Patient:

For this request, PSS applies the common resource Patient as described in section 8.2.2.

Observation:

Purpose: The Observation resource represents clinical observations made by the prescriber, such as symptoms or findings like head trauma, headache, etc. In the context of the "Get Diagnoses" endpoint request, the Observation resource provides detailed information about the patient's current health status as observed by the prescriber. This information is crucial for generating

accurate and relevant diagnoses. The resource includes fields such as status, code, and subject reference, ensuring that the information is structured and standardized.

Field	Description
resourceType	Identifies the type as "Observation"
id	A unique identifier for the observation
status	The status of the observation
code - code.coding - code.coding.system - code.coding.code	Code specifying the observation, represented with a coding object
code - code.text	Free-text description of the code, used for text-based search queries
subject - subject.reference	A reference to the associated patient

ServiceRequest:

Purpose: The ServiceRequest resource represents an optional request for healthcare procedures. It reflects the initial thought of the prescriber regarding the best course of action. In the context of the "Get Diagnoses" endpoint request, the ServiceRequest resource provides details about the specific procedures being considered, including the status, intent, and description of the procedure. By running PSSr, the system evaluates whether this initial thought is indeed the best solution or if there are better alternative procedures. This helps ensure that the generated diagnoses and subsequent recommendations are optimal for the patient's needs.

Field	Description
resourceType	Identifies the type as "ServiceRequest"
id	A unique identifier for the service request
meta.profile	Specifies the canonical URL of the profile that this ServiceRequest resource conforms to. This ensures the structure and content of the ServiceRequest align with the PSS implementation guide and validation rules.
status	The status of the service request
intent	The intent of the service request
code - code.coding - code.coding.system - code.coding.code	Code specifying the ServiceRequest, represented with a coding object
subject - subject.reference	A reference to the associated patient

8.3.2.1.2.1. Implemented rules

The following rules apply to the Observation resource fields:

- The field **status** will always have the value "final"

The following rules apply to the ServiceRequest resource fields:

- The field **meta.profile** should have the following value
“<https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition-PSSResponseServiceRequest.html>”
- The field **status** will always have the value “active”
- The field **intent** will always have the value “proposal”

8.3.2.1.2.2. Example

An example for this request can be found here:

<https://www.ehealth.fgov.be/standards/fhir/pss/Bundle-radiology-getdiagnoses.html>

8.3.2.1.3. Response

Bundle:

For this response, PSS applies the common resource Bundle as described in section 8.2.1.

RequestGroup:

For this response, PSS applies the common resource RequestGroup as described in section 8.2.3.

Task

Purpose: The Task resource represents specific actions that need to be carried out as part of the diagnostic process. The Task resource details the possible diagnoses that match the patient's health status. Each task represents a potential diagnosis and includes a reference to a Condition resource. The prescriber must select one or multiple conditions from these tasks in the next step, which involves the "Get Recommendations" endpoint. This resource includes fields such as status, intent, code, and input data, providing a structured and actionable framework for the diagnostic process.

Field	Description
resourceType	Identifies the type as “Task”
id	A unique identifier for the task
status	The status of the Task
intent	The intent of the Task
code - code.coding - code.coding.system - code.coding.code	Code specifying the condition, represented with a coding object
for - for.reference	A reference to the associated patient
input - input.coding - input.coding.system - input.coding.code	Input data for the task, which includes a reference to the associated Questionnaire
input.valueReference.reference	Reference to a condition

Condition:

Purpose: The Condition resource in the "Get Diagnoses" endpoint response is used to describe a clinical condition linked to the referenced patient. This resource includes details such as the clinical status, verification status, category, and specific coding information. By providing the Condition resource, the PSSr system ensures that the generated diagnoses are based on accurate and relevant clinical information.

Field	Description
resourceType	Identifies the type as "Condition"
id	A unique identifier for the condition
meta.profile	Specifies the canonical URL of the profile that this condition resource conforms to. This ensures the structure and content of the condition align with the CPG implementation guide and validation rules.
clinicalStatus - clinicalStatus.coding - clinicalStatus.coding.system - clinicalStatus.coding.code	Indicates the condition's clinical state
verificationStatus - verificationStatus.coding - verificationStatus.coding.system - verificationStatus.coding.code	Confirms the diagnostic certainty
category - category.coding - category.coding.system - category.coding.code	Array of categories for the condition, represented with coding information
code - code.coding - code.coding.system - code.coding.code	Code specifying the condition, represented with a coding object
subject - subject.reference	A reference to the associated patient
onsetDateTime	The onset date and time of the condition

8.3.2.1.3.1. Implemented rules

The following rules apply to the Task resource fields:

- The field **status** will always have the value "requested"
- The field **intent** will always have the value "proposal"
- The field **code** will always have the value "propose-diagnosis"

The following rules apply to the Condition resource fields:

- The field **meta.profile** should have the following value
"<http://hl7.org/fhir/uv/cpg/StructureDefinition/cpg-condition>"
- The field **clinicalStatus** will always have the value "active"
- The field **verificationStatus** will always have the value "provisional"
- The field **category** will always have the value "problem-list-item"

- The field **onsetDateTime** has to be structured based on ISO 8601 format (YYYY-MM-DD)

8.3.2.1.3.2. Example

An example for this request can be found here:

<https://www.ehealth.fgov.be/standards/fhir/pss/Bundle-radiology-getdiagnoses-response.html>

8.3.2.2. Get Recommendations

This endpoint represents the second step in PSSr following the "Get Diagnoses" endpoint. In this step, the prescriber submits the selected diagnoses from the previously provided list. Based on these selections, PSSr generates a set of recommendations. These recommendations include various ServiceRequest resources and evidence links, detailing the sources and guidelines upon which the recommendations are based. This ensures that the prescriber has access to evidence-based support for making informed referral decisions. All information will be available in the language the prescriber is using in their system.

8.3.2.2.1. Endpoint

POST /PlanDefinition/GetRecommendations/\$apply

8.3.2.2.2. Request

- **Method:** POST
- **Content-Type:** application/fhir+json
- **Payload:** A FHIR Bundle

Bundle:

For this request, PSS applies the common resource Bundle as described in section 8.2.1.

Patient:

For this request, PSS applies the common resource Patient as described in section 8.2.2.

Condition

Purpose: By including one or multiple conditions, the PSSr system can generate accurate and relevant recommendations tailored to the patient's specific clinical scenario. The Condition resource ensures that the recommendations are based on up-to-date and precise clinical data.

Field	Description
resourceType	Identifies the type as "Condition"
id	A unique identifier for the condition
meta.profile	Specifies the canonical URL of the profile that this condition resource conforms to. This ensures the structure and content of the condition align with the CPG implementation guide and validation rules.
clinicalStatus - clinicalStatus.coding - clinicalStatus.coding.system	Indicates the condition's clinical state

- clinicalStatus.coding.code	
verificationStatus - verificationStatus.coding - verificationStatus.coding.system - verificationStatus.coding.code	Confirms the diagnostic certainty
category - category.coding - category.coding.system - category.coding.code	Array of categories for the condition, represented with coding information
code - code.coding - code.coding.system - code.coding.code	Code specifying the condition, represented with a coding object
subject - subject.reference	A reference to the associated patient
onsetDateTime	The onset date and time of the condition

ServiceRequest:

Purpose: Although this information was provided in the "Get Diagnoses" endpoint, it needs to be included again because the PSSr system is stateless.

Field	Description
resourceType	Identifies the type as "ServiceRequest"
id	A unique identifier for the service request
status	The status of the service request
intent	The intent of the service request
code - code.coding - code.coding.system - code.coding.code	Code specifying the ServiceRequest, represented with a coding object
subject - subject.reference	A reference to the associated patient

8.3.2.2.2.1. Implemented rules

The following rules apply to the Condition resource fields:

- The field **meta.profile** should have the following value
"<http://hl7.org/fhir/uv/cpg/StructureDefinition/cpg-condition>"
- The field **clinicalStatus** will always have the value "active"
- The field **verificationStatus** will always have the value "provisional"
- The field **category** will always have the value "problem-list-item"
- The field **onsetDateTime** has to be structured based on ISO 8601 format (YYYY-MM-DD)

The following rules apply to the ServiceRequest resource fields:

- The field **meta.profile** should have the following value
“<https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition-PSSResponseServiceRequest.html>”
- The field **status** will always have the value “active”
- The field **intent** will always have the value “proposal”

8.3.2.2.2. Example

An example for this request can be found here:

<https://www.ehealth.fgov.be/standards/fhir/pss/Bundle-getrecommendations-data3.html>

8.3.2.2.3. Response

Bundle:

For this request, PSS applies the common resource Bundle as described in section 8.2.1.

RequestGroup:

For this response, PSS applies the common resource RequestGroup as described in section 8.2.3.

ServiceRequest:

Purpose: The ServiceRequest resource in the GetRecommendations endpoint response is used to provide a list of recommended procedures based on the selected conditions. This resource includes essential details such as the status, intent, and description of the requested service. If the prescriber provided an optional ServiceRequest at the beginning, it will be included in the list along with other recommended options that may have a better score. By including this information, the PSSr system ensures that the prescriber receives a comprehensive set of evidence-based recommendations, allowing them to make informed decisions about the most appropriate radiology referrals for their patients.

Field	Description
resourceType	Identifies the type as “ServiceRequest”
id	A unique identifier for the service request
meta.profile	Specifies the canonical URL of the profile that this ServiceRequest resource conforms to. This ensures the structure and content of the ServiceRequest align with the PSS implementation guide and validation rules.
identifier.value	An internal identifier for the service request
status	The status of the service request
intent	The intent of the service request
code - code.coding - code.coding.system - code.coding.code	Code specifying the ServiceRequest, represented with a coding object
subject - subject.reference	A reference to the associated patient

8.3.2.2.3.1. Implemented rules

The following rules apply to the ServiceRequest resource fields:

- The field **meta.profile** should have the following value
“<https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition-PSSResponseServiceRequest.html>”
- The field **status** will always have the value “active”
- The field **intent** will always have the value “proposal”

8.3.2.2.3.2. Example

An example for this request can be found here:

<https://www.ehealth.fgov.be/standards/fhir/pss/Bundle-getrecommendations-r-response.html>

8.3.2.3. Feedback

This endpoint allows the prescriber to submit feedback on the recommendations provided by PSSr (Radiology). The feedback captures the user’s conclusion on the proposed imaging recommendations and, if applicable, a reason for deviation.

For PSSr, the prescriber is allowed to select multiple recommendations per session. Each selected recommendation is expressed as a separate feedback Task:

- a reference to a recommendation provided by PSS
- alternative treatment that was not proposed by PSS.

The feedback is always linked to a unique PSS-ID.

8.3.2.3.1. Endpoint

POST /PlanDefinition/GetRecommendations/\$feedback

8.3.2.3.2. Request

- **Method:** POST
- **Headers**
 - **Content-Type:** application/fhir+json
 - **Accept-Language**
 - NL
 - FR
- **Payload:** a FHIR Parameters resource

Parameters:

Purpose: The Parameters resource is used as a lightweight container to submit feedback data that does not represent a standalone clinical resource. It bundles the unique PSS identifier together with the feedback details expressed as a Task resource.

Field	Description
-------	-------------

resourceType	Identifies the type as “Parameters”
id	Identifier of the parameters instance
parameter	List of named parameters

Parameters Entries:

Field	Description
name	Always pss-id
valueString	Unique PSS exchange identifier

Purpose: Links the feedback to the correct PSS dossier and original recommendation set.

Field	Description
name	Always feedback-task
resource	Embedded Task resource describing the user feedback

Task (Feedback)

Purpose: The Task resource represents the prescriber’s conclusion regarding a recommendation. It expresses whether the recommendation was accepted or deviated from, optionally providing a reason and pointing to the selected treatment or recommendation.

Field	Description
resourceType	Identifies the type as “Task”
id	Unique identifier for the feedback task
meta.profile	Canonical URL of the FeedbackTask profile
status	Outcome of the recommendation
statusReason - statusReason.coding - statusReason.coding.system - statusReason.coding.code	Reason explaining deviation or contextual justification
intent	Always option
focus - focus.reference Or - focus.identifier.system - focus.identifier.value	Reference to the selected recommendation or alternative
lastModified	Timestamp of feedback submission

8.3.2.3.2.1. Implemented rules

The following rules apply to the **Parameters** resource fields:

- The parameter pss-id is **mandatory**
- Exactly one feedback-task **must** be provided

The following rules apply to the **Task** resource fields:

- The field **meta.profile** should have the following value
[“https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition/FeedbackTask”](https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition/FeedbackTask)
- The field **intent** will always have the value “option”
- If **statusReason** is present:
 - statusReason.coding.system must be PSSrFeedbackReasons
- **Task.focus** must reference either one of these:
 - a PSS recommendation
 - an alternative treatment via identifier
 - If the alternative treatment/recommendation has no suitable code in the relevant coding system, the generic SNOMED CT code 74964007 (Other) must be used for focus.identifier.value, together with focus.display containing the free-text name of the proposed treatment/exam. The reasoning for the deviation is still captured in statusReason.text.
- The field **lastModified** has to be structured based on ISO 8601 format (YYYY-MM-DD)

8.3.2.3.2. Example

An example for this request can be found here:

<https://www.ehealth.fgov.be/standards/fhir/pss/Parameters-radiology-feedback.html>

8.3.2.3.3. Response

The response is a FHIR **Bundle**. Below are the key components:

Bundle:

For this response, PSS applies the common resource Bundle as described in section 8.2.1.

Task

Purpose: Each entry contains one persisted Feedback Task. For PSSr, multiple Task entries may be returned, reflecting that multiple recommendations that were selected per session.

Field	Description
resourceType	Identifies the type as “Task”
id	A unique identifier for the task
meta.profile	Canonical URL of the FeedbackTask profile
status	Final outcome of the recommendation
statusReason	Reason for deviation or justification
intent	Defines the purpose or motivation
focus - focus.reference Or - focus.identifier.system - focus.identifier.value	Reference to the selected recommendation or alternative
lastModified	Timestamp of feedback submission

8.3.2.3.3.1. Implemented rules

The following rules apply to the Task resource fields:

- The field **meta.profile** should have the following value
[“https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition/FeedbackTask”](https://www.ehealth.fgov.be/standards/fhir/pss/StructureDefinition/FeedbackTask)
- The field **intent** will always have the value “option”
- If **statusReason** is present:
 - statusReason.coding.system must be PSSrFeedbackReasons
- **Task.focus** must be one of the following:
 - A reference to a PSS recommendation
 - An alternative treatment via identifier
- The field **lastModified** has to be structured based on ISO 8601 format (YYYY-MM-DD)

8.3.2.4. Retrieve Original Recommendations or Feedback

This endpoint allows the client to retrieve the **original bundle** associated with a radiology dossier, based on the **bundle identifier**.

To use this endpoint, a search must be performed using the **exchangeId with a suffix**:

- exchangeId + "_RECOMMENDATIONS" to retrieve the original recommendations bundle
- exchangeId + "_FEEDBACK" to retrieve the feedback bundle

Depending on which suffix is used, the endpoint returns the stored **recommendations** or **feedback** bundle exactly as persisted by PSSr.

8.3.2.4.1. Endpoint

GET / Bundle?identifier={bundleIdentifier}

Where {bundleIdentifier} is:

- {exchangeId}_RECOMMENDATIONS
- {exchangeId}_FEEDBACK

8.3.2.4.2. Request

- **Method:** GET
- **Headers**
 - **Content-Type:** application/fhir+json
 - **Accept-Language**
 - NL
 - FR
- **Query parameter:** identifier = {exchangeId}_RECOMMENDATIONS or {exchangeId}_FEEDBACK

8.3.2.4.3. Response

The response is a **FHIR searchset Bundle** containing the matching stored bundle (if found). The search result bundle contains exactly one entry when a match exists.

Field	Description
resourceType	Identifies the type as "Bundle"
meta.lastUpdated	Timestamp of the search response generation
type	Always searchset
total	Number of matches (typically 1 or 0)
link[relation="self"]	Echoes the executed search URL
entry	Search result entries containing the stored bundle resource

Stored bundle in entry.resource

The entry.resource is itself a Bundle (type collection) holding the persisted content.

Recommendations bundle ({exchangeId}_RECOMMENDATIONS)

Purpose: Returns the original recommendation content produced by the PSSr "Get Recommendations" step, including the RequestGroup, the recommended ServiceRequests, and the anonymized Patient context.

Key characteristics:

- entry.resource.identifier.value ends with _RECOMMENDATIONS
- entry.resource.type is collection
- Typically contains:
 - **RequestGroup** (with actions and structured ratings)
 - **ServiceRequest** resources representing recommended procedures (e.g. SNOMED procedure codes)
 - **Patient** (anonymized context)

Feedback bundle ({exchangeId}_FEEDBACK)

Purpose: Returns the persisted feedback content submitted for the same dossier.

Key characteristics:

- entry.resource.identifier.value ends with _FEEDBACK
- entry.resource.type is collection
- Typically contains:
 - one or more Task resources conforming to FeedbackTask (since PSSr supports multiple selected recommendations)

9. Error management

In the cycle of search support, PSS API allows different type of requests and multiple different actors can interact with the API. If there is an error in the request, or if the action is forbidden by the system, PSS sends back an error. This section documents how errors will be represented by PSS.

Alongside the correct HTTP code, PSS uses the FHIR resource OperationOutcome which is defined by FHIR to display the error.

An error can appear for different reasons. The errors returned by PSS are structured in a specific way to allow the end-user to quickly understand where the errors come from.

PSS uses OperationOutcome issues with the following fields:

- **severity:** defines if this is an “error” or a “warning”. (<https://hl7.org/fhir/r4b/valueset-issueseverity.html>)
- **code:** FHIR error type. PSS uses (business-rule, value, security, forbidden, conflict, processing). (<https://hl7.org/fhir/r4b/valueset-issue-type.html>)
- **details.coding.system:** The system where the error is defined. Errors thrown and defined by PSS are in the system “urn:pss:errors”
- **details.coding.code:** The code that defines the error. In the document, it is referenced as the PSS code
- **diagnostics:** Contains the description of the PSS code to help understanding. It should always be the same message for one PSS code. This message ends with an error id that can be used for support purpose since this error is logged and more information can be retrieved by the PSS team through the error tracking system of PSS.

All error messages returned by PSS are listed in the Excel document “PSS_API_ErrorCodes.xlsx” alongside this cookbook.

10. Antimicrobial domain: front-end requirements

This chapter outlines the front-end requirements and best practices for implementing two key components: 1) the Patient Situation Module, and 2) the PSS Recommendations Viewer, both specifically designed for the antimicrobial domain. Its goal is to guide software integrators in building a user-friendly, interoperable interface capable of accurately handling the unique cases and complexities within the antimicrobial field.

10.1. Disclaimer

When a professional uses PSS Antimicrobial for the first time, a disclaimer must be displayed. The user should have the option to confirm that they have read the disclaimer and choose to 'not show it again'. The development of the disclaimer pop-up is the responsibility of the integrators.

The disclaimer should contain the following content:

Language	Disclaimer content
NL	De aanbevelingen zijn gebaseerd op de Belgische gids voor anti-infectieuze behandeling in de ambulante praktijk, uitgegeven door BAPCOC en kunnen dus enkel gebruikt worden voor dit en gelijkaardige toepassingsgebieden. De aanbevelingen dienen slechts ter ondersteuning bij het voorschrijven en zijn geen vervanging van de medische expertise van de voorschrijver.
FR	Les recommandations sont basées sur le guide belge de traitement anti-infectieux en pratique ambulatoire, publié par BAPCOC et ne peuvent donc être utilisées que pour ce domaine d'application et des domaines d'application similaires. Les recommandations sont uniquement destinées à aider à la prescription et ne

	remplacent pas l'expertise médicale du prescripteur.
DE	Die Empfehlungen basieren auf dem belgischen Leitfaden für die antiinfektiöse Behandlung in der ambulanten Praxis, herausgegeben von BAPCOC, und können daher nur für diesen und ähnliche Anwendungsbereiche verwendet werden. Die Empfehlungen sollen lediglich als Hilfestellung bei der Verschreibung dienen und ersetzen nicht die medizinische Fachkompetenz des verschreibenden Arztes.
EN	The recommendations are based on the Belgian guide for anti-infectious treatment in outpatient practice, published by BAPCOC and can therefore only be used for this and similar areas of application. The recommendations are only intended to support prescribing and are not a substitute for the medical expertise of the prescriber.

10.2. Consent

Before using PSSa for the first time, the prescriber must actively provide their consent. This is a mandatory prerequisite: the Consent endpoint must be called successfully before any subsequent PSSa operations (Get Data to Collect, Get Recommendations, Feedback) can be executed.

The consent screen must be displayed to the prescriber upon their first use of PSSa. The prescriber must confirm that they have read and accepted the terms before proceeding. Once consent has been given, the system should remember the choice and not prompt the user again on subsequent sessions.

Front-end requirements:

- The consent pop-up must be shown on first use of PSSa and must not be skippable.
- The consent screen must display the disclaimer content defined in section 10.1 Disclaimer.
- The prescriber must be able to confirm consent via a clearly labelled button (e.g., "I agree" / "Ik ga akkoord" / "J'accepte").
- The consent choice (true/false) and the anonymization preference must be submitted to PSS via the Consent endpoint (POST /QuestionnaireResponse) as described in section 8.3.1.1.
- Once consent is confirmed, the integrator must persist this locally so that the consent pop-up is not shown again on subsequent sessions for the same prescriber.

10.3. Patient situation

The patient situation includes all relevant Support Parameters and Patient Variables for the specified indication. The values for these parameters and variables must be automatically prefilled based on the patient data registered in the EPD. The user must review and, if necessary, adjust the values before confirming the patient situation to continue with the process.

10.3.1. Guidance

A clear guidance message should be displayed to the user. This should be located above the support parameters and patient variables. This message provides essential instructions and context to help the user understand what is expected:

Language	Guidance message content
NL	Gelieve alle parameters te controleren en te wijzigen indien nodig. De vooraf ingevulde waarden komen uit het patiëntendossier.
FR	Veuillez vérifier tous les paramètres et modifier si nécessaire. Les valeurs préremplies viennent du dossier patient.
DE	Bitte überprüfen Sie alle Parameter und ändern Sie sie bei Bedarf. Die vorausgefüllten Werte stammen aus der Patientenakte.
EN	Please check all parameters and adjust if necessary. The pre-filled values come from the patient record.

Note: The instruction should not be displayed when there is only one recommendation linked to the indication, as in this case, no Support Parameters or Patient Variables are shown to the user.

Below the guidance message, all relevant Support Parameters and Patient Variables for the specific indication should be presented. The prescriber must be able to view all relevant data elements immediately, without the need for additional clicks or navigation.

This requirement applies to all types of support parameters, which are categorized as follows:

- **General Support Parameters** (prefix: *sp_*)
- **Exclusive Support Parameters** (prefix: *sp_exc_*)
- **Exclusive Mandatory Support Parameters** (prefix: *sp_excMand_*)

Patient Variables (prefix: *pv_*) may be linked to these different types of parameters. When no codes are linked to a Patient Variable or Support Parameter, they are referred to as "manual observable entities."

Detailed requirements for each type of parameter are outlined in the following chapters.

10.3.2. Support Parameters (*sp_*)

Support parameters are identified by the prefix 'sp_' (e.g., 'sp_penicillinAllergy'). This prefix serves as a clear indicator for recognizing and differentiating support parameters within the system.

10.3.3. Patient Variables (*pv_*)

Patient Variables can be linked to Support Parameters.

If a single Patient Variable is associated with a Support Parameter and the label of the Patient Variable is identical to the Support Parameter label, excluding the 'sp_' or 'pv_' prefix, then the Patient Variable should not be displayed to avoid redundant information being presented to the user.

Example: if the Patient Variable 'pv _penicillinAllergy' is linked to the Support Parameter 'sp_penicillinAllergy' for the indication ACUTE_BRONCHITIS_VOLWASSENEN, and it is the only Patient

Variable for that Support Parameter, then the Patient Variable should not be shown, as it duplicates the information already provided by the Support Parameter.

☐ Penicilline allergie

When multiple Patient Variables are linked to a Support Parameter, the hierarchical relationship should be clearly indicated through visual indentation. In this context, the Support Parameter is considered the 'parent' level, and the linked Patient Variables are considered the 'child' level.

Example : if three Patient Variables — 'pv_compromisedImmuneSystem' and 'pv_oncologyPatient' and 'pv_cWithCerebrospinalFluid_arh' — are linked to the Support Parameter 'sp_riskPatient_arh' for the indication ACUTE_RHINOSINUSITIS, then the hierarchy should be clearly displayed with the Support Parameter at the parent level and the Patient Variables indented beneath it as child elements.

- ☐ Risicopatiënt
 - ☐ Gecompromitteerd immuunsysteem
 - ☐ Oncologische patiënt
 - ☐ Kinderen met cerebrospinal vochttek

There may be instances where no Patient Variables are linked to a Support Parameter.

Example: there are no Patient Variables linked to the Support Parameter 'sp_alarmingSymptoms_aec' for the indication ACUTE_EXACERBATIES_VAN_COPD:

☐ Alarmsymptomen (tekenen van uitputting, cyanose, bewustzijnsdaling)

It is possible for the same Patient Variable to be linked to two different Support Parameters.

When one of these Patient Variables is selected (set to 'TRUE'), the change should automatically apply to the corresponding Patient Variable linked to the other Support Parameter.

For example, if the Patient Variable 'pv_pregnant' is linked to both the Support Parameters 'sp_pregnant' and 'sp_contraIndicationChinolonen' for the indication ACUTE_PYELONEPHRITIS, selecting one of these variables (setting it to 'TRUE') will automatically update the state of the other linked Patient Variable."

- ☒ Zwangerschap
- ☐ Contra indicatie voor chinolonen
 - ☐ Allergie voor chinolonen
 - ☒ Zwangerschap
 - ☐ Borstvoeding
 - ☐ Risicofactoren voor QT verlenging
 - ☐ <12 jaar

10.3.4. 10.2.4 Exclusive Support Parameters (sp_exc_)

When an Exclusive Support Parameter (sp_exc_) is checked (set to 'TRUE'), it is mandatory to specify a corresponding Patient Variable value. The user must provide this value to proceed, as it is required for the proper configuration of the system.

☐ Oorzakelijke kiem

Gelieve te specificeren:

Type en selecteer een waarde*

Only one Patient Variable value can be selected for this type of parameter. To ensure ease of selection, the Patient Variables linked to this parameter should ideally be presented in a dropdown list.

Example: when configuring the Support Parameter “sp_exc_causalPathogen_ure” for the indication URETHRITIS, it is mandatory to select one of the Patient Variables from the dropdown menu:

☒ Oorzakelijke kiem

Gelieve te specificeren:

Type en selecteer een waarde*

Chlamydia

Gonokok

Mycoplasma genitalium

Andere

10.3.5. Exclusive Mandatory Support Parameters (sp_excMand_)

Exclusive Mandatory Support Parameters are identified by the prefix "sp_excMand_". It is always mandatory to provide a value for this type of Support Parameter. These parameters must be checked by default and cannot be manually unchecked by the user.

Example: for the Support Parameter "sp_excMand_typeSyphilis" for the indication SYFILIS, it is required to select one of the available Patient Variables, and the parameter will be checked automatically without the option to uncheck it.

☒ Type syphilis

Gelieve te specificeren:

For Exclusive Mandatory Support Parameters, it is mandatory to select a Patient Variable value. Only one Patient Variable value can be chosen for this type of parameter. To facilitate this selection, the linked Patient Variables should ideally be presented in a dropdown list, ensuring a streamlined and error-free user experience.

☒ Type syphilis

Gelieve te specificeren:

Secundaire syphilis

Primaire syphilis

Secundaire syphilis

Tertiaire syphilis

Vroeg latente syphilis

Laat latente syphilis

10.3.6. No parameters applicable - only 1 recommendation available

For certain indications, such as *Influenza*, no support parameters or patient variables are required to provide the recommendation. In these cases, only one recommendation is available for the indication. A message should be displayed to inform the user that no additional parameters or variables are needed for this recommendation.

Language	Message to inform that there is only 1 recommendation
NL	Voor deze indicatie is er maar één aanbeveling mogelijk.
FR	Pour cette indication, il n'y a qu'une seule recommandation possible.
DE	Für diese Indikation gibt es nur eine mögliche Empfehlung.
EN	There is only one possible recommendation for this indication.

10.4. Manually override patient situation

It is important to visually distinguish between values that were automatically retrieved from the patient's data in the EPD (Electronic Patient Database) and values that have been manually overridden by the prescriber.

- **For parameters or variables with auto-filled values:** Display a label below the parameter/variable when the user manually unchecks a value that was pre-selected based on a match with a code found in the EPD. The label should only appear if the user unchecks a checkbox that was automatically checked due to an EPD code match.
- **For Exclusive and Exclusive Mandatory Parameters:** Display the label when the user selects a different patient variable value from a dropdown, overriding the value that was prefilled based on a code found in the EPD.

Language	Message to inform about manual adjustment
NL	Manuele aanpassing van waarde opgehaald uit het patiëntdossier
FR	Modification manuelle de la valeur récupérée du dossier patient
DE	Manuelle Anpassung des aus der Patientenakte abgerufenen Wertes
EN	Manual adjustment of value retrieved from patient file

Overview of cases for displaying manual override labels

Below is an overview of the different scenarios when the label should (or should not) be displayed to indicate that a value has been manually overridden.

Case 1: Support Parameter linked to code

Given the EPD software integrator requests support for "ACUTE_BRONCHITIS_VOLWASSENEN"
 And finds a match with the code for support parameter "sp_penicillinAllergy" (code found "Z88.0")
 And the prescriber consults the patient situation
 Then the support parameter "sp_penicillinAllergy" is automatically checked based on EPD code match
 When the prescriber unchecks the parameter
 Then the label should be displayed below the support parameter to indicate that the value, which was pre-checked based on the EPD code, has been manually unchecked.

Case 2: Patient Variable linked to code

Given the EPD software integrator requests support for "ACUTE_BRONCHITIS_VOLWASSENEN "
 And finds a match with the code for patient variable "pv_oncologyPatient" (for example "R85")
 And "pv_oncologyPatient" is linked to support parameter "sp_riskPatient_aab"
 And the prescriber consults the patient situation
 Then the patient variable "pv_oncologyPatient" is automatically checked based on the EPD code match
 When the prescriber unchecks the patient variable
 Then the label should be displayed below the patient variable to indicate that the value, which was pre-checked based on the EPD code, has been manually unchecked.

Case 3: Manual observable entity

Given that a manual observable entity is not linked to a code, it is not applicable for automatic retrieval from the EPD. The label is thus never shown as the value cannot be retrieved from the EPD.

Case 4.a: Exclusive parameter – uncheck support parameter

Given the EPD software integrator requests support for "URETHRITIS"

And finds a match with the code for patient variable "pv_causalPatChlamydia_ure "

And the prescriber consults the patient situation

Then the patient variable "pv_causalPatChlamydia_ure" is already selected from the dropdown

And the support parameter "sp_exc_causalPathogen_ure " is also checked based on the EPD data

☒ Oorzakelijke kiem

Gelieve te specificeren:

Chlamydia
×

When the prescriber unchecks the support parameter

Then the label should be displayed below the dropdown to indicate that the value, which was prechecked based on the EPD, has been manually modified.

☐ Oorzakelijke kiem

Gelieve te specificeren:

Type en selecteer een waarde*
×

Manuele aanpassing van waarde opgehaald uit het patiëntdossier

Case 4.b: Exclusive parameter – change patient variable

Given the EPD software integrator requests support for "URETHRITIS"

And finds a match with the code for patient variable "pv_causalPatChlamydia_ure"

And the prescriber consults the patient situation

Then the patient variable "pv_causalPatChlamydia_ure" is already selected from the dropdown

And the support parameter "sp_exc_causalPathogen_ure " is also checked based on the EPD data

☒ Oorzakelijke kiem

Gelieve te specificeren:

Chlamydia
×

When the prescriber changes the patient variable from "pv_causalPatChlamydia_ure" to "pv_causalPatGonokok_ure"

Then the label should be displayed below the dropdown to indicate that the value, that was originally retrieved from the EPD, has been manually modified.

☒ Oorzakelijke kiem

Gelieve te specificeren:

Gonokok

Manuele aanpassing van waarde opgehaald uit het patiëntdossier

Case 5: Exclusive mandatory parameter

This case does not apply at the support parameter level, as Exclusive Mandatory Parameters are always checked by default and cannot be manually unchecked. The Support Parameter is preset to 'TRUE,' and it is mandatory to specify a corresponding Patient Variable.

However, the requirement to display the label still applies if user adapts the patient variable:

Given the EPD software integrator requests support for "SYFILIS"

And finds a match with the code for patient variable "pv_primarySyphilis"

And the prescriber consults the patient situation

Then the patient variable "pv_primarySyphilis" is already selected from the dropdown

When the prescriber unselects the patient variable

Then it is mandatory to select another patient variable, as this is an exclusive mandatory parameter

And when the user selects a value that is different from the value that was retrieved from the EPD (for example "pv_secondarySyphilis")

Then the label should be displayed below the patient variable to indicate that the value, initially retrieved from the EPD, has been manually modified.

10.5. Patient situation summary

Important Note: We are currently exploring a solution within FHIR to return the Support Parameter Values calculated based on the Patient Variable values during the support derivation process. This capability is essential for enabling integrators to display a summary of the patient's clinical situation. While this feature is already available in the web components, it is not yet supported in FHIR.

The summary will include all support parameters and patient variables marked as TRUE for the patient the selected indication, providing prescribers with a quick overview of the relevant clinical data used to derive support.

If no support parameters are associated with the selected indication, or if none are applicable to the patient, a specific message will be shown in the web component to inform the user and prevent confusion.

10.6. Recommendations

⚠ Opgelet: in deze aanbevelingen is nog geen rekening gehouden met alle mogelijke contra-indicaties of intoleranties voor de vermelde geneesmiddelen.

[Legende](#) 

	Afwachtend beleid Antibiotica zijn in de regel niet geïndiceerd bij acute bronchitis. Hoestklachten kunnen lang aanhouden (tot meer dan 4 weken).
	Amoxicilline Antibiotica kunnen wel overwogen worden bij verontrustende kliniek: • Amoxicilline 3x 1 g per dag gedurende 7 dagen. Herevaluatie na 48 uur is aangewezen.
	Amoxicilline-clavulaanzuur Niet aangewezen
	Cefalosporines Niet aangewezen
	Chinolonen Niet aangewezen
	Macroliden Niet aangewezen
	Tetracyclinen Niet aangewezen
Andere (geen van bovenstaande opties is in lijn met wat ik wens te doen voor mijn patiënt)	

[Meer details op de BCFI site](#)

[Download het beslismodel van EBPNET](#)

10.6.1. Disclaimer

An information disclaimer must be displayed in alignment with the visual styling and standards of the integrator's system. This ensures consistency in user experience and clear communication of the advisory nature of the information.

⚠ Opgelet: in deze aanbevelingen is nog geen rekening gehouden met alle mogelijke contra-indicaties of intoleranties voor de vermelde geneesmiddelen.

10.6.2. Support options

The system presents a list of support options as part of the PSS result. There is at least one support option available for display. Each support option includes the following elements:

- Score
- Instruction
- Evidence Summary

Sco



Scoring System

In the antimicrobial domain, the support options are scored using a three-tier system:

- **Score 3** – Green bar: Generally recommended
- **Score 2** – Yellow bar: Possibly recommended
- **Score 1** – Red bar: Not recommended

In addition to using color coding, we recommend incorporating an extra visual indicator to ensure accessibility for users with color vision deficiencies. For example, the length of the filled portion of a scoring bar can vary by score, offering a non-color-based visual cue. Or by adding the text “generally recommended”, “possibly recommended” or “not recommended” in the tab.

Instruction

The instruction (e.g., “Amoxicillin”) should be displayed in **bold** to attract attention and enhance the readability of the recommendations.

Evidence Summary

The formatting of the evidence summary must comply with the styles and standards defined by the guideline managers. The summary may include:

- **Bold** and *italic* text
- Bullet points
- Hyperlinks

Interactivity

Each support option must be clickable, enabling the user to register their conclusion or selection directly.

Example: The support table in the example displays seven support options. All the support options are fully clickable. When the user hovers over the first option, then the first support option is highlighted, indicating that it can be selected.

⚠ Opgelet: in deze aanbevelingen is nog geen rekening gehouden met alle mogelijke contra-indicaties of intoleranties voor de vermelde geneesmiddelen.

Legende 

	Afwachtend beleid Antibiotica zijn in de regel niet geïndiceerd bij acute bronchitis. Hoestklachten kunnen lang aanhouden (tot meer dan 4 weken).
	Amoxicilline Antibiotica kunnen wel overwogen worden bij verontrustende kliniek: • Amoxicilline 3x 1 g per dag gedurende 7 dagen. Herevaluatie na 48 uur is aangewezen.
	Amoxicilline-clavulaanzuur Niet aangewezen
	Cefalosporines Niet aangewezen
	Chinolonen Niet aangewezen
	Macroliden Niet aangewezen
	Tetracyclinen Niet aangewezen
Andere (geen van bovenstaande opties is in lijn met wat ik wens te doen voor mijn patiënt)	

 [Meer details op de BCFI site](#)

 [Download het beslismodel van EBPNET](#)

Links to Additional Information

Below the support table, one or more links are provided to redirect the user to additional resources hosted on external platforms such as BAPCOC or EBPracticenet. These links offer access to detailed guidelines, clinical background information, and supporting evidence.

To ensure clarity and set the right expectations for the user, each link should be accompanied by a relevant icon—for example, an external link icon—to clearly indicate that the user will be redirected to an external website.

These visual cues help improve the user experience by providing intuitive guidance and reducing confusion about the nature of the content behind the links.

Each of the links to additional information, when clicked, opens the information in a new tab.

10.6.3. Scoring system legend

To help users interpret the scoring system correctly, a legend should be provided that explains the meaning of the different color-coded categories (green, yellow, red). This ensures that users clearly understand how to interpret the recommendations based on their score.

The entry point for this legend should be a clickable link, which is placed in close proximity to the recommendations section. Clicking on this link allows users to open a pop-up window containing the legend.

The clickable text for this link can be:

- “Legende” in Dutch
- “Légende” in French

[Legende](#)

Afwachtend beleid

Antibiotica zijn in de regel niet geïndiceerd bij acute bronchitis. Hoestklachten kunnen lang aanhouden (tot meer dan 4 weken).

Amoxicilline

Antibiotica kunnen wel overwogen worden bij verontrustende kliniek:

- Amoxicilline 3x 1 g per dag gedurende 7 dagen.

Herevaluatie na 48 uur is aangewezen.

Amoxicilline-clavulaanzuur

Niet aangewezen

Placing the link near the recommendations ensures it is easily discoverable and contextually relevant, enhancing usability and comprehension.

The pop-up should clearly describe each score level:

- **Green (Score 3)** – Green bar: Generally recommended
- **Yellow (Score 2)** – Yellow bar: Less recommended
- **Red (Score 1)** – Red bar: Not recommended

Wat betekenen de aanbevelingen?

Alle aanbevelingen in PSS zijn gebaseerd op de Belgische gids voor anti-infectieuze behandeling in de ambulante praktijk (BAPCOC).

Groene balk: Over het algemeen aangewezen



Hier vindt u behandelingen die het meest aangewezen zijn:

- Het kan gaan om één of meerdere evenwaardige behandelingen voor uw patiënt. Maak vrij een keuze uit een van de beschreven opties.
- U kunt er ook adviezen terugvinden die complementair zijn aan specifieke behandelingen voor uw patiënt. Het kan bijvoorbeeld gaan om de behandeling van partners, symptoombehandeling, doorverwijzing naar een specialist,...

Gele balk: Mogelijk aangewezen



Dit betekent dat de voorgestelde behandeling geschikt is in specifieke omstandigheden:

- Het gaat meestal om één of meer behandelingen van tweede keuze, of
- Het is een te overwegen behandeling waarvoor u rekening moet houden met de toegevoegde instructies of specificaties omschreven in de aanbeveling.

Vindt u meerdere behandelingsvoorstellen, zijn ze altijd evenwaardig.

Rode balk: Niet aangewezen



Dit betekent dat de behandeling niet is aangewezen voor de ingegeven indicatie en patiëntparameters.

[Sluiten](#)

Language	Content of the legend
NL	Wat betekenen de aanbevelingen?

Alle aanbevelingen in PSS zijn gebaseerd op de Belgische gids voor anti-infectieuze behandeling in de ambulante praktijk (BAPCOC).


Groene balk: Over het algemeen aangewezen



Hier vindt u behandelingen die het meest aangewezen zijn:

3. Het kan gaan om één of meerdere evenwaardige behandelingen voor uw patiënt. Maak vrij een keuze uit een van de beschreven opties.
4. U kunt er ook adviezen terugvinden die complementair zijn aan specifieke behandelingen voor uw patiënt. Het kan bijvoorbeeld gaan om de behandeling van partners, symptoombehandeling, doorverwijzing naar een specialist,...

Gele balk: Mogelijk aangewezen



Dit betekent dat de voorgestelde behandeling geschikt is in specifieke omstandigheden:

5. Het gaat meestal om één of meer behandelingen van tweede keuze, of
6. Het is een te overwegen behandeling waarvoor u rekening moet houden met de toegevoegde instructies of specificaties omschreven in de aanbeveling.

Vindt u meerdere behandelingsvoorstellen, zijn ze altijd evenwaardig.

Rode balk: Niet aangewezen



Dit betekent dat de behandeling niet is aangewezen voor de ingegeven indicatie en patiëntparameters.

FR

Que signifient les recommandations?

Toutes les recommandations que vous trouverez dans PSS sont basées sur le guide belge du traitement anti-infectieux en pratique ambulatoire (BAPCOC).

Barre verte : Généralement approprié



Vous trouverez ici les traitements les plus recommandés :

7. Cela peut impliquer un ou plusieurs traitements équivalents pour votre patient. Choisissez librement parmi l'une des options décrites.
8. Vous pouvez également trouver des conseils complémentaires aux traitements spécifiques à votre patient. Par exemple, cela peut concerner le traitement lié aux partenaires, traitement des symptômes, renvoi à un spécialiste, ...

Barre jaune : Peut être approprié



Cela signifie que le traitement proposé est adapté dans des circonstances spécifiques :

9. Il s'agit généralement d'un ou plusieurs traitements de deuxième choix, ou
10. C'est un traitement à envisager dans les conditions où les spécifications complémentaires décrites dans la recommandation sont d'application.

Si vous trouvez plusieurs propositions de soins, elles sont toujours équivalentes.

Barre rouge : Pas approprié

	
	Cela signifie que le traitement n'est pas recommandé pour l'indication et les paramètres donnés sur le patient.
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>

10.6.4. Other support option

In some cases, the prescriber may choose a treatment that is not listed among the PSS support options. To accommodate this, the system must offer an “Other support option” that allows the prescriber to register a free-text treatment choice.

The “Other support option” must be displayed as the last item in the support options list and must be clearly distinguishable from the scored PSS recommendations. It must be clickable in the same way as the other support options.

When the prescriber selects the “Other support option”, a free-text input field must appear, prompting the user to describe the chosen treatment. This input is mandatory before the selection can be confirmed.

The label for this option should be translated as follows:

- **NL:** Andere behandeling
- **FR:** Autre traitement
- **EN:** Other treatment
- **DE:** *The translation for this content should be provided by the software provider.*

10.7. Feedback

The call-to-action must be clear, direct, and intuitive, guiding the user to select one support option as their final choice. This can be implemented in two ways:

- By placing a dedicated action button within each support option
- Or by making the entire support option area clickable

To enhance usability and ensure the user recognizes the interactive elements, include clear visual cues such as:

- Hover effects (e.g., background color change or shadow effect)
- Cursor changes to indicate interactivity
- Consistent styling aligned with the overall user interface

These design elements help users understand that an action is expected and make the selection process smoother and more accessible.

10.7.1. Green or yellow score

When the user selects a support option with a **green** or **yellow** score, the system should immediately display a **confirmation** message to acknowledge their selection. This provides the user with instant feedback, confirming that their choice is registered and that the selection meets the necessary criteria.

10.7.2. Red score: ask reason of deviation

When the user selects a support option with a red score, a pop-up must appear, prompting the user to provide a reason or motivation for deviation. This step helps ensure that the user's decision to select a less recommended option is intentional and properly documented.

The pop-up should include:

- A dropdown with fixed list of reasons for deviations, and the option to choose an "other reasons" which opens a free text field for the user to specify the reason
- Clear instructions on why this information is necessary

Reden van afwijking

Waarom wijkt uw keuze af van de gele/groene aanbeveling?

 Help ons om de ondersteuningsdienst te verbeteren!

Bevestigen

The user must select maximum 1 item from the list of reason of deviations and confirm his selection.

The list of possible reasons has been validated with the business. The list of reasons for deviation are not communicated through FHIR. The following list of 8 reasons for deviation must be implemented:

Language	Concerning clinical signs
NL	Verontrustende kliniek
FR	Clinique inquiétante
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>

Language	Comorbidities
NL	Comorbiditeiten
FR	Comorbidités
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>

Language	Yields faster results
NL	Geeft sneller resultaat
FR	Donne des résultats plus rapides
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>


Language	Positive past experiences
NL	Positieve eerdere ervaringen
FR	Expériences antérieures positives
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>

Language	Previously recommended treatment was insufficiently effective
NL	Onvoldoende effect van aanbevolen beleid in voorgeschiedenis
FR	Effet insuffisant de la politique recommandée dans l'histoire
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>

Language	Is better tolerated
NL	Wordt beter verdragen
FR	Mieux toléré
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>

Language	Allergy
NL	Allergie
FR	Allergie
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>

Language	Other reason
NL	Andere reden
FR	Autre raison
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>

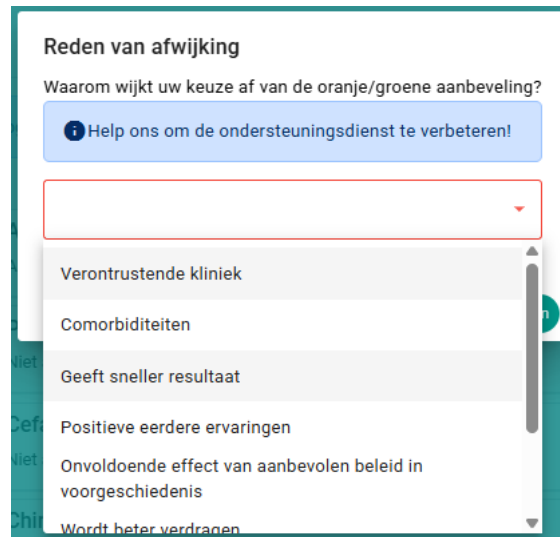

When the user selects “Other reason” from the list, then an input field must be provided so that the user can enter free text to provide a reason. It is mandatory to fill in free text when “Other reason” was selected. Once the user has entered their text, a confirmation button should be available to finalize their input. The user should not be able to confirm without inserting a free text for “Other reason”.



Hereby a suggested list of translations for the other labels in the reason for deviation pop-up:

Language	Title “Reason for deviation”
NL	Reden van afwijking
FR	Raison de la déviation
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>

Language	Text “why user deviates from yellow/green recommendation”
NL	Waarom wijkt uw keuze af van de gele/groene aanbeveling?
FR	Pourquoi votre choix diffère-t-il de la recommandation jaune/verte?
DE	<i>The translation for this content should be provided by the software provider.</i>

EN	<i>The translation for this content should be provided by the software provider.</i>
----	--

Language	Text “why user deviates from oran”
NL	Help ons om de ondersteuningsdienst te verbeteren!
FR	Aidez-nous à améliorer le service d'assistance!
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>

Language	Wich other reason (mandatory field)
NL	Welke?
FR	Laquelle ?
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>

Language	Confirm
NL	Bevestigen
FR	Confirmer
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>

When the user confirmed, then a confirmation must be displayed the same way as for the green/yellow treatment options.

10.7.3. Other support option


When the prescriber selects the “Other support option” (see section 10.5.4), the feedback must be submitted to PSS with a reference to the free-text treatment entered by the prescriber. The system must treat this selection in the same way as a green or yellow scored option: a confirmation message must be displayed upon successful submission.

No reason for deviation is required when the prescriber selects the “Other support option”, as this option by definition represents an autonomous clinical choice outside the scored guideline.

10.7.4. Confirmation

Upon successful submission of the user conclusion, a confirmation message should be displayed to the user, clearly stating: “The selection has been registered successfully.”

This message provides immediate feedback to the user, assuring them that their selection has been processed correctly. It should be visually prominent and easy to understand.



Language	Confirmation message user conclusion successfully saved
NL	Uw selectie is succesvol geregistreerd.
FR	Votre sélection a été enregistrée avec succès.
DE	<i>The translation for this content should be provided by the software provider.</i>
EN	<i>The translation for this content should be provided by the software provider.</i>